


Service
Service
Service



Service Manual

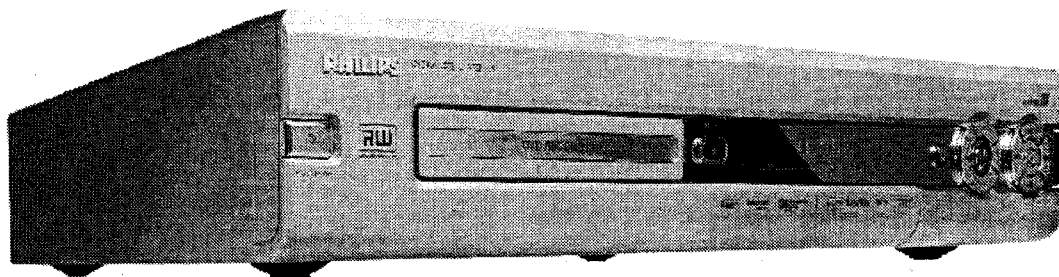

Contents

	Page
1 Technical Specifications and Connection	2
Facilities	2
Diversity Matrix	5
PCB Locations	6
2 Safety Information, General Notes	8
3 Directions for Use	45
4 Mechanical Instructions	49
5 Diagnostic Software	112
6 Block Diagrams, Waveforms, Wiring Diagram	112
Wiring Diagram	113
Waveforms	117
Testpoints	122
7 Circuit Diagrams and PWB Layouts	122
Display Panel (Diagram 1)	123
Front Connector (FC) (Diagram 2)	127
Standby Panel (STBY) (Diagram 3)	128
Tray Left Panel (TRL) (Diagram 4)	129
Tray Right Panel (TRR) (Diagram 5)	130
Analog Board: Fronted Video (FV) (Diagram 1)	131
Analog Board: In / Out Video (IOV) (Diagram 2)	132
Analog Board: In / Out Audio (IOA) (Diagram 3)	133
Analog Board: Power Supply (PS) (Diagram 4)	134
Analog Board: Multi Sound Processing (MSP) (Diagram 5)	135
Analog Board: VPS (Diagram 6)	135
Analog Board: Follow Me (FOME) (Diagram 7)	136
Analog Board: Digital In/Out (DIGIO) (Diagram 8)	137
Analog Board: Audio Converter 603 3033 (DAC_ADC) (Diagram 9)	138
Analog Board: Audio Converter 603 3028 (DAC_ADC) (Diagram 10)	147
UP Sub Board: Central Controller (CECO) (Diagram 11)	

Contents

	Page
UP Sub Board: Fan Control (FACO) (Diagram 12)	148
DVIO Board: 1394 Interface (Diagram 1)	151
DVIO Board: Link + Codec (Diagram 2)	152
DVIO Board: uP Part (Diagram 3)	153
DVIO Board: Interface + DAC (Diagram 4)	154
DVIO Board: Clock (Diagram 5)	155
Digital Board 1.5: VSM Buffer Memory and Bit Engine Interface (Diagram 1)	159
Digital Board 1.5: AV Dec. ST15519 (Diagram 2)	160
Digital Board 1.5: AV Decoder Mem. (Diagram 3)	161
Digital Board 1.5: Video Enc. Empress (Diagram 4)	162
Digital Board 1.5: VIP CVBS Y/C Video Input (Diagram 5)	163
Digital Board 1.5: Analog Board Cons. Video In/Out (Diagram 6)	164
Digital Board 1.5: Progressive Scan (Diagram 7)	165
Digital Board 1.5: Progressive Scan (Diagram 8)	166
Digital Board 1.5: Power, Clock and Reset (Diagram 9)	167
DB Chrysalis 2.1: IDE, UARTS, RESET, BE (Diagram 1)	181
DB Chrysalis 2.1: 1394 (Diagram 2)	182
DB Chrysalis 2.1: Audio PLL (Diagram 3)	183
DB Chrysalis 2.1: Chrysalis (Diagram 4)	184
DB Chrysalis 2.1: 1.8V Power (Diagram 5)	185
DB Chrysalis 2.1: Prog. scan DAC (Diagram 6)	186
DB Chrysalis 2.1: Flash SDRAM EEPROM (Diagram 7)	187
DB Chrysalis 2.1: Video IO (Diagram 8)	188
DB Chrysalis 2.1: VIPs (Diagram 9)	189
8 Alignments	185
9 Circuit-, IC Descriptions and List of Abbreviations	187
10 Spare Parts List	266
11 Revision List	280

© Copyright 2002 Philips Consumer Electronics B.V. Eindhoven, The Netherlands.
All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, or otherwise without the prior permission of Philips.



PHILIPS

1. Technical Specifications and Connection Facilities

1.1 Diversity Matrix

Type		DVDR	75/001	75/021	75/051	70/001	70/021	70/051
		Version						
		A' Lead	X	X	X			
		A Lead				X	X	X
DVIO		DVIO 1.8	<VNXY	<VNXY	<VNXY			
Digital Board (Chrysalis) 2.1		E1	>VNXY	>VNXY	>VNXY			
		E2				>VNXY	>VNXY	>VNXY
Digital Board (Empress) 1.5		E1	<VNXY	<VNXY	<VNXY	<VNXY	<VNXY	<VNXY
BE AV2 LF			X	X	X	X	X	X
UP Sub		AL E1	X	X	X	X	X	X
Analog-Board	3103 603 3033	AL E2/PS			X			X
		AL E1/PS	<VN03	X		<VN03	X	
	3103 603 3028	AL E2			X			X
		AL E1	>VN02	X		>VN02	X	
Display Control		DC1 AL	X	X	X	X	X	X

Remarks:

<VN03 ... This module is used in sets with production codes VN01 and VN02. Please see the type plate of the set for the production code.

>VN02 ... This module is used in sets with production code VN03 and higher.

<VNXY ... This module will only be used until a certain moment in time and production code. At creation of the service documentation the production code was not yet known.

E1 ... Digital Board Chrysalis Version Euro 1 for sets with DV input

E2 ... Digital Board Chrysalis Version Euro 2 for sets without DV input

AL E1/PS ... Analog Board version A-Lead Euro 1, used from production start onwards.

AL E2/PS ... Analog Board version A-Lead Euro 2 for UK, used from Production Start onwards.

The Analog Board versions "AL Ex/PS" are based on the PWB layout code 3103 603 3033.

This layout code can also be seen on the underside of the Analog Board in the copper near the power supply part.

AL E1 ... Analog Board version A-Lead Euro 1 replaces "AL E1/PS" at a certain production date.

AL E2 ... Analog Board version A-Lead Euro 2 for UK replaces "AL E2/PS" at a certain production date.

The Analog Board versions "AL Ex" are based on the PWB layout code 3103 603 3028.

The main difference to the Analog Board used at production start is the used audio digital/analogue converter; see Analog Board circuit diagram 9.

1.2 General:

Mains voltage	: 198V-276V
Mains frequency	: 43 Hz - 63Hz
Power consumption mains	: 28 W
Power consumption standby	: < 7 W
Power consumption low power stand-by	: < 3 W

1.3 RF Tuner

Test equipment: Fluke 54200 TV Signal generator
Test streams: PAL BG Philips Standard test pattern

1.3.1 System:

PAL B/G, PAL D/K, SECAM L/L', PAL I

1.3.2 RF - Loop Through:

Frequency range	: 45 MHz - 860 MHz
Gain: (ANT IN - ANT OUT)	: -6 dB to 0dB

1.3.3 Radio Interference:

input voltage /3 tone method (+40 dB min) : no limit

1.3.4 Receiver:

PLL tuning with AFC for optimum reception
Frequency range: : 45.25 MHz - 857 MHz
Sensitivity at 40 dB S/N : $\geq 60 \text{ dB}\mu\text{V}$ at 75 Ω
(video unweighted)

1.3.5 Video Performance:

Channel 25 / 503.25 MHz,
Test pattern: PAL BG PHILIPS standard test pattern,
RF Level 74 dBV
Measured on SCART 1
Frequency response: : 0 - 4.00 MHz +0-4dB
Group delay (0.1 MHz - 4.4 MHz) : 0 nsec \pm 150nsec

1.3.6 Audio Performance:**Audio Performance Analogue - HiFi:**

Frequency response at SCART 1 (L+R) output: : 100 Hz - 12 kHz / 0 \pm 3dB
S/N according to DIN 45405, 7, 1967 : and PHILIPS standard test pattern video signal: : FM: $\geq 50 \text{ dB}$; AM $\geq 45 \text{ dB}$, unweighted
Harmonic distortion (1 kHz, ± 25 kHz deviation): : FM $\leq 1.5\%$; AM $\leq 2\%$

Audio Performance NICAM:

Frequency response at SCART 1 (L+R) output: : 40 Hz - 15 kHz 0 \pm 3dB
S/N according to DIN 45405, 7, 1967 : and PHILIPS standard test pattern video signal: : $\geq 60 \text{ dB}$ unweighted
Harmonic distortion (1 kHz): : $\leq 0.5 \%$

1.3.7 Tuning**Automatic Search Tuning**






























scanning time without antenna : typ. 3 min. PAL
stop level (vision carrier) : $\geq 37 \text{ dB}\mu\text{V}$

Maximum tuning error of a recalled program : $\pm 62.5 \text{ kHz}$
Maximum tuning error during operation : $\pm 100 \text{ kHz}$

















Tuning Principle







automatic B,G, I, DK and L/L' detection
manual selection in "STORE" mode

1.4 Analogue Inputs**1.4.1 SCART 1 (Connected to TV)****Pin Signals:**

1	- Audio R	1.8V RMS	
2	- Audio R		
3	- Audio L	1.8V RMS	
4	- Audio GND		
5	- Blue/Chroma		
	GND		
6	- Audio L		
7	- Blue out/		
	Chroma in	0.7Vpp \pm 0.1V into 75 Ohm (*)	
8	- Function switch	<2V = TV >4.5V / <7V = asp. ratio 16:9 DVD >9.5V / <12V = asp. ratio 4:3 DVD	
9	- Green GND		
10	- P50 control		
11	- Green	0.7Vpp \pm 0.1V into 75 Ohm (*)	
12	- Nc		
13	- Red/Chroma		
	GND		
14	- fast switch		
	GND		
15	- Red out/		
	Chroma out	0.7Vpp \pm 0.1V into 75 Ohm (*) $\pm 3 \text{ dB}$ 0.3Vpp Chroma (burst)	
16	- fast switch		
	RGB/ CVBS	or Y <0.4V into 75 Ohm = CVBS >1V / <3V into 75 Ohm = RGB	
17	- Y/CVBS GND		
	OUT		
18	- Y/CVBS GND		
	IN		
19	- CVBS/Y	1Vpp \pm 0.1V into 75 Ohm (*)	
20	- CVBS/Y		
21	- Shield		

1.4.2 SCART 2 (Connected to AUX)**Pin Signals:**

1	-Audio R	1.8V RMS	
2	-Audio R		
3	-Audio L	1.8V RMS	
4	-Audio GND		
5	-Blue/Chroma		
	GND		
6	-Audio L		
7	-Blue in/		
	Chroma out	$\pm 3 \text{ dB}$ 0.3Vpp Chroma (burst)	
8	-Function switch		
9	-Green GND		
10	-P50 control		
11	-Green		
12	-Nc		
13	-Red/Chroma		
	GND		
14	-fast switch		
	GND		
15	-Red in/		
	Chroma in		

16	-fast switch RGB/ CVBS or Y	
17	-CVBS GND OUT	
18	-CVBS GND IN	
19	-CVBS/Y/RGB sync	
20	-CVBS/Y	
21	-Shield	

(*) for 100% white

Intermodulation distortion	: >70dB
Mute (spin-up, pause, access)	: >85dB
Outband attenuation:	: >40dB above 25kHz

1.7 Digital Output

1.7.1 Coaxial

CDDA/ LPCM (incl MPEG1)	: according IEC958
MPEG2, AC3 audio	: according IEC1937
DTS	: according IEC1937, amendment 1

1.4.3 Audio/Video Front Input Connectors

Audio

Input voltage	: 2 Vrms
Input impedance	: >10kΩ

Video - Cinch

Input voltage	: 1 Vpp ± 3dB
Input impedance	: 75 Ω

Video - YC (Hosiden)

Input voltage Y	: 1Vpp ± 3dB
Input impedance Y	: 75 Ω
Input voltage C	: burst 300 mVpp ± 3 dB
Input impedance C	: 75 Ω

1.5 Video Performance

All outputs loaded with 75 Ohm
SNR measurements over full bandwidth without weighting.

1.5.1 SCART (RGB)

SNR	: > -65 dB on all output
Bandwidth	: 4.8 MHz ± 2dB

1.6 Audio Performance CD

1.6.1 Cinch Output Rear

Output voltage 2 channel mode	: 2Vrms ± 2dB
Channel unbalance (1kHz)	: <1dB
Crosstalk 1kHz	: >95dB
Crosstalk 20Hz-20kHz	: >85dB
Frequency response 20Hz- 20kHz	: ±0.2dB max
Signal to noise ratio	: >95 dB
Dynamic range 1kHz	: >85dB
Dynamic range 20Hz-20kHz	: >80dB
Distortion and noise 1kHz	: >85dB
Distortion and noise 20Hz-20kHz	: >75dB
Intermodulation distortion	: >77dB
Mute	: >95dB
Outband attenuation:	: >40dB above 30kHz

1.6.2 Scart Audio

Output voltage 2 channel mode	: 1.6Vrms ± 2dB
Channel unbalance (1kHz)	: <1dB
Crosstalk 1kHz	: >85dB
Crosstalk 20Hz-20kHz	: >70dB
Frequency response 20Hz- 20kHz	: ± 0.2dB max
Signal to noise ratio	: >85 dB
Dynamic range 1kHz	: >75dB
Dynamic range 20Hz-20kHz	: >70dB
Distortion and noise 1kHz	: >75dB
Distortion and noise 20Hz-20kHz	: >65dB

1.8 Digital Video Input (IEEE 1394)

1.8.1 Applicable Standards

Implementation according:
IEEE Std 1394-1995
IEC 61883 - Part 1
IEC 61883 - Part 2 SD-DVCR (02-01-1997)
Specification of consumer use digital VCR's using 6.3 mm
magnetic tape - dec.1994
Mechanical connection according:
Annex A of 61883-1

1.9 P50 System Control

Via SCART pin nr 10

1.10 Dimensions and Weight

Height of feet	: 10mm
Apparatus tray closed	: WxDxH :435 x 324.5 x 88cm
Apparatus tray open	: WxDxH :435 x 366 x 88cm
Weight without packaging	: app. 4 kg ± 0.5 kg
Weight in packaging	: app. 6.5 kg

1.11 Laser Output Power & Wavelength


1.11.1 DVD

Output power during reading	: 0.8mW
Output power during writing	: 20mW
Wavelength	: 660nm

1.11.2 CD

Output power	: 0.3mW
Wavelength	: 780nm

1.12 PCB Locations

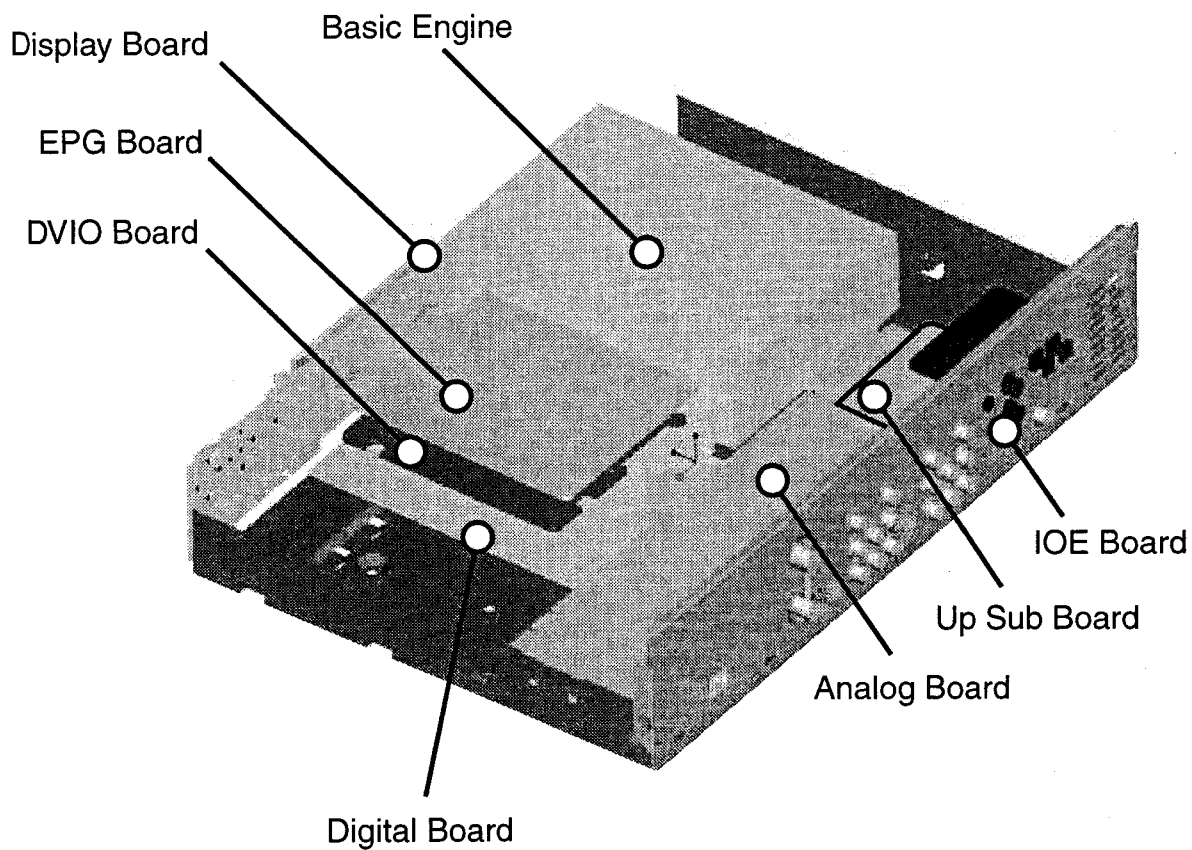**Remarks:**

The EPG Board and the In/Out Extension Board IOE are only used in the DVDR80.

The DVIO Board is only present in the DVDR75 and only in combination with the Digital Board 1.5 (Empress). It is not present in DVDR75 with Digital Board 2.1 (Chrysalis).

2. Safety Information, General Notes

2.1 Safety Instructions

2.1.1 General Safety

Safety regulations require that during a repair:

- Connect the unit to the mains via an isolation transformer.
- Replace safety components, indicated by the symbol ▲, only by components identical to the original ones. Any other component substitution (other than original type) may increase risk of fire or electrical shock hazard.

Safety regulations require that after a repair, you must return the unit in its original condition. Pay, in particular, attention to the following points:

- Route the wires/cables correctly, and fix them with the mounted cable clamps.
- Check the insulation of the mains lead for external damage.
- Check the electrical DC resistance between the mains plug and the secondary side:
 1. Unplug the mains cord, and connect a wire between the two pins of the mains plug.
 2. Set the mains switch to the 'on' position (keep the mains cord unplugged!).
 3. Measure the resistance value between the mains plug and the front panel, controls, and chassis bottom.
 4. Repair or correct unit when the resistance measurement is less than 1 MΩ.
 5. Verify this, before you return the unit to the customer/user (ref. UL-standard no. 1492).
 6. Switch the unit 'off', and remove the wire between the two pins of the mains plug.

2.1.2 Laser Safety

This unit employs a laser. Only qualified service personnel may remove the cover, or attempt to service this device (due to possible eye injury).

Laser Device Unit

Type	: Semiconductor laser GaAlAs
Wavelength	: 650 nm (DVD) 780 nm (VCD/CD)
Output Power	: 20 mW (DVD+RW writing) 0.8 mW (DVD reading) 0.3 mW (VCD/CD reading)
Beam divergence	: 60 degree




Figure 2-1

Note: Use of controls or adjustments or performance of procedure other than those specified herein, may result in hazardous radiation exposure. Avoid direct exposure to beam.

2.2 Warnings

2.2.1 General

- All ICs and many other semiconductors are susceptible to electrostatic discharges (ESD, ▲). Careless handling during repair can reduce life drastically. Make sure that, during repair, you are at the same potential as the mass of the set by a wristband with resistance. Keep components and tools at this same potential.

Available ESD protection equipment:

- Complete kit ESD3 (small tablemat, wristband, connection box, extension cable and earth cable) 4822 310 10671.
- Wristband tester 4822 344 13999.
- Be careful during measurements in the live voltage section. The primary side of the power supply (pos. 1005), including the heatsink, carries live mains voltage when you connect the player to the mains (even when the player is 'off!'). It is possible to touch copper tracks and/or components in this unshielded primary area, when you service the player. Service personnel must take precautions to prevent touching this area or components in this area. A 'lightning stroke' and a stripe-marked printing on the printed wiring board, indicate the primary side of the power supply.
- Never replace modules, or components, while the unit is 'on'.

2.2.2 Laser

- The use of optical instruments with this product, will increase eye hazard.
- Only qualified service personnel may remove the cover or attempt to service this device, due to possible eye injury.
- Repair handling should take place as much as possible with a disc loaded inside the player.
- Text below is placed inside the unit, on the laser cover shield:




Figure 2-2

2.2.3 Notes

Dolby

Manufactured under licence from Dolby Laboratories. "Dolby", "Pro Logic" and the double-D symbol are trademarks of Dolby Laboratories. Confidential Unpublished Works. ©1992-1997 Dolby Laboratories, Inc. All rights reserved.




Figure 2-3

Trusurround

TRUSURROUND, SRS and symbol (fig 2-4) are trademarks of SRS Labs, Inc. TRUSURROUND technology is manufactured under licence from SRS Labs, Inc.



Figure 2-4

Video Plus

"Video Plus+" and "PlusCode" are registered trademarks of the Gemstar Development Corporation. The "Video Plus+" system is manufactured under licence from the Gemstar Development Corporation.



Figure 2-5

Macrovision

This product incorporates copyright protection technology that is protected by method claims of certain U.S. patents and other intellectual property rights owned by Macrovision Corporation and other rights owners.

Use of this copyright protection technology must be authorized by Macrovision Corporation, and is intended for home and other limited viewing uses only unless otherwise authorized by Macrovision Corporation. Reverse engineering or disassembly is prohibited.

3. Directions For Use

M4

Select previous title/search backwards:
Briefly press the button during playback. Previous chapter/film or previous title.
Hold down the button: Search backwards.
Hold down button during still picture, slow motion backwards.

M5

Select next title/search forwards:
Briefly press the button during playback. Next chapter/film or next title.
Hold down the button: Search forwards.
Hold down button during still picture, slow motion forwards.

STOP ■

Stop. Stop playback/recording except with programmed recordings (TIMER).
Hold down button, opens and closes the disc tray.

AUDIO

Audio: Select the audio language for recording language 1 or 2.

REC/OTR ●

Record: Record the current TV channel.

PAUSE ■■

Pause (still picture): If this button is pressed during playback, the DVD recorder switches to pause. You will see a still picture. If this button is pressed during recording, the DVD recorder will also switch to pause.

Additional TV functions

This will only work with TV sets with the same remote control code *RC5 (e.g. Philips TV sets).

TV VOLUME +

TV volume: Increase TV volume.

TV VOLUME -

TV volume: Reduce TV volume.

For the following functions you need to hold down the button at the side DVD/TV and then select the function you need with the appropriate button.

STANDBY ○

Switching the TV off.

0-9

Number buttons 0-9.

CH+ ▲

TV programme number: To select a higher programme number.

CH- ▼

TV programme number: To select a lower programme number.

The remote control

MONITOR

Monitor: This button lets you switch between the TV receiver (normal tuner) in the DVD recorder (TV picture on the TV set) and playback on the DVD recorder.

STANDBY ○

Switch on or off: To switch set on or off, interrupt menu function, interrupt a programmed recording (TIMER).

TV/DVD

TV/DVD switch: Switches the start socket, EXT 2 AUX-IO directly to the TV set. This lets you watch the pictures from any unit connected to this start socket (set-top box, video recorder or satellite receiver) and at the same time record from another source.
If you have not connected a device to the EXT 2 AUX-IO socket, use this button to switch between TV reception and the DVD recorder. But this only works if you use a start cable to connect the TV set to your DVD recorder (EXT 1 TO START-IO socket) and your TV set responds to this switch-over.

T/C

Title/Chapter: Choose the T (Title)/C (Chapter) directly from the menu bar.
If "T/C" appears in the display, the index menu from a recorded disc or an introductory film will be shown. In this case, this function is not available.

PLAY MODE

Playback type: Closes between repeat, shuffle play and stop-scan.

REC MODE

Record type (quality): To select the maximum possible record time.

0-9

Number buttons 0-9.

DISC-MENU

Disc menu: To show the DVD menu or the index screen.

SYSTEM-MENU

System menu: Call up/cancel the main menu (menu bar at the top of the screen).

SELECT

Select: Select function/value.

OK

Store/confirm: To store or confirm entry.

◀ ▶

Cursor keys: Cursor left, right.

CH+ ▲

Cursor buttons/Plus: Cursor up/Next programme number.

CH- ▼

Cursor buttons/Minus: Cursor down/Previous programme number.

TIMER

TIMER: To make a TIMER programming with ShowView®/without ShowView® or to alter or clear a programmed TIMER.

FSS <X>

EDIT: For displaying the edit menu for DVD-R(W) discs, for setting chapter markers.

RETURN


Back: Return to previous menu on a video CD (VCD). This also works with some DVDs.

CLEAR


Delete: To delete last entry or clear programmed recording (TIMER).

PLAY ▶

Playback: To play a recorded disc.

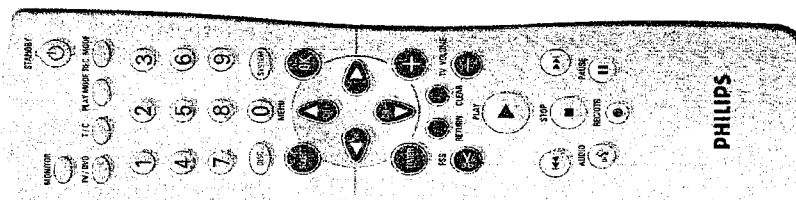


Front of the device

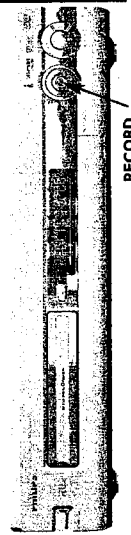

RECORD

STANDBY/ON	Switch on or off. To switch off or on, interrupt a function, interrupt a programmed recording (TIMER).
OPEN/CLOSE	Open/close disc tray. Open/close disc tray.
RECORD	Record. Record the current TV channel.
▶	Play back. To play a recorded disc.
◀◀	Select previous title/search backwards.
▶▶	Select next title/search forwards.
■	Stop. Interrupt playback/recording.

Behind the flap at the right-hand corner on the front



S-VIDEO	S-Video socket. Connection of SVHS/HBB camcorders or SVHS/HBB video recorders (programme number [R1]).
Yellow socket VIDEO	Video input socket. Connection of camcorders or video recorders (programme number [R1]).
White/red socket Left AUDIO right	Audio input socket left/right. Connection of camcorders or video recorders (programme number [R1]).

Switching between the S-VIDEO and VIDEO socket takes place automatically. If both sockets are in use, the signal at the S-VIDEO socket has priority.

DV IN	Link/DV socket (digital video input, IEEE 1394, FireWire). Connecting a digital camcorder or other suitable device (programme number [R2]).
--------------	---

Back of the unit



~ MAINS	Main socket. Connection to the mains supply (230V/50Hz).
ANTENNA IN	Aerial input. Connection of the aerial.
TV OUT	Aerial output. Connection of the TV set.
EXT 2 AUX-IO	Scart socket 2. Connection of an additional device (satellite receiver, set-top box, video recorder, camcorder, etc.).
EXT 1 TO TV-IO	Scart socket 1. Connection of a TV set. RGB output.

Output sockets (AUDIO/VIDEO OUT)

OUT S-VIDEO (Y/C)	S-Video output. Connection of an S-Video-compatible TV set.
OUT VIDEO (CVBS)	Video output (yellow socket). Connecting a TV set with a video input (CVBS, Composite Video).
OUT L AUDIO R	Analogous audio output (white/red socket). Connection of a TV set with audio input sockets or connection of an additional device.

Output socket (DIGITAL AUDIO OUT)

DIGITAL AUDIO OUT	Digital audio output. Connection of a digital audio device (amplifier/receiver).
--------------------------	--

The symbols on your DVD recorder display

These symbols can light up on your DVD recorder display:

	Multi-function display/text line
	Click
	Disc title playing time
	OTR switch-off time
	Title name
	Display of the programme number of the TV channel playing and channel number function
	Display of information and alarm



EMPTY DISC	The disc inserted is either new or has been completely erased (no recording).
PROTECTED	The disc is protected against recording.
MAX TITLE	The maximum number of titles per disc has been reached. The maximum number of titles per disc is 48.
MAX CHAP	The maximum number of chapters per title/disc has been reached. The maximum number of chapters per title is 124.
DISC FULL	The disc is full. There is no space for new recordings.
PAUSE	A disc with PAL recordings has been inserted. The machine is trying to record an NTSC signal. Insert a new disc or one that contains NTSC recordings.
NTSC DISC	A disc with NTSC recordings has been inserted. The machine is trying to record a PAL signal. Insert a new disc or one that contains PAL recordings.
RECORDING	An illegal action (e.g. OPEN/CLOSE button) was attempted during recording.
FREE TITLE	Playback was started for an empty title or the following title is empty.
DISC LOCK	An attempt has been made to record during playback of a protected disc. This message appears if an attempt is made to insert a chapter marker (FSS X button).
DISC ERR	An error occurred when writing the title. If this error keeps occurring, please clean the disc or use a new one. For instructions on how to clean a disc see the section on 'Cleaning the disc' in the next chapter.
DISC ERROR	An error occurred when writing the title. Recording was continued; the error was skipped.
SETUP	After the automatic search the menu for setting the date/time will appear on the screen.
PAUSE D1	During the automatic search the TV channels found are counted.
PAUSE D2	The disc tray cannot be closed/opened.
SAFE REC	The new recording will be added at the end of all the other recordings (SAFE RECORD).
EASYLINK	Data is being transferred from the EasyLink TV.
POST-FORMAT	Post format.

ENGLISH

DISC BAR	Displays the current position on the disc (disc pointer).
PLAY/RECORD	Single flashing segment at the current position.
PAUSE	Flashing segment on both sides of the current position.
STOP	Illuminated segment at the current position.
SAT	A satellite recording has been programmed.
TIMER	A recording (timer) has been programmed.
RC	A remote control signal has been received.
VPS/PDC	Video programming system / programme delivery control. A VPS or PDC code will be transmitted for the selected TV program.
LANG II	During playback a HF/2 channel tone was detected or a HF/2 channel tone was received. If a light up depending on which sound channel has been selected.

Messages in the DVD recorder display

The following messages may appear in your DVD recorder display


STILL DVD	The DVD recorder is in initialisation mode. Switch the TV on then read the paragraph on 'Initial installation' in 'Installing your DVD recorder'.
NO SIGNAL	No input signal available (signal inadequate or unstable).
REINIT	The menu on the screen is active.
OPENING	Disc tray opening.
TRAY OPEN	Disc tray open.
CLOSING	Disc tray closing.
READY	Disc being read.
NEW LIST	Once recording has been successfully completed the table of contents is created.
INIT MENU	The menu structure is created after the first recording has been made on a new disc.
COPY PROT	You have tried to copy a copy-protected DVD/video cassette.
ABT	Please wait until this message disappears. The DVD recorder is busy performing a task.
NO DISC	A disc has not been inserted for recording. If a disc has been inserted, it cannot be read.
INFO	Information about the inserted DVD is displayed on the screen.
ABSY	The DVD recorder is processing the changes to make then DVD compatible.
DISCING	The entire disc is erased.

READING

2

Connecting the DVD recorder

Preparing the remote control for operation



The remote control and its batteries are packed separately in the original DVD recorder packaging. You must install the batteries in the remote control before use - described in the following section.

- 1 Take the remote control and the enclosed batteries (2 batteries)
- 2 Open the battery compartment, insert the batteries as shown and then close the battery compartment.

The remote control is now ready to use. Its range is approximately 5 to 10 meters.

'Aim' correctly
In the following sections, you will need the remote control for the first time. Aim the remote control at the DVD recorder and not at the TV set.



Connecting your DVD recorder to the TV set

The necessary cable connections must be made before you can record or playback TV programmes using your DVD recorder.

Connect the DVD recorder directly to your TV set. If there is a video recorder in between the picture quality may be poor. We recommend that you use a scart cable to connect your TV set and DVD recorder.

What is a scart cable?
The scart or Euro AV cable serves as the universal connector for picture, sound and control signals. With this type of connection, there is practically no loss of quality in picture or sound transmission.



ENGLISH

When you install your DVD recorder for the first time, select one of the following options:


- Connecting with a scart cable and Easy Link[®]
If your TV set is equipped with Easy Link, Cinema Link, NeoView Link, Q-Link, Smart Link, MegaLink, Datalink, ... and you wish to use a scart cable.
- Connecting with a scart cable without Easy Link[®]
If your TV set is not equipped with Easy Link, Cinema Link, NeoView Link, Q-Link, Smart Link, MegaLink, Datalink, ... and you wish to use a scart cable.
- Connecting with an S-Video(Y/C) cable[®]
If your TV set is equipped with an S-Video(SHS) socket.
- Connecting with video(CVBS) cable[®]
If your TV set is equipped only with an video(CVBS) socket.

Connecting with a scart cable and 'Easy Link'


Your DVD recorder can exchange information with your TV set using 'Easy Link'. Your TV channels can also be transferred in the same order from your TV set to your DVD recorder using 'Easy Link'. Please see your TV's operating instructions.




Have the following cables ready:
an aerial cable (1. supplied), a mains cable (2. supplied), a special scart cable (3. suitable for EasyLink).



- 1 Switch off your TV set.
- 2 Remove the aerial cable plug from your TV set. Insert it into the ANTENNA IN socket at the back of the DVD recorder.
- 3 Insert one end of the supplied aerial cable into the TV OUT socket at the back of the DVD recorder and the other end into the aerial input socket at the back of the TV set.
- 4 Plug in a special scart cable (for EasyLink) into the scart socket EXT 1 TO TV-40 at the back of the DVD recorder and the corresponding scart socket at the back of the TV set (see TV set operating instructions).

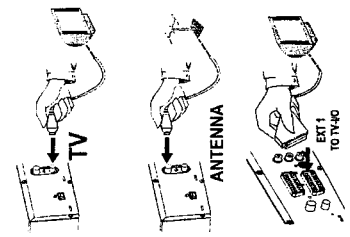

Connecting with a scart cable without 'Easy Link'



Have the following cables ready:
an aerial cable (1, supplied), a mains cable (2, supplied), a scart cable (3).


1 Remove the aerial cable plug from your TV set. Insert it into the ANTENNA IN socket at the back of the DVD recorder.



2 Insert one end of the supplied aerial cable into the TV OUT socket at the back of the DVD recorder and the other end into the aerial input socket at the back of the TV set.



3 Plug a scart cable into the scart socket EXT 1 TO TV/VIDEO at the back of the DVD recorder and the scart socket for the DVD recorder at the back of the TV set (see TV set operating instructions).



My TV set has several scart sockets. Which one should I use?


Select the scart socket that is suitable for both video output and for video input.

My TV set shows me a selection menu for the scart socket

Select 'VCR' as the source for this scart socket.

4 Switch on the TV set.

5 Insert one end of the supplied mains cable into the mains socket ~ MAINS at the back of the DVD recorder and the other end into the wall socket.



The most important features of the DVD recorder will appear in scrolling text on the display. After the first installation is completed this function will be switched off. How you switch on this function again, read in the chapter 'User preferences' in the section 'standby'.

6 Switch on the DVD recorder using STANDBY/ON. '15 74 00h2' will appear on the display.


7 If the connection was properly made and your TV was automatically switched to the programme number for the scart socket, e.g. 'EXT', 'V', 'AV', you will see the following picture:

Connecting the DVD recorder

ENGLISH

5 Switch on the TV set.

6 Insert one end of the supplied mains cable into the mains socket ~ MAINS at the back of the DVD recorder and the other end into the wall socket.



7 A message appears on the screen announcing that the transfer has started. 'EASY LINK' appears on the display during transfer. The TV set transfers all saved TV channels, in the same order, to the DVD recorder. This may take several minutes.

* 'Time', 'Year', 'Month', 'Date' appears on the TV screen

Normally the date and time are taken from the data sent by the TV channel stored on programme P01. If the aerial signal is too weak or there is excessive interference, you should set the date and time manually:

1 Check if the time in 'Time' is correct.

2 If required, change the time with the number buttons 0-9 on your remote control.

3 Select the next line with CH+ ▲ or CH- ▼.

4 Check if the displayed settings for 'Year', 'Month' and 'Date' are correct.

5 When all information is correct, save by pressing OK.



Problem

* I can see more installation menus on my TV set

Not all the necessary data has been transferred. Please enter the settings by hand as follows. For more information on the various functions see 'Initial installation' in 'Installing your DVD recorder'.

1 Select the desired audio language using CH+ ▲ or CH- ▼ and confirm with OK.

2 Select the desired subtitle language with CH+ ▲ or CH- ▼ and confirm with OK.

3 Select the desired screen format position using CH+ ▲ or CH- ▼. For a 4:3 TV set: cinema format (black bars above and below the picture)

* 4:3 letterbox For a 4:3 TV set: full height format with the sides cut off

* 4:3 panscan For a 4:3 TV set: full height format with the sides cut off

* 16:9 For a 16:9 TV set


4 Confirm with OK.

5 Select the country of your residence with CH+ ▲ or CH- ▼.


6 If your country does not appear, select 'Other'.

7 Confirm with OK.

Initial installation is now complete.



Connecting the DVD recorder



Problem

My screen is empty.


- Many TV sets are switched by the DVD recorder to the programme number for the start socket by way of a control signal sent through the start cable.
- If the TV set does not automatically switch to the start socket programme number, manually change to the corresponding programme number on your TV set (see your TV's operating instructions).
- Check that the start cable is connected from the TV set to the EXT 1 TO TV-40 socket on the DVD recorder. The EXT 2 AUX-40 socket is intended only for additional devices.

ENGLISH

Then, read the paragraph on 'Initial installation' in 'Installing your DVD recorder'.


Connecting with an S-Video(Y/C)cable

This connecting cable, also known as the SVHS cable, is used to transmit the brightness signal (Y signal) and colour signal (C signal) separately. This mini DIN socket/plug is also called a Hosiden socket/plug.



Have the following cables ready:
an aerial cable (1, supplied), a mains cable (2, supplied), an S-Video(SVHS) cable (3), an audio cable (4, supplied, red/white plug).



1 Remove the aerial cable plug from your TV set. Insert it into the ANTENNA IN socket at the back of the DVD recorder.




2 Insert one end of the supplied aerial cable into the TV OUT socket at the back of the DVD recorder and the other end into the aerial input socket at the back of the TV set.



3 Insert one end of an S-Video(SVHS) cable into the OUT S-VIDEO (Y/C) socket at the back of the DVD recorder and the other end into the S-Video (SVHS) input socket on the TV set (usually labelled 'S-Video in' or 'SVHS in'. See TV operating instructions).



4 Insert one end of the supplied audio (Cinch) cable into the red/white Cinch socket OUT L AUDIO R at the back of the DVD recorder and the other end into the audio input socket (usually red/white) on the TV set (usually labelled 'Audio in' or 'AV in'. See TV operating instructions).



5 Switch on the TV set. Switch the TV set over to the SVHS input socket or select the relevant programme number. Please see your TV's operating instructions for the programme number you need.

6 Insert one end of the supplied mains cable into the mains socket at the back of the DVD recorder and the other end into the wall socket.


7 The most important features of the DVD recorder will appear in scrolling text on the display. After the first installation is completed this function will be switched off. How you switch on this function again, read in the chapter 'User preferences' in the section 'standby'.

8 Switch on the DVD recorder using **STANDBY/ON**. 15 TV GMP will appear on the display.

Then, read the paragraph on 'Initial installation' in 'Installing your DVD recorder'.

Connecting with video(CVBS) cable

This cable, usually with yellow Cinch connectors, is used for transmitting the Composite Video signal (FBAS, CVBS). In this method of transmission the colour signal and the brightness signal are transmitted on the same cable. In certain circumstances, this can lead to problems with the picture, such as 'Moiré' patterns.



Have the following cables ready:
an aerial cable (1, supplied), a mains cable (2, supplied), a video (CVBS) cable (3, supplied, yellow plug), an audio cable (4, supplied, red/white plug).

1 Remove the aerial cable plug from your TV set. Insert it into the ANTENNA IN socket at the back of the DVD recorder.




2 Insert one end of the supplied aerial cable into the TV OUT socket at the back of the DVD recorder and the other end into the aerial input socket at the back of the TV set.



3

Connecting additional devices




3 Insert one end of the supplied video (CVBS) cable into the yellow Cinch socket **OUT VIDEO (CVBS)** at the back of the DVD recorder and the other end into the video input socket (usually yellow) on the TV set (usually labelled 'Video in' or 'AV in'. See TV operating instructions).

4

4 Insert one end of the supplied audio (Cinch) cable into the red/white Cinch socket **OUT L AUDIO R** at the back of the DVD recorder and the other end into the audio input socket (usually red/white) on the TV set (usually labelled 'Audio in' or 'AV in'. See TV operating instructions).

5

5 Switch on the TV set. Switch the TV set over to the Video/Audio input socket or select the relevant programme number. Please see your TV's operating instructions for the programme number you need.



6 Insert one end of the supplied mains cable into the mains socket **~ MAINS** at the back of the DVD recorder and the other end into the wall socket.


The most important features of the DVD recorder will appear in scrolling text on the display. After the first installation is completed this function will be switched off. How you switch on this function again, read in the chapter 'User preferences' in the section 'standby'.

7

7 Switch on the DVD recorder using **STANDBY/ON**. The '15' 17 19 21' will appear on the display.

Then, read the paragraph on 'Initial installation' in 'Installing your DVD recorder'.

Connecting additional devices to the second scart socket



You can connect additional devices such as decoders, satellite receivers, camcorders, etc. to the **EXT 2 AUX-IO** socket. When playback is started on this additional device the DVD recorder automatically connects the **EXT 2 AUX-IO** start socket with the **EXT 1 TO TV-IO** start socket. You will then see the picture from the additional device on your TV set, even if the DVD recorder is switched off.

The **TV/DVD** button on the remote control allows you to switch between playback through the **EXT 2 AUX-IO** start socket and playback from the DVD recorder.

Connecting additional video recorders

You can connect a video recorder to the **EXT 2 AUX-IO** socket. If you have an **SVHS** video recorder you can also use the **OUT S-VIDEO (Y/C)** socket and the **OUT L AUDIO R** sockets.

Please note:

Most prerecorded video cassettes and DVDs are copy-protected. If you try to copy them you will see the message **'COPY PRO'** on the DVD recorder's display.

*When copying video cassettes the display on the DVD recorder shows 'NO S-VIDEO'.

✓ Check that the cable is plugged in firmly.

✓ If a recording is made from a video recorder, change the tracking on the video recorder.

✓ The DVD recorder may not be able to recognise the video input signal if this signal is poor or does not comply with relevant standards.

*When I copy DVD video discs or prerecorded video cassettes the picture is fuzzy and the brightness varies

✓ This happens if you try to copy DVDs or video cassettes that have been copy-protected. Even though the picture on the TV is fine the recording on a DVD-R(W) is faulty. This interference is unavoidable with copy-protected DVDs or video cassettes.

Problem




Connecting audio devices to the digital audio socket

At the back of the DVD recorder there is a digital audio output socket. **DIGITAL AUDIO OUT** for an coaxial cable.

These can be used to connect the following:

- an **AV receiver** or an **AV amplifier** with a digital multi-channel sound decoder
- a receiver with **two-channel digital stereo (PCM)**



Digital multi-channel sound

Digital multi-channel sound offers the best possible sound quality. You will need a multi-channel AV receiver or amplifier that supports at least one of the audio formats of the DVD recorder (MPEG2, Dolby Digital and DTS). Consult the operating instructions for your receiver to find out which audio formats it supports.



Problem

* All I can hear from my loudspeakers is a loud distorted noise

✓ The receiver is not compatible with the digital audio format of the DVD recorder. The audio format of the DVD disc is displayed in the status window when you switch to another language. Playback in six-channel digital surround sound is only possible if the receiver has a digital multi-channel sound decoder.

Connect camcorder to the front sockets

To copy camcorder recordings, you can use the front sockets. These sockets are located behind the flap on the left hand side.

Best picture quality

If you have a DV or Digital 8 camcorder, connect the **DV IN** input of the DVD recorder to the appropriate DV output on the camcorder.

When films are transferred the original recording data and time are stored as DVD subtitles. On playback, this data can be displayed on the TV screen by using the **[SUB]** function (Subtitle).

Very good picture quality

If you have a Hi8 or S-VHS(C) camcorder, connect the **S-VIDEO** input of the DVD recorder to the appropriate S-VHS output on the camcorder.


You must also connect the audio input. **left AUDIO right** on the DVD recorder to the audio output on the camcorder.

Good picture quality

If you have a camcorder that only has a single video output (Composite Video, CVBS), connect the **VIDEO** input on the DVD recorder to the appropriate output on the camcorder.

You must also connect the audio input. **left AUDIO right** on the DVD recorder to the audio output on the camcorder.

Connecting audio devices to the analogue audio sockets



Two audio output sockets **OUT L AUDIO R** are located on the back of the DVD recorder (audio signal output: left/right)

These can be used to connect the following:

- a receiver with **Dolby Surround Pro Logic**
- a receiver with **two-channel analogue stereo**

Can I use the 'Phono' input on my amplifier?

This socket (input) on the amplifier is designed only for record players without preamplifiers. Do not use this input for connecting the DVD recorder.


The DVD recorder or the amplifier may be damaged as a result.



ENGLISH

4

Installing your DVD recorder



Initial installation

After successfully connecting your DVD recorder to the TV set and other additional devices as described in the previous chapters, this chapter will show you how to start the initial installation. The DVD recorder automatically seeks out and stores all available TV channels.

ENGLISH



Connecting additional devices

If you have connected additional devices such as a satellite receiver to the aerial cable, switch them on. The automatic channel search will recognise it and save it.

No aerial connected

Even if you only want to use the DVD recorder to play back or have only connected a satellite receiver, you must still complete the initial installation. This is necessary so that the basic settings are stored correctly. Once initial installation is complete you can use the DVD recorder as normal.

Tip



Select the desired language for the on-screen menu by pressing **CH-▼** or **CH+▲**.

What is an on-screen menu?

The multi-language on-screen menu takes the mystery out of using your new DVD recorder. All settings and/or functions are displayed on your TV screen in the relevant language.

Confirm with **OK**.



Select the desired audio language using **CH-▼** or **CH+▲**.

What is an audio language?

The DVD will play the sound in the language you select, provided this language is available on the disc. If it is not available on the disc the first language on the DVD will be used instead. The DVD Video Disc menu, if available, will also be displayed in the language you select.

Confirm with **OK**.



Select the desired language for the subtitles by pressing **CH-▼** or **CH+▲**.

What is the subtitle language?

The subtitles will be displayed in the language you select, provided this language is available on the disc. If it is not available on the disc the first language on the DVD will be used instead.

Confirm with **OK**.

Virgin mode

Menu Language

English
Español
Français
Italiano
Deutsch

Press OK to continue

Virgin mode

Audio Language

English
Español
Français
English
Italiano

Press OK to continue

Virgin mode

Subtitle Language

English
Español
Français
English
Italiano

Press OK to continue

Virgin mode

TV Shape

4:3 letterbox
4:3 panscan
16:9

Press OK to continue

Virgin mode

Country

Austria
Belgium
Denmark
Finland
France

Press OK to continue

Installation

Autom. search

Searching for TV channels

00 Channels found

Please wait

Press OK to continue

Autom. search

Autom. search complete

00 Channels found

Time 20:01
Year 2003
Month 01
Date 01

To continue
Press OK

Select the desired screen format position using **CH-▼** or **CH+▲**. These settings will only be used if you insert a DVD that contains this information.

Which screen formats can I select?

4:3 letterbox for a 'wide-screen' (cinema format) picture with black bars at the top and bottom.

4:3 panscan for a full-height picture with the sides trimmed.

16:9 for a wide-screen TV set (screen edge ratio 16:9)

Confirm with **OK**.

Select the country of your residence with **CH-▼** or **CH+▲**. If your country does not appear, select **Other**.

Why do I have to select a country?

To call up the specific settings for the respective country, you must first install the country.

Confirm with **OK**.

After you connect the aerial (or cable TV, satellite receiver, etc.) to the DVD recorder, press **OK**. The automatic TV channel search starts. 'HF1?' will appear on the display.

* The DVD recorder cannot find any TV stations

✓ Select channel 1 on the TV set. Can you see the stored TV channel on the TV set?

If not, check the cable connection from the aerial (aerial socket) to the DVD recorder and to the TV set.

✓ Please have patience.

The DVD recorder searches the entire frequency range in order to find and save the largest possible number of TV channels.

✓ If you have not connected an aerial, go through all the basic settings right to the end and then, if you wish, start the automatic search (see 'Automatic TV station search').

Problem

When the automatic TV channel search is complete, 'Autom. search complete' will appear on the TV screen. 'Time', 'Year', 'Month', 'Date' will then appear on the TV screen.


Check if the time in 'Time' is correct.

If required, change the time with the number buttons 0..9 on your remote control.

Select the next line with **CH+▲** or **CH-▼**.

- 16 Check if the displayed settings for 'Year', 'Month' and 'Date' are correct.
- 17 When all information is correct, save by pressing OK.


The initial installation is now complete.



Tip

Satellite receiver
If you are connecting a satellite receiver, please read the section on 'Using a satellite receiver'.

Decoder
If you are connecting a decoder, you must install it as described in the next section.



Problem

* Sound may be distorted on some TV channels.
✓ If the sound is distorted on any of the stored TV channels or if there is no sound at all, the wrong TV system may have been stored for the TV channel. Read 'Manual TV channel search' for information on how to change the TV system.


Using a satellite receiver

TV channels from a satellite receiver (connected to scart socket EXT 2 AUX-I/O) are received on the DVD recorder on programme number 'EXT2'.


If necessary, use the MONITOR button to switch to the internal tuner.
Select programme number 'EXT1' with 0 on the remote control and then select programme number 'EXT2' with CH-.

You should select the TV channels to be received by the satellite receiver directly on the receiver itself.

Allocating a decoder




Some TV channels send coded TV signals that can only be viewed properly with a purchased or rented decoder. You can connect such a decoder (descrambler) to your DVD recorder. The following function automatically activates the connected decoder for the TV channel you want to watch.



How do I allocate the decoder for Easy Link?
If your TC-V set supports 'Easy Link' the decoder must be assigned to the relevant TV channel on the TV set (see the operating instructions for your TV set). Settings cannot then be made in this menu.

- 1 Switch on the TV set. If required, select the programme number for the DVD recorder.
- 2 Switch on the DVD recorder using STANDBY/ON.
- 3 Use the CH+ and CH- buttons or the number buttons 0-9 on the remote control to select the TV channel for which you want to use the decoder. If necessary, use the MONITOR button to switch to the internal tuner.
- 4 Press the SYSTEM-MENU button on the remote control. The menu bar appears.
- 5 Select 'T' symbol with < or >.
- 6 Select 'Installation' using CH- or CH+ and confirm with >.
- 7 Select 'Manual search' using CH- or CH+ and confirm with >.
- 8 Select 'Decoder' using CH- or CH+.
- 9 Select 'On' with < or >.
- 10 Confirm with OK.
- 11 To end, press SYSTEM-MENU.

Installation	
Manual search	
Channel/freq.	CH
Entry/search	01
Programme number	01
TV channel name	BBC1
Decoder	On
TV system	PAL/SG
NICAM	On
Fine tuning	0
	To store Press OK




How do I switch the decoder off again?
Use > to select 'Off' in the 'Decoder' line on the screen (Decoder off).

Your decoder has now been allocated to this TV channel.

Manual TV channel search

In some cases, not all of the available TV channels may have been found and stored during initial installation. In this case, you will need to search for and store the missing or coded TV channels manually.



ENGLISH

Manual search with EasyLink

With 'Easy Link', the DVD recorder will automatically download the TV channels stored on the TV set. This is why some lines have no function. To store new TV channels, they must first be stored on the TV set. The information will then be transferred to the DVD recorder automatically.

Tip

- 1 Switch on the TV set. If required, select the programme number for the DVD recorder.
- 2 Switch on the DVD recorder using **STANDBY/ON**.
- 3 Press **SYSTEM-MENU** on the remote control. The menu bar appears.
- 4 Select **TV** symbol with **◀** or **▶**.
- 5 Select 'Installation' using **CH+▲** or **CH+▲** and confirm with **▶**.
- 6 Select 'Manual search' using **CH-▼** or **CH-▼** and confirm with **▶**.

Installation

Manual search
Channel/freq. CH 01
Programme number 01 BBC1
TV channel name Off
Decoder Off
TV system PAL-60
NICAM In
Fine tuning 0 To store
Press OK

- 7 In 'Channel/freq.', select the desired display using **▶**.
- 8 In 'Entry/search', enter the frequency or channel of the TV station using the number buttons 0..9.

*I don't know the channel for my TV station

✓ In this case, press **▶** to start the automatic search. A changing channel number/frequency number will appear on the TV screen. Continue the automatic search until you have found the TV channel you are looking for.

Problem

- 9 Using **◀** or **▶** in 'Programme number', select the programme number you want to use for the TV channel, e.g. '01'.

How can I change the symbol of a TV channel?

- 1 In 'TV channel name', press **▶**.
- 2 Select the desired symbol position using **◀** or **▶**.
- 3 Change the symbol at the symbol position with **CH-▼** or **CH+▲**.
- 4 Select the next symbol position in the same way.
- 5 Keep pressing **▶** until the cursor disappears.

Tip

How can I change the TV system of the TV channel?

In 'TV system', use **◀** or **▶** to select the TV system that produces the least distortion of picture and sound.

What is NICAM?

NICAM is a digital sound transmission system. Using NICAM, you can transmit either 1 stereo channel or 2 separate mono channels. However, if reception is poor and the sound distorted you can turn off NICAM.

In 'NICAM', select **Off** using **◀** or **▶**.

How can I improve the automatic process for storing channels?

To change the automatic process for storing channels (fine tuning), select **Fine tuning**.
Using **◀** or **▶** you can try to fine-tune the TV channel manually.

Tip

- 10 Press **OK** to store the TV channel.
- 11 To search for other TV channels, begin again at 1.
- 12 To end, press **SYSTEM-MENU**.

Sorting TV channels automatically (Follow TV)

When the automatic channel search function is activated, the TV channels are stored in a specific order. This may differ from the order in which the TV channels appear on your TV set. This function changes the order of the TV channels stored in your DVD recorder to match the order on the TV set.


This only works if the DVD recorder (EXT 1 TO TV-IO socket) and the TV set are connected with a scart cable.

What does EasyLink do?

If your TV set supports 'EasyLink', TV channels will be stored during initial installation in the same order as they appear on the TV set. To store the TV channels in a different order, you'll need to change the order on the TV set. When you start the Follow TV function the information is transferred again from the TV set.

- 1 Switch on the TV set. If required, select the programme number for the DVD recorder.

Automatic TV channel search



During installation, all available TV channels are searched for and stored. If the channel assignments of your cable or satellite TV provider change or if you are reinstalling the DVD recorder, e.g. after moving house, you can start this procedure again. This will replace the stored TV channels with the new ones.



What does Easy Link do?

With EasyLink, you can search for and store TV channels only on the TV set. These settings are accepted by the DVD recorder. Use this function to start the transfer of TV channels from the TV set.

- 1 Switch on the TV set. If required, select the programme number for the DVD recorder.
- 2 Switch on the DVD recorder using **STANDBY/ON**.
- 3 Press **SYSTEM-MENU** on the remote control. The menu bar appears.
- 4 Select **TA** symbol with **◀** or **▶**.
- 5 Select **'Installation'** using **CH-▼** or **CH+▲** and confirm with **▶**.
- 6 Select **'Autom. search'** using **CH-▼** or **CH+▲**.
- 7 Press **▶**.
- 8 The automatic TV channel search starts. This allows the DVD recorder to save all available TV channels. This procedure may take several minutes.
- 9 When all the TV channels have been found, **'Autom. search complete'** will appear on the TV screen.
- 10 To end, press **SYSTEM-MENU**.

Installation
Autom. search
Searching for TV channels
00 Channels found
Please wait

You can read about how to search for a TV channel manually in 'Manual TV channel search'.

ENGLISH



Problem

x1 cannot switch my TV set to programme number '1'.
✓ If you have connected additional devices to the **EXT 2 AUX-IO** socket, please disconnect these devices. Other connected devices may have switched the TV set to the programme number of the start socket.

- 2 Switch on the DVD recorder using **STANDBY/ON**.
- 3 Press the **SYSTEM-MENU** button on the remote control. The menu bar appears.
- 4 Select **TA** symbol with **◀** or **▶**.
- 5 Select **'Installation'** using **CH-▼** or **CH+▲** and confirm with **▶**.
- 6 Select line **'Follow TV with CH-▼ or CH+▲'** and confirm with the **▶** button.
- 7 Confirm the message on the screen with **OK**. **TV 01** will appear in the DVD recorder display.
- 8 Select programme number **'1'** on the TV set.

TV 01

- 9 Confirm with **OK** on the DVD recorder remote control. **'TV 1'** will appear in the display. The DVD recorder compares the TV channels on the TV set and the DVD recorder.
If the DVD recorder finds the same TV channel as on the TV set it stores it at **'01'**.



Problem

x1 'TV 1' will appear in the display. The DVD recorder is not receiving a video signal from the TV set.
✓ Check the connectors at both ends of the start cable.
✓ Check your TV's operating instructions to see which start socket is used for video signals.
✓ If the problem persists, you won't be able to use this feature. Please read **'Adding and clearing TV channels manually'**.




Tip

Deleting sorting
You can delete incorrect TV channel sorting by pressing **◀**.
Repeat steps 10 to 12 until you have assigned all the TV channels.
To end, press **SYSTEM-MENU**.

TV 02

Setting the language/country




You can select the country and, for DVD playback, the language for the subtitles and the audio language. Please note that with some DVDs the audio language and/or subtitle language can be changed only via the DVD menu.

For bilingual shows you can also select the sound channel of the TV station for recording. You also have the option of setting one of the displayed languages for the on-screen menu (OSD). However, the DVD recorder display will only display English text regardless of this setting.

- 1 Switch on the TV set. If required, select the programme number for the DVD recorder.
- 2 Switch on the DVD recorder using **STANDBY/ON**.
- 3 Press **SYSTEM-MENU** on the remote control. The menu bar appears.
- 4 Select **LA** symbol with **◀** or **▶**.
- 5 Select line 'Language' with **CH-▼** or **CH+▲**, and confirm with the **▶** button.

Select the appropriate line and confirm with **▶**.

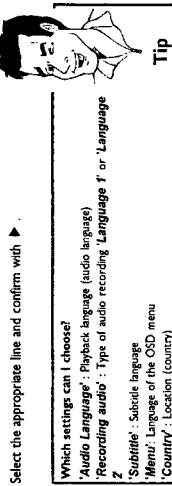


Tip

- 7 Select the appropriate setting using **CH-▼** or **CH+▲** and confirm with **OK**.
- 8 To end, press **SYSTEM-MENU**.


Switching over audio recording (2-channel sound)

Some TV programmes transmit an extra audio signal in stereo in addition to the normal audio signal (2-channel sound). In most cases this means that an additional language is available. If a TV programme is available in, say, English and German, German may be available as the second language.

To record TV programmes in stereo or 2-channel sound you can select Stereo or the language you want as the default setting. This setting does not become active until the sound of a TV programme is transmitted in 2-channel sound. When you play back the recording you can play back the sound only in the language you used for the recording.




Adding and clearing TV channels manually




After you have performed the automatic channel search you may not agree with the sequence in which the individual TV channels have been allocated to the programme positions (programme numbers). You can use this function to rearrange the TV channels already stored or to delete TV channels you don't want or those with poor reception.

ENGLISH

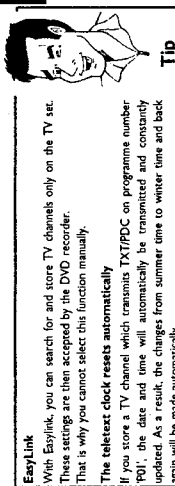

Tip

- 1 Switch on the TV set. If required, select the programme number for the DVD recorder.
- 2 Switch on the DVD recorder. Press the **SYSTEM-MENU** button on the remote control. The menu bar appears.
- 3 Select **LA** symbol with **◀** or **▶**.
- 4 Select 'Installation' using **CH-▼** or **CH+▲** and confirm with **▶**.
- 5 Select 'Sort TV channels' using **CH-▼** or **CH+▲** and confirm with **▶**.

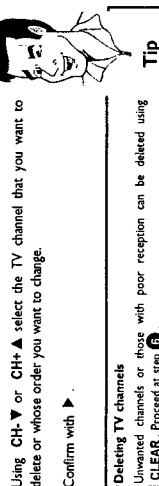


Tip

- 6 Using **CH-▼** or **CH+▲** select the TV channel that you want to delete or whose order you want to change.
- 7 Confirm with **▶**.


Deleting TV channels

Unwanted channels or those with poor reception can be deleted using **CLEAR**. Proceed at step 6.

- 8 Using **CH-▼** or **CH+▲**, shift the TV channel to the desired position and press the **◀** button. The DVD recorder will insert the TV channel.
- 9 Repeat steps 6 to 8 until you have resorted/deleted all the TV channels you want.
- 10 To store, press **OK**.
- 11 To end, press **SYSTEM-MENU**.





- 1 Switch on the TV set. If required, select the programme number for the DVD recorder.
- 2 Switch on the DVD recorder using **STANDBY/ON**.
- 3 Press **SYSTEM-MENU** on the remote control. The menu bar appears.
- 4 Select **TA** symbol with **◀** or **▶**.
- 5 Select line 'Language' with **CH-▼** or **CH+▲** and confirm with the **▶** button.
- 6 Select line 'Recording audio' and confirm with **▶**.
- 7 Select 'Language 1' or 'Language 2' with **CH-▼** or **CH+▲** and confirm with **OK**.
- 8 To end, press **SYSTEM-MENU**.



Setting the time and date

If the display shows an incorrect time or '---:--', the time and date must be reset manually. If a TV channel which transmits TXI/PDC (teletext/PDC) is stored under programme number 'P01', the time and date will automatically be taken from the TXI/PDC information.

- 1 Press **SYSTEM-MENU** on the remote control. The menu bar appears.
- 2 Select **TA** symbol with **◀** or **▶**.
- 3 Select 'Installation' using **CH-▼** or **CH+▲** and confirm with **▶**.
- 4 Select 'Time/Date' using **CH-▼** or **CH+▲** and confirm with **▶**.
- 5 Check if the time in 'Time' is correct. If required, change the time with the number buttons 0-9 on your remote control.
- 6 Check 'Year', 'Month' and 'Date' in the same way. To move between the fields, use **CH-▼** or **CH+▲**.
- 7 Check the displayed settings and confirm with **OK**. 'Stored' will appear briefly on the screen.
- 8 To end, press **SYSTEM-MENU**.




You can check or change many of the functions and settings of your DVD recorder via the system menu bar. The menu bar cannot be displayed during recording.

Symbols in the menu bar

Press **SYSTEM-MENU** to open and close the menu bar (main menu). Use **◀** and **▶** to select the relevant function. Use **CH-▼** to confirm the function and go either to another menu or execute the function directly. Some functions may not be available, depending on the disc inserted.

Menu bar 1

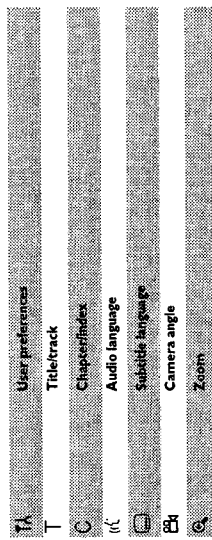

Menu bar 2



While menu bar 1 is being displayed you can go to menu bar 2 by pressing **▶** again.



Operating mode symbols

	Recording
	Stop
	Playback
	Playback-Pause
	Record-Pause
	Search forwards (8x speed)
	Search backwards (8x speed)
	Slow motion

Tuner information box

This field is located in the bottom left-hand corner of the screen. The aerial signal, the TV channel and the TV channel name for the selected programme are displayed.

	Current channel (selected input socket)
	No signal The TV channel is not available/the additional device is not connected or it is switched off
	Copy-protected signal

Timer information box

This box appears above the tuner information box. When a timer recording is set, it shows the timer icon and the start time or date of the first programme to be recorded. If no timer recording is scheduled, the current time is displayed. This box disappears during playback of a disc or after a recording starts.

	Timer starts on the day shown
	OTR recording runs until the stop time displayed
	Current time No timer event programmed

Field for temporary messages

The top left corner of the menu line contains a field for temporary messages relating to the various operating modes. This information appears briefly on the screen when certain disc functions have been activated:

ENGLISH

	Shuffle
	Scan
	Repeat entire disc
	Repeat title
	Repeat track
	Repeat chapter
	Repeat from A to the end
	Repeat from A to B
	Camera angle
	Child lock enabled
	Resume playback
	Illegal action


Status field

The status field shows the current operating mode (status) of the DVD recorder and the type of disc inserted. This display can be disabled.

Disc type symbols

	DVD+RW
	DVD+R
	DVD-Video
	Video-CD
	No disc
	Error

6 playback



General notes on playback

With this DVD recorder you can play back the following systems:

- DVD Video
- (Super)Video CD Disc
- DVD+RW Disc
- DVD-R Disc
- DVD-RW (video mode, finalised)
- DVD-R
- CD-R
- CD-RW
- Audio CD
- MP3 CD

You can operate the video recorder using the remote control or the buttons on the front of the DVD recorder.

ENGLISH

Inserting a disc



- 1 Press the **OPEN/CLOSE** button on the front. The disc tray will open. While the disc tray is opening, **OPENING** and then **READY OPEN** will appear in the display when the tray is fully open.
- 2 Carefully place the disc in the tray with the label facing up and press **PLAY** or **OPEN/CLOSE**. **CLOSING** and then **REOPENING** will appear in the display. The information on the disc will be read.

How do I Insert a double-sided DVD?


Double-sided discs do not have labelling over the whole surface. The labelling for each side is in the centre of the disc. To play a side its label must be facing up.



Opening/closing the tray using the remote control

You can open and close the disc tray using the remote control. Press and hold the **STOP** button on the remote control until the dialog box shows "OPENING" or "CLOSING".

Playback starts automatically.



A menu may appear when a DVD is played back. If the titles and chapters are numbered, press a number button on the remote control. You can also use the ◀ ▶ CH+ ▲ CH- ▼ buttons or number buttons 0-9 to select a menu item and confirm with **OK**. You can also access the menu using **DISC-MENU** on the remote control. For further information see "Playing a DVD video disc".





When a DVD+RW is played back the index overview appears. Using CH- ▾ , CH+ ▲ , ◀▶▶▶ , ▶▶▶▶ select the title you want to play back.

Confirm with OK.







If playback does not start automatically, press **PLAY** ▶
For further information, see "Playing an audio CD."



If the  symbol appears in the display, start playback by pressing **PLAY**  .
If a menu appears on the screen, use the remote control buttons indicated on the screen to select the menu option you want (PREV= , NEXT= ) or with the number buttons **0-9** .
For further information see "Playing a (Super) Video CD".

Playing a DVD video disc

- 1 If playback does not start automatically, press **PLAY** . This will appear on the display: title, chapter, elapsed time.
- 2 To stop playback, press **STOP**  on the remote control or  on the DVD recorder.
- 3 To eject the disc, press **OPEN/CLOSE**  on the front of the DVD recorder.



Playing a DVD+RW/+R disc

- 1 If the disc is write-protected or a finalised DVD+R disc, playback starts automatically.
- 2 If playback does not start automatically, use the CH-▼ or CH+▲ button to select the title you want to play on the index screen.
You can also use the ◀◀ or ▶▶ button on the front.
- 3 Press the PLAY▶ button.
This will appear on the display:
title number, recording quality.



Problem

*1 can see the message "COPY/SEC".
✓ The disc does not contain any recordings.

- 4 To stop playback, press STOP■ on the remote control or ■ on the DVD recorder.

- 5 To eject the disc, press OPEN/CLOSE▲ on the front of the DVD recorder.



What should I note when playing back different recording types (qualities)?
The correct recording quality 'M1, M2, M2x, M3, M4, M6' will automatically be selected during playback.
For more information see the section on 'Selecting the recording type (quality)' in the chapter on 'Manual recording'.

Playing an audio CD

You can also use the DVD recorder to play audio CDs.

- 1 Insert an audio CD. Playback starts automatically.



Tip

Audio CD display
If the TV is on, the audio CD screen appears automatically.
During playback, the current track number and its elapsed playing time will show on the TV screen and on the recorder display.

- 2 Stop playback using STOP■. The number of tracks and the total time are displayed.

Playing an MP3 CD

MP3 (MPEG1 Audio Layer-3) files are highly compressed music files. Using this technology the data volume can be compressed by a factor of 10. This means it is possible to record 10 hours of music in CD quality on a single CD-R/W.

When creating MP3 CDs please note the following:

File system: ISO9660
Directory structure: maximum of 8 levels
Format: *.mp3
Filenames: maximum of 12 characters (8+3)
Maximum of 32 albums, 999 titles
Supported sampling frequencies: 32, 44.1, 48 (kHz). Music with sampling frequencies other than these will be skipped.
Supported bit rates: 32, 64, 96, 128, 192, 256 (kbps)
ID3 Tag: Version 1, 1.1. In later versions the directory name is displayed as the album and the filename as the title.

Important notes for playback:

Only the first session of a multi-session CD will play back.

- 1 Insert an MP3 CD. Playback starts automatically.



Tip

MP3 CD display

If the TV is on, the MP3 CD screen appears automatically.
During playback, the current track number and its elapsed playing time will show on the TV screen and on the recorder display.
During stopped playback (STOP■ button), the numbers of the albums will show on the TV screen and on the display.
Further information on the album, track and artist will also be displayed if included in the ID tag.

- 2 Stop playback using STOP■. The number of albums is displayed in the display.



Tip

Additional playback features


You can also use the TIC button to select titles and albums.
1 Press the TIC button and use the ▶ or ◀ button to select the 'T' symbol for title or 'C' for chapter.
2 Use the CH-▼ or CH+▲ buttons or the number buttons 0-9 on the remote control to select the number of the title/chapter.
You can also use the repeat functions (PLAY MODE button).

7

Additional playback features

Playing a (Super) Video CD

(Super) Video CDs may be equipped with PBC (Play Back Control). This means that special playback functions (menus) can be directly selected. The video CD must be PBC compatible (see CD case).
PBC is active in the default settings.

- 1 Insert a (Super) Video CD.
If the  symbol appears in the display, start playback by pressing **PLAY**.
- 2 If a menu appears on the screen, use the remote control buttons indicated on the screen to select the menu option you want (PREV=◀, NEXT=▶) or with the number buttons 0-9.
If a PBC menu consists of a list of titles, you can select a title directly.
- 3 Use **RETURN** to go back to the previous menu.
- 4 Stop playback using **STOP**.

ENGLISH

Changing to another title/chapter

If there is more than one title or chapter on a disc you can change to another title or chapter as follows. However, if there are several chapters within a title, these will be selected. The title can then still be selected via the menu bar.

- 1 During playback, press **▶▶** to go to the next title/chapter. Press **◀◀** to return to the start of the current title/chapter. Press **◀◀** twice to return to the start of the previous title/chapter.



Use the **TIC** (title/chapter) button

- 1 Press **TIC** (title/chapter) and then use **CH+▲** or **CH-▼** to select the appropriate title.
- 2 Make sure the symbol 'T' (title) is selected in the menu bar.
- 3 Use **TIC** to select chapters within a title. Press **TIC** and use **▶** to select the 'C' symbol (chapter).

Tip

Now select the appropriate chapter with **CH+▲** or **CH-▼**.

Searching a disc

You can search the disc for a recording at 4x, 8x or 32x playback speed. Other speeds can only be selected via the menu bar (▶▶).

- 1 During playback, press and hold **◀◀** (reverse) or **▶▶** (forward) to switch to the search feature. You can switch between the playback speeds using **◀◀/▶▶**.
- 2 To continue playback, press **PLAY** twice at your chosen location.



Problem

- * No sound
- ✓ The sound is switched off in search mode. This is not a fault in your machine.

Search feature via menu bar

- 1 During playback, press **SYSTEM-MENU** on the remote control. The menu bar will appear at the top of the screen.
- 2 Select the **▶▶** symbol using **▶** or **◀** and confirm with **CH-▼**.
- 3 You can now use the **◀** or **▶** button to select different forward and backward search speeds.
- 4 If necessary, switch the menu bar off with the **SYSTEM-MENU** button.
- 5 To continue playback, press **PLAY** twice.



Tip

Still picture

- During playback, press **PAUSE II** to stop playback and display a still picture.

001 2:04

Frame advance via menu bar

- During a still picture, press **SYSTEM-MENU** on the remote control. The menu bar will appear at the top of the screen.
- Select the **◀▶** symbol using **▶** or **◀** and confirm with **CH-▼**.
- You can now use the **◀** or **▶** button to go forwards or backwards one frame at a time.
- If necessary, switch the menu bar off with the **SYSTEM-MENU** button.

Tip

- To continue playback, press **PLAY ▶**.

Slow motion

- During playback, press **PAUSE II** on the remote control. Now hold down **⏮** or **⏭** to switch to slow motion.
- You can switch between different speeds using **⏮** or **⏭**.

Slow motion via menu bar

- During playback, press **PAUSE II** and then **SYSTEM-MENU** on the remote control. The menu bar will appear at the top of the screen.
- Select the **⏮** symbol using **▶** or **◀** and confirm with **CH-▼**.
- You can now use the **◀** or **▶** button to select different forward and backward slow motion speeds.
- If necessary, switch the menu bar off with the **SYSTEM-MENU** button.

Tip

- To continue playback, press **PLAY ▶** twice.

Search by time

Using this feature you can select where playback should start (select elapsed time).

- During playback, press **SYSTEM-MENU** on the remote control. The menu bar will appear at the top of the screen.
- Select the **⌚** symbol using **▶** or **◀** and confirm with **CH-▼**. Playback is stopped and a box appears on the screen showing the elapsed time.



Problem

- Enter the start time with the digit keys 0-9 from where playback should start.
- Confirm with **OK**.

* The time entered will flash on the screen

✓ The selected title is shorter than the time entered. Enter a new time or cancel the function by pressing **SYSTEM-MENU**.

- Playback starts at the time you entered.

Repeat/Shuffle play

You can mark entire sections or the whole disc for endless playback. Depending on the type of disc (DVD video, DVD-RW, video CD) you can select a chapter, title or the entire disc.

- Select the desired chapter, title or the entire disc and start playback.
- During playback, press **PLAY MODE**. By pressing **PLAY MODE** again you can choose from the following options:
 - Repeat**: repeat chapter (DVD only)
 - Repeat track/title**
 - Repeat entire disc** (Video CD, Audio CD only)
 - Shuffle**
 - Display disappears**: no repeat
- To end the repeat, press the **STOP ■** button. You can also keep pressing the **PLAY MODE** button until the displays disappear.

Repeating a passage (A-B)

You can repeat a particular passage within a title/chapter. You need to indicate the start and end of the passage.

- During playback, press **PAUSE II** at the start point. You will see a still picture.
- Keep pressing **PLAY MODE** until **⏮** appears on the screen. Press **PLAY ▶** to start playback.
- When the end point is reached, press **OK**. **⏮** appears on the TV screen. Playback now takes place within these points.
- To end the repeat, press the **STOP ■** button. You can also keep pressing the **PLAY MODE** button until the displays disappear.

- 6 Confirm with OK.
- 7 To stop the feature, press **PLAY** and then **SYSTEM-MENU**.


Select the audio language

Many pre-recorded DVD discs have more than one audio language. The language initially selected for playback will be the one you selected when you first set up the DVD recorder. However you can change the audio language of the inserted disc at any time. You can change the audio language either using the menu of the inserted disc (**DISC-MENU** button) or the **AUDIO** button. The audio languages for DVD playback in the two menus may be different. Please note that with some DVD's the audio language and/or subtitle language can be changed only via the DVD menu.

- 1 During playback press **AUDIO**.
- 2 Select the required audio language using **CH-▼** or **CH+▲**. You can also enter the number directly using the number buttons **0..9**.
- 3 Play continues in the new audio language.


Subtitles

Many pre-recorded DVD discs have more than one subtitle language. The language initially selected for playback will be the one you selected when you first set up the DVD recorder. However you can change the subtitle language of the inserted disc at any time. You can change the subtitle language either using the menu of the inserted disc (**DISC-MENU** button) or the menu bar (**SYSTEM-MENU** button). The subtitle languages in the menus may differ.

- 1 During playback press **SYSTEM-MENU** and select the  icon using **▶**.
- 2 Select the required subtitle language using **CH-▼** or **CH+▲**. You can also enter the number directly using the number buttons **0..9**. You can switch off subtitles again with **0** or by pressing **off**.
- 3 Playback continues in the new subtitle language.

Scan feature

This feature plays back the first 10 seconds of each chapter (DVD) or track (CD).

- 1 During playback, press **PLAY MODE**. Select  using **PLAY MODE**.
- 2 After 10 seconds the DVD recorder switches to the next chapter/index. To start playback at the relevant chapter/index press **STOP** and then **PLAY**.


Camera angle

If a DVD contains scenes that have been shot from different camera angles you can select these camera angles for playback.


- 1 During playback, press **PAUSE II**. You will see a still picture.
- 2 Press **SYSTEM-MENU** and select the  icon using **▶**.



Problem


* The  symbol will be hidden


✓ The selected scene has been shot from only one camera angle. This feature is therefore not available. For more information please read the cover of your DVD disc.

- 3 Select the required camera angle with **CH-▼** or **CH+▲**. You can also directly enter the number with the number buttons **0..9**.
- 4 After a short time, playback will resume from the new camera angle. The  symbol will remain visible until a scene starts for which there is only one camera angle.

Zoom feature

The Zoom feature allows you to enlarge the video image and pan through the enlarged image.

- 1 During playback, press **PAUSE II**. The DVD recorder switches to 'PAUSE'. You will see a still picture.
- 2 Press **SYSTEM-MENU** and select the  icon using **▶**.
- 3 Select the required zoom factor using **CH-▼** or **CH+▲**.
- 4 When 'press OK to pan' appears on the screen, the zoom process is complete.
- 5 Press **OK**. Using **CH+▲**, **CH-▼**, **▶**, **◀** select the part of the image you wish to view.



General

Which discs can I use for recording?
With this DVD recorder, you can record on two types of DVD:
DVD+RW
This disc can be written to and then the contents deleted.
DVD+R
This type of disc can only be recorded once.
If you want to play this DVD in a DVD player it must be finalized using the 'Finalise disc' function. It is not possible to make further recordings using this disc.
If this disc is to be played in a DVD recorder it must not be finalized. Recordings can be added and deleted. The disc space (playback time) from the deleted recording cannot be recovered for further recordings.

Use the 'Manual recording' function to spontaneously start recording (e.g. to record a TV show already in progress).
In the 'index display' select the title to be overwritten or 'Empty title' with **CH+ ▾**, **CH+ ▲**. If you insert recordings between existing recordings, check the lengths of the old and new recordings. If the new recording is too long the subsequent recording (title/chapter) will be overwritten.

Insert new recordings at the end of all existing recordings (Safe Record)
To add a new recording at the end of the last recording on the disc, hold down the **REC/OTR** button until the message **SAFE REC** appears on the display.
For DVD+R discs each new recording is always added at the end of all previous recordings as existing recordings cannot be overwritten.
End of disc is reached
If the end of a disc is reached during recording, recording will stop and the Recorder will turn itself off automatically.

Tip

Please refer to section 'Recording without automatic switch-off' if you want to manually start and stop your own recording.
If you want to start a recording manually but have it stopped automatically read the section 'Recording with automatic switch-off' (e.g. not to record to the end of the disc).
Read the section 'Automatic recording from a satellite receiver' if you want a recording to be controlled automatically by a satellite receiver.
Read the section 'Direct record' if you want to record a programme currently being shown.

ENGLISH

Recording without automatic switch-off

1 Switch on the TV set and select the programme number for the DVD recorder.

2 Insert a disc on which the recording is to be made. This disc is then checked for content and system. **REC/OTR** will appear on the display.

*** Index display**
✓ A DVD+RW disc has been inserted that already contains recordings. Use the **CH+ ▲** or **CH- ▼** button to select the point where the recording is to start.
✓ The message **TIME LIMIT** appears in the display.
✓ The disc inserted is a blank DVD disc.
✓ A dialog box appears asking you whether you want to delete the contents or eject the disc.
✓ The disc inserted is a DVD+RW but its contents are not DVD video-compatible (e.g. a data disc). Recordings on this disc can only be made if the entire disc is first deleted with the **REC/OTR** button.
✓ The message **Title limit** appears on the screen if a recording is to be made.
✓ A disc may contain a maximum of 48 titles (including blank titles). Delete titles or change the disc.

Problem

3 If necessary, use the **MONITOR** button on the remote control to switch to the internal tuner in the DVD recorder.

4 Use **CH+ ▲** or **CH- ▼** to select the programme number (station name) you want to record. This will appear on the display.

1 FREE TITLE PQ1

Programme numbers of the external inputs:
EXT 1 Start socket at the back EXT 1 TO TV-INO
EXT 2 Start socket at the back EXT 2 AUX-INO
EXT 3 Front S-Video sockets S-VIDEO / left AUDIO right
EXT 4 Front video/audio sockets AV S-VIDEO / left AUDIO right
Switching between the S-VIDEO and VIDEO sockets takes place automatically. If both sockets are in use, the signal at the S-VIDEO socket has priority.
EXT 5 Digital Video (Link) front socket DV IN

Tip

5 To start recording, press **REC/OTR** on the remote control or **RECORD** on the DVD recorder.

If you want to start the recording at the end of the existing recordings, hold down the **REC/OTR** button until the message **SAFE REC** appears on the display.

For DVD+R discs each new recording is always added at the end of all previous recordings as existing recordings cannot be overwritten. This will, for example, appear in the display:

01 4:45:51 PM

Insert chapter markers

During recording you can mark scenes to you can find them or hide them later.
During recording, press FSS/X at the start point. 'Inserting marker' appears on the TV screen. In the display, the number of the CHAPTER increases by one.
For further information on titles and chapters, see the section on 'Changing to another title/chapter' in Playback.

Tip

6

Use the STOP button on the remote control or on the machine to stop the recording. 'FSS/X' will appear on the display. The DVD recorder is writing the list of contents. Wait until the message disappears from the display. The recording is then complete.

* The display will read 'FSS ERR'

✓ Recording could not be completed correctly because of a disc error. Check the disc and clean it if necessary.

Problem

Making recordings on DVD-R discs compatible

If you want to play back the recording on a DVD player, you need to finalise the disc in the DVD recorder. You prepare your DVD for use in a DVD player using the 'Finalising' feature. See 'Finalising DVD-R discs' in 'Managing the disc contents'.

Tip

Interrupt recording (Pause)

1 During recording press PAUSE II, for example to avoid recording the commercials.

2 To continue recording, press REC/OTR.

End recording

To end the recording, press the STOP button. Wait until 'FSS/X' disappears from the display.

Tip

Recording with automatic switch-off (OTR one-touch-recording)

- 1 Insert a disc.
- 2 If necessary, use the MONITOR button on the remote control to switch to the internal tuner in the DVD recorder.
- 3 Use CH+ or CH- to select the programme number (channel name) you want to record.
- 4 Press REC/OTR on the remote control.
- 5 Each time you press REC/OTR you will add 30 minutes to the recording time.

How can I cancel the recording time I have just entered?

To delete an entry, press CLEAR while the display shows the recording time.

Preventing accidental erasing of discs

To ensure you don't accidentally delete a recording you can protect the entire disc. You can only ever protect the entire disc. You cannot protect individual recordings.

What happens with DVD-R discs?

As long as these discs are not finalised, they can be protected against accidental erasure in the same way as DVD-RW discs.

- 1 Insert the disc to be protected.
- 2 While the index screen is displayed press STOP on the remote control. The first title is highlighted.
- 3 Press CH+ . This takes you to the disc info screen.
- 4 Press the button. Select the 'Protection' line. Confirm with .
- 5 Select 'Protected' with the CH- button and confirm with OK.
- 6 Press and then DISC-MENU to terminate.

Selecting the recording type (Quality)

You can select the picture quality of the recording using the recording quality feature and hence the maximum recording time per disc. You can check the quality by changing the recording mode and then watching the picture from the built-in tuner (MONITOR button). During playback, the correct picture quality will automatically be selected.

- 1 Switch on the TV set. If required, select the programme number for the DVD recorder.
Select the record mode with the button **REC MODE** on the remote control.

Which recording types can I choose?

'M1': High Quality offers the best picture quality and a recording time of 1 hour.
'M2': Standard Play (pre-recorded DVD quality) offers standard picture quality and a recording time of 2 hours.
'M2X': Standard Play plus (better than S-VHS quality) offers standard picture quality and a recording time of 2.5 hours.
'M3': Long Play (S-VHS picture quality). Recording time of 3 hours.
'M4': Extended Play (better than VHS picture quality). Recording time of 4 hours.
'M5': Super Long Play (VHS picture quality). Recording time of 6 hours.

Can I select the recording type via a menu as well?

- 1 Press the **SYSTEM-MENU** button.
- 2 Select the symbol with ◀ or ▶.
- 3 Select 'Record settings' using CH- ▾ or CH+ ▴ and confirm with ▶.
- 4 In the line 'Record mode' select the recording type with ◀ or ▶.
- 5 Confirm using OK and **SYSTEM-MENU**.
- 6 If you have selected the recording mode 'M3', 'M4' or 'M5', you can select the settings 'Standard' (Standard) or 'Sport' (for rapid movements) in the **Filter mode** line.



Tip

ENGLISH

Lining up recordings within a title (assemble cut)

The entire disc is now protected. If an attempt is made to record on a protected disc, 'DISC LOCKED' will appear on the display and 'Disc locked' will appear on the screen.

On a recorded DVD-RW disc you can add another recording to an existing title. This recording is added to the title as a 'chapter'. The existing information will be overwritten starting from this point. Titles will also be overwritten that follow the current title depending on the length of the new recording. The recording type (Quality) will be taken from the current title. To play back this recording, press **SYSTEM-MENU** and use the ▶ button to select the 'C' (Chapter) symbol. You can also use the **TIC** key.

For further information, see 'Changing to another title/chapter' in 'Playback'.



What happens with DVD-R discs?

New recordings on DVD-R discs can only be added after existing recordings. It is not possible to overwrite existing recordings on DVD-R discs.

- 1 In the index display, find the title to which the new recording is to be added.
- 2 Look at the last minute of the old recording (playback).
- 3 Press **PAUSE II** on the remote control at the position where the new recording is to go. 'II' will appear on the screen.
- 4 To monitor the recording you can press **MONITOR** to switch to the internal tuner.
- 5 Now start recording as usual by pressing **REC/OTR** on the remote control. The new recording will be inserted.
- 6 Stop recording with **STOP**.

Automatic recording from a satellite receiver (Sat recording)

You can use this function if you own a satellite receiver that can control other devices via a start cable and a programming function (timer). For more information, please see the operating instructions for the satellite receiver.

- 1 Switch on the TV set. If required, select the programme number for the DVD recorder.
- 2 Press **SYSTEM-MENU** on the remote control. The menu bar appears.
- 3 Select **⏏** symbol with **◀** or **▶**.
- 4 Select 'Record settings' using **CH- ▼** or **CH+ ▲** and confirm with **▶**.
- 5 Select 'Sat record' using **CH- ▼** or **CH+ ▲**.
- 6 Select 'EXTZ' with **◀** or **▶**.



Tip

Switching off 'Sat Recording'

To switch off the function, select **Off** using **▶** or **◀**.

Confirm with **OK**.

- 7 Use a start cable to connect start socket **EXT 2 AUX-I/O** on the DVD recorder to the corresponding start socket on the satellite receiver.

- 8 To end, press **SYSTEM-MENU**.

- 9 Insert a disc you want to use for recording.

- 10 Programme the satellite receiver with the required information (programme number of the TV channel, start time, end time). If necessary, please see the operating instructions for your satellite receiver.

- 11 Switch off the DVD recorder using **STANDBY ⏏**. 'SAT' also appears in the display to indicate that the function is active.

The DVD recorder is now ready to record. The start and end of the recording is controlled via start cable **EXT 2 AUX-I/O**.

ENGLISH

Direct Record

Can you record the right TV channel in seconds when the DVD recorder is switched off? No problem. If recording is started manually, the switched-off DVD recorder takes the current TV channel from the TV set via the start cable. You will find more information on how to switch 'Direct record' on or off in the next section Direct record.

How does Direct Record work?

The DVD recorder compares the TV channel selected on the TV set with its stored TV channels via the start cable. If the same TV channel is found, it switches the DVD recorder to the corresponding programme number and starts recording.

Please do not change channel on the TV during the search. This could affect the tuning of the DVD recorder.



- 1 On the TV set, select the programme number you want make the recording from.

- 2 Press **REC/OTR** with the DVD recorder switched off.

The display will read 'SFI'.

✓ The DVD recorder is comparing its saved TV channels with those of the TV set. Please do not change the TV channel on the TV set while 'SFI' is shown in the display.

'SFI' appears in the display

✓ This TV channel could not be found in the DVD recorder's memory. Check that all TV channels saved on the TV set are available on the DVD recorder. If required, save any missing channels. Please read 'Manual TV channel search' in 'Installing your DVD recorder'.

✓ Check the connectors at both ends of the start cable.

✓ Check your TV's operating instructions to see which start socket is used for video signals.

✓ If the problem persists, you won't be able to use this feature.




Problem

- 3 Stop recording with **STOP**.

9

Managing the disc contents


General



When a recording is made to disc, the following additional information is also stored at the beginning of the recording:

- Name of the recording
- If the TV station does not transmit a name, only the channel number and time will be stored as the name
- Length of the recording
- Record type (Quality)
- Date of the recording
- Index picture of the recording

A marker will be set every 5.6 minutes if the 'Auto chapters' function is activated in the 'Record settings' menu. This marker is known as a 'chapter'. These markers can be changed when the recording has finished.

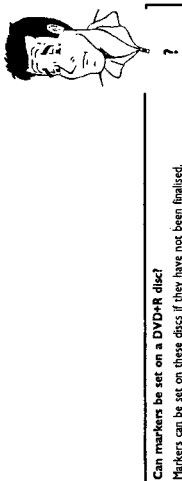

Can markers be set on a DVD-R disc?
Markers can be set on these discs if they have not been finalised.

It is also possible to add 'chapters' later. This means that scenes you do not want to see during playback, such as commercials, can be hidden or skipped. During playback you can watch your recording as a continuous sequence without the hidden chapters.

Select from the following chapters:

'Favorite Scene Selection' to divide the disc into chapters or to manage the chapters.

'Editing recording titles (name)' to change the recording names.

'Play complete title' to play the entire title including the hidden chapters.

'Delete recording/title' to delete the relevant title and therefore also the recording.

'Disc settings' to change the general settings of the disc.

Switching 'Direct Record' on or off

- 1 Switch on the TV set. If required, select the programme number for the DVD recorder.
- 2 Press **SYSTEM-MENU** on the remote control. The menu bar appears.
- 3 Select **TR** symbol with **◀** or **▶**.
- 4 Select 'Record settings' using **CH-▼** or **CH+▲** and confirm with **▶**.
- 5 Select 'Direct Record' using **CH-▼** or **CH+▲**.
- 6 Select 'On' (Direct Record on) or 'Off' (Direct Record off) using **◀** or **▶**.
- 7 Confirm with **OK**.
- 8 To end, press **SYSTEM-MENU**.
- 9 Switch off with **STANDBY**.

ENGLISH


Favorite Scene Selection

In this menu you can adapt a title to suit your particular needs. You can insert/delete chapter markers, hide chapters, select a new index, or split up a title. Press **FSS X** on the remote control during recording to open this menu.

Insert chapter markers

During recording you can set or delete chapter markers within a title. The maximum number of chapters per disc is 124 and 99 per title. If one of these limits is reached the following message will appear on the screen: **'Chapter limit'**. You need to delete some markers before you can insert new ones or make recordings.

- 1 During playback, press **FSS X** on the remote control at the appropriate point. The **'Favorite Scene Selection'** menu appears on the TV screen.




Tip
 'X' will appear on the screen:
 This DVD is write-protected or the disc is a finalised DVD-R. Subsequent changes cannot be made.

- 3 To stop this function, press **FSS X**.

Hiding chapters

Initially, all the chapters are visible. You can hide chapters for playback (e.g. advertisements) or make them visible again. In editing mode, hidden chapters are shown as dimmed.



- 1 While the relevant chapter is playing, press **FSS X** on the remote control. The **'Favorite Scene Selection'** menu appears on the TV screen.

How can I select different chapters?

- 1 Press the **T/C** button on the remote control. Titles and chapters are displayed at the top of the screen.
- 2 Select title (T) or chapter (C) with **▶** or **◀**.
- 3 Use **CH+▲** or **CH-▼** to select the title/chapter channel you want to edit.

- 2 Select **'Current chapter'** using **CH-▼**.

- 3 Using **▶** select **'hidden'**. The picture is shown darker.



Tip

Switching quickly
 You can switch between show chapters (**visible**) and hide chapters (**hidden**) quickly and easily using **SELECT**.


- 4 To end, press **FSS X**.

During playback this chapter will be skipped.

If the chapter is not visible, select **'visible'** in step 3 with **▶**.

Deleting chapter markers

Within a title you can delete either all markers or individual markers.



- 1 While the relevant chapter is playing, press **FSS X** on the remote control. The **'Favorite Scene Selection'** menu appears on the TV screen.

How can I select different chapters?

- 1 Press the **T/C** button on the remote control. Titles and chapters are displayed at the top of the screen.
- 2 Select title (T) or chapter (C) with **▶** or **◀**.
- 3 Use **CH+▲** or **CH-▼** to select the title/chapter channel you want to edit.

- 2 Use **CH-▼** to select either **'Delete marker'** for this chapter or **'Delete all markers'** for all chapters within the selected title.

- 3 Confirm with **OK**.

- 4 To end, press **FSS X**.




Tip

Changing the index picture

Normally the first picture of a recording is used as the index picture. You can however choose any picture from the recording as the index picture.

- 1 During playback, search for location of the new index picture. Press the **PAUSE** button.
- 2 Press the **FSS** button. The **'Favorite Scene Selection'** menu appears on the TV screen.
- 3 Select line **'New index picture'** and confirm with **OK**.
- 4 Start the change with **OK**. **'Updating menu'** appears on the TV screen.



Once the revision has been completed successfully the DVD recorder reverts to the index overview.

Splitting titles


You can split a title into several sections (titles) of any size. Each of these sections (titles) is identified by its own index.

Note: This split cannot be undone.



Can I split titles on DVD-R discs?
As recordings on DVD-R discs cannot be overwritten, it is not possible to split titles.

- 1 While the relevant title is playing, press **FSS** on the remote control. The **'Favorite Scene Selection'** menu appears on the TV screen.
- 2 Select **'Divide title'** and confirm with the **OK** button.
- 3 If you are sure, press **OK** to start the process. **'Dividing title'** appears on the TV screen.
- 4 Wait until the new title is displayed with an index picture in the index picture overview.




The process of splitting the title is now complete.

Editing recording titles (name)

Some TV stations transmit the title (name) of a programme. In this case, the name will be included automatically (e.g. 'ROCKY'). Otherwise, the only the programme number (programme name) and the time are stored as the name of the recording. The name of the recording can only be changed after the recording has been completed.


- 1 Press the **STOP** button or during playback press **DISC-MENU**.
- 2 Using **CH+▲** or **CH-▼** select the title whose name you want to edit and confirm with **▶**. The menu for editing names appears.
- 3 Select **'Name'** using **CH+▲** or **CH-▼** and confirm with **▶**.
- 4 Using **▶** or **◀** select the position where the letter/number/icon is to be changed/re-entered.
- 5 Change the icon using **CH+▲** or **CH-▼**. You can switch between upper and lowercase using **SELECT**. You can delete the character using **CLEAR**.
- 6 Repeat 4 and 5 until you have made the changes you want.
- 7 Save the new name with **OK**. **'Storing name'** appears on the TV screen for confirmation.
- 8 To end, press **◀**.



Playing the entire title

If you have hidden certain sections (chapters) of a title, this setting lets you watch the entire title including the hidden sections. To do this, proceed as follows:


- 1 Press the **STOP** button or during playback press **DISC-MENU**.
- 2 Using **CH+▲** or **CH-▼** select the title you want to play all of and confirm with **▶**. The title editing menu will appear.
- 3 Select **'Play full title'** using **CH+▲** or **CH-▼** and confirm with **OK**.
- 4 Playback starts automatically. The title is played in its entirety - including the hidden chapters.



Deleting recordings/titles

You can delete specific recordings from a disc. To do this, proceed as follows:

- 1 Press the **STOP** button or during playback press **DISC-MENU**.
- 2 Using **CH+▲** or **CH-▼** select the title you want to delete and confirm with **▶**. The title editing menu will appear.
- 3 Select 'Erase this title' using **CH+▲** or **CH-▼** and confirm with **OK**. 'This will completely erase this title' appears on the TV screen. Press **OK** to confirm.
- 4 If you want to delete this title, press **OK** to confirm. Otherwise press **◀**.
- 5 'Erasing title' appears on the TV screen.
- 6 At this point 'Empty title' appears in the 'index picture display'. A new recording can now be made here.



Can titles be deleted from a DVD-R disc?

Titles on DVD-R discs are only marked as deleted. 'Deleted title' will appear in the display instead of 'Empty title'. During playback the 'deleted' title is skipped. The space used for this title cannot be used again as the title has not been physically deleted. Once the disc has been finalised no further changes can be made.

Disc settings


This screen appears before the first title and contains general information about the current disc.

You can:

-) change the name of the disc
-) activate or deactivate write protection on the disc
-) Finish editing (make the disc DVD compatible)
-) finalise a DVD-R
-) delete a DVD-RW


To get to this display, proceed as follows:

- 1 Press the **STOP** button or during playback press **DISC-MENU**.
- 2 Select the first title with **CH+▲** or press **STOP**.
- 3 Press the **CH+▲** button. The disc info display will appear.



Changing the disc name

- 1 In the 'Disc info display' press **▶**. The 'Settings for' menu appears on the TV screen.
- 2 Select 'Disc name' using **CH+▲** or **CH-▼** and confirm with **▶**.
- 3 Using **▶** or **◀** select the position where the letter/number/icon is to be changed/re-entered.
- 4 Change the icon using **CH+▲** or **CH-▼**. You can switch between upper and lowercase using **SELECT**. You can delete the character using **CLEAR**.
- 5 Repeat 3 and 4 until you have made the changes you want.
- 6 Save the new title with **OK**. 'Storing name' appears on the TV screen for confirmation.
- 7 To end, press **◀**.



Finishing editing

If one or more titles have been edited a DVD player may still display the original titles. You can prepare your disc in such a way that a DVD player will be able to play the edited version.

- 1 In the 'Disc info display' press **▶**. The 'Settings for' menu appears on the TV screen.
- 2 Select 'Make edits compatible' using **CH+▲** or **CH-▼** and confirm with **OK**.



Problem


* 'Make edits compatible' does not appear
✓ Your disc is already compatible. There is no need for conversion.
To end, press **SYSTEM-MENU**.

- 3 The screen displays 'This will take' to show how long the process will last.
- 4 To confirm press **OK**. 'Working' appears on the TV screen. A bar will move from left to right indicating progress.

10

Programming a recording (TIMER)

General



Use 'Programming a recording (TIMER)', to automatically start and stop a recording at a later date.

The DVD recorder will switch to the right programme number and begin recording at the correct time. With this DVD recorder, you can pre-programme up to six recordings within a period of one month.

To make a programmed recording, your DVD recorder needs to know:

- * the date you want to make the recording
- * the programme number of the TV channel
- * the start and stop time of the recording
- * VPS or PDC on or off
- * the recording mode (M1/M2/M3/M4/M6)

This information is saved in a 'TIMER block'.

What is 'VPS/PDC'?

'VPS' (Video Programming System)/PDC (Programme Delivery Control) are used to control the start and duration of TV channel recordings. If a TV programme starts earlier or ends later than was scheduled, the DVD recorder will then turn on and off at the correct time.

What do I need to know about 'VPS/PDC'?

- * Usually the start time is the same as the VPS or PDC time. If a different 'VPS/PDC time' is indicated, e.g. '20:15 (VPS/PDC 20:14)', the 'VPS/PDC time 20:14' must be entered exactly to the minute during programming. If you want to programme a time that is different from the VPS or PDC time, you must switch off VPS or PDC.
- * Only one TV program of a TV channel can be controlled using 'VPS/PDC' at a time. If you want to record two or more TV programmes on a TV channel using 'VPS/PDC', you will need to programme these as two separate recordings.
- * Since the DVD recorder requires a certain lead time (for getting the disc up to speed and positioning the laser) before recording can start, it is possible that the recorder will miss the first few seconds of a TV show recorded with 'VPS/PDC'. In this case, disable 'VPS/PDC' and enter a start time one minute earlier.



Finalising DVD+R discs

This feature is required to play back a DVD+R disc in a DVD player. Once the disc has been finalised no further recordings or changes can be made.

- 1 In the 'Disc info display' press **▶**. The 'Settings for' menu appears on the TV screen.
- 2 Select 'Finalise disc' using **CH+▲** or **CH-▼** and confirm with **OK**.

* 'Finalise disc' does not appear
✓ Either there is no DVD+R disc inserted or the disc is already finalised.
To end, press **SYSTEM-MENU**.

* The 'Settings for' menu does not appear
✓ The menu may not appear if the disc has been recorded on another DVD recorder. In this case, use the 'Finalise disc' feature in the **▶▶** menu, under 'Features'.




Problem

- 3 The screen displays 'This will take...' to show how long the process will take.
- 4 To confirm press **OK**. 'Working' appears on the TV screen. A bar will move from left to right indicating progress.

Delete DVD+RW disks

- 1 In the 'Disc info display' press **▶**. The 'Settings for' menu appears on the TV screen.
- 2 Select 'Erase disc' using **CH+▲** or **CH-▼** and confirm with **OK**. 'This will erase all titles' appears on the TV screen. Press **OK** to confirm.
- 3 If you want to delete all the titles, press **OK** to confirm. Otherwise press **◀**.
- 4 'Erasing disc' appears on the TV screen.
- 5 After deletion, the index picture display shows the free space on the disc.




Programming recordings with the ShowView® System

Thanks to this programming system, you no longer need to tediously enter the date, programme number, start and end times. All the information needed by the DVD recorder for programming is contained in the ShowView® programming number. This 9-digit ShowView® number is found in most TV listings magazine.

SHOWVIEW®

- 1 Switch on the TV set. If required, select the programme number for the DVD recorder.
- 2 Press **TIMER** on the remote control.
- 3 The programming method selected last is marked.
- 4 Select 'ShowView system' using **CH+▲** or **CH+▼** and confirm with **►**.
- 5 Enter the entire ShowView number. This number is up to 9 digits long and can be found next to the start time of the TV programme in your TV listings magazine.
e.g.: 5.312.4 or 5.312.4
Enter 53124 for the ShowView-number.
If you make a mistake, you can clear your instructions with **CLEAR**.

Timer	ShowView system
ShowView number
Mo-Fri/Weekly	Press SELECT
To store	Press OK



Tip

Selecting daily/weekly recordings

Using **SELECT**, select from the following options:

'Mo-Fr': Repeated daily recordings (Monday to Friday)

'Weekly': Repeated weekly recordings (every week on the same day)

- 5 Confirm with **OK**.

- * The following message appears on the screen: 'Please enter programme number'
- ✓ The programme number of the TV channel has not yet been assigned to the ShowView number. Use **►**, **▲** or the number buttons 0-9 on the remote control to select the appropriate programme number (name) of the TV channel and confirm with **OK**.
- * The following message appears on the screen: 'ShowView number wrong'
- ✓ The entered ShowView number is incorrect. Correct your entry or cancel using the **SYSTEM-MENU** button.
- ✓ Check the time/date (see 'Setting the time & date' in 'Installing your DVD recorder').
- * The following message appears on the screen: 'Weekend programming not possible'
- ✓ A daily recording was entered for the wrong day. Daily programming can only be used for recordings to be made from Monday to Friday.

Problem

- 6

Timer	ShowView system
Date	01
Prog Start	BBC1 2015
VPS	PDC
End	21.30
Rec Mode	M2
Mo-Fri/Weekly	Press SELECT
To store	Press OK

The decoded data appears after confirmation. You can go back and change the data. Select the appropriate input field with **►** or **◀**. If required, make changes using **CH+▲**, **CH+▼** or the number buttons 0-9.



Tip



Switching on 'VPS/PDC' in the 'Start' input field
Select the 'Start' input field using **►**. Using **SELECT** switch on 'VPS/PDC' (* lights up). If you press **SELECT** again, you will switch 'VPS/PDC' off (* goes out).

Changing the recording mode in input field 'End'
Select the 'End' input field using **►**.
Use **SELECT** to select the recording mode: 'M1, M2, M2x, M3, M4, M6'.

- 7 If all information is correct, press the **OK** button. The programming information is stored in a **TIMER** block.

- 8 To end, press **TIMER**.

- 9 Insert a recordable disc (one without write protection).
The disc you have inserted will be checked.

- 10 Switch the DVD recorder off with **STANDBY** .
The programmed recording will only function properly if the DVD recorder has been switched off using the **STANDBY**  button.

If any of the **TIMER** blocks are in use, **TIMER** will light up on the recorder display.

Programming recordings without the Show View® System

- 1 Switch on the TV set. If required, select the programme number for the DVD recorder.
- 2 Press **TIMER** on the remote control.
The programming method selected last is marked.
- 3 Select line 'Timer programming' with **CH- ▾** or **CH+ ▴**, and confirm with the **▶** button.
The information will appear on the screen.
- 4 Select the input field with **◀** or **▶**.
- 5 Enter information with **CH- ▾** or **CH+ ▴** or with the number buttons 0-9.

Timer programming	VPS	Rec
Date	Prog Start PDC	End
01	BBC1 2015	21:30 M1
Mo-Fri Weekly Press SELECT		

Selecting daily/weekly recordings

In 'Date' use **SELECT** to select from the following options:
'Mo-Fr': Repeated daily recordings from Monday to Friday
'Mon': Repeated weekly recordings (every week on the same day, e.g. Monday).

Programme numbers of the 'EXT1' and 'EXT2' start socket

You can also programme recordings from external sources via start socket:
EXT 1 TO TV-IO (EXT1) or **EXT 2 AUX-IO (EXT2)**.

Switching on 'VPS/PDC' in the 'Start' input field

Select the 'Start' input field using **TIMER**. Using **SELECT** switch on 'VPS/PDC' (" lights up). If you press **SELECT** again, you will switch 'VPS/PDC' off (" goes out).

Changing the recording quality in input field 'End'

Select the 'End' input field using **▶**.
Use **SELECT** to select the recording mode.

- 6 If all information is correct, press the **OK** button. The programming information is stored in a **TIMER** block.
- 7 To end, press **TIMER**.
- 8 Insert a DVD (one without write protection).
The disk you have inserted will be checked.
- 9 Switch off with **STANDBY**.
The programmed recording will only function properly if the DVD recorder has been switched off using the **STANDBY** button.

If any of the **TIMER** blocks are in use, 'TIMER' will light up on the recorder display.

How to change or delete a programmed recording (TIMER)

- 1 Switch on the TV set. If required, select the programme number for the DVD recorder.
- 2 Press **TIMER** on the remote control.
The programming mode selected last is marked.
- 3 Select 'Timer List' using **CH- ▾** or **CH+ ▴** and confirm with **▶**.
- 4 Select the programmed recording (TIMER) you want to check, change or delete with **CH- ▾** or **CH+ ▴**.

Timer	VPS	Rec
Timer List	Prog Start PDC	End
Date	BBC1 2015	21:30 M2
01
Total record time 01:15		
To change Press		
To exit Press TIMER		

Delete programmed recording

- 1 Press the **CLEAR** button.
- 2 Confirm with **OK**. 'Timer Cleared' will briefly appear on the TV screen.
'---' appears rather than the displayed values.
- 3 To end, press **TIMER**.

Tip

- 5 Press **▶**.
Select the input field with **◀** or **▶**.
If required, change the information with **CH+ ▴**, **CH- ▾** or the number buttons 0-9.
- 6 Confirm with **OK**.
- 7 To end, press **TIMER**.
- 8 Switch off with **STANDBY**.

'NexTVView Link'

This DVD recorder is equipped with the 'NexTVView Link' feature. If your television is also equipped with this function, you can mark TV programmes on the television for programming. These TV programmes will automatically be transmitted to a **TIMER** block on the DVD recorder. If you clear the marking of the TV programme on the television, the corresponding **TIMER** block on the DVD recorder will also be cleared.
For more information, read the instruction manual of your TV set.

User preferences

In this section you will learn how to set your user preferences on the DVD recorder. The symbols have the following meanings:

	Picture setting
	Sound setting
	Language setting
	Additional settings
	Remote control settings
	Disc settings
	Recording settings
	Installation

- Switch on the TV set. If required, select the programme number for the DVD recorder.
- Press **SYSTEM-MENU** on the remote control. The menu bar appears.
- Select **T1** using **◀** or **▶** and confirm with **CH-▼**.
- Select the appropriate function with **CH-▼** or **CH+▲** and confirm with **▶**.
- Select the appropriate line using **CH-▼** or **CH+▲** and confirm with **▶**.
- Select the appropriate function using **CH-▼** or **CH+▲** or the setting with **◀** or **▶**.
- Confirm the new setting by pressing **OK**.
- To close the menu item, press **◀**.

Picture settings

You can choose the following features in this menu:


'TV shape'

The picture signal from your DVD Recorder can be set to match your TV screen.

- '4:3 letterbox': for a 'wide-screen' picture with black bars at the top and bottom
- '4:3 panscan': for a full-height picture with the sides trimmed.
- '16:9': for a wide-screen TV set (screen edge ratio 16:9)

'Black level shift'

Adapts the colour dynamics for NTSC playback



Problem solving for programmed recordings

PROBLEM	SOLUTION
The DVD recorder is not responding	<ul style="list-style-type: none"> While a programmed recording is being made, you cannot operate your DVD recorder manually. If you want to cancel the programmed recording, press STANDBY.
'Switch off, timer recording' flashes on the TV screen.	<ul style="list-style-type: none"> The DVD recorder was switched on several minutes before the start of a programmed recording. Switch off the DVD recorder using STANDBY. A programmed recording (timer) will only function if the DVD recorder is switched off (STANDBY button).
Error message: 'Insert recordable disc'	<ul style="list-style-type: none"> Either a disc has not been inserted or the disc cannot be used for recording. Insert a disc on which recordings can be made. Switch off the DVD recorder using STANDBY.
The error message 'Disc locked' appears briefly on the screen.	<ul style="list-style-type: none"> A write-protected disc has been inserted. Undo the write protection (see 'Preventing accidental erasing of discs' in 'Manual recording') or insert a different disc.
Error message: 'Memory full'	<ul style="list-style-type: none"> If this error message appears after pressing TIMER, then all TIMER blocks are already programmed. No more recordings can be programmed. Press the ▶ button if you want to clear or check a programmed recording (TIMER block), select it with CH+▲ or CH-▼.
The 'Data error' message appears on the screen.	<ul style="list-style-type: none"> The data for the recording could not be transferred. Please check date, start time and end time of the programmed recording.
The 'Collision' message appears on the screen.	<ul style="list-style-type: none"> Two programmed recordings overlap. If you ignore this error message the show with this timer start time will be recorded first. The start of the second show will not be recorded. Change the setting for either of the two recordings. Clear either of the two recordings.

'Vertical video shift'

Use this feature to adjust the position of the picture on your TV left or right using ◀, ▶ to suit your TV set.

'SCART video'

By default the recorder is set to 'RGB'. Select 'S-Video' if you want to connect an S-VHS recorder.

Sound settings

Depending on which audio outputs are used, you can select the settings in this menu. If you only use the analogue audio output (OUT L AUDIO R), select the settings: **Off** in the **'Digital output'** menu.

'Digital output'

For devices connected to the **DIGITAL AUDIO OUT** socket, you can select from the following settings:

'All': Dolby Digital and DTS signals are fed unaltered to the digital output. MPEG-2 multi-channel signals are converted to PCM (Pulse Code Modulation).

For receivers/amplifiers with digital multi-channel sound decoders.

'PCM only': Dolby Digital and MPEG-2 multi-channel signals are converted to PCM (Pulse Code Modulation).

For receivers/amplifiers without digital multi-channel sound decoders.

'Off': Digital output switched off.

For devices with analogue audio input.

'Analogue output'


For devices connected to the analogue audio output (OUT L AUDIO R), you can select from the following settings:

'Stereo': For devices without DolbySurround or TruSurround. Use this setting if the DVD recorder is only connected to a stereo TV set.

'Surround': Dolby Digital and MPEG-2 multi-channel are mixed down to a DOLBY surround-compatible two-channel output signal. For devices with **Dolby Surround Pro Logic** decoder.


'Night mode'

Night mode optimises the sound for playback at low volume. You are therefore less likely to disturb your neighbours. This only works for Dolby Digital audio on DVD video discs.



Language settings

You can choose the following settings in this menu:



'Audio Language'

Playback audio language

'Recording audio'

Audio recording

'Subtitle'

Subtitle language

'Menu'


Screen menu language

'Country'

Country

Additional settings

You can select the following functions in this menu:



'Status box'

Along with the on screen menu, the OSD (On Screen Display) also displays information on the current operating status (counter, playback, recording, TV channel, etc.) on the TV screen. You can switch off the information about the operating status so that the on screen display (OSD) is not recorded during copying.


'On': The OSD information appears in every selected mode for a few seconds and disappears again.

'Off': The OSD information is switched off. It is no longer displayed on the screen.

'Standby'

To save power, you can switch off the clock display on the DVD recorder. Programmed (TIMER) recordings will still take place. In addition, you can present the most important features of the DVD recorder in scrolling text in the display (demo).

'Low power': If the DVD-Recorder is switched off (button **STANDBY** ) the clock display is also switched off.

'Off': If the DVD-Recorder is switched off (button **STANDBY** ) the clock display is visible.

'Demo mode': If the DVD recorder is switched off with the **STANDBY**  button, a list of the most important features is shown in the display

'Display'

You can change the brightness of the display on the DVD recorder. This setting only affects the DVD recorder when it is switched on.

'Bright': The display appear with normal brightness. The disc tray light is switched on.

'Dimmed': The display appears less bright. The disc tray light is switched off.

'Off': The display and the disc tray light are switched off.

Remote Control settings

In this menu you can set the remote control type to which your DVD recorder should respond.

'DVD player': The DVD recorder responds to a DVD player remote control.


The DVD recorder also responds to the remote control of a DVD player (remote control code RC-4). Choose this setting if your Philips TV remote supports DVD functions.

'DVD recorder': The DVD recorder only responds to the supplied remote control.



Disk feature menu

In this menu you can make the changes that relate to the disc:

'Access control'

Please read the next chapter on 'Access control (child lock)'.


'Auto resume'

If playback of a pre-recorded DVD video disc or video CD is interrupted (button **STOP**  or **OPEN/CLOSE** ) when the disc is reloaded (disc is started) playback starts at the precise location where it stopped. This applies not only to the current disc but to the last 20 discs played.

This feature can be switched off if not required.

'PBC'

This line appears only if a VCD is loaded.

This function lets you activate or deactivate the PBC menu (Playback Control) for video CDs. See 'Playing a (Super) Video CD'.

'Finalise disc'

This feature allows you to finalise DVD+R discs. If the disc has already been finalised this line will appear darker.


'Adapt disc format'

If a DVD+RW has been recorded in a computer drive or in another DVD recorder the index screen may not be displayed correctly.

This feature allows you to change the format of the disc. It is therefore only visible if the disc format is different.

12

Access control (Child Lock)



Child lock (DVD and VCD)

This feature enables discs to be locked for children.

When Child Lock is on, a 4-digit code (PIN) needs to be entered before a disc can be played. You can also decide whether the inserted disc should always be played or should be played only once, despite the child lock.

•)Play always:

This disc is stored in a memory with space for 50 child-safe discs. If more than 50 discs are stored, the last disc in the list is removed and the new disc is added. The screen shows 'Child safe' at the start of playback.

•)Play once:

This disc is only authorised for single playback. If the recorder is switched off, the PIN code must be re-entered.

ENGLISH

Activating/deactivating child lock

- 1 Switch on the TV set. If required, select the programme number for the DVD recorder.
- 2 Switch on the DVD recorder using **STANDBY/ON**.
- 3 Press **SYSTEM-MENU**. The menu bar appears.
- 4 Select the **Child lock** icon using **◀** or **▶**.
- 5 Select **(Disc features)** using **CH-▼** or **CH+▲** and confirm with **▶**.
- 6 Confirm **Access control** using **▶**.
- 7 Enter a 4-digit code of your choice. If the code is new, you may have to enter the code a second time as confirmation.
- 8 Select **Child lock** using **CH+▲** or **CH-▼** and confirm with **▶**.
- 9 Select the **Child lock** icon using **CH-▼** or **CH+▲**.
- 10 Confirm with **OK**.
- 11 Quit the feature using **◀** and **SYSTEM-MENU**.

Unauthorised discs can only be played by entering the four-digit PIN code. To deactivate the child lock, select the **Child lock** icon in 8.

Authorising a disc

- 1 Insert a disc. The access control box will appear after a short delay.
- 2 Using **CH+▲** or **CH-▼** select **Play once** or **Play always**.
- 3 Enter your PIN code using the number buttons 0..9.

Double-sided DVDs may have a different ID for each side. For these discs, each side must be authorised. Multi-volume video CDs may have a different ID for each volume. For these CDs, each volume must be authorised.

Locking unlocked discs

To lock a disc that was formerly authorised follow the instructions below

- 1 Insert a disc. Playback starts automatically. If the playback does not start automatically, press **PLAY▶**.
- 2 Press the **STOP** button while the **Parental Control** icon is visible. The icon changes to **Parental Control**. The disc is now locked.

Parental level control (DVD video only)


Films on pre-recorded DVD discs may contain scenes not suitable for children. Therefore, some discs may contain 'Parental Control' rating information that applies to the entire disc or to certain scenes on the disc.

The appropriate scenes have filter values that range from 1-8. If such a scene is detected during playback, the filter value set on the DVD recorder is compared to the scene. If the filter value is higher than the setting, an alternative scene will be played (if available). Most DVDs apply the rating to an entire DVD. Therefore, if certain scenes exceed the rating you select, the entire disc will be blocked from viewing.

Changing the country

The set filter values depend on the respective country. It is therefore necessary to enter the country to which these filter values apply.


- 1 Switch on the TV set. If required, select the programme number for the DVD recorder.
- 2 Switch on the DVD recorder using **STANDBY/ON**.
- 3 Press **SYSTEM-MENU**. The menu bar appears.
- 4 Select the **1A** icon using **◀** or **▶**.
- 5 Select line **Disc features** using **CH+▲** or **CH-▼** and confirm with **▶**.
- 6 Confirm the line **Access control** using **▶**.
- 7 Enter your four-digit code. If the code is new, you may have to enter the code a second time as confirmation.
- 8 Select **Change country** using **CH+▲** or **CH-▼** and confirm with **▶**.
- 9 Select the corresponding country using **CH+▲** or **CH-▼** and confirm with **OK**.
- 10 To end, press **◀** and then **SYSTEM-MENU**.




Activating/deactivating parental level control

ENGLISH

- 1 Switch on the TV set. If required, select the programme number for the DVD recorder.
- 2 Switch on the DVD recorder using **STANDBY/ON**.
- 3 Press **SYSTEM-MENU**. The menu bar appears.
- 4 Select the **1A** icon using **◀** or **▶**.
- 5 Select line **Disc features** using **CH+▲** or **CH-▼** and confirm with **▶**.
- 6 Confirm **Access control** using **▶**.
- 7 Enter a 4-digit code of your choice. If the code is new, you may have to enter the code a second time as confirmation.
- 8 Select the **Parental level** using **CH+▲** or **CH-▼** and confirm with **▶**. A bar appears to select the parental level.
- 9 Select the appropriate rating using **CH+▲**, **CH-▼**, **CH+▲** or the number buttons **0-9**.
- 10 Confirm with **OK**. Quit using **◀** and **SYSTEM-MENU**.






Tip

What do the ratings mean?
 Rating 0 (displayed as -): parental control not active.
 Rating 1 (suitable for children)
 Rating 8 (only suitable for adults)
What happens if a DVD scene contains a higher level than the rating set?
 If the recorder does not find a suitable alternative, playback will stop and you must enter the four-digit code.

Changing the PIN code

- 1 Switch on the TV set. If required, select the programme number for the DVD recorder.
- 2 Switch on the DVD recorder using **STANDBY/ON**.
- 3 Press **SYSTEM-MENU**. The menu bar appears.
- 4 Select the **Disc features** icon using **◀** or **▶**.
- 5 Select **Access control** using **CH-▼** or **CH+▲** and confirm with **▶**.
- 6 Confirm **Access control** using **▶**.
- 7 Enter your four-digit PIN code. If the code is new, you may have to enter the code a second time as confirmation.
- 8 Select **Change code** using **CH+▲** or **CH-▼** and confirm with **▶**.
- 9 Enter the new code using the number buttons **0-9**. Enter the same code again as confirmation.
- 10 Quit using **◀** and **SYSTEM-MENU**.



Tip

I have forgotten my code

Press **STOP** four times (step 2), then press **OK**. Access control is now switched off. You can now enter a new code as described above.

4. Mechanical Instructions

4.1 Dismantling and Assembly of the Set

For item numbers please see the exploded views in chapter 10.

4.1.1 Front

- After removing the top cover, remove tray front 70, see picture 4-1
- Remove the three screws 205
- Release the two snap hooks on the sides and remove the front
- Remove the 9 screws 200 to remove the front plate 102, see picture 4-2

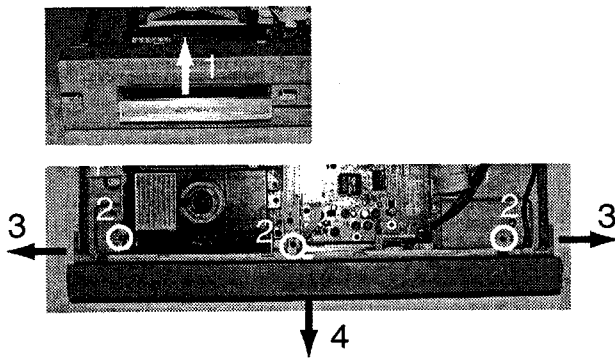


Figure 4-1

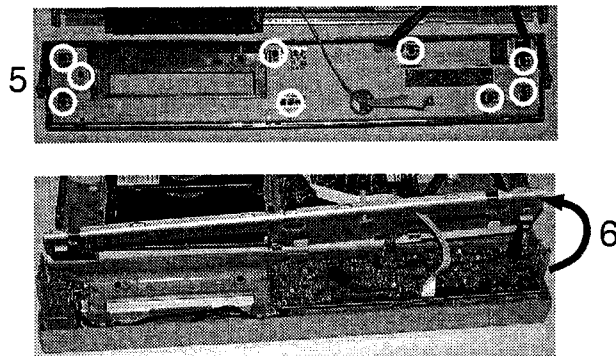


Figure 4-2

4.1.2 EPG Board, only for sets with Guide Plus

- Remove the two screws 218, see picture 4-3
- Release the snaps of the two board spacers 130
- Turn the PCB in the service position

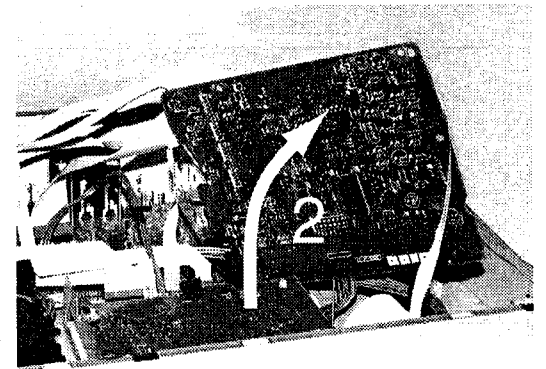
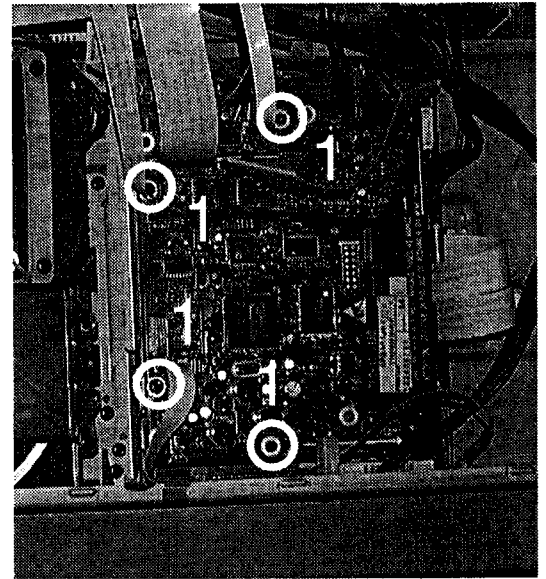


Figure 4-3

4.1.3 DVIO Board, only for sets with DV input

To put the DVIO board in a service position, an extender board must be used. This extender board can be ordered with codenumber 3104 128 07770.

- After removal of the EPG board (if present) the DVIO board can be reached
- Remove the two screws 216, see picture 4-4
- Release the snaps of the two board spacers 125
- Put the DVIO board in the service position with the extender board 3104 128 07770.

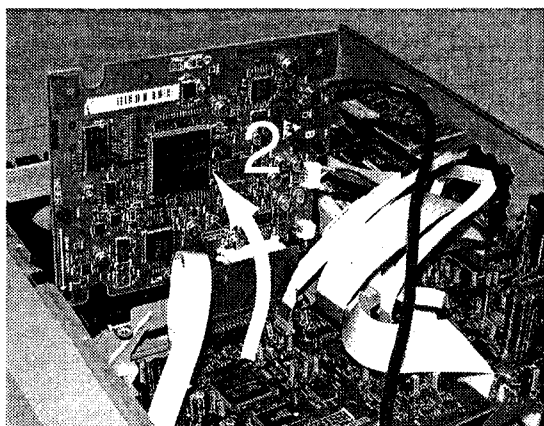
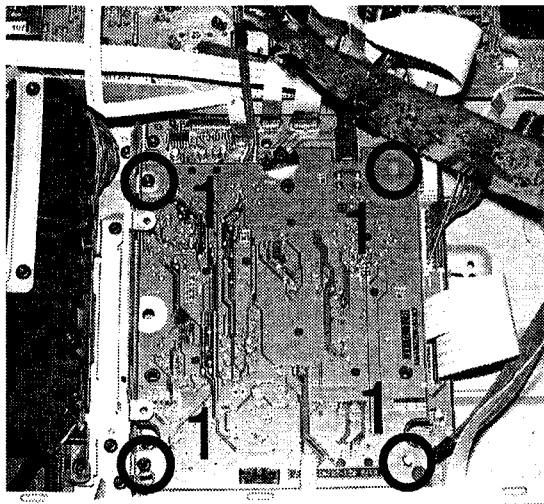


Figure 4-4

4.1.4 Digital Board

- After removal of EPG board (if present) and DVIO board the digital board can be reached
- Remove screws 214
- Turn the PCB in the service position

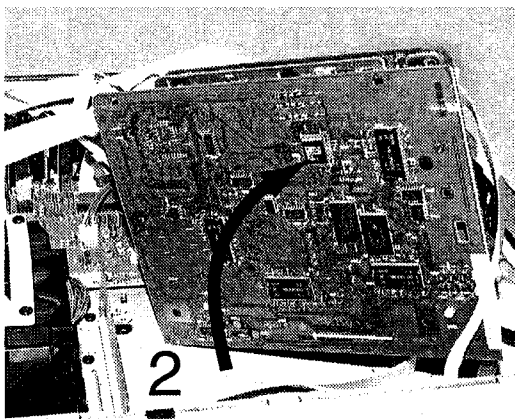
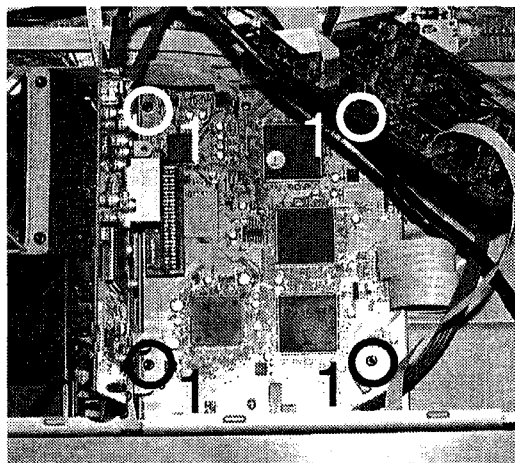


Figure 4-5

4.1.5 Basic Engine

- Remove the tray 70
- Remove the four screws 255
- Turn the engine in the service position

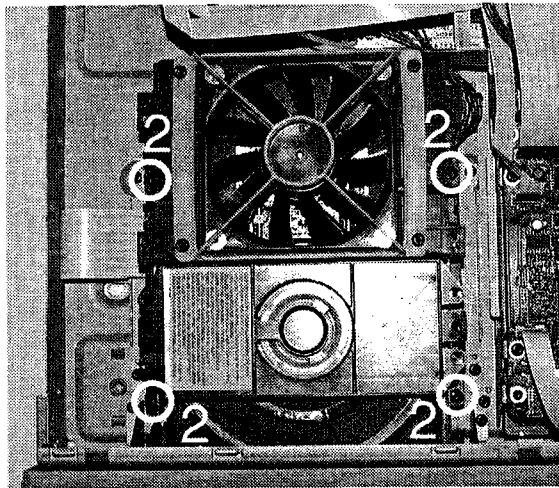
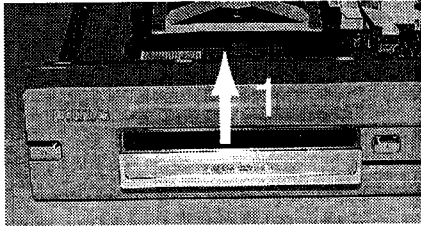


Figure 4-6

4.1.6 Analog Board

- Remove the 7 screws 250 and 210
- Remove screw safety holder 145
- Unlock the two snaps hooks on the left and right
- Turn the PCB in the service position

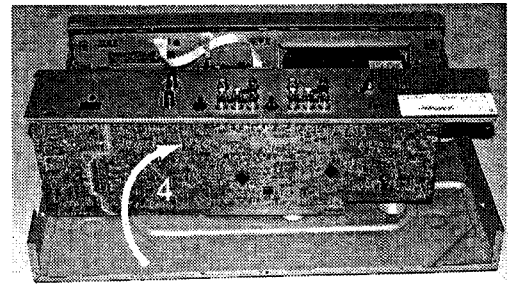
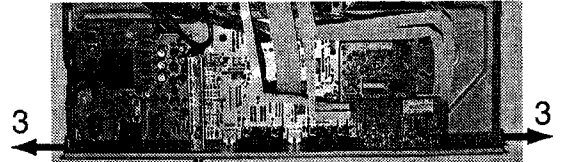
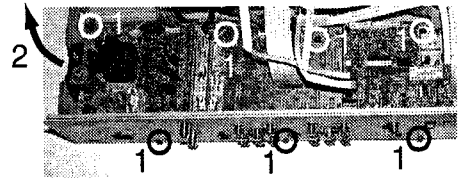


Figure 4-8

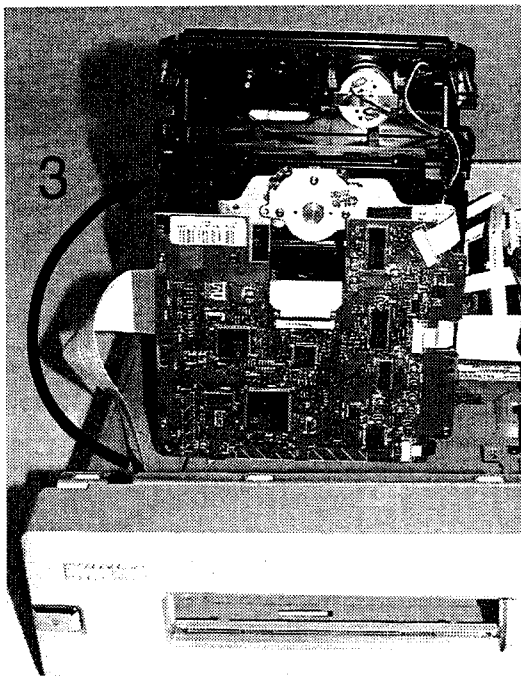


Figure 4-7

4.2 Dismantling Instructions

DISMANTLING INSTRUCTIONS

See exploded view for item numbers

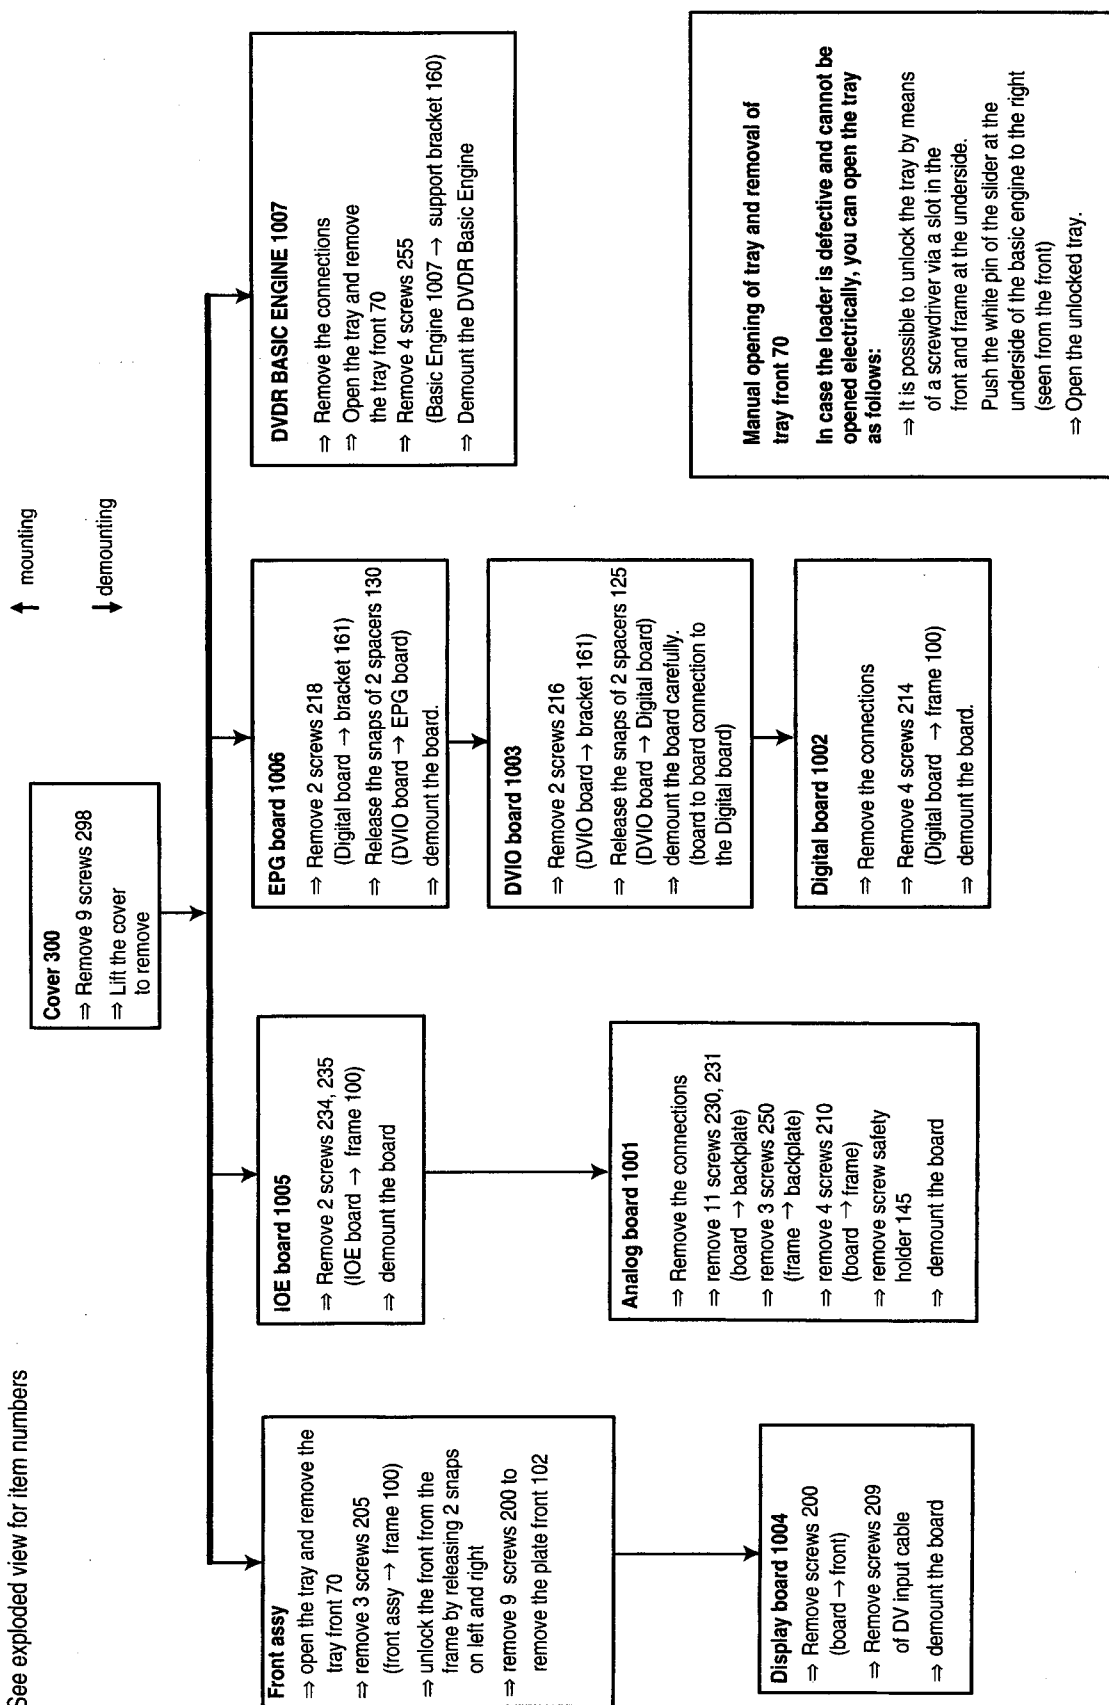
TR 06003_001
300103

Figure 4-9

5. Diagnostic Software

Due to the complexity of the DVD recorder, the time to find a defect in the recorder can become long. To reduce this time, the recorder has been equipped with Diagnostic and Service software (DS). The DS offers functionality to diagnose the DVDR hardware and tests the following:

- Interconnections between components
- Accessibility of components
- Functionality of the audio and video paths

This functionality can be accessed via several interfaces:

1. End user/Dealer script interface
2. Command Interface
3. Player script interface for sets with Digital Board 1.5, Empress
4. Menu interface for sets with Digital Board 1.5, Empress

5.1 End User/Dealer Script Interface

5.1.1 Description

The End user/Dealer script interface gives a diagnosis on a stand alone DVD recorder. During this mode, a number of hardware tests (nuclei) are automatically executed to check if the recorder is faulty. The diagnosis is simply a "fail" or "pass" message. If the message "FAIL" appears on the display, there is apparently a failure in the recorder. If the message "PASS" appears, the nuclei in this mode have been executed successfully. There can be still a failure in the recorder because the nuclei in this mode don't cover the complete functionality of the recorder.

5.1.2 Structure

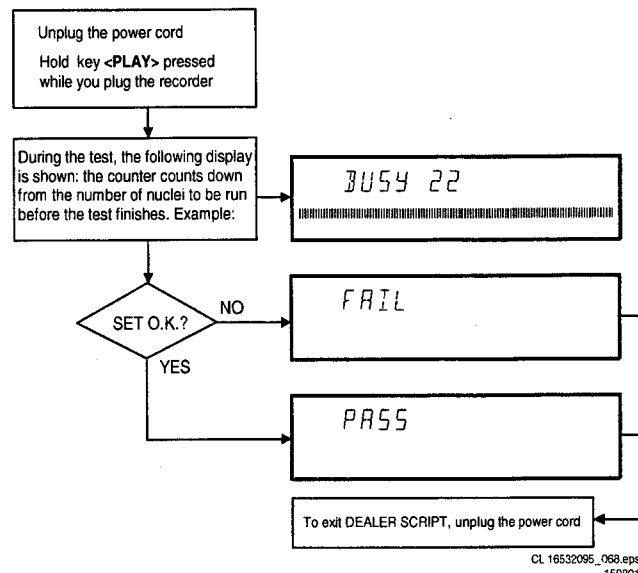


Figure 5-1

The End use/Dealer script executes all diagnostic nuclei that do not need any user interaction and are meaningful on a standalone DVD recorder.

5.1.3 Contents for sets with Digital Board 1.5, Empress

The nuclei called in the End user/Dealer script are the following:

Counter	Nucleus	Name	Description
22	104	HostdSdramWrR	checks all memory locations of the 4MB SDRAM
21	106	HostdDramWrR	checks all the DRAM connected to the microprocessor of the digital board
20	123	Hostdl2cNvram	checks the data line (SDA) and the clock line (SCL) of the I2C bus between the host decoder and NVRAM
19	202	SAA7118I2c	checks the interface between the Host I2C controller and the AVENC SAA7118 Video Input Processor
18	200	VideoEncI2c	checks the interface between the host I2C controller and Empress SAA6752
17	207	AudioEncI2c	checks the I2C connection between the host decoder and Empress SAA6752
16	204	AudioEncAccess	tests the HIO8 interface lines between the host decoder and the audio encoder
15	203	AudioEncSramAccess	checks the access of the SRAM by the audio encoder (address and data lines).
14	205	AudioEncSramWrR	tests the SRAM connected to the audio encoder
13	206	AudioEncInterrupt	tests the interrupt line between the host decoder and the audio encoder
12	300	VsmAccess	checks whether the VSM interrupt controllers and DRAM are accessible
11	303	VsmInterrupt	checks both interrupt lines between the VSM and the host decoder
10	302	VsmSdramWrR	tests the entire SDRAM of the VSM
9	1400	Clock11_289MHz	switches the A_CLK of the micro clock to 11.2896 MHz
8	1401	Clock12_288MHz	switches the A_CLK of the micro clock to 12.288 MHz
7	601	BeS2Bengine	checks the S2B interface with the Basic Engine by sending an echo command
6	500	DisplayEcho	checks the interface between the host processor and the slave processor on the display board
5	700	AnalogueEcho	checks the interface between the host processor and the microprocessor on the analogue board
4	711	AnalogueNvram	checks the NVRAM on the analogue board
3	706	AnalogueTuner	checks whether the tuner on the analogue board is accessible

Counter	Nucleus	Name	Description
2	901	LoopAudioUserDealer	This nucleus tests the components on the audio signal path The host decoder - The analogue board - The audio encoder - The VSM Attention: the rear cinch audio out has to be connected to the front cinch audio in.
1	906	LoopVideoUserDealer	Nucleus for testing the components on the video signal system path: - The VIP - The video encoder - The VSM - The host decoder - The analogue board Attention: the rear cinch video out has to be connected to the front cinch video in.

5.1.4 Contents for sets with Digital Board Chrysalis

Included tests:	1.DS_ANAB_COMMUNICATIONECHO_NUC 2.DS_DCB_COMMUNICATIONECHO_NUC 3. DS_BROM_COMMUNICATION_NUC 4. DS_SYS_SETTINGSDISPLAY_NUC 5. DS_CHR_DEVTYPEGET_NUC 6. DS_CHR_INT_PIC_NUC 7. DS_CHR_DMA_NUC 8. DS_BROM_WRITEREAD_NUC 9. DS_NVRAM_COMMUNICATION_NUC 10. DS_NVRAM_WRITEREAD_NUC 11. DS_SDRAM_WRITEREADFAST_NUC 12. DS_FLASH_WRITEREAD_NUC 13.DS_FLASH_CHECKSUMPROGRAM_NUC 14.DS_SYS_HARDWAREVERSIONGET_NUC 15. DS_VIP_DEVTYPEGET_NUC 16. DS_VIP_COMMUNICATION_NUC 17. DS_DVIO_LINKDEVTYPEGET_NUC 18. DS_DVIO_PHYDEVTYPEGET_NUC 19. DS_DVIO_LINKCOMMUNICATION_NUC 20. DS_DVIO_PHYCOMMUNICATION_NUC 21.DS_PSCAN_COMMUNICATIONDENC_NUC 22.DS_PSCAN_COMMUNICATIONDEINTERLACER_NUC 23. DS_BE_COMMUNICATIONECHO_NUC 24.DS_ANAB_COMMUNICATIONIICNVRAM_NUC 25.DS_ANAB_COMMUNICATIONIICTUNER_NUC 26.DS_ANAB_COMMUNICATIONIICSOUNDPROCESSOR_NUC 27.DS_ANAB_COMMUNICATIONIICAVSELECTOR_NUC 28. DS_ANAB_CHECKSUMPROGRAM_NUC
-----------------	---

5.2 Player Script Interface only for sets with Digital Board Chrysalis

5.2.1 Description

The Player script will give the opportunity to perform a test that will determine which of the DVD recorder's modules are faulty, to read the error log and to perform an endurance loop test. To successfully perform the tests, the DVD recorder must be connected to a TV set.

To be able to check results of certain nuclei, the player script expects some interaction of the user (i.e. to approve a test picture or a test sound). Some nuclei (e.g. nuclei that test functionality of the DVDR module) require that a DVD+RW disc is inserted.

Only tests within the scope of the diagnostic software will be executed hence only faults within this scope can be detected.

5.2.2 Structure of the Player Script

The player script consists of a set of nuclei testing the hardware modules in the DVD recorder: the Display PWB, the Digital PWB, the Analogue In/Out PWB and the DVDR module. Nuclei run by the player test need some user interaction; in the next table this interaction is described. The player test is done in two phases:

- Interactive tests: this part of the player test depends strongly on user interaction and input to determine nucleus results and to progress through the full test. Reading the error log information can be useful to determine any errors that occurred recently during normal operation of the DVD player.
- The loop test will perform the same nuclei as the dealer test, but it will loop through the list of nuclei indefinitely.

STEP	DESCRIPTION	NUCLEUS
1	Press OPEN/CLOSE and PLAY at the same time and POWER ON the recorder to start the playerscript	2
2	The local display shows FPSEGMENTS . Press PLAY to start the test. First the <i>starburst pattern</i> is lit, then the <i>horizontal segments</i> are lit, followed by the <i>vertical segments</i> and the last test is <i>light all segments</i> test. After each of the 4 tests the user has to confirm that the correct pattern was lit. Press PLAY to confirm that the correct pattern was lit (four times if the FPSEGMENTS test was successful). Press RECORD to indicate that the correct pattern was not successfully lit. Press STOP to skip this nucleus.	502

STEP	DESCRIPTION	NUCLEUS
3	The local display shows FPLABELS . Press PLAY to start the test. Press PLAY to confirm that all labels are lit. Press RECORD to indicate that not all labels are lit. Press STOP to skip this nucleus.	503
4	The local display shows FPLIGHT ALL . Press PLAY to start the test. Press PLAY to confirm that everything was lit. Press RECORD to indicate that not all patterns are lit. Press STOP to skip this nucleus.	520
5	The local display shows FPLED . Press PLAY to start the test. Press PLAY to confirm that the led is lit. Press RECORD to indicate that the led is not lit. Press STOP to skip this nucleus.	504
6	The local display shows FPKEYBOARD . Press PLAY to start the test. Attention all keys have to be pressed to get a positive result! Press PLAY for more than one second to confirm that all the keys were pressed and shown on the local display. If not all the keys were pressed, a FAIL message will appear on the local display. Press RECORD for more than one second to indicate that not all keys were pressed and shown on the local display. Press STOP for more than one second to skip this nucleus.	505
7	The local display shows FPREMOTE CONTROL . Press PLAY to start the test. Press PLAY to confirm that a key on the remote control was pressed and shown on the local display. Only one key has to be pressed to get a successful result. Press RECORD to indicate that the key on the remote control was pressed but not shown on the local display. Press STOP to skip this nucleus.	506
8	The local display shows FPDIMMER . Press PLAY to start the test. Press PLAY to confirm that the text on the local display was dimmed. Press RECORD to indicate that the text on the local display was not dimmed. Press STOP to skip this nucleus.	518
9	The local display shows ROUTE VIDEO . Press PLAY to start the test. Press STOP to skip this nucleus.	712
10	The local display shows ROUTE AUDIO . Press PLAY to start the test. Press STOP to skip this nucleus.	713
11	The local display shows COLOUR-BAR ON . Press PLAY to start the test. Press STOP to skip this nucleus.	120
12	The local display shows PINK NOISE ON . Press PLAY to start the test. Press STOP to skip this nucleus.	115
13	The local display shows PINK NOISE OFF . Press PLAY to start the test. Press STOP to skip this nucleus.	116
14	The local display shows SINE ON . Press PLAY to start the test. Press STOP to stop the sine. Press STOP to skip this nucleus.	117
15	The local display shows COLOUR-BAR OFF . Press PLAY to start the test. Press STOP to skip this nucleus.	121
16	The local display shows BERESET . Press PLAY to start the test. Press STOP to skip this nucleus.	603
17	The local display shows BETRAY OPEN . Press PLAY to start the test. Press STOP to skip this nucleus.	616
18	The local display shows BETRAY CLOSE . Press PLAY to start the test. Press STOP to skip this nucleus.	615
19	The local display shows BEWRITE READ . Press PLAY to start the test. Press STOP to skip this nucleus.	617
20	The local display shows BETRAY OPEN . Press PLAY to start the test. Press STOP to skip this nucleus.	616
21	The local display shows BETRAY CLOSE . Press PLAY to start the test. Press STOP to skip this nucleus.	615
22	The local display shows READ ERRORLOG . Press PLAY to start the test. Press STOP to skip this nucleus. If the player test succeeded, the user/dealer script will start in an endless loop. If the player test failed, the local display will display FAIL and the error code	633

Remark

In case of failure, the display shows " FAIL XXXXXX ". The description of the shown error code can be retrieved in the survey of Nuclei Error Codes (paragraph 5.4). Once an error occurs, it is not possible to continue the player script. Unplug the set and restart the player script. By pressing the STOP key, it is possible to jump over the failure and to continue the player script.


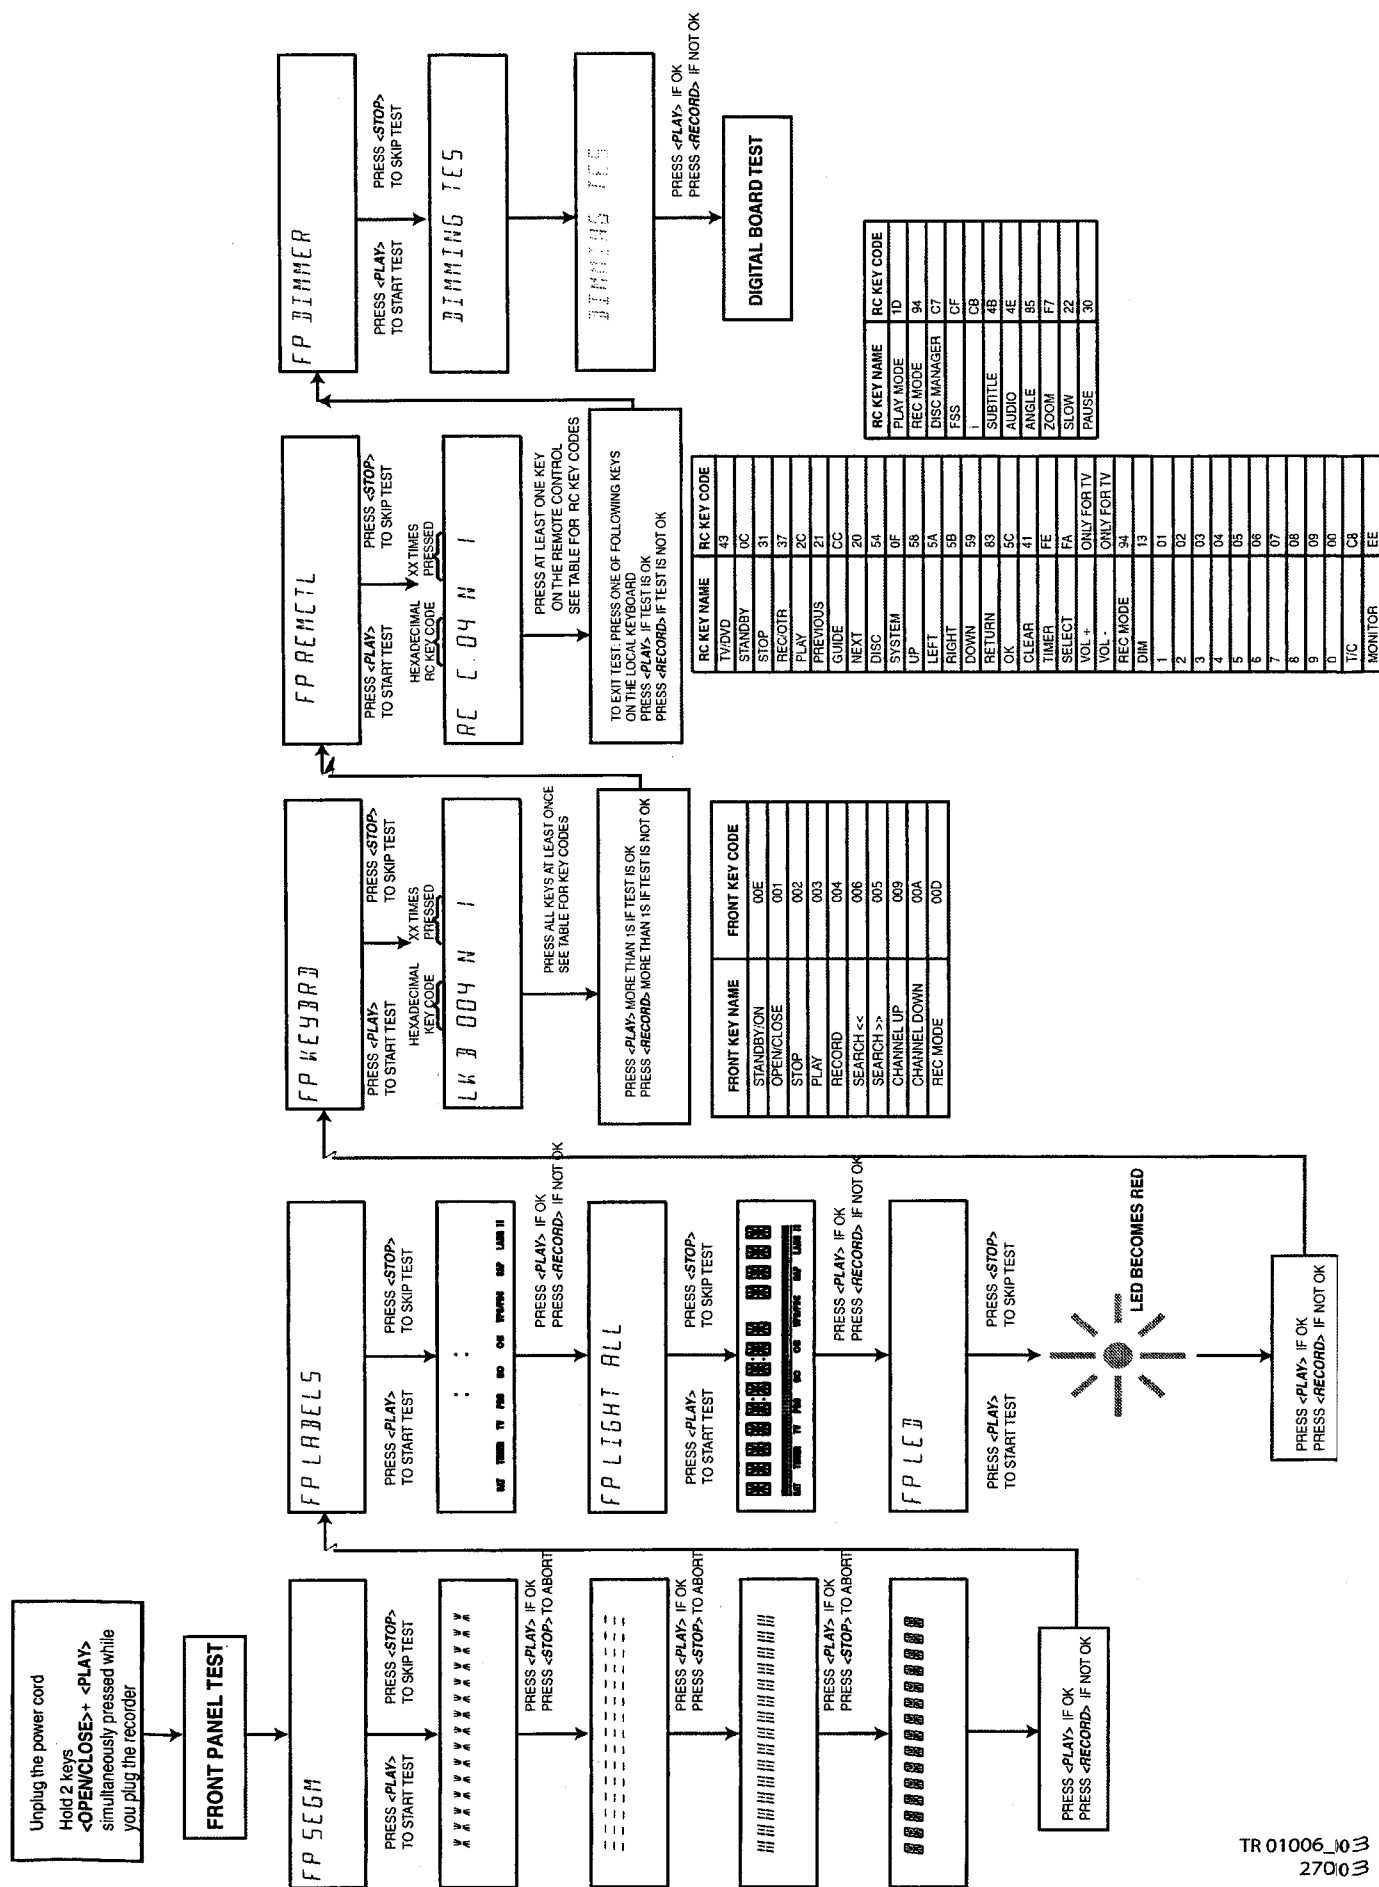


Figure 5-2

TR 01006_03
27003

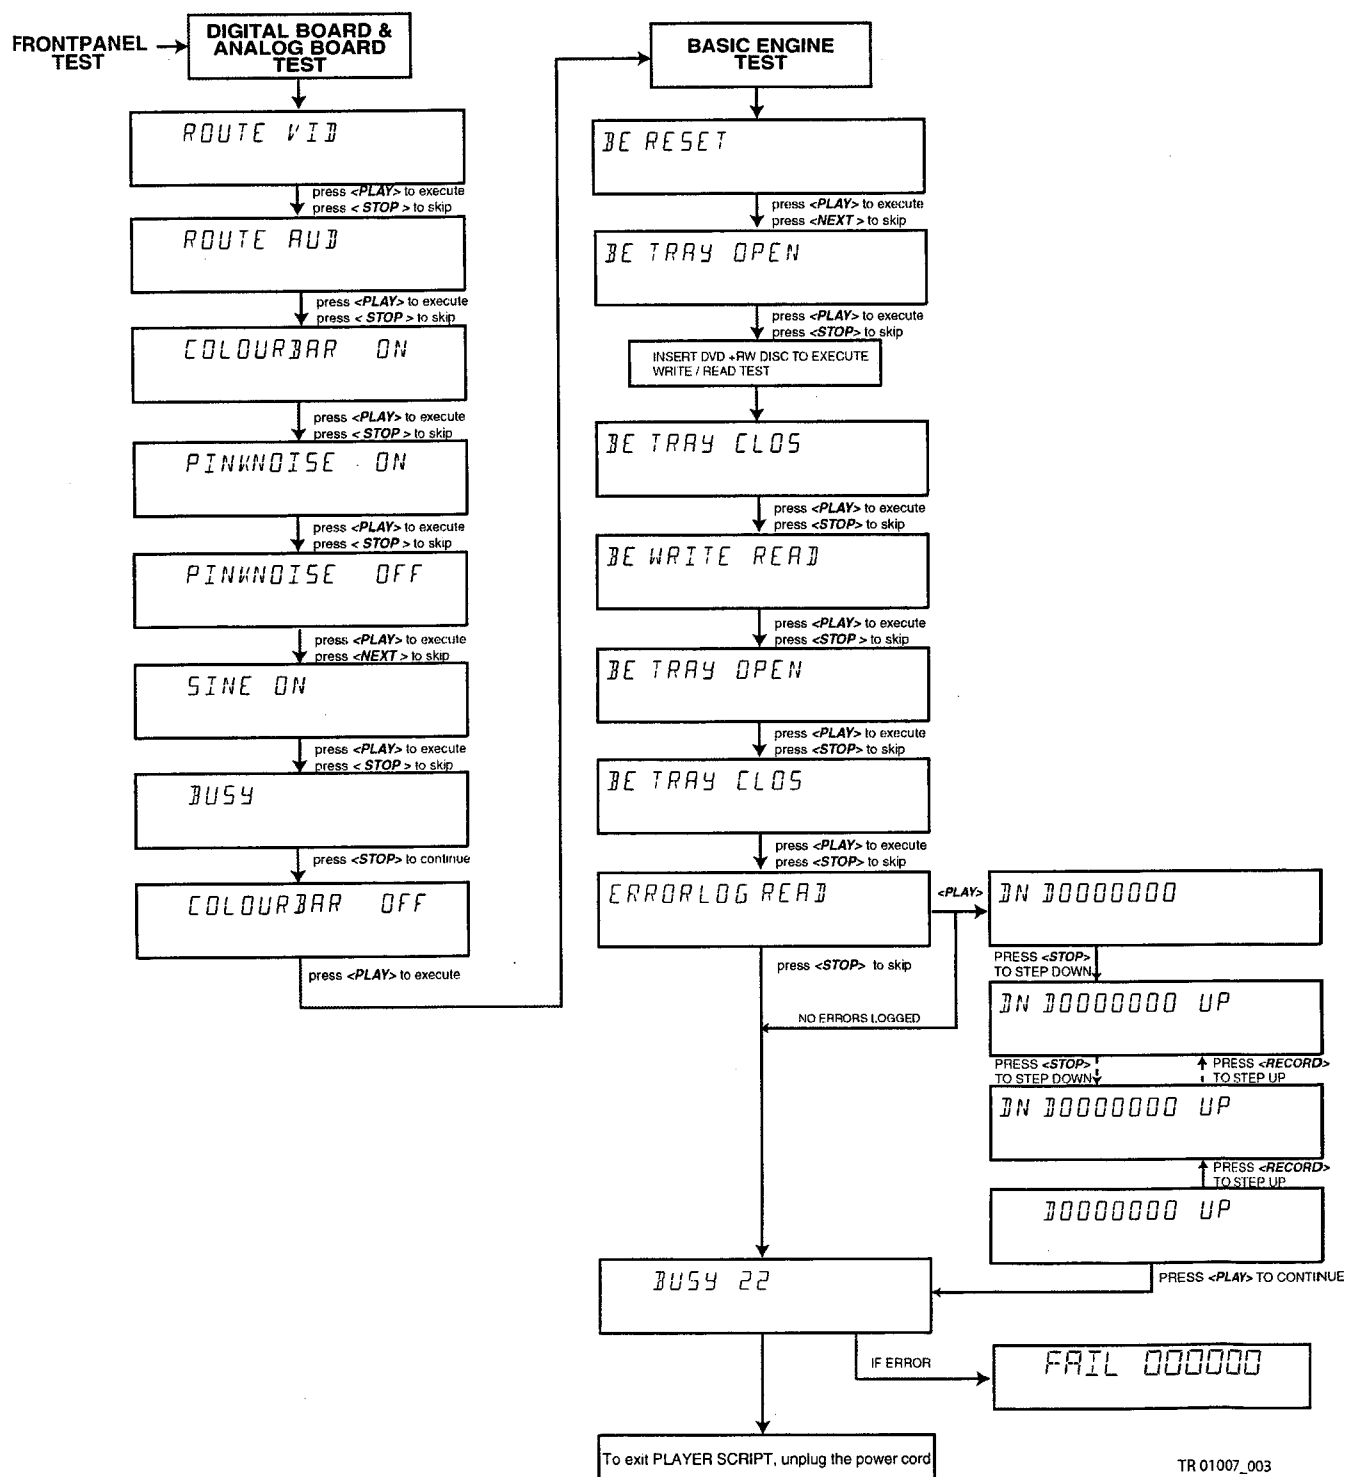

TR 01007_003
270103

Figure 5-3

5.2.3 Error Log

Explanation:

The application errors will be logged in the NVRAM. The maximum number of error bytes that will be visible is 19. The last reported error is shown as DN D0000000, the oldest visible error as D0000000 UP and the errors in between as DN D0000000 UP. DN stands for DOWN, UP stands for UPWARDS. The shown error codes are identical to the Nuclei Error Codes (paragraph 5.4).

5.2.4 Trade Mode

TRADE MODE

When the recorder is in Trade Mode, the recorder cannot be controlled by means of the front key buttons, but only by means of the remote control.

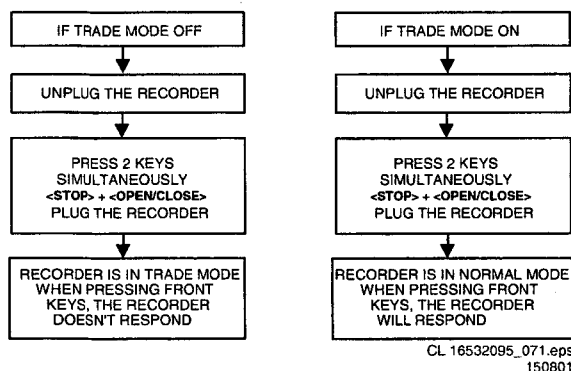


Figure 5-4

5.2.5 Virgin mode

If you want that the recorder starts up in Virgin mode, follow this procedure:

- Unplug the recorder
- plug the recorder again while you keep the STAND BY/ON key pressed
- the set starts up in Virgin mode.

5.3 Menu and Command Mode Interface

5.3.1 Nuclei Numeration

Each nucleus has a unique number of four digits. This number is the input of the command mode.

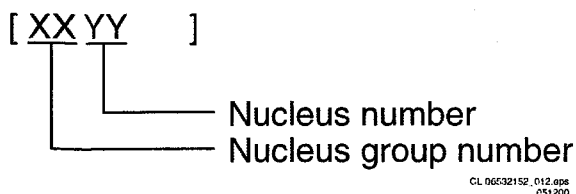


Figure 5-5

The following groups are defined for Digital Board 1.5, Empress:

Group number	Group name
0	Basic / Scripts
1	Host decoder (Sti5505 and memory)
2	Audio / video encoder (DVDR only)
3	VSM (DVDR only)
4	NVRAM
5	Front Panel

Group number	Group name
6	Basic Engine
7	Analogue board (DVDR only)
8	DVIO (DVDR only)
9	Loop nuclei (DVDR only)
10	Library sub nuclei (I2C nuclei)
11	User interface
12	Furore (SACD only)
13	DAC (SACD only)

The following groups are defined for Digital Board Chrysalis:

Group number	Group name
0	Basic / Scripts
1	Chrysalis
2	Boot EEPROM
3	NVRAM
4	SDRAM
5	Flash
6	Video Input Processor
7	DVIO
8	Progressive Scan
9	Basic Engine
10	Display and Control Board
11	Analogue Board
12	System

5.3.2 Error Handling

Each nucleus returns an error code. This code contains six numerals, which means:

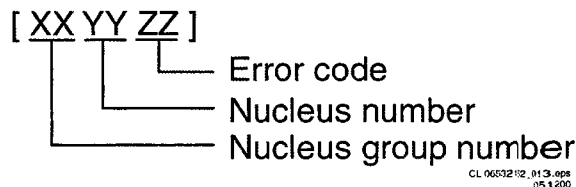


Figure 5-6

The nucleus group numbers and nucleus numbers are the same as above.

5.3.3 Command Mode Interface

Set-Up Physical Interface Components

Hardware required:

- Service PC
 - one free COM port on the Service PC
 - special cable to connect DVD recorder to Service PC
- The service PC must have a terminal emulation program (e.g. Hyperterminal) installed and must have a free COM port (e.g. COM1). Activate the terminal emulation program and check that the port settings for the free COM port are: 19200bps, 8 data bits, no parity, 1 stop bit and no flow control. The free COM port must be connected via a special cable to the RS232 port of the DVD recorder. This special cable will also connect the test pin, which is available on the connector, to ground (i.e. activate test pin).

Code number of PC interface cable: 3122 785 9001!

Activation Digital Board 1.5 Empress

Plug the recorder to the mains and the following text will appear on the screen of the terminal (program):

```

DVD Video Recorder Diagnostic Software version 48
Basic SDRAM Data bus test passed
Basic SDRAM Address bus test passed
Basic SDRAM Device test passed

(M) enu, (C) ommand or (S) 2B-interface? [M] : @ C
DD:>

```

CL 16532095_073 eps
150801

Figure 5-7

The first line indicates that the Diagnostic software has been activated and contains the version number. The next lines are the successful result of the SDRAM interconnection test and the basic SDRAM test. The last line allows the user to choose between the three possible interface forms. If pressing C has made a choice for Command Interface, the prompt ("DD>") will appear. The diagnostic software is now ready to receive commands. The commands that can be given are the numbers of the nuclei.

Activation Digital Board Chrysalis

1. Pull the mains cord from the recorder and reconnect it again (reboot).
2. The next welcome message will appear on the PC:

Welcome screen D&S program

```

Factory Diagnostics and Service Software
DVD Video Recorder
Version 6 (Jan 9 2003, 11:11:15)

DS:>

```

Connected 0:01:10 Auto detect 19200 Baud

Figure 5-8

Now, the prompt 'DS:>' will appear. The diagnostic software is now ready to receive commands. The commands that can be given are the numbers of the nuclei. If you see above shown screen, continue with paragraph 'Nuclei Codes'.

3. It is possible that the next messages will appear when starting the DVD+RW for the first time

Error messages D&S program

```

[MS-DIV.WARNING,Digital Board Hardware Information is corrupt,]
Factory Diagnostics and Service Software
DVD Video Recorder
Version 6 (Jan 9 2003, 11:11:15)

WARNING,Digital Board Hardware Information is corrupt
DS:>

```

Connected 0:01:10 Auto detect 19200 Baud

Figure 5-9a

Error messages D&S program

```

DS> *****
System error: Diversity string UnAccessible!! Eeprom problem! *****

Factory Diagnostics and Service Software
DVD Video Recorder
Version 8 (May 12 2003, 16:44:35)

WARNING,Digital Board Hardware Information is corrupt
DS>

```

Figure 5-9b

In these cases, the boot EEPROM of the Chrysalis Digital Board does not contain the required string with the hardware information. To update the Digital Board with the correct string, nucleus 1226 must be executed.

See next section 'Diversity String Input'.

There can also be the next error message.

```

DS> *****
System error: Due to a setting in the Digital Board Diversity -
Settings, the Recorder is unable to function properly.
Please change the hardware diversity settings by using the
proper nuclei BEFORE proceeding to the application!! *****

The next Hardware Settings can be safely programmed:
Board name: FAILSAFE
Hardware ID: 21

Codec IC: PNK7100_MF3
Video Input Processor IC: SAA7118
Progressive Scan Deinterlacer IC: None
Progressive Scan Denc IC: ADV7196
I-Link physical layer circuit IC: PDI1394P25
I-Link link layer circuit IC: PDI1394P40
Audio clock: Clock scheme 1
Bit engine connector: available
IDE connector 1: available
IDE connector 2: not available
PCI connector: not available
RAM size: 32MByte
ROM size (NOR FLASH bank 1): 8MByte
ROM size (NOR FLASH bank 2): Not available
ROM size (NAND FLASH): Not available
Settings ID: 4641494C5341464521030300010101020101000020080000
Program these settings? [Y/N]
Programming the settings values...

Factory Diagnostics and Service Software
DVD Video Recorder
Version 8 (May 1 2003, 18:38:27)

DS>_

```

Figure 5-9c

Enter "Y" to program a safe string. With this automatically generated string the board will work in principle but it has to be checked if all board settings were detected correctly.

Diversity String Input

4. Execute nucleus 1226 to enter the string. Please see chapter 8.5 for details

Nucleus 1226 execution with string

```

D&S - HyperTerminal
File Edit View Call Transfer Help
[Icons]
DS:> 1226 4E3100000000000022030300010101020100000020000000
122600:
Test OK
DS:> _

```

Connected 0:01:41 | Auto detect | 19200 8-N-1 | SCROLL | CAPS | NUM | Capture

Figure 5-10

5. To check if the hardware info is filled correctly, you can execute nucleus 1228.

Nucleus 1228 info example

```

D&S - HyperTerminal
File Edit View Call Transfer Help
[Icons]
DS:> 1228
Settings ID: 4E3100000000000022030300010101020100000020000000
Board name: N1
Hardware ID: 34
Codec IC: PMX7100_MF3
Video Input Processor IC: SAA7118
Progressive Scan Deinterlacer IC: None
Progressive Scan Denc IC: ADU7196
I-Link physical layer circuit IC: PDI1394P25
I-Link link layer circuit IC: PDI1394P40
Audio clock: Clock scheme 1
Bit engine connector: available
IDE connector 1: not available
IDE connector 2: not available
PCI connector: not available
RAM size: 32MByte
ROM size (NOR FLASH bank 1): 8MByte
ROM size (NOR FLASH bank 2): Not available
ROM size (NAND FLASH): Not available
Bit Engine:
122800:
Test OK
DS:> _

```

Connected 0:02:26 | Auto detect | 19200 8-N-1 | SCROLL | CAPS | NUM | Capture | Print

Figure 5-11

6. Exit the 'Terminal' program.
7. Reboot the DVD recorder to allow the software to start.

Command Overview Digital Board 1.5 Empress

We provide an overview of the nuclei and their numbers. This overview is preliminary and subject to modifications.

Host Decoder [01]

[xx yy] Number	Nuclei
100	Checksum Flash
101	Flash Write Access 1
102	Flash Write Access 2
103	Flash Write Read
104	SdRam Write Read
105	SdRam Write Read Fast
106	Dram Write Read
107	Dram Write Read Fast
108	Hardware Version
109	Mute On
110	Mute Off
115	Pink Noise On
116	Pink Noise Off
117	Sine On
118	Sine Burst 1kHz
119	Sine Burst 12kHz
120	Colour-bar On Note: Use nucleus 712 with parameter 07 to route the signals to the analogue board output
121	Colour-bar Off
122	NvramWrR
123	NvramI2c
130	Boot Version
131	Application Version
132	Diagnostics Version
133	Download Version
134	Write / read I2C message to / from digital board
135	Video Test Signal OnNote: Use nucleus 712 with parameter 07 to route the signals to the analogue board output. Input: 135 [a] [b] a: Number of test image, 0. Horizontal colour-bar 1. White 2. Yellow 3. Light blue 4. Green 5. Magenta 6. Red 7. Blue 8. Black 9. Colour triangle (execution time is 12 seconds) 10. Test image for progressive scan (execution time is 6 seconds) b: Video standard, 0. PAL BDGHI 1. NTSC
136	Video Test Signal Off
137	Macrovision Off

Audio Video Decoder [02]

[xx yy] Number	Nuclei
200	Video Encoder I2C
202	SAA7118 I2C
203	Audio Encoder SRAM Access
204	Audio Encoder Access
205	Audio Encoder SRAM Write Read
206	Audio Encoder Interrupts

[xx yy] Number	Nuclei
207	Audio Encoder I2C
208	SAA7118 select input
209	Empress Version

VSM [03]

[xx yy] Number	Nuclei
300	Register Access
301	SDRAM Access
302	SDRAM Write Read
303	Interrupt lines
304	VSM Interconnection
305	UART

NVRAM [04]

[xx yy] Number	Nuclei
400	Reset
401	Read
402	Modify
403	UniqueNr Read
404	Read Error Log
407	Reset Error Log
409	Line2 Region-Code Reset
410	UniqueNr Store

Front Panel [05]

[xx yy] Number	Nuclei
500	Echo
501	Version
502	Segment
503	Label
504	Led
505	Keyboard
506	Remote-Control
507	Segment Starburst
508	Segment Vertical
509	Segment Horizontal
514	Beeper
515	Discbar
516	Discbar Dots
517	Vu / Grid
518	Dimmer
519	Blinking
520	Light All Segments
522	Flap Open
523	Flap Close

Basic Engine [06]

[xx yy] Number	Nuclei
600	S2B Pass
601	S2B Echo
602	Version
603	Reset
604	Focus On
605	Focus Off
606	Disc Motor On
607	Disc Motor Off
608	Radial On

[xx yy] Number	Nuclei
609	Radial Off
615	Tray In
616	Tray Out
617	Write Read
618	Write Read Endless Loop
619	Selftest
620	BE Test
621	Laser Test
622	Spindle (Disc) Motor Test
623	Focus Test
624	Sledge Motor Test
625	Sledge Motor Slow
626	Tilt
627	EEPROM Read
628	EEPROM Write
629	Optimise Jitter
630	Radial ATLS Calibration
631	Get Statistics Information
632	Reset Statistics Information
633	BE Read Error Log
634	BE Reset Error Log
638	Get Self Test Result
639	Radial Initialisation
640	Get OPU info

Analog Board [07]

[xx yy] Number	Nuclei
700	Echo
703	Boot Version
704	Hardware Version
705	Clock Adjust
706	Tuner
707	Frequency Download
708	Data Slicer
709	Sound Processor
710	AV Selector
711	Nvram
712	Route Video
713	Route Audio
715	Set Slash Version
716	Application Version
717	Diagnostics Version
718	Download Version
720	Bargraph Level Adjustment
721	Clock correction
722	Clock reference
723	Re-virginise Recorder
724	Flash Checksum
725	Tuner frequency selection Europe: To make video and audio signals from the tuner available on Scart2, send command "712 08". For Nafta/Apac: To make the black/white Video available on Y/C Rear Out connector, send command "712 08" Input: 725 [frequency in MHz*16] [system] System: NTSC=16, PAL BG=16, PAL I=32, PAL DK=48, SEC L=64, SEC LS=80, SEC BG=96, SEC DK=112
727	Set virgin bit
728	Clear Virgin Bit
729	Write / read I2C message to / from analogue board

[xx yy] Number	Nuclei
730	Store external presets
731	Get slash version
732	AFC Reference Voltage Tuner
736	Get EPG Version
737	Get operating hours in Tuner Mode

DVIO [08]

[xx yy] Number	Nuclei
800	Check DVIO board presence
801	Reset DVIO
802	DVIO Access
803	Get DVIO error codes
804	Get DVIO module Ids
805	Execute DVIO module SelfTestInput: 805 [a] [b]Parameters: a=1/0...full Ram test, b=1/0...cable connected
806	Set DVIO led on.
807	Set DVIO led off.

Loop Nuclei [09]

[xx yy] Number	Nuclei
900	Digital Audio Loop(no function in Gen. 1.5 and Lead)
901	User / Dealer Audio Loop
902	Digital Video Loop
903	Digital Video VBI Loop
904	System Video Loop
905	System Video VBI Loop
906	User / Dealer Video Loop
907	User / Dealer Video VBI Loop
908	System Audio Loop SCART
909	System Audio Loop CINCH
910	Digital DVIO Video Loop
911	System Video Vip

Miscellaneous [14]

[xx yy] Number	Nuclei
1400	Clock 11.289 MHz
1401	Clock 12.288 MHz
1412	Progressive Scan I2C
1413	Progressive Scan test image on
1414	Progressive Scan test image off
1415	Progressive Scan Route Enable
1416	Progressive Scan Route Disable

Scripts [00]

[xx yy] Number	Nuclei
1	UserDealer Script
2	Player Script

Routing Audio and Video*Route Video*

Nucleus Number: 712

Description

This nucleus routes the video signals on the analogue board to the destination determined by the input parameters

The paths that are available for video routing and their description (Euro region):

Path ID	Description
00	Input signal is VIDEO(CVBS) from digital board and will be re-routed back to the digital board.
01	Input signal is from FRONT VIDEO(CVBS) IN and will be routed to the digital board.
02	No Routing.
03	Input signal is from FRONT S-VIDEO(Y/C) and will be routed to the digital board.
04	No Routing.
05	Input signal is CVBS from SCART1 and will be routed to the digital board.
06	Input signal is CVBS from SCART2 and will be routed to the digital board.
07	Input Signal is CVBS from Digital Board and it will be routed to Scart1 and Scart2.
08	Input signal is VIDEO(CVBS) from ANTENNA IN and will be routed to SCART2.
09	Input signal is VIDEO(CVBS) from SCART1 and will be routed to SCART2.
10	Input signal is VIDEO(CVBS) from SCART2 and will be routed to SCART1.
11	Signal path is routed Fast Blank from Scart2 pin16 and will be routed Scart1 pin16
12	Input Signal is YC from Digital Board and it will be routed to Scart1.
13	
14	No Routing.
15	Input Signal is CVBS from TUNER and it will be routed to Digital .
16	No Routing.
17	Input Signal is routed from digital board YC to REAR S-VIDEO(YC) OUT
18	Signal path is routed from digital board RGB to RGB SCART1 and from digital board CVBS to digital board CVBS.
19	No Routing.
20	Input RGB Signal is routed from Digital Board to SCART1(RGB),Input CVBS Signal from Digital Board to Digital Board and Fast Blanking Signal from Scart 2 to Scart1.
21	Input Y/C Signal from Digital Board is routed to Rear Y/C Connector and Input Y/c Signal from Front Y/C connector is routed to Digital Board.

Example

DD:> 712 01

71200: Video routing on the Analogue Board OK.

Test OK @

Route Audio

Nucleus Number: 713

Description

This nucleus routes the audio on the analogue board to the destination determined by the input parameters

The paths that are available for audio routing and their description (Europe version)

Path ID	Description
00	Input signal is from FRONT AUDIO IN and will be routed to the digital board.(This is done so that nucleus 901 works)
01	Input signal is from FRONT AUDIO IN and will be routed to the digital board.
02	No Routing.
03	Input signal is AUDIO from SCART1 and will be routed to the digital board.
04	Input signal is AUDIO from SCART2 and will be routed to the digital board.
05	No routing.
06	No routing.
07	Input Audio signal is from the digital Board and it will be routed to the Scart 1 and Scart2
08	Input AUDIO signal from TUNER and will be routed to SCART2.
09	Input signal is AUDIO from SCART1 and will be routed to SCART2.
10	Input audio signal from Scart2 is routed to Scart1.
11	Input Audio signal is routed from DVIO to Scart2.
12	
13	No Routing.
14	Input is Audio Signal from DVIO and it will be routed to Digital Board.
15	Input is Audio Signal from TUNER and it will be routed to Digital Board..
16	No routing.
17	No Routing.
18	Input signal is from FRONT AUDIO IN and will be routed to SCART2.
21	Input signal is from FRONT AUDIO IN and will be routed to the digital board.(This is done so that nucleus 909.1 works)

EXAMPLE

DD:> 713 00

71300: Audio routing on the Analogue Board OK.

Test OK @

Command overview Digital Board Chrysalis

Below you will find an overview of the nuclei, their numbers, and their error codes. This overview is preliminary and subject to modifications.

Chrysalis (CHR)

Nucleus Name	DS_CHR_DevTypeGet	
Nucleus Number	100	
Description	Sends the device ID and the module ids and revisions of the PNX7100 (Chrysalis) to the stdout port.	
Technical	<ul style="list-style-type: none"> - Determine the codec ID by means of comparing version ids of the modules. - Read the module-id register from every module. 	
Execution Time	Less than 1 second.	
User Input	None	
Error	Number	Description
	10000	Getting the information succeeded
	10001	Wrong codec ID detected
Example	<pre> DS:> 100 Device ID 7100 Codec ID PNX7100_MF2 F-BCU (0x0102) 1.0 INTC (0x011d) 1.0 PCI-XIO(0x0113) 1.0 SIF(0x013b) 1.0 EJTAG (0x0104) 0.0 S-BCU (0x0102) 1.0 BOOT (0x010a) 1.0 CONFIG (0x013f) 1.0 RESET (0x0123) 1.0 DEBUG (0x0116) 0.0 UART0 (0x0107) 0.1 UART1 (0x0107) 0.1 UART2 (0x0107) 0.1 UART3 (0x0107) 0.1 I2C0 (0x0105) 0.1 I2C1 (0x0105) 0.1 GPIO (0x013c) 1.0 SYNC (0x013a) 1.0 DISP0 (0xa015) 0.1 DISP1 (0xa00f) 0.0 OSD (0x0136) 0.1 SPU (0xa00e) 0.0 MIXER (0x0137) 1.0 DENC (0x0138) 0.1 CCIR (0x0139) 1.0 VDEC (0x0133) 0.1 PARSE (0xa00d) 0.0 DV (0xa00c) 0.0 BEI (0xa00a) 0.0 IDE (0xa009) 0.0 SGDX (0xa008) 0.0 BYTE (0xa00b) 0.0 OUTPUT (0xa003) 0.0 ACOMP (0xa000) 0.0 VFE (0xa001) 0.0 VCOMP (0xa002) 0.0 SCR (0x0000) 0.0 SIFF (0xa011) 0.0 WMD (0xa010) 0.0 AUDIO0 (0xa015) 0.1 AUDIO1 (0xa00f) 0.0 PSCAN (0xa018) 0.0 010000: Test OK @ </pre>	

Nucleus Name	DS_CHR_TestImageOn	
Nucleus Number	101	
Description	Generates a test-image of a selected video standard on selected video output on the digital board. When no input is given, the default values will be used. Use nucleus DS_ANAB_VideoRouting to route the video signal on the analogue board output	
Technical	<ul style="list-style-type: none"> - Validate the user input. - Initialise the SYNC module. - Initialise the DISPLAY module. - Initialise the MIXER module. - Initialise the DENC module. - Set the selected video standard. - Generate the selected test image in memory. - Start the DISPLAY module. - Start the MIXER module. - Start the DENC module according to the selected test image id. 	
Execution Time	1 second.	

User Input	The user has to decide which test image, video standard and video output must be used: Test image id: 0 VERTICAL_COLOURBAR (default) 1 HORIZONTAL_COLOURBAR 2 WHITE 3 YELLOW 4 CYAN 5 GREEN 6 MAGENTA 7 RED 8 BLUE 9 BLACK 10 GRAY Video standard: PAL (default) NTSC Video output: ALL CVBS and YC and RGB (default) CVBS YC RGB YUV PSCAN progressive scan	
Error	Number	Description
	10100	Generating the test image succeeded.
	10101	Invalid input was provided.
	10102	The Chrysalis SYNC-module cannot be initialised.
	10103	The Chrysalis MIXER-module cannot be initialised.
	10104	The Chrysalis VPP-module cannot be initialised.
	10105	The Chrysalis DENC-module cannot be initialised.
Example	DS:> 101 010100: Test OK @ DS:> 101 0 pal cvbs 010100: Test OK @ DS:> 101 4 ntsc yc 010100: Test OK @	

Nucleus Name	DS_CHR_TestImageOff	
Nucleus Number	102	
Description	Switches the test-image off.	
Technical	- Stop the DENC module.	
Execution Time	Less than 1 second.	
User Input	None	
Error	Number Description	
Example	10200 Stopping the test image generation succeeded 10201 The Chrysalis DENC-module failed. DS:> 102 010200: Test OK @	

Nucleus Name	DS_CHR_SineOn	
Nucleus Number	103	
Description	Generate an audio sine signal on the audio output of the digital board. Note: Left channel 6kHz, right channel 12 kHz sine. Make sure to route the signal first.	
Technical	<ul style="list-style-type: none"> - De-mute the analogue board - Set fifo parameters for audio - Set the volume - Set the I2S outputs and configuration paths - Set the decoder mode - Configure the DUET DSP - Configure the PALM DSP - Put the AC3 audio in the fifo - Send 'prepare' command to the audio decoder - Send 'play' command to the audio decoder 	
Execution Time	Less than 1 second	
User Input	None	
Error	Number	Description

	10300	The sine signal was successfully generated
	10301	The analogue board could not be de-muted
	10302	The audio decoder did not initialise
	10303	The dsp2 of the audio decoder did not configure
	10304	The dsp1 of the audio decoder did not configure
	10305	There was a delay-error before starting
	10306	Wrong input was given to the decoder function
Example	DS:> 103 010300: Test OK @	

Nucleus Name	DS_CHR_SineOff	
Nucleus Number	104	
Description	Stop generating the audio sine signal	
Technical	- Reset the audio block of the Chrysalis	
Execution Time	Less than 1 second.	
User Input	None	
Error	Number	Description
	10400	Switching off the audio sine signal succeeded
Example	DS:> 104 010400: Test OK @	

Nucleus Name	DS_CHR_SineBurst	
Nucleus Number	105	
Description	Generate an audio sine signal on the audio output of the digital board for 4 seconds.	
	Note: Left channel 6kHz, right channel 12 kHz sine with some known hick-ups	
Technical	- Call the DS_CHR_SineOn nucleus	
	- Delay for 4 seconds	
	- Call the DS_CHR_SineOff nucleus	
Execution Time	4 seconds	
User Input	None	
Error	Number	Description
	10500	The sine signal burst was successfully generated
	10501	The delay did not succeed during the burst
	10502	The audio sine could not be generated
Example	DS:> 105 010500: Test OK @	

Nucleus Name	DS_CHR_MuteOn	
Nucleus Number	106	
Description	Mute the audio outputs of the digital board	
Technical	- Send the 'Mute' command to the PALM DSP	
Execution Time	Less than 1 second.	
User Input	None	
Error	Number	Description
	10600	Muting the audio succeeded
Example	DS:> 106 010600: Test OK @	

Nucleus Name	DS_CHR_MuteOff	
Nucleus Number	107	
Description	De-mute the audio outputs of the digital board	
Technical	- Send the 'DeMute' command to the PALM DSP	
Execution Time	Less than 1 second.	
User Input	None	
Error	Number	Description
	10700	De-muting the audio succeeded
Example	DS:> 107 010700: Test OK @	

Nucleus Name	DS_CHR_DvLedOn	
Nucleus Number	108	
Description	Check the connection to the DV-LED on the digital board by switching it on	
Technical	- Write to the PIO pin to light the DV LED	
Execution Time	Less than 1 second.	
User Input	None	
Error	Number	Description
	10800	Switching the DV-LED on succeeded
	10801	Switching the DV-LED on failed
Example	DS:> 108 010800: Test OK @	

Nucleus Name	DS_CHR_DvLedOff	
Nucleus Number	109	
Description	Switch off the DV-LED on the digital board	
Technical	- Write to the PIO pin to switch off the DV LED	
Execution Time	Less than 1 second.	
User Input	None	
Error	Number	Description
	10900	Switching the DV-LED off succeeded
	10901	Switching the DV-LED off failed
Example	DS:> 109 010900: Test OK @	

Nucleus Name	DS_CHR_MacroVisionOn	
Nucleus Number	110	
Description	Turn on MacroVision.	
Technical	- Set some registers of the DENC module in the Chrysalis.	
Execution Time	Less than 1 second.	
User Input	None	
Error	Number	Description
	11000	Turning on MacroVision succeeded
	11001	Turning on MacroVision failed
Example	DS:> 110 011000: Test OK @	

Nucleus Name	DS_CHR_MacroVisionOff	
Nucleus Number	111	
Description	Turn off MacroVision.	
Technical	- Set some registers of the DENC module in the Chrysalis.	
Execution Time	Less than 1 second.	
User Input	None	
Error	Number	Description
	11100	Turning off MacroVision succeeded
	11101	Turning off MacroVision failed
Example	DS:> 111 011100: Test OK @	

Nucleus Name	DS_CHR_Peek	
Nucleus Number	112	
Description	Peek a value on a specified address	
Technical	<ul style="list-style-type: none"> - Check the user input - Read out the address specified - Check whether the address to be read is aligned on 4 bytes 	
Execution Time	Less than 1 second.	
User Input	The address to peek on	
Error	Number	Description
	11200	Peeking on the specified address succeeded
	11201	Peeking on the specified address failed, wrong user input

	11202	Peeking on the specified address failed due to misalignment
Example	DS:> 112 0xa0700000 011200: Value read = 0x000001BD Test OK @	

Nucleus Name	DS_CHR_Poke	
Nucleus Number	113	
Description	Poke a value on a specified address	
Technical	<ul style="list-style-type: none"> - Check the user input - Change the value on the address specified - Check whether the address to be modified is aligned on 4 bytes 	
Execution Time	Less than 1 second.	
User Input	The address to poke and the value: <address><value>	
Error	Number	Description
	11300	Poking the specified address succeeded
	11301	Poking the specified address failed, wrong user input
	11302	Poking the specified address failed due to misalignment
Example	DS:> 113 0xa0700000 0xaabccdd 011300: Test OK @	

Nucleus Name	DS_CHR_INT_PICInterrupts	
Nucleus Number	114	
Description	Test all interrupts of the priority interrupt controller	
Technical	<ul style="list-style-type: none"> - Install interrupt handlers - Generate interrupts - Test whether all interrupts were received 	
Execution Time	Less than 1 second.	
User Input	-	
Error	Number	Description
	11400	Testing all the PIC interrupts succeeded
	11401	Testing all the PIC interrupts failed
Example	DS:> 114 011400: Test OK @	

Nucleus Name	DS_CHR_DMA_TestDMA	
Nucleus Number	115	
Description	Test the memory to memory DMA transfer	
Technical	<ul style="list-style-type: none"> - Create a block with known data in memory - Copy this block to the consecutive area using 3 different DMAs - Check whether all DMAs transferred the data properly 	
Execution Time	Less than 2 seconds.	
User Input	-	
Error	Number	Description
	11500	The testing of the DMAs succeeded
	11501	The initialisation of the DMAs failed for one or more DMA
	11502	One or more DMAs failed the test
Example	DS:> 115 011500: Test OK @	

Boot EEPROM (BROM)

Nucleus Name	DS_BROM_Communication	
Nucleus Number	200	
Description	Check the communication between the IIC controller of the Chrysalis and the boot EEPROM	
Technical	<ul style="list-style-type: none"> - Initialise IIC - Read something from the eeprom 	
Execution Time	Less than 1 second.	
User Input	None	
Error	Number	Description
	20000	The data is properly read so the communication is OK
	20001	The IIC bus was not accessible

	20002	There was a timeout reading the device
	20003	The IIC acknowledge was not received
	20004	An IIC-bus error occurred
	20005	The IIC bus initialisation failed
	20006	An unexpected IIC error occurred
Example	DS:> 200 020000: Test OK @	

Nucleus Name	DS_BROM_WriteRead	
Nucleus Number	201	
Description	Check whether the Boot EEPROM can be written to and read from	
Technical	<ul style="list-style-type: none"> - Initialise IIC - Write something to the eeprom - Read from the same location and check whether it is the same as written 	
Execution Time	Less than 1 second.	
User Input	None	
Error	Number	Description
	20100	The write-read test succeeded
	20101	The write-read test failed
	20102	An IIC-bus error occurred
	20103	There was a timeout reading the device
	20104	The IIC bus was not accessible
	20105	The IIC acknowledge was not received
	20106	Got unknown IIC bus error
	20107	The IIC bus initialisation failed
Example	DS:> 201 020100: Test OK @	

NVRAM

Nucleus Name	DS_NVRAM_Communication	
Nucleus Number	300	
Description	Check the communication between the IIC controller of the Chrysalis and the EEPROM	
Technical	<ul style="list-style-type: none"> - Initialise IIC - Read from a location in NVRAM 	
Execution Time	Less than 1 second.	
User Input	None	
Error	Number	Description
	30000	Something is properly read so the communication is OK
	30001	The IIC bus was not accessible
	30002	There was a timeout reading the device
	30003	The IIC acknowledge was not received
	30004	The communication with the device failed
	30005	The IIC bus initialisation failed
Example	DS:> 300 030000: Test OK @	

Nucleus Name	DS_NVRAM_WriteRead	
Nucleus Number	301	
Description	Check whether the EEPROM can be written to and read from	
Technical	<ul style="list-style-type: none"> - Initialise IIC - Backup data from location to modify - Write to location and read it back again - Write back the backed up data to the location to leave the nvram as found 	
Execution Time	Less than 1 second	
User Input	None	
Error	Number	Description
	30100	The write-read test succeeded
	30101	The IIC bus could not be initialised
	30102	There was an NVRAM IO error
	30103	The value could not be read back from the NVRAM

Example	DS:> 301 030100: Test OK @
---------	----------------------------------

Nucleus Name	DS_NVRAM_Clear	
Nucleus Number	302	
Description	Make the EEPROM empty, containing all zeroes.	
Technical	<ul style="list-style-type: none"> - Initialise IIC - Create a memory block filled with zeroes - Write this block to the NVRAM 	
Execution Time	16 seconds	
User Input	None	
Error	Number	Description
	30200	The clearing of the NVRAM succeeded
	30201	There was an IIC error
	30202	Clearing the NVRAM failed
Example	DS:> 302 030200: Test OK @	

Nucleus Name	DS_NVRAM_Modify	
Nucleus Number	303	
Description	Modifies one or more locations in NVRAM and updates the checksum of the section modified	
Technical	<ul style="list-style-type: none"> - Initialise IIC - Decode user input - Modify the NVRAM as indicated - Validate the NVRAM by calculating the checksum and storing it 	
Execution Time	Less than 1 second	
User Input	1. The location that must be modified i.e. "ALL" "BOOT" "DIAGNOSTICS" "DOWNLOAD" "CONFIG" "RECORDER" or no string if an offset from the base address of the NVRAM is required 2. The offset and data which to put on the selected location <offset> <length> <data>	
Error	Number	Description
	30300	Modifying the NVRAM contents succeeded
	30301	Unable to initialise NVM
	30302	Modifying the NVRAM contents failed
	30303	length out of range
	30304	unable to decode length
	30305	offset out of range
	30306	unable to decode offset
	30307	unknown location specified
	30308	no location is specified
	30309	number of values incorrect
	30310	There was an IIC error
Example	DS:> 303 DIAGNOSTICS 5 1 0x5a 030300: Section is modified successfully Test OK @	

Nucleus Name	DS_NVRAM_Read	
Nucleus Number	304	
Description	Read out one or more locations in the NVRAM	
Technical	<ul style="list-style-type: none"> - Initialise IIC - Decode user input - Read from the NVRAM and return this info to the user 	
Execution Time	Less than 1 second	
User Input	1. The location which must be read i.e. "ALL" "BOOT" "DIAGNOSTICS" "DOWN LOAD" "CONFIG" "RECORDER" or no string if an offset from the base address of the NVRAM is required 2. The offset and number of bytes to read <offset> <length>	
Error	Number	Description
	30400	Value read
	30401	Unable to initialise NVM

	30402	Reading the NVRAM contents failed
	30403	length out of range
	30404	unable to decode length
	30405	offset out of range
	30406	unable to decode offset
	30407	unknown location specified
	30408	no location is specified
Example	304 DIAGNOSTICS 0 6 030400: Value read = 0x00 0x00 0x00 0x00 0x00 0x5A Test OK @	

SDRAM

Nucleus Name	DS_SDRAM_WriteRead	
Nucleus Number	400	
Description	Check all data lines, address lines and memory locations of the SDRAM	
Technical	<ul style="list-style-type: none"> - Test the databus - Test the addressbus - Test the integrity of the device itself (memory locations) 	
Execution Time	11 seconds	
User Input	None	
Error	Number	Description
	40000	The write-read test succeeded
	40001	The data bus contains an error
	40002	The address bus contains an error
	40003	The SDRAM itself contains an error
Example	DS:> 400 040000: Test OK @	

Nucleus Name	DS_SDRAM_WriteReadFast	
Nucleus Number	401	
Description	Check all data lines and address lines of the SDRAM	
Technical	<ul style="list-style-type: none"> - Test the databus - Test the addressbus 	
Execution Time	Less than 1 second	
User Input	None	
Error	Number	Description
	40100	The write-read test succeeded
	40101	The data bus contains an error
	40102	The address bus contains an error
Example	DS:> 401 040100: Test OK @	

Nucleus Name	DS_SDRAM_Write	
Nucleus Number	402	
Description	Write to a specific memory address	
Technical	<ul style="list-style-type: none"> - Decode the user input and check its ranges and alignment on 4 bytes - Write the data to the SDRAM 	
Execution Time	Less than 1 second	
User Input	<ol style="list-style-type: none"> 1. The location that must be modified (SDRAM starts at address 0xA0000000) 2. The value to put on the selected location 	
Error	Number	Description
	40200	Writing to the SDRAM succeeded
	40201	Writing to the SDRAM failed; Wrong user input
	40202	Address is not dividable by 4
Example	DS:> 402 0xa1000010 0xad112222 040200: Test OK @	

Nucleus Name	DS_SDRAM_Read	
Nucleus Number	403	
Description	Read from a specific memory address	

Technical	<ul style="list-style-type: none"> - Decode the user input and check the ranges - Read from the SDRAM and return this info to the user 	
Execution Time	Less than 1 second	
User Input	The location from which the data must be read (SDRAM starts at address 0xA0000000)	
Error	Number	Description
	40300	Reading from the SDRAM succeeded
	40301	Reading from the SDRAM failed; Wrong user input
	40302	Address is not dividable by 4
Example	DS:> 403 0xa1000010 040300: Value read = 0xAD112222 Test OK @	

FLASH

Nucleus Name	DS_FLASH_DevTypeGet	
Nucleus Number	500	
Description	Get the device (revision) type information of the FLASH IC. (manufacturer and device ID)	
Technical	<ul style="list-style-type: none"> - Set the timing for the flash writing - Write a command sequence to determine device type information - Return the information to the user 	
Execution Time	Less than 1 second	
User Input	None	
Error	Number	Description
	50000	Getting the information from the FLASH succeeded
	50001	Getting the information from the FLASH failed
Example	DS:> 500 050000: Found FLASH memory: Manufacturer ID: 0x01 Device ID : 0x01 Test OK @	

Nucleus Name	DS_FLASH_WriteRead	
Nucleus Number	501	
Description	Check whether the FLASH can be written to and read from	
Technical	<ul style="list-style-type: none"> - Find the test segment in flash - Read the data into SDRAM - Modify the data - Write this data from SDRAM to FLASH and verify it by reading back again 	
Execution Time	Less than 1 seconds.	
User Input	None	
Error	Number	Description
	50100	The FLASH write-read test succeeded
	50101	The test segment could not be found
	50102	All bits in the TEST region are filled with 0
	50103	The WriteRead test failed
	50104	The Write Failed
Example	DS:> 501 050100: Test OK @	

Nucleus Name	DS_FLASH_Read	
Nucleus Number	502	
Description	Read from a specific memory address in FLASH	
Technical	<ul style="list-style-type: none"> - Decode the user input and check the ranges and whether the address is aligned on 4 bytes - Read the data and return this to the user 	
Execution Time	Less than 1 seconds.	
User Input	The location from which data must be read (FLASH starts at address 0xB8000000)	
Error	Number	Description
	50200	Reading the FLASH succeeded
	50201	Reading the FLASH failed; Wrong user input
	50202	Address is not dividable by 4

Example	DS:> 502 0xb8000000 050200: Value read = 0x3C08A000 Test OK @
---------	---

Nucleus Name	DS_FLASH_ChecksumProgram	
Nucleus Number	503	
Description	Check the checksum of the application partitions by recalculating and comparing partition checksums	
Technical	<ul style="list-style-type: none"> - Determine the number of segments - Find the application in each segment and determine its checksum - Check whether the checksums stored match the newly calculated 	
Execution Time	6 seconds	
User Input	None	
Error	Number	Description
	50300	The checksum is valid, the test succeeded
	50301	The checksum is invalid
Example	DS:> 503 050300: BootCode checksum is: 0xBABE5B6F, which is correct Diagnostics checksum is : 0xBABEBAFF, which is correct Download checksum is: 0xBABEEDBF, which is correct Application checksum is : 0xBABE8EEC, which is correct Test OK @	

Nucleus Name	DS_FLASH_CalculateChecksum	
Nucleus Number	504	
Description	Calculate the checksum over all memory addresses. Used to check entire FLASH contents	
Technical	- Run the checksum calculation algorithm all addresses	
Execution Time	6 seconds	
User Input	None	
Error	Number	Description
	50400	Calculating the checksum over all addresses succeeded
Example	DS:> 504 050400: The Checksum = 0xBABE30A4 Test OK @	

Nucleus Name	DS_FLASH_CalculateChecksumFast	
Nucleus Number	505	
Description	Calculate a checksum over a selected number of address locations	
Technical	- Run the checksum calculation algorithm on a selected number of addresses	
Execution Time	Less than 1 second	
User Input	None	
Error	Number	Description
	50500	Calculating the checksum over selected addresses succeeded
Example	DS:> 505 050500: The Checksum = 0xBABEB064 Test OK @	

Video Input Processor (VIP)

Nucleus Name	DS_VIP_DevTypeGet	
Nucleus Number	600	
Description	Get the device (revision) type information of the VIP IC	
Technical	<ul style="list-style-type: none"> - Initialise IIC - Read out the device (revision) type information of the VIP IC 	
Execution Time	Less than 1 second	
User Input	None	
Error	Number	Description
	60000	Getting the information from the VIP succeeded
	60001	The IIC bus initialisation failed
	60002	There was an error getting the information from the VIP
	60003	Type not according to type stored in HW diversity string
Example	DS:> 600 060000: Found SAA7118 Test OK @	

Nucleus Name	DS_VIP_Communication	
Nucleus Number	601	
Description	Check the communication between the IIC controller of the chrysalis and the VIP IC	
Technical	<ul style="list-style-type: none"> - Initialise IIC - Read data from a location in the VIP 	
Execution Time	Less than 1 second	
User Input	None	
Error	Number	Description
	60100	Communicating with the VIP succeeded
	60101	The IIC bus was not accessible
	60102	There was a timeout reading the device
	60103	The IIC acknowledge was not received
	60104	The communication with the device failed
	60105	The IIC bus initialisation failed
Example	DS:> 601 060100: Test OK @	

Nucleus Name	DS_VIP_ClockOutputOn	
Nucleus Number	602	
Description	Switch the clock output on	
Technical	<ul style="list-style-type: none"> - Initialise IIC - Set the clock output through IIC 	
Execution Time	Less than 1 second	
User Input	None	
Error	Number	Description
	60200	Switching the clock output on succeeded
	60201	Switching the clock output on failed
Example	DS:> 602 060200: Test OK @	

Nucleus Name	DS_VIP_ClockOutputOff	
Nucleus Number	603	
Description	Switch the clock output off	
Technical	<ul style="list-style-type: none"> - Initialise IIC - Reset the clock output through IIC 	
Execution Time	Less than 1 second	
User Input	None	
Error	Number	Description
	60300	Switching the clock output off succeeded
	60301	Switching the clock output off failed
Example	DS:> 603 060300: Test OK @	

Nucleus Name	DS_VIP_SelectInput	
Nucleus Number	604	
Description	Select an input video path to be switched to the analogue output pin (AOUT) of the VIP	
Technical	<ul style="list-style-type: none"> - Check the user input - Initialise IIC - Read out the VIP id - Write the set of registers required for the input specified 	
Execution Time	Less than 1 second	

User Input	The input to select, see table below. 1 CVBS_Y_IN_A 2 CVBS_OUT_B 3 CVBS_Y_IN_B 4 CVBS_Y_IN_C 6 C_IN 8 G_IN 9 Y_IN 13 B_IN 14 U_IN 18 R_IN 19 V_IN	
Error	Number	Description
	60400	Selecting the input of the VIP succeeded
	60401	The user provided wrong input
	60402	The VIP was not accessible
Example	DS:> 604 1 060400: Test OK @	

Digital Video Input Output (DVIO)

Nucleus Name	DS_DVIO_LinkDevTypeGet	
Nucleus Number	700	
Description	Get the device (revision) type information of the 1394 Link layer IC	
Technical	<ul style="list-style-type: none"> - Initialise the PIO pins on the chrysalis - Read out the ID register 	
Execution Time	Less than 1 second	
User Input	None	
Error	Number	Description
	70000	Getting the information from the link layer IC succeeded
	70001	Getting the information from the link layer IC failed
	70002	Type not according to type stored in HW diversity string
Example	DS:> 700 070000: Device type of the link layer IC: ffc00301 Test OK @	

Nucleus Name	DS_DVIO_LinkCommunication	
Nucleus Number	702	
Description	Check the accessibility of the 1394 Link layer IC by writing to and reading from a specific address	
Technical	<ul style="list-style-type: none"> - Initialise the PIO pins of the chrysalis - Write a pattern to the CYCTM register of the link chip - Read back and verify the pattern 	
Execution Time	Less than 1 second	
User Input	None	
Error	Number	Description
	70200	Communicating with the link layer IC succeeded
	70201	Communicating with the link layer IC failed
	70202	Result of nucleus not according to HW diversity string
Example	DS:> 702 070200: Test OK @	

Nucleus Name	DS_DVIO_PhyCommunication	
Nucleus Number	703	
Description	Check the accessibility of the 1394 Physical layer IC by writing to and reading from a specific address	
Technical	<ul style="list-style-type: none"> - Initialise the PIO pins of the chrysalis - Initialise IIC - Write the data to be written to the phy-chip to the link chip first - Wait until the link chip indicates that the data has been written to the phy - Write the phy-access register in the Link chip to indicate phy read access - Wait until the link chip has obtained the value from the phy-chip - Test whether the value read back equals the one previously written 	
Execution Time	Less than 1 second	
User Input	None	

Error	Number	Description
	70300	Communicating with the physical layer IC succeeded
	70301	The physical layer IC was not accessible
	70302	Communicating with the physical layer IC failed
	70303	Result of nucleus not according to HW diversity string
Example	DS:> 703 070300: Test OK @	

Nucleus Name	DS_DVIO_Routing	
Nucleus Number	704	
Description	Route a DV stream containing an audio and video signal through the physical and link layer ICs to the Chrysalis	
Technical	<ul style="list-style-type: none"> - Initialise the DMA to transfer 5 frames PAL/NTSC - Initialise the DV demultiplexer - Initialise the 1394 interface and start reception of the DV stream - Check whether the stream was copied to memory properly by the byte input interface (port to memory type DMA) 	
Execution Time	6-10 seconds (6 when OK, 10 when no stream or error)	
User Input	None, test works for both NTSC and PAL	
Error	Number	Description
	70400	Routing the signals succeeded
	70401	The 1394 link chip could not be initialised properly
	70402	There was a syntax error in the DV stream
	70403	DMA could not copy DV stream to memory. Stream connected?
	70404	DMA not working properly
Example	DS:> 704 070400: Test OK @	

Nucleus Name	DS_DVIO_DetectNode	
Nucleus Number	705	
Description	Check whether a DV node can be detected by the hardware	
Technical	<ul style="list-style-type: none"> - Initialise the 1394 interface - Detect whether a node is in range 	
Execution Time	3 or 5 seconds (3 when OK, 5 when no stream or error)	
User Input	None, test works for both NTSC and PAL	
Error	Number	Description
	70500	The node was detected OK
	70501	The 1394 link chip could not be initialised properly
	70502	Unable to write to 1394 PHY chip
	70503	Unable to read from 1394 PHY chip
	70504	No node was detected
Example	DS:> 705 070500: Test OK @	

Nucleus Name	DS_DVIO_DetectStream	
Nucleus Number	706	
Description	Check whether a DV stream can be detected by the hardware	
Technical	<ul style="list-style-type: none"> - Initialise the 1394 interface - Start receiving the stream - Detect whether the stream is OK 	
Execution Time	3 or 5 seconds (3 when OK, 5 when no stream or error)	
User Input	None, test works for both NTSC and PAL	
Error	Number	Description
	70600	The stream was detected
	70601	The 1394 link chip could not be initialised properly
	70602	No stream detected
Example	DS:> 706 070600: Test OK @	

Progressive Scan (PSCAN)

Nucleus Name	DS_PSCAN_CommunicationDenc	
Nucleus Number	801	
Description	Check the communication between the IIC controller of the chrysalis and the progressive scan DENC-IC	
Technical	<ul style="list-style-type: none"> - Initialise IIC - Write data to a register of the DENC through IIC 	
Execution Time	Less than 1 second	
User Input	None	
Error	Number	Description
	80100	Communicating with the progressive scan DENC-IC succeeded
	80101	The IIC bus was not accessible
	80102	There was a timeout reading the device
	80103	The IIC acknowledge was not received
	80104	Communicating with the progressive scan DENC-IC failed
	80105	The initialisation of the IIC bus failed
	80106	The read data is not the same as the written data
	80107	No chip was expected
Example	DS:> 801 080100: Test OK @	

Nucleus Name	DS_PSCAN_TestImageOn	
Nucleus Number	802	
Description	Generate the test images that are present on the progressive scan IC.	
Technical	<ul style="list-style-type: none"> - See whether the user wanted a HATCH or a FRAME image pattern - Initialise the PIO pins of the chrysalis - Initialise IIC - Reset the DENC - Enable the 27Mhz clock - Send all settings for the pattern to the DENC through IIC 	
Execution Time	Less than 1 second	
User Input	In case of ADV7196: When no input is given "HATCH" is the default -"HATCH" -"FRAME" Remark: "HATCH" is a crosshatch test pattern (horizontal and vertical white lines are displayed against a black background) "FRAME" is a uniform coloured frame/field test pattern (default white). In case of FLI2300: Nothing.	
Error	Number	Description
	80200	The generation of the test image succeeded
	80201	Unable to initialise pscan ic
	80202	Unable to reset DENC
	80203	Unable to generate image
	80204	No chip was expected
Example	DS:> 802 HATCH 080200: Test OK @	

Nucleus Name	DS_PSCAN_TestImageOff	
Nucleus Number	803	
Description	Switch off the generated test image	
Technical	<ul style="list-style-type: none"> - Initialise IIC - Send the default DENC settings to the DENC through IIC 	
Execution Time	Less than 1 second	
User Input	None	
Error	Number	Description
	80300	Turning off the test image succeeded
	80301	Unable to initialise pscan ic
	80302	IIC Error during writing pscan ic
	80303	No chip was expected

Example	DS:> 803 080300: Test OK @
---------	----------------------------------

Nucleus Name	DS_PSCAN_TestImageColourSettingsSet	
Nucleus Number	804	
Description	Set the colour of the hatch- or the frame- field to a different value than the default white	
Technical	<ul style="list-style-type: none"> - Determine which colour must be set. - Initialise IIC. - Enable 27 Mhz PSCAN Clock. - Send all settings to the DENC through IIC. 	
Execution Time	Less than 1 second.	
User Input	A colour string of one of the next non-case sensitive strings (WHITE, BLACK, RED, GREEN, BLUE, YELLOW, CYAN, MAGENTA) or Y Cr Cb (hexa-) decimal values.	
Error	Number	Description
	80400	Setting the new colour-settings succeeded
	80401	The user provided wrong input
	80402	Unable to initialise pscan ic
	80403	Unable to set colour
	80404	No chip was expected
Example	DS:> 804 yellow 080400: Test OK @ DS:> 804 0x6a 0xde 0xca 080400: Test OK @	

Nucleus Name	DS_PSCAN_TestImageColourSettingsGet	
Nucleus Number	805	
Description	Get the colour settings of the hatch- or the frame- field.	
Technical	<ul style="list-style-type: none"> - Initialise IIC. - Read the colour settings from the DENC through IIC. 	
Execution Time	Less than 1 second.	
User Input	None	
Error	Number	Description
	80500	Getting the colour-settings succeeded
	80501	The progressive scan DENC-IC was not accessible through IIC
	80502	Unable to get colour
	80503	No chip was expected
Example	DS:> 805 080500: Colour Y Cr Cb values: 0xD2 0x92 0x10 Test OK @	

Nucleus Name	DS_PSCAN_Routing	
Nucleus Number	806	
Description	Route a video signal from the host processor through the progressive scan ICs to the progressive scan output of the set. Note: to route the progressive scan to the output of the set, first call nucleus 1112 with parameter 0 (video routing on analogue board).	
Technical	<ul style="list-style-type: none"> - Initialise the PIO pins of the chrysalis - Initialise IIC - Reset the DENC - Enable the 27Mhz clock - Send all settings to the DENC through IIC. 	
Execution Time	Less than 1 second.	
User Input	None	
Error	Number	Description
	80600	Routing path is created successfully.
	80601	Unable to initialise the Chrysalis.
	80602	Unable to access DENC
	80603	Unable to access deinterlacer.
	80604	Wrong chips were expected.
Example	DS:> 806 080600: Test OK @	

Nucleus Name	DS_PSCAN_DevTypeGetDeinterlacer	
Nucleus Number	807	
Description	Get the device (revision) type information of the progressive scan deinterlacer.	
Technical	<ul style="list-style-type: none"> - Initialise the deinterlacer. - Read the version register of the deinterlacer. 	
Execution Time	1 second	
User Input	None	
Error	Number	Description
	80700	Everything went well.
	80701	The communication with the device failed
	80702	No chip was expected
Example	DS:> 807 080700: Chip name : 2300 Chip version : 1 Test OK @	

Nucleus Name	DS_PSCAN_CommunicationDeinterlacer	
Nucleus Number	808	
Description	Check the communication between the IIC controller of the chrysalis and the progressive scan Deinterlacer-IC	
Technical	<ul style="list-style-type: none"> - Initialise IIC - Set the video source synchronisation source to the Chrysalis - Write data to the DENC through IIC 	
Execution Time	Less than 1 second	
User Input	None	
Error	Number	Description
	80800	Communicating with the progressive scan Deinterlacer-IC succeeded
	80801	The IIC bus was not accessible
	80802	There was a timeout reading the device
	80803	The communication with the device failed (no ACK)
	80804	Communicating with the progressive scan Deinterlacer-IC failed
	80805	The initialisation of the IIC bus failed
	80806	The data read back is not the same as the data written
	80807	No chip was expected
Example	DS:> 808 080800: Test OK @	

Basic Engine (BE)

Nucleus Name	DS_BE_CommunicationEcho	
Nucleus Number	900	
Description	Check the communication between the digital board and the basic engine by issuing an echo command over the S2B interface	
Technical	<ul style="list-style-type: none"> - Send the ECHO command - Check if the BE returned the string 0x00 0xAA 0x55 	
Execution Time	Less than 1 second	
User Input	None	
Error	Number	Description
	90000	Communicating with the BE over the S2B interface succeeded
	90001	There was a time-out while communicating
	90002	The Basic Engine returned an unexpected result
	90003	The Basic Engine returned an error code
	90004	No acknowledge received from BE
	90005	Communicating with the Basic Engine failed
	90006	Echo check failed, no echo received
	90007	Echo check failed, received wrong pattern
Example	DS:> 900 090000: Test OK @	

Nucleus Name	DS_BE_Reset	
Nucleus Number	901	
Description	Reset the basic engine	
Technical	- Toggle the reset pin of the I2S interface	
Execution Time	2 seconds	
User Input	None	
Error	Number	Description
	90100	Resetting the Basic Engine succeeded
	90101	Resetting the Basic Engine failed
Example	DS:> 901 090100: Test OK @	

Nucleus Name	DS_BE_VersionGet	
Nucleus Number	903	
Description	Get the version of the basic engine and that of the optical unit	
Technical	- Send the GET_VERSION_NUMBER command - Display the returned version	
Execution Time	Less than 1 second	
User Input	None	
Error	Number	Description
	90300	BE version OK
	90301	There was a time-out while communicating
	90302	The Basic Engine returned an unexpected result
	90303	The BE returned an error code
	90304	No acknowledge received from BE
	90305	Communicating with the Basic Engine failed
	90306	The BE returned no info
Example	DS:> 903 090300: BE version = 20.09.18 Optical unit version = 3C.00.09.41.08 Test OK @	

Nucleus Name	DS_BE_GetSelftestResult	
Nucleus Number	902	
Description	Return the self-test results through the service port	
Technical	- Send the GET_SELF_TEST_RESULT command - On error display the error received from the BE	
Execution Time	Less than 1 second	
User Input	None	
Error	Number	Description
	90200	Self test succeeded, no errors
	90201	There was a time-out while communicating
	90202	The Basic Engine returned an unexpected result
	90203	The BE returned an error code
	90204	No acknowledge received from BE
	90205	Communicating with the Basic Engine failed
	90206	Basic Engine returned no info
	90207	Self test failed, errors are echoed
Example	DS:> 902 090200: Test OK @	

Nucleus Name	DS_BE_TrayOut	
Nucleus Number	904	
Description	Open the tray of the basic engine	
Technical	- Send the TRAY_OUT command	
Execution Time	Approximately 2 seconds	
User Input	None	
Error	Number	Description
	90400	The command executed successfully
	90401	There was a time-out while communicating
	90402	The Basic Engine returned an unexpected result
	90403	The BE returned an error code

	90404	No acknowledge received from BE
	90405	Unable to enter normal mode
	90406	Communicating with the Basic Engine failed
Example	DS:> 904 090400: Test OK @	

Nucleus Name	DS_BE_TrayIn	
Nucleus Number	905	
Description	Close the tray of the basic engine	
Technical	- Send the TRAY_IN command	
Execution Time	Approximately 1 - 2 seconds	
User Input	None	
Error	Number	Description
	90500	The command executed successfully
	90501	There was a time-out while communicating
	90502	The Basic Engine returned an unexpected result
	90503	The BE returned an error code
	90504	No acknowledge received from BE
	90505	Unable to enter normal mode
	90505	Communicating with the Basic Engine failed
Example	DS:> 905 090500: Test OK @	

Nucleus Name	DS_BE_WriteReadDvdRw	
Nucleus Number	906	
Description	Write data to and read data from a DVD+RW disc through the basic engine for verification of the writing	
Technical	<ul style="list-style-type: none"> - Execute DS_BE_GetSelftestResults - Send the TRAY_IN command - Send the READ_TOC command - Generate a random disc location - Generate test data to write to the DVD+RW - Transfer the test data to the disc location using DMA - Read back the data from disc using DMA - Compare the two data areas and check whether the areas are equal 	
Execution Time	Approximately 20 seconds	
User Input	None	
Error	Number	Description
	90600	The command executed successfully
	90601	This nucleus cannot be executed because the Self-Test failed
	90602	The BE cannot enter normal operating mode
	90603	Unable to send the tray in
	90604	Unable to read TOC from disc
	90605	Invalid disc is loaded, please insert a DVD+RW disc
	90606	Writing the test pattern to DVD+RW failed
	90607	Reading back the test pattern from DVD+RW failed
	90608	Compare check failed
	90609	Calibrating DVD+RW failed
Example	DS:> 906 090600: Testing on sector 0x5dbe0: OK Test OK @	

Nucleus Name	DS_BE_WriteReadDvdR	
Nucleus Number	907	
Description	Write data to and read data from a DVD+R disc through the basic engine for verification of the writing	

Technical	<ul style="list-style-type: none"> - Execute DS_BE_GetSelftestResults - Send the TRAY_IN command - Send the READ_TOC command - Use the OPC area to test if the DVD+R is (still) writable - Generate test data to write to the DVD+R - Transfer the test data to the disc location using DMA - Read back the data from disc using DMA - Compare the two data areas and check whether the areas are equal 	
Execution Time	Approximately 20 seconds	
User Input	None	
Error	Number	Description
	90700	The command executed successfully
	90701	This nucleus cannot be executed because the Self-Test failed
	90702	The BE cannot enter normal operating mode
	90703	Unable to send the tray in
	90704	Unable to read TOC from disc
	90705	Invalid disc is loaded, please insert a DVD+RW disc
	90706	Unable to write, the DVD+R disc is full
	90707	No writable DVD+R sector found
	90708	Writing the test pattern to DVD failed
	90709	Reading back the test pattern from DVD failed
	90710	Compare check failed
Example	DS:> 907 090700: Testing on sector 0x36210: OK Test OK @	

Nucleus Name	DS_BE_StatisticalInformationGet	
Nucleus Number	908	
Description	Retrieve the statistical information from the basic engine	
Technical	<ul style="list-style-type: none"> - Send the GET_STATISTICAL_INFO command - Display the info returned from the BE 	
Execution Time	Less than 1 second	
User Input	None	
Error	Number	Description
	90800	The command executed successfully
	90801	There was a time-out while communicating
	90802	The Basic Engine returned an unexpected result
	90803	The BE returned an error code
	90804	No acknowledge received from BE
	90805	Communicating with the Basic Engine failed
	90806	The BE returned no info
Example	DS:> 908 Number of times Tray went Open/Closed : 4 Total minutes the CD laser was on : 0 Total minutes the DVD laser was on : 0 Total minutes the write laser was on : 0 090800: Test OK @	

Nucleus Name	DS_BE_StatisticalInformationReSet	
Nucleus Number	909	
Description	Reset the statistical information in the basic engine	
Technical	<ul style="list-style-type: none"> - Send the RESET_STATISTICAL_INFO command - Send the POWER_DOWN command - Toggle the reset pin of the I2S interface 	
Execution Time	2 seconds	
User Input	None	
Error	Number	Description
	90900	The command executed successfully
	90901	There was a time-out while communicating
	90902	The Basic Engine returned an unexpected result
	90903	The BE returned an error code
	90904	No acknowledge received from BE
	90905	Communicating with the Basic Engine failed

Example	DS:> 909 090900: Test OK @
---------	----------------------------------

Nucleus Name	DS_BE_ErrorLogGet	
Nucleus Number	910	
Description	Get the error log from the basic engine	
Technical	<ul style="list-style-type: none"> - Send the GET_ERROR command - Display the returned info 	
Execution Time	Less than 1 second	
User Input	None	
Error	Number	Description
	91000	The command executed successfully
	91001	There was a time-out while communicating
	91002	The Basic Engine returned an unexpected result
	91003	The BE returned an error code
	91004	No acknowledge received from BE
	91005	Communicating with the Basic Engine failed
	91006	The BE returned no info
Example	DS:> 910 Momentary errors (Byte 1 - Byte 7) : 0x00 0x00 0x00 0x00 0x00 0x00 0x00 Cumulative errors (Byte 1 - Byte 7) : 0x00 0x00 0x00 0x20 0x00 0x00 0x00 Fatal errors (Oldest - Youngest) : 0x00 0x00 0x00 0x00 0x00 091000: Test OK @	

Nucleus Name	DS_BE_ErrorLogReset	
Nucleus Number	911	
Description	Reset the error log in the basic engine	
Technical	<ul style="list-style-type: none"> - Send the RESET_STATISTICAL_INFO command - Send the POWER_DOWN command - Toggle the reset pin of the I2S interface 	
Execution Time	2 seconds	
User Input	None	
Error	Number	Description
	91100	The command executed successfully
	91101	There was a time-out while communicating
	91102	The Basic Engine returned an unexpected result
	91103	The BE returned an error code
	91104	No acknowledge received from BE
	91105	Communicating with the Basic Engine failed
Example	DS:> 911 091100: Test OK @	

Nucleus Name	DS_BE_JitterOptimise	
Nucleus Number	912	
Description	Perform jitter optimisation: A formatted DVD must be loaded into the engine before executing this nucleus	
Technical	<ul style="list-style-type: none"> - Send the TRAY_IN command - Send the READ_TOC command - Send the JITTER_COMMAND command with parameter 0x00 0x00 - Send the JITTER_COMMAND command with parameter 0x00 0x01 - Send the JITTER_COMMAND command with parameter 0x00 0x02 until offset 0x80 is received 	
Execution Time	Approximately 20 seconds	
User Input	none	
Error	Number	Description
	91200	Optimising jitter succeeded
	91201	There was a time-out while communicating
	91202	The Basic Engine returned an unexpected result
	91203	The Basic Engine returned an error code
	91204	No acknowledge received from BE
	91205	Unable to send tray in
	91206	Unable to read the disc

	91207	No disc is loaded
	91208	Unknown disc is loaded
	91209	Unable to enter service mode
Example	DS:> 912 Test OK @	

Nucleus Name	DS_BE_FocusOn	
Nucleus Number	913	
Description	Put the laser of the BE into focus	
Technical	- Send the FOCUS command with parameter 0x01	
Execution Time	3 seconds	
User Input	None	
Error	Number	Description
	91300	Focus on succeeded
	91301	There was a time-out while communicating
	91302	The Basic Engine returned an unexpected result
	91303	The BE returned an error code
	91304	No acknowledge received from BE
	91305	Communicating with the Basic Engine failed
	91306	Unable to enter service mode
Example	DS:> 913 091300: Test OK @	

Nucleus Name	DS_BE_FocusOff	
Nucleus Number	914	
Description	Turn off putting the laser of the BE into focus	
Technical	- Send the FOCUS command with parameter 0x00	
Execution Time	Less than 1 second	
User Input	None	
Error	Number	Description
	91400	Focus off succeeded
	91401	There was a time-out while communicating
	91402	The Basic Engine returned an unexpected result
	91403	The BE returned an error code
	91404	No acknowledge received from BE
	91405	Communicating with the Basic Engine failed
	91406	Unable to enter service mode
Example	DS:> 914 091400: Test OK @	

Nucleus Name	DS_BE_MotorOn	
Nucleus Number	915	
Description	Turn on the turntable motor	
Technical	- Send the TURN_TABLE_MOTOR_ON command	
Execution Time	Less than 1 second	
User Input	None	
Error	Number	Description
	91500	Turn table motor is on
	91501	There was a time-out while communicating
	91502	The Basic Engine returned an unexpected result
	91503	The BE returned an error code
	91504	No acknowledge received from BE
	91505	Communicating with the Basic Engine failed
	91506	Unable to enter service mode
Example	DS:> 915 091500: Test OK @	

Nucleus Name	DS_BE_MotorOff	
Nucleus Number	916	
Description	Turn off the turntable motor	

Technical	- Send the TURN_TABLE_MOTOR_OFF command	
Execution Time	Less than 1 second	
User Input	None	
Error	Number	Description
	91600	Turn table motor is off
	91601	There was a time-out while communicating
	91602	The Basic Engine returned an unexpected result
	91603	The BE returned an error code
	91604	No acknowledge received from BE
	91605	Communicating with the Basic Engine failed
	91606	Unable to enter service mode
Example	DS:> 916 091600: Test OK @	

Nucleus Name	DS_BE_RadialOn	
Nucleus Number	917	
Description	Close the radial loop	
Technical	<ul style="list-style-type: none"> - Send the TRAY_IN command - Send the READ_TOC command - Send the RADIAL_COMMAND command with parameter 0x00 0x01 	
Execution Time	Approximately 10 ñ 15 seconds	
User Input	A formatted DVD must be loaded into the engine before executing this nucleus	
Error	Number	Description
	91700	Radial loop is close
	91701	There was a time-out while communicating
	91702	The Basic Engine returned an unexpected result
	91703	The Basic Engine returned an error code
	91704	No acknowledge received from BE
	91705	Unable to send tray in
	91706	Unable to read the disc
	91707	No disc is loaded
	91708	Unknown disc is loaded
	91709	Unable to enter service mode
Example	DS:> 917 091700: Test OK @	

Nucleus Name	DS_BE_RadialOff	
Nucleus Number	918	
Description	Open the radial loop	
Technical	- Send the RADIAL_COMMAND command with parameter 0x00 0x00	
Execution Time	1 second if radial loop is open otherwise 3 seconds	
User Input	None	
Error	Number	Description
	91800	Radial loop is open
	91801	There was a time-out while communicating
	91802	The Basic Engine returned an unexpected result
	91803	The BE returned an error code
	91804	No acknowledge received from BE
	91805	Communicating with the Basic Engine failed
	91806	Unable to enter service mode
Example	DS:> 918 091800: Test OK @	

Nucleus Name	DS_BE_RadialCalibration	
Nucleus Number	919	
Description	Calibrate the radial loop	
Technical	<ul style="list-style-type: none"> - Send the TRAY_IN command - Send the READ_TOC command - Send the RADIAL_COMMAND command with parameter 0x03 0x05 - Send the RADIAL_COMMAND command with parameter 0x03 0x06 - Send the RADIAL_COMMAND command with parameter 0x03 0x09 	

Execution Time	Approximately 15 seconds	
User Input	A formatted DVD must be loaded into the engine before executing this nucleus	
Error	Number	Description
	91900	The command executed successfully
	91901	There was a time-out while communicating
	91902	The Basic Engine returned an unexpected result
	91903	The Basic Engine returned an error code
	91904	No acknowledge received from BE
	91905	Unable to send tray in
	91906	Unable to read the disc
	91907	No disc is loaded
	91908	Unknown disc is loaded
	91909	Unable to enter service mode
Example	DS:> 919 091900: Test OK @	

Nucleus Name	DS_BE_Tilt	
Nucleus Number	920	
Description	Test the tilt mechanism control loop, or allow its proper functioning to be measured. Before executing this nucleus a disc must be loaded into the recorder	
Technical	<ul style="list-style-type: none"> - Send the TRAY_IN command - Send the READ_TOC command - Send the TILT_COMMAND command with parameter 0x00 0x00 - Send the TILT_COMMAND command with parameter 0x00 0x01 - Send the TILT_COMMAND command with parameter 0x00 0x02 	
Execution Time	Approximately 15 seconds	
User Input	None	
Error	Number	Description
	92000	The command executed successfully
	92001	There was a time-out while communicating
	92002	The Basic Engine returned an unexpected result
	92003	The Basic Engine returned an error code
	92004	No acknowledge received from BE
	92005	Unable to send tray in
	92006	Unable to read the disc
	92007	No disc is loaded
	92008	Unknown disc is loaded
	92009	Unable to enter service mode
Example	DS:> 920 092000: Tilt sensor bathtub: (71,-12,145)(68,-12,135)(62,-10,120)(56,-92,97)(50,-75,86) (44,-59,80)(41,-52,80)(35,-37,86)(29,-22,86) (23,-7,92)(17,8,111)(11,23,135)(8,31,138)(5,39,158) Test OK @	

Nucleus Name	DS_BE_CheckDisc	
Nucleus Number	921	
Description	Check whether there is a disc inside the BE	
Technical	<ul style="list-style-type: none"> - Send the TRAY_IN command - Send the READ_TOC command - Display the Disc type info 	
Execution Time	Approximately 15 seconds	
User Input	None	
Error	Number	Description
	92100	There was a disc inside the set
	92101	A disc is loaded, disc type info if echoed
	92102	Unable to load the tray
	92103	Error received from BE
Example	DS:> 921 092100: A DVD+Rewritable is loaded (disc is empty or partially recorded) Test OK @ DS:> 921 092100: No Disc is loaded Test OK @	

Nucleus Name	DS_BE_SledgeMotor	
Nucleus Number	922	
Description	Send the sledge to its home position, then to the middle of the disc, and then to the end.	
Technical	<ul style="list-style-type: none"> - Send the PCS_COMMAND command with parameter 0x03 0x00 - Send the PCS_COMMAND command with parameter 0x02 0x00 - Send the PCS_COMMAND command with parameter 0x00 0x01 - Send the PCS_JUMP_SLEGE_STEPS command for 3 times - Send the PCS_COMMAND command with parameter 0x00 0x00 	
Execution Time	4 seconds	
User Input	None	
Error	Number	Description
	92200	The command executed successfully
	92201	There was a time-out while communicating
	92202	The Basic Engine returned an unexpected result
	92203	The BE returned an error code
	92204	No acknowledge received from BE
	92205	Communicating with the Basic Engine failed
	92206	Unable to enter service mode
Example	DS:> 922 092200: Test OK @	

Display and Control Board (DCB)

Nucleus Name	DS_DCB_CommunicationEcho	
Nucleus Number	1000	
Description	Check the communication between the digital board and the DCB by issuing an echo command	
Technical	- Send an echo command to the DCB via the analogue board and wait for the result	
Execution Time	Less than 1 second.	
User Input	None	
Error	Number	Description
	100000	Communicating with the DCB succeeded
	100001	The DCB could not be accessed by the analogue board.
	100002	There was no response from the analogue board.
	100003	The returned errorcode from the analogue board is unknown
	100004	Something went wrong with the error code.
Example	DS:> 1000 100000: Test OK @	

Nucleus Name	DS_DCB_VersionGet	
Nucleus Number	1001	
Description	Get the version of the DCB	
Technical	- Issue the DCB version get command to the analogue board and wait for the result	
Execution Time	Less than 1 second.	
User Input	None	
Error	Number	Description
	100100	Retrieving the version of the DCB succeeded
	100101	The DCB could not be accessed by the analogue board.
	100102	There was no response from the analogue board.
	100103	The returned errorcode from the analogue board is unknown
	100104	Something went wrong with the error code.
Example	DS:> 1001 100100: DCB version: 13 Test OK @	

Nucleus Name	DS_DCB_LightDisplay	
Nucleus Number	1002	
Description	Light the entire display of the DCB, and clear the display after confirmation. User confirmation is necessary.	

Technical	<ul style="list-style-type: none"> - First issue a command to clear the display and wait for the result - Then issue the command to light the entire display and wait for confirmation by the user 	
Execution Time	Until user confirmation.	
User Input	None	
Error	Number	Description
	100200	Lighting the entire display succeeded
	100201	The DCB could not be accessed by the analogue board.
	100202	There was no response from the analogue board.
	100203	The returned errorcode from the analogue board is unknown
	100204	The DCB could not be accessed by the analogue board.
	100205	There was no response from the analogue board.
	100206	The DCB did not light all labels.
	100207	The user skipped the rest of the DCB_Light_Display test.
	100208	The user returned an unknown confirmation:
	100209	The returned errorcode from the analogue board is unknown
Example	DS:> 1002 100200: Test OK @	

Nucleus Name	DS_DCB_Keyboard	
Nucleus Number	1004	
Description	Check all keys of the keyboard by confirming the key-code displayed of each key.	
Technical	<ul style="list-style-type: none"> - Initialise the display - Display the key pressed by the user on the display - Monitor the service port for an abort and get the next key pressed - Update the display and repeat previous steps until user stops / confirms 	
Execution Time	Until user confirmation.	
User Input	None	
Error	Number	Description
	100400	All the keys on the keyboard have been pressed
	100401	DCB Keyboard; test failed
	100402	DCB Keyboard; test aborted
	100403	Not all the keys were pressed.
	100404	The DCB could not be accessed by the analogue board.
Example	DS:> 1004 100400: Test OK @	

Nucleus Name	DS_DCB_RemoteControl	
Nucleus Number	1005	
Description	Check the interface between the remote control and the DCB by checking the key-code displayed	
Technical	<ul style="list-style-type: none"> - Initialise the display - Display the key pressed by the user on the display - Monitor the service port for an abort and get the next key pressed - Update the display and repeat previous steps until user stops / confirms 	
Execution Time	Until user confirmation.	
User Input	None	
Error	Number	Description
	100500	Remote Control test succeeded
	100501	DCB Remote control; test failed
	100502	DCB Remote control; test aborted
	100503	The DCB could not be accessed by the analogue board.
	100504	DCB Remote control; no user input received
Example	DS:> 1005 100500: Test OK @	

Nucleus Name	DS_DCB_Led	
Nucleus Number	1006	

Description	Switch the record LED on, and after confirmation off. The user confirms by pressing the REC key, STOP key, or the PLAY key on the local keyboard. The PLAY key confirms that the LED is on and the REC key	
Technical	- Issue the command to light the record LED via the analogue board and wait for confirmation by the user	
Execution Time	Until user confirmation.	
User Input	None	
Error	Number	Description
	100600	Switching Led on succeeded
	100601	The DCB could not be accessed by the analogue board.
	100602	There was no response from the analogue board.
	100603	The DCB did not light the record LED.
	100604	The user skipped the rest of the DCB_Led test.
	100605	The user returned an unknown confirmation:
	100606	The returned errorcode from the analogue board is unknown
Example	DS:> 1006 100600: Test OK @	

Analogue Board (ANAB)

Nucleus Name	DS_ANAB_CommunicationEcho	
Nucleus Number	1100	
Description	Check the communication between the digital board and the analogue board by issuing some echo string.	
Technical	Send command P_DS_ANACOM_ECHO with the parameter string "Hello Analogue board" to the analogue board and read back the result	
Execution Time	Less than 1 second	
User Input	None	
Error	Number	Description
	110000	Communicating with the analogue board succeeded
	110001	The test returned the wrong string
	110002	Communicating with the analogue board failed
	110103	The analogue board returned an unexpected result
Example	DS:> 1100 110000: Hello Analogue Board Test OK @	

Nucleus Name	DS_ANAB_CommunicationIicNvram	
Nucleus Number	1101	
Description	Check the communication between the digital board and the NVRAM on the analogue board.	
Technical	Send command P_DS_ANACOM_NVRAM with no parameters to the analogue board and read back the result	
Execution Time	Less than 3 seconds	
User Input	None	
Error	Number	Description
	110100	Communicating with the NVRAM on the analogue board succeeded
	110101	The analogue board could not communicate with the NVRAM
	110102	Communicating with the analogue board failed
	110103	The analogue board returned an unexpected result
Example	DS:> 1101 110100: Test OK @	

Nucleus Name	DS_ANAB_CommunicationIicTuner	
Nucleus Number	1102	
Description	Check the communication between the digital board and the tuner on the analogue board	
Technical	Send command P_DS_ANACOM_TUNER with no parameters to the analogue board and read back the result	
Execution Time	Less than 1 second	
User Input	None	

Error	Number	Description
	110200	Communicating with the tuner on the analogue board succeeded
	110201	The analogue board could not communicate with the tuner
	110202	There was an error communicating with the analogue board
	110203	The analogue board returned an unexpected result
Example	DS:> 1102 110200: Test OK @	

Nucleus Name	DS_ANAB_CommunicationlicDataSlicer	
Nucleus Number	1103	
Description	Check the communication between the digital board and the data slicer on the analogue board	
Technical	Send command P_DS_ANACOM_DATA_SLICER with no parameters to the analogue board and read back the result	
Execution Time	Less than 1 second	
User Input	None	
Error	Number	Description
	110300	Communicating with the data slicer on the analogue board succeeded
	110301	The analogue board could not communicate with the data slicer
	110302	There was an error communicating with the analogue board
	110303	The analogue board returned an unexpected result
Example	DS:> 1103 110300: Test OK @	

Nucleus Name	DS_ANAB_CommunicationlicSoundProcessor	
Nucleus Number	1104	
Description	Check the communication between the digital board and the sound processor on the analogue board	
Technical	Send command P_DS_ANACOM_SOUND_PROCESSOR with no parameters to the analogue board and read back the result	
Execution Time	Less than 1 second	
User Input	None	
Error	Number	Description
	110400	Communicating with the sound procesor on the analogue board succeeded
	110401	The analogue board could not communicate with the sound processor
	110402	There was an error communicating with the analogue board
	110403	The analogue board returned an unexpected result
Example	DS:> 1104 110400: Test OK @	

Nucleus Name	DS_ANAB_CommunicationlicAVSelector	
Nucleus Number	1105	
Description	Check the communication between the digital board and the A/V-selector on the analogue board	
Technical	Send command P_DS_ANACOM_AV_SELECTOR with no parameters to the analogue board and read back the result	
Execution Time	Less than 1 second	
User Input	None	
Error	Number	Description
	110500	Communicating with the A/V selector on the analogue board succeeded
	110501	The analogue board could not communicate with the A/V selector

	110502	There was an error communicating with the analogue board
	110503	The analogue board returned an unexpected result
Example	DS:> 1105 110500: Test OK @	

Nucleus Name	DS_ANAB_HardwareVersionGet	
Nucleus Number	1106	
Description	Get the hardware version of the analogue board	
Technical	Send command P_DS_ANACOM_HARDWARE_VERSION with no parameters to the analogue board and read back the result	
Execution Time	Less than 1 second	
User Input	None	
Error	Number	Description
	110600	Reading the hardware version succeeded
	110601	The segment containing the hardware version could not be found
	110602	There was an error communicating with the analogue board
	110603	The analogue board returned an unexpected result
Example	DS:> 1106 110600: Analogue hardware version : 11 Test OK @	

Nucleus Name	DS_ANAB_SoftwareVersionBootGet	
Nucleus Number	1107	
Description	Get the software version of the boot software of the analogue board	
Technical	Send command P_DS_ANACOM_SOFTWARE_VERSION with no parameters to the analogue board and read back the result	
Execution Time	Less than 1 second	
User Input	None	
Error	Number	Description
	110700	Reading the boot-software version succeeded
	110701	The segment containing the boot-software version could not be found
	110702	There was an error communicating with the analogue board
	110703	The analogue board returned an unexpected result
Example	DS:> 1107 110700: Bootcode application version : 11.00.11 Test OK @	

Nucleus Name	DS_ANAB_SoftwareVersionDownloadGet	
Nucleus Number	1108	
Description	Get the software version of the download software of the analogue board	
Technical	Send command P_DS_ANACOM_SW_VERSION_DOWN with no parameters to the analogue board and read back the result	
Execution Time	Less than 1 second	
User Input	None	
Error	Number	Description
	110800	Reading the download-software version succeeded
	110801	The segment containing the download-software version could not be found
	110802	There was an error communicating with the analogue board
	110803	The analogue board returned an unexpected result
Example	DS:> 1108 110800: Download application version : 11.00.06 Test OK @	

Nucleus Name	DS_ANAB_SoftwareVersionApplGet	
Nucleus Number	1109	
Description	Get the software version of the application software of the analogue board	

Technical	Send command P_DS_ANACOM_SW_VERSION_APPL with no parameters to the analogue board and read back the result	
Execution Time	Less than 1 second	
User Input	None	
Error	Number	Description
	110900	Reading the application-software version succeeded
	110901	The segment containing the application-software version could not be found
	110902	There was an error communicating with the analogue board
	110903	The analogue board returned an unexpected result
Example	DS:> 1109 110900: Recorder application version : 11.00.23 Test OK @	

Nucleus Name	DS_ANAB_SoftwareVersionDiagnosticsGet	
Nucleus Number	1110	
Description	Get the software version of the diagnostic software of the analogue board	
Technical	Send command P_DS_ANACOM_SW_VERSION_DIAG with no parameters to the analogue board and read back the result	
Execution Time	Less than 1 second	
User Input	None	
Error	Number	Description
	111000	Reading the diagnostics-software version succeeded
	111001	The segment containing the diagnostics-software version could not be found
	111002	There was an error communicating with the analogue board
	111003	The analogue board returned an unexpected result
Example	DS:> 1110 111000: Diagnostics application version : 11.00.13 Test OK @	

Nucleus Name	DS_ANAB_ChecksumProgram	
Nucleus Number	1111	
Description	Check the checksum of the several partitions by recalculating and comparing partition checksums	
Technical	Send command P_DS_ANACOM_FLASH_CHECKSUM with no parameters to the analogue board and read back the result	
Execution Time	Less than 5 seconds	
User Input	None	
Error	Number	Description
	111100	Checksum calculation succeeded
	111101	The FLASH was not accessible
	111102	The checksum stored in FLASH is not correct
	111103	There was an error communicating with the analogue board
	111104	The analogue board returned an unexpected result
Example	DS:> 1111 BootCode checksum is: 0xBABE6240, which is correct Diagnostics checksum is : 0xBABEBEAD, which is correct Download checksum is: 0xBABEA6B7, which is correct Application checksum is : 0xBABEB277, which is correct 111100: Test OK @	

Nucleus Name	DS_ANAB_VideoRouting	
Nucleus Number	1112	
Description	Perform the routing of the video paths on the analogue board	
Technical	Send command P_DS_ANACOM_ROUTE_VIDEO with parameters to the analogue board and read back the result	
Execution Time	Less than 1 second	
User Input	The user has to input the correct parameter for the routing (see table 'video routing' below).	
Error	Number	Description

	111200	Routing the video on the analogue board succeeded
	111201	Routing the video on the analogue board failed
	111202	The user provided wrong input
	111203	There was an error communicating with the analogue board
	111204	The analogue board returned an unexpected result
Example	DS:> 1112 00 111200: Test OK @	

Nucleus Name	DS_ANAB_AudioRouting	
Nucleus Number	1113	
Description	Perform the routing of the audio paths on the analogue board	
Technical	Send command P_DS_ANACOM_ROUTE_AUDIO with parameters to the analogue board and read back the result	
Execution Time	Less than 1 second	
User Input	The user has to input the correct parameter for the routing (see table 'audio routing' below)	
Error	Number	Description
	111300	Routing the audio on the analogue board succeeded
	111301	Routing the audio on the analogue board failed
	111302	The user provided wrong input
	111303	There was an error communicating with the analogue board
	111304	The analogue board returned an unexpected result
Example	DS:> 1113 00 111300: Test OK @	

Nucleus Name	DS_ANAB_SelectTunerChannel																										
Nucleus Number	1114																										
Description	Set the tuner to receive a valid audio and video signal																										
Technical	Send command P_DS_ANACOM_TUNER_FREQ_SELECT with parameters to the analogue board and read back the result																										
Execution Time	Less than 1 second																										
User Input	<p><Frequency*16> <video standard id> Tuner frequency: to tune the tuner to e.g. 216 MHz, this parameter must be 3456. (Since 216*16 = 3456. This is to avoid the decimal points to the parameter list.) Video standard id: The table below shows which video standards are possible</p> <table><tr><td>Video standard id</td><td>Europe</td><td>NAFTA</td></tr><tr><td>16</td><td>PAL_BG</td><td>NTSC</td></tr><tr><td>32</td><td>PAL_I</td><td>Invalid</td></tr><tr><td>48</td><td>PAL_DK</td><td>Invalid</td></tr><tr><td>64</td><td>SEC_L</td><td>Invalid</td></tr><tr><td>80</td><td>SEC_LS</td><td>Invalid</td></tr><tr><td>96</td><td>SEC_BG</td><td>Invalid</td></tr><tr><td>112</td><td>SEC_DK</td><td>Invalid</td></tr></table>			Video standard id	Europe	NAFTA	16	PAL_BG	NTSC	32	PAL_I	Invalid	48	PAL_DK	Invalid	64	SEC_L	Invalid	80	SEC_LS	Invalid	96	SEC_BG	Invalid	112	SEC_DK	Invalid
Video standard id	Europe	NAFTA																									
16	PAL_BG	NTSC																									
32	PAL_I	Invalid																									
48	PAL_DK	Invalid																									
64	SEC_L	Invalid																									
80	SEC_LS	Invalid																									
96	SEC_BG	Invalid																									
112	SEC_DK	Invalid																									
Error	Number	Description																									
	111400	Setting the tuner channel succeeded																									
	111401	Setting the tuner channel failed																									
	111402	The user provided wrong input																									
	111403	There was an error communicating with the analogue board																									
	111404	The analogue board returned an unexpected result																									
Example	DS:> 1114 3456 16 111400: Test OK @																										

Nucleus Name	DS_ANAB_IICWriteRead	
Nucleus Number	1115	
Description	Perform an IIC write and read action on the analogue board	
Technical	Send command P_DS_ANACOM_I2C_WRR with parameters to the analogue board and read back the result	
Execution Time	Less than 1 second	

User Input	Writing: [<W> <w>] [I2C address] [number of data bytes to write] with <data[0]...data[n]> Max 16 data bytes (n < 16). Reading: [<R> <r>] [I2C address] [number of data bytes to read] Max 16 data bytes (n < 16).	
Error	Number	Description
	111500	Reading and writing IIC on the analogue board succeeded
	111501	The user provided wrong input
	111502	Reading and writing IIC on the analogue board failed
	111503	There was an error communicating with the analogue board
	111504	The analogue board returned an unexpected result
Example	DS:> 1115 w 0x94 2 0x06 0x02 111500: Test OK @	

Nucleus Name	DS_ANAB_ClockAdjust	
Nucleus Number	1116	
Description	Set the clock to the value passed through in the YYYY MM DD HH MM SS format	
Technical	Send command P_DS_ANACOM_CLOCK_ADJUST with parameters to the analogue board and read back the result	
Execution Time	Less than 1 second	
User Input	<YYYY> <MM> <DD> <HH> <MM> <SS>	
Error	Number	Description
	111600	Adjusting the clock succeeded
	111601	Adjusting the clock failed
	111602	The user provided wrong input
	111603	There was an error communicating with the analogue board
	111604	The analogue board returned an unexpected result
Example	DS:> 1116 2002 11 11 11 11 111600: Test OK @	

Nucleus Name	DS_ANAB_ClockReference	
Nucleus Number	1117	
Description	Generate a 1 kHz signal on pin 7 (INT) of the clock IC	
Technical	Send command P_DS_ANACOM_CLOCK_REFERENCE with no parameters to the analogue board and read back the result	
Execution Time	Less than 1 second	
User Input	None	
Error	Number	Description
	111700	Generating the signal on the designated pin succeeded
	111701	Generating the signal on the designated pin failed
	111702	There was an error communicating with the analogue board
	111703	The analogue board returned an unexpected result
Example	DS:> 1117 111700: Test OK @	

Nucleus Name	DS_ANAB_ClockCorrection	
Nucleus Number	1118	
Description	Store the clock IC correction value in NVRAM	
Technical	Send command P_DS_ANACOM_CLOCK_CORRECTION with parameters to the analogue board and read back the result	
Execution Time	Less than 1 second	
User Input	The correction value for the clock	
Error	Number	Description
	111800	Storing the correction value for the clock in NVRAM succeeded
	111801	Storing the correction value for the clock in NVRAM failed
	111802	Value out of range: default value stored

	111803	The user provided wrong input
	111804	There was an error communicating with the analogue board
	111805	The analogue board returned an unexpected result
Example	DS:> 1118 1000023 111800: Test OK @	

Nucleus Name	DS_ANAB_TunerAFCReferenceVoltage	
Nucleus Number	1119	
Description	Store the reference voltage for the tuner in NVRAM	
Technical	Send command P_DS_ANACOM_AFC_REFERENCE_TUNER with no parameters to the analogue board and read back the result	
Execution Time	Less than 1 second	
User Input	The reference voltage, between 0 and 255	
Error	Number	Description
	111900	Storing the reference voltage for the tuner in NVRAM succeeded
	111901	Storing the reference voltage for the tuner in NVRAM failed
	111902	The user provided wrong input
	111903	There was an error communicating with the analogue board
	111904	The analogue board returned an unexpected result
Example	DS:> 1119 5 111900: Test OK @	

Nucleus Name	DS_ANAB_TunerFrequencyDownload	
Nucleus Number	1120	
Description	Store the frequency table in NVRAM. The frequency table is passed through the error-string provided to the nucleus.	
Technical	Send command P_DS_ANACOM_FREQ_DOWNLOAD with parameters to the analogue board and read back the result	
Execution Time	Less than 3 seconds	
User Input	See frequency table	
Error	Number	Description
	112000	Downloading the frequency table in NVRAM succeeded
	112001	Downloading the frequency table in NVRAM failed
	112002	The user provided wrong input
	112003	There was an error communicating with the analogue board
	112004	The analogue board returned an unexpected result
Example	DS:> 1120 2233 00 02 4E45442031 112000: Test OK @	

Nucleus Name	DS_ANAB_StoreExternalPresets	
Nucleus Number	1121	
Description	Store the external presets in NVRAM	
Technical	Send command P_DS_ANACOM_STORE_EXT_PRESETS with no parameters to the analogue board and read back the result	
Execution Time	Less than 1 second	
User Input	None	
Error	Number	Description
	112100	Storing the external presets in NVRAM succeeded
	112101	Storing the external presets in NVRAM failed
	112102	There was an error communicating with the analogue board
	112103	The analogue board returned an unexpected result
Example	DS:> 1121 112100: Test OK @	

Nucleus Name	DS_ANAB_BargraphLevelAdjust	
Nucleus Number	1122	

Description	Measure the audio signal corresponding to 0dB per channel and store it as correction value in NVRAM	
Technical	Send command P_DS_ANACOM_BARGRAPH_LEVEL_ADJUSTMENT with no parameters to the analogue board and read back the result	
Execution Time	Less than 1 second	
User Input	none	
Error	Number	Description
	112200	Storing the bargraph adjustment values in NVRAM succeeded
	112201	Storing the bargraph adjustment values in NVRAM failed
	112202	There was an error communicating with the analogue board
	112203	The analogue board returned an unexpected result
Example	DS:> 1122 112200: Test OK @	

Video routing paths (Europe)

Path ID	Description
0	Input signal is VIDEO(CVBS) from digital board and will be re-routed back to the digital board.
1	Input signal is from FRONT VIDEO(CVBS) IN and will be routed to the digital board.
2	No Routing.
3	Input signal is from FRONT S-VIDEO(Y/C) and will be routed to the digital board.
4	No Routing.
5	Input signal is CVBS from SCART1 and will be routed to the digital board.
6	Input signal is CVBS from SCART2 and will be routed to the digital board.
7	Input Signal is CVBS from Digital Board and it will be routed to Scart1 and Scart2.
8	Input signal is VIDEO(CVBS) from ANTENNA IN and will be routed to SCART2.
9	Input signal is VIDEO(CVBS) from SCART1 and will be routed to SCART2.
10	Input signal is VIDEO(CVBS) from SCART2 and will be routed to SCART1.
11	Signal path is routed Fast Blank from Scart2 pin16 and will be routed SCART1 pin16
12	Input Signal is YC from Digital Board and it will be routed to SCART1.
13	
14	No Routing.
15	Input Signal is CVBS from TUNER and it will be routed to Digital .
16	No Routing.
17	Input Signal is routed from digital board YC to REAR S-VIDEO(YC) OUT
18	Signal path is routed from digital board RGB to RGB SCART1 and from digital board CVBS to digital board CVBS.
19	No Routing.
20	Input RGB Signal is routed from Digital Board to SCART1(RGB),Input CVBS Signal from Digital Board to Digital Board and Fast Blanking Signal from SCART2 to SCART1.
21	Input Y/C Signal from Digital Board is routed to Rear Y/C Connector and Input Y/C Signal from Front Y/C connector is routed to Digital Board.

Video routing paths (NAFTA)

Path ID	Description
0	No Routing.
1	Input signal is from FRONT VIDEO(CVBS) IN and will be routed to the digital board.This routing is same as the above path id.
2	Input signal is from REAR VIDEO(CVBS) IN and will be routed to the digital board.
3	Input signal is from FRONT S-VIDEO(Y/C) IN and the signal received will be routed to the digital board.
4	Input signal is from REAR S-VIDEO(Y/C) IN and will be routed to the digital board.
5	No Routing.
6	No routing.
7	No routing.
8	Input signal is VIDEO(CVBS) from TUNER and will be routed to Y Pin of Rear Y/C Connector.This will give only black/White Picture .
9	Input signal is from YUV IN and will be routed to YUV OUT.This is possible only if Digital Board routes back YUV signal received back to the Analogue board(DENC)
10	No routing.
11	No routing.

12	No Routing.
13	No Routing.
14	No Routing.
15	Input CVBS Signal from Tuner is routed to Digital Board..
16	No Routing.
17	No Routing.
18	Input Signal from CVBS Rear In is routed to Digital Board. This is the same as path ID 02.
19	Input Y/C signal from Digital Board is routed to Y/C Rear Out Connector and Input signal from Y/C Front In Connector is routed to Y/C Digital Board.
20	Y/C signal from Digital Board is routed to Y/C Rear Out Connector and Input signal from Y/C Rear In Connector is routed to Y/C Digital Board.
23	The Video signal received from the Digital board will be output on Modulator channel 3.
24	The Video signal received from the Digital board will be output on Modulator channel 4.

Audio routing paths (Europe)

Path ID	Description
0	Input signal is from FRONT AUDIO IN and will be routed to the digital board.
1	Input signal is from FRONT AUDIO IN and will be routed to the digital board.
2	No Routing.
3	Input signal is AUDIO from SCART1 and will be routed to the digital board.
4	Input signal is AUDIO from SCART2 and will be routed to the digital board.
5	No routing.
6	No routing.
7	Input Audio signal is from the digital Board and it will be routed to the SCART1 and SCART2
8	Input AUDIO signal from TUNER and will be routed to SCART2.
9	Input signal is AUDIO from SCART1 and will be routed to SCART2.
10	Input audio signal from SCART2 is routed to SCART1.
11	Input Audio signal is routed from DVIO to SCART2.
12	
13	No Routing.
14	Input is Audio Signal from DVIO and it will be routed to Digital Board.
15	Input is Audio Signal from TUNER and it will be routed to Digital Board..
16	No routing.
17	No Routing.
18	Input signal is from FRONT AUDIO IN and will be routed to SCART2.
21	Input signal is from FRONT AUDIO IN and will be routed to the digital board.

Audio routing paths (NAFTA)

Path ID	Description
0	No Routing.
1	Input signal is from FRONT AUDIO IN and will be routed to the digital board.
2	Input signal is from REAR AUDIO IN 2 and will be routed to the digital board.
3	Input Audio Signal is routed from FRONT Cinch In to Digital Board.(This is same as path ID 01)
4	Input Signal is from Rear Cinch In1 and it will be routed to Digital Board..
5	No routing.
6	No routing.
7	No routing.
8	No Routing.
9	No routing.
10	No Routing.
11	No Routing.
12	No Routing.
13	Input Signal is from Digital Board and it will be routed to the digital board.
14	No routing.
15	Input is Audio Signal from TUNER and it will be routed to Digital Board.
16	Input signal is AUDIO from dvio board and will be routed to Digital Board.
17	No routing.
18	No routing.
19	No routing.
20	Input signal is from REAR AUDIO IN 2 and will be routed to the digital board.
21	Input signal is from REAR AUDIO IN 1 and will be routed to the digital board.

22	Input signal is from REAR AUDIO IN 1 and will be routed to the digital board.
23	The Audio signal received from the Digital board will be outputted on Modulator channel 3.
24	The Audio signal received from the Digital board will be outputted on Modulator channel 4.

Frequency download string format

Format	description	remarks
X(XXX)	Preset number	
VVWW	VV: Channel number WW : Channel offset	
ZZ	Byte containing 8 bit fields for TRUE/FALSE : BIT 0: Decoder BIT 1: Modulation BIT 2: NICAM SAP BIT 3: Satpreset BIT 4: Presetdefined Channelpreferred BIT 5: ExtPreset BIT 6: NameManuallyChanged BIT 7: ChannelPreset	NICAM/stereo bit for Europe SAP/stereo bit for NAFTA Preset defined bit is only used for Europe. For NAFTA, it is renamed as channelpreferred to indicate if a channel is preferred or not. TRUE if preset is defined from P50 as extern [TGA]
HH	HfSystemFineTuning	HfS: 4 bit, FT: -4,...,4
IIJJKKLLMM	Netname	Range: A,...,Z,0,...,9,... Netname length exists for Europe only. 'I' is the HEX-value for the first character, 'J' for the second, 'O'
<p>The message string of (DS_MessageDef *msgString) should be in the format: "X(XXX)_VVWW_ZZ_HH_IIJJKKLLMM". Here will be 'X(XXX)' a decimal value in the range of 0 to 255. V, W, Z, H, I, J, K, L, M are hex values with out the prefix '0x' (in the range 0... 9,A ... F) "_" Denotes a space character.</p> <p><u>Remarks:</u> CHANNEL_SYSTEM is for NAFTA. PRESET_SYSTEM is for Europe.</p>		

System (SYS)

Nucleus Name	DS_SYS_HardwareVersionGet	
Nucleus Number	1200	
Description	Get the hardware version and type of the digital board	
Technical	<ul style="list-style-type: none"> - Initialise the PIO pins of the chrysalis - Read out the hardware version through the PIO pins - Read the segment header in FLASH and determine hardware version 	
Execution Time	Less than 1 second	
User Input	None	
Error	Number	Description
	120000	Getting the hardware version and type of the digital board succeeded
	120001	Getting the hardware version and type of the digital board failed
	120002	Wrong hardware version read from FLASH
Example	DS:> 1200 120000: Hardware ID = 00 The (PIO-pins) Digital Board ID = 2 Test OK @ DS:>	

Nucleus Name	DS_SYS_SoftwareVersionBootGet	
Nucleus Number	1201	
Description	Get the version of the boot software on the digital board	
Technical	<ul style="list-style-type: none"> - Read the segment header in FLASH and determine Boot software version 	
Execution Time	Less than 1 second	
User Input	None	
Error	Number	Description
	120100	Getting the Boot software version succeeded
	120101	Getting the Boot software version failed

Example	DS:> 1201 120100: Software Boot Version = 0001 Test OK @
---------	--

Nucleus Name	DS_SYS_SoftwareVersionDownloadGet	
Nucleus Number	1202	
Description	Get the version of the download software on the digital board	
Technical	- Read the segment header in FLASH and determine Download software version	
Execution Time	Less than 1 second	
User Input	None	
Error	Number	Description
	120200	Getting the Download software version succeeded
	120201	Getting the Download software version failed
Example	DS:> 1202 120200: Software Download Version = 0001 Test OK @	

Nucleus Name	DS_SYS_SoftwareVersionApplGet	
Nucleus Number	1203	
Description	Get the version of the application software on the digital board	
Technical	- Read the segment header in FLASH and determine Application software version	
Execution Time	Less than 1 second	
User Input	None	
Error	Number	Description
	120300	Getting the Application software version succeeded
	120301	Getting the Application software version failed
Example	DS:> 1203 120300: Software Application Version = 0001 Test OK @	

Nucleus Name	DS_SYS_SoftwareVersionDiagnosticsGet	
Nucleus Number	1204	
Description	Get the version of the diagnostics software on the digital board	
Technical	- Read the segment header in FLASH and determine Diagnostics software version	
Execution Time	Less than 1 second	
User Input	None	
Error	Number	Description
	120400	Getting the Diagnostics software version succeeded
	120401	Getting the Diagnostics software version failed
Example	DS:> 1204 120400: Software Diagnostics Version = 0001 Test OK @	
	120503	Something went wrong while transferring the data.
	120504	User cancelled the upload.
Example	DS:> 1205 1 120500: Test OK @	

Nucleus Name	DS_SYS_EepromUpload	
Nucleus Number	1205	
Description	Upload the contents of the NVRAM on the analogue board or the digital board to the service PC, by using the X-modem protocol	
Technical	<ul style="list-style-type: none"> - Decode the user input - Determine whether to upload the analogue board or digital board NVRAM - Start uploading using the XMODEM protocol - Determine whether all was uploaded OK 	
Execution Time	Depends on the chosen NVRAM and the User.	

User Input	Choose one of the following parameters for the nucleus: 1. Upload the contents of the NVRAM of the digital board 2. Upload the contents of the NVRAM of the analogue board Choose in the terminal on the control PC -> transfer -> receive file. Select X-modem protocol. Then click receive in the dialogue and fill in the file name in which you want to store the data.	
Error	Number	Description
	120500	Download succeeded.
	120501	User input is not valid.
	120502	Something went wrong while copying the data from NVRAM to SDRAM .

Nucleus Name	DS_SYS_EepromDownload	
Nucleus Number	1206	
Description	Download a file with the contents of the NVRAM for the analogue board or the digital board from the service PC to the recorder, by using the X-modem protocol	
Technical	<ul style="list-style-type: none"> - Decode the user input and determine what eeprom to fill: digital / analogue - Store the downloaded (using XMODEM) bytes in SDRAM first - Then copy these contents into the eeprom after verification 	
Execution Time	Depends on the chosen NVRAM and the User.	
User Input	Choose one of the following parameters for the nucleus: 1. Download the contents of the NVRAM of the digital board 2. Download the contents of the NVRAM of the analogue board Choose in the terminal of the control PC -> transfer -> send file. Select X-modem protocol. Then choose a file with the Browse button in the dialogue and click on send.	
Error	Number	Description
	120600	Download succeeded
	120601	The write to NVRAM failed.
	120602	Timeout. Too many retries.
	120603	A file was sent with a wrong header.
	120604	User cancelled the download.
	120605	User input is not valid.
	120606	Unknown Error
Example	DS:> 1206 1 120600: Test OK @	

Nucleus Name	DS_SYS_DvidNumberGet	
Nucleus Number	1208	
Description	Get the IEEE1394 ID	
Technical	- Read out the ID from the configuration segment and return this info to the user	
Execution Time	Less than 1 second.	
User Input	None	
Error	Number	Description
	120800	Getting the unique DV ID succeeded
	120801	Getting the unique DV ID failed
Example	DS:> 1208 120800: The DvidNumber is: 0x0C22384E5A Test OK @	

Nucleus Name	DS_SYS_licWrite	
Nucleus Number	1209	
Description	Perform an IIC write action on the digital board	
Technical	<ul style="list-style-type: none"> - Determine bus ID, slave address, number of bytes to be written and the byte array of data from the user input - Initialise IIC - Write the data to the slave specified through IIC 	
Execution Time	Less than 1 second	
User Input	The user input the number of bytes to write followed by these bytes: <BusID><Slave address to write to><number of bytes to write><d1><d2><...><dx> Where the bus ID is either 0 (normally used) or 1	
Error	Number	Description
	120900	Writing the data over IIC succeeded

	120901	The IIC bus was not accessible
	120902	There was a timeout writing to the device
	120903	The IIC acknowledge was not received
	120904	The communication with the device failed
	120905	Got unknown IIC bus error:
	120906	Unable to initialise IIC bus
	120907	Decoding bus ID unsigned value failed
	120908	Decoding slaveAddr unsigned value failed
	120909	Decoding nrBytes unsigned value failed
	120910	Bus ID out of range
	120911	nrBytes out of range
	120912	Unable to decode parameters
Example	DS:> 1209 0 0xa0 1 0x6 120900: 1 Bytes written Test OK @	

Nucleus Name	DS_SYS_licRead	
Nucleus Number	1210	
Description	Perform an IIC read action on the digital board	
Technical	<ul style="list-style-type: none"> - Determine the bus ID, slave address and number of bytes to read from the user input - Initialise IIC - Read the data from the slave specified 	
Execution Time	Less than 1 second	
User Input	The user inputs the number of bytes to read and the address to read them from: <BusID><Slave address to read from><Number of bytes to read> Where the bus ID is either 0 (normally used) or 1	
Error	Number	Description
	121000	Reading the data over IIC succeeded
	121001	The IIC bus was not accessible
	121002	There was a timeout writing to the device
	121003	The IIC acknowledge was not received
	121004	The communication with the device failed
	121005	There was an unknown IIC bus error
	121006	IIC bus initialisation failed
	121007	Decoding bus ID unsigned value failed
	121008	Decoding slave address unsigned value failed
	121009	Decoding number of bytes unsigned value failed
	121010	Bus ID out of range
	121011	nrBytes out of range
Example	DS:> 1210 0 0xa0 1 121000: Value read =0x06 Test OK @	

Nucleus Name	DS_SYS_UartWrite	
Nucleus Number	1211	
Description	Perform an UART write action on the digital board on a specified UART	
Technical	<ul style="list-style-type: none"> - Decode the user input for the proper port to use - Write out the bytes through the indicated port 	
Execution Time	Less than 1 second.	
User Input	The user inputs the UART to write to, the number of bytes and the bytes to be written to the UART. 1=UART port 1 : not used 2=UART port 2 : Bit Engine 3=UART port 3 : Analogue board <UartNr><Number of bytes to write><d1><d2><...><dx>	
Error	Number	Description
	121100	Writing the bytes to the UART succeeded
	121101	The user provided wrong input
	121102	Writing to the UART failed
Example	DS:> 1211 2 2 0xd1 0x01 121100: Test OK @	

Nucleus Name	DS_SYS_UartRead	
Nucleus Number	1212	
Description	Perform an UART read action on the digital board on a specified UART	
Technical	<ul style="list-style-type: none"> - Decode the user input for the port to read from - Read from the port and return data read to the user 	
Execution Time	Less than 1 second.	
User Input	The user inputs the UART to read from. 1=UART port 1 : not used 2=UART port 2 : Bit Engine 3=UART port 3 : Analogue board <UartNr >	
Error	Number	Description
	121200	Reading the data from the UART succeeded
	121201	The user provided wrong input
	121202	Reading the data from the UART failed
Example	DS:> 1212 2 121200: The value that was read is: 0x50 0xD1 0x00 Test OK @	

Nucleus Name	DS_SYS_VideoLoopThroughStart	
Nucleus Number	1213	
Description	The video signal, which is confirm the user input, is routed from the input to the output. Input is set with the routing nucleus 1112. All outputs are enabled.	
Technical	<ul style="list-style-type: none"> - Decode the videosignal: PAL / NTSC and Y/C, RGB, CVBS,YUV - Initialise the Video Input Processor and check for valid signal - Initialise the Video Front End and start capturing frames to memory - Initialise the SYNC module - Initialise the Video Post Processing and retrieve frames from memory - Initialise the mixer - Initialise the DENC module - Route the signal to all outputs 	
Execution Time	Less than 1 second, but stays running.	
User Input	<vipInput> <VideoOutput> <VideoStandard> 1. vipInput (CVBS, YC, YUV, RGB). 2. VideoOutput (YUV, RGB). 3. VideoStandard (PAL, NTSC).	
Error	Number	Description
	121300	Video LoopthroughStart succeeded
	121301	User input is not valid.
	121302	Initialisation of the VIP failed.
	121303	Video Signal on the input is not a valid signal.
	121304	Initialisation of the VFE failed.
Example	DS:> 1213 CVBS RGB PAL 121300: Test OK @	

Nucleus Name	DS_SYS_VideoLoopThroughStop	
Nucleus Number	1214	
Description	Stop routing the video input to all the outputs.	
Technical	<ul style="list-style-type: none"> - Stop the DENC and the Video Front End 	
Execution Time	Less than 1 second.	
User Input	-	
Error	Number	Description
	121400	VideoLoopthroughStop succeeded
	121401	DENC module on Chrysalis failed.
Example	DS:> 1214 121400: Test OK @	

Nucleus Name	DS_SYS_VideoLoop	
Nucleus Number	1215	
Description	Note: Before executing this nucleus the user must route the video signal on the analog board with nucleus DS_ANAB_VideoRouting(1112).	

Technical	<ul style="list-style-type: none"> - Evaluate user input. - Reset the global variables, video memory. - Fill the video memory with a vertical colourbar. - Initialise the Chrysalis SYNC-module. - Initialise the Chrysalis MIXER-module. - Initialise the Chrysalis VPP-module. - Initialise the Chrysalis DENC-module. - Display the original image. - Initialise the VIP. - Initialise the Chrysalis VFE-module. - Try to detect a sync in the VIP input. - Catch the received image in memory. - Display the received image. - Compare the received image with original image. - Create a conclusion. 	
Execution Time	3 seconds.	
User Input	<p>Video input of the digital board:</p> <ul style="list-style-type: none"> - CVBS - YC - YUV - RGB - TEST (The video output will be routed to the video input on the digital board.) <p>Video standard:</p> <ul style="list-style-type: none"> - PAL - NTSC <p>When no input is given, the nucleus will take TEST for video input and PAL for video standard.</p>	
Error	Number	Description
	121500	Videoloop test succeeded.
	121501	Wrong user input.
	121502	The Chrysalis SYNC-module cannot be initialised.
	121503	The Chrysalis MIXER-module cannot be initialised.
	121504	The Chrysalis VideoPostProcessor-module cannot be initialised.
	121505	The Chrysalis DENC-module cannot be initialised.
	121506	The VideoInputProcessor cannot be initialised.
	121507	The VideoInputProcessor cannot detect a sync-signal.
	121508	The Chrysalis VideoFrontEnd-module cannot be initialised.
	121509	The Chrysalis VideoFrontEnd-module cannot capture a video field.
	121510	<p>When selected the RGB video input:</p> <p>Error in colour red signal and/or</p> <p>Error in colour green signal and/or</p> <p>Error in colour blue signal.</p> <p>When selected one of the other video inputs:</p> <p>Error in luminance signal (Y) and/or</p> <p>Error in chrominance signal (U) and/or</p> <p>Error in chrominance signal (V).</p>
Example	<p>DS:> 1215 cvbs ntsc</p> <p>121500:</p> <p>Test OK @</p> <p>DS:> 1215 cvbs pal</p> <p>121508: The VideoInputProcessor cannot detect a sync-signal.</p> <p>Error @</p> <p>DS:> 1215 yuv ntsc</p> <p>121511:</p> <p>Error in luminance signal(Y)</p> <p>Error in chrominance signal(U)</p> <p>Error in chrominance signal(V)</p> <p>Error @</p>	

Nucleus Name	DS_SYS_SlashVersionSet
Nucleus Number	1217
Description	Set the slash version of the system
Technical	<ul style="list-style-type: none"> - Decode the user input for the slash version to set - Issue the command to set the slash version to the analogue board - Wait for the result and return this to the user
Execution Time	Less than 1 second.
User Input	The slash version

Error	Number	Description
	121700	Setting the slash version succeeded
	121701	Invalid slash version, no slash version is set.
	121702	Setting the slash version on the Analogue Board fails.
	121703	Invalid input.
	121704	The returned errorcode from the analogue board is unknown:
	121705	No DS errCode known for analogue board error:
	121706	There was no response from the analogue board.
Example	DS:> 1217 82 121700: Test OK @	

Nucleus Name	DS_SYS_SlashVersionGet	
Nucleus Number	1218	
Description	Get the slash version of the system	
Technical	<ul style="list-style-type: none"> - Issue the command to get the slash version to the analogue board - Return the received information to the user 	
Execution Time	Less than 1 second.	
User Input	None	
Error	Number	Description
	121800	Getting the slash version succeeded
	121801	Getting the slash version failed
	121802	The IIC write failed
	121803	The IIC read failed
	121804	There was no response from the analogue board.
	121805	No DS errCode known for analogue board error:
Example	DS:> 1218 121800: The slash version is: 82 Test OK @	

Nucleus Name	DS_SYS_Virginize	
Nucleus Number	1219	
Description	(Re-) Virginize the recorder. User data in the NVRAM of the analogue board is cleared	
Technical	<ul style="list-style-type: none"> - Issue the command to return to the factory defaults to the analogue board - Wait for the result and return this to the user 	
Execution Time	1 second.	
User Input	None	
Error	Number	Description
	121900	Virginization succeeded
	121901	Virginization on the Analogue Board failed.
	121902	The returned errorcode from the analogue board is unknown:
	121903	No DS errCode known for analogue board error:
	121904	There was no response from the analogue board.
Example	DS:> 1219 121900: Test OK @	

Nucleus Name	DS_SYS_VirginModeOn	
Nucleus Number	1220	
Description	Turn on the virgin mode functionality (e.g. the auto channel search upon start-up)	
Technical	<ul style="list-style-type: none"> - Issue the command to set the bit for the virgin mode to the analogue board - Wait for the result and return this to the user 	
Execution Time	Less than 1 second.	
User Input	None	
Error	Number	Description
	122000	Turning on the virgin mode succeeded
	122001	Turning on VirginMode on the Analogue Board failed.
	122002	The returned errorcode from the analogue board is unknown:
	122003	No DS errCode known for analogue board error:
	122004	There was no response from the analogue board.

Example	DS:> 1220 122000: Test OK @
---------	-----------------------------------

Nucleus Name	DS_SYS_VirginModeOff	
Nucleus Number	1221	
Description	Turn off the virgin mode functionality (e.g. the auto channel search upon start-up)	
Technical	<ul style="list-style-type: none"> - Issue the command to reset the bit for the virgin mode to the analogue board - Wait for the result and return this to the user 	
Execution Time	Less than 1 second.	
User Input	None	
Error	Number	Description
	122100	Turning off the virgin mode succeeded
	122101	Turning off VirginMode on the Analogue Board failed.
	122102	The returned errorcode from the analogue board is unknown:
	122103	No DS errCode known for analogue board error:
	122104	There was no response from the analogue board.
Example	DS:> 1221 122100: Test OK @	

Nucleus Name	DS_SYS_DisplayFatalOn	
Nucleus Number	1223	
Description	Turn on the display-fatal functionality which displays debug-information on the display when encountering a fatal error condition from which could not be recovered automatically	
Technical	<ul style="list-style-type: none"> - Issue the command to use the display-fatal functionality to the analogue board - Wait for the result and return this to the user 	
Execution Time	Less than 1 second.	
User Input	None	
Error	Number	Description
	122300	Turning on the display-fatal functionality succeeded
	122301	Turning on the display-fatal functionality failed
	122302	The returned errorcode from the analogue board is unknown:
	122303	No DS errCode known for analogue board error:
	122304	There was no response from the analogue board.
Example	DS:> 1223 122300: Test OK @	

Nucleus Name	DS_SYS_DisplayFatalOff	
Nucleus Number	1224	
Description	Turn off the display-fatal functionality which displays debug-information on the display when encountering a fatal error condition from which could not be recovered automatically	
Technical	<ul style="list-style-type: none"> - Issue the command to stop using the display-fatal functionality to the analogue board - Wait for the result and return this to the user 	
Execution Time	Less than 1 second.	
User Input	None	
Error	Number	Description
	122400	Turning off the display-fatal functionality succeeded
	122401	Turning off the display-fatal functionality failed
	122402	The returned errorcode from the analogue board is unknown:
	122403	No DS errCode known for analogue board error:
	122404	There was no response from the analogue board.
Example	DS:> 1224 122400: Test OK @	

Nucleus Name	DS_SYS_DisplayFatalGet	
Nucleus Number	1225	

Description	Get the display-fatal flag of the recorder	
Technical	<ul style="list-style-type: none"> - Issue the command to get the status of the display-fatal functionality to the analogue board - Wait for the result and return this to the user 	
Execution Time	Less than 1 second.	
User Input	None	
Error	Number	Description
	122500	Getting the display-fatal flag succeeded
	122501	Getting the display-fatal flag failed
	122502	The returned errorcode from the analogue board is unknown:
	122503	No DS errCode known for analogue board error:
	122504	There was no response from the analogue board.
Example	DS:> 1225 122500: Test OK @	

Nucleus Name	DS_SYS_SettingsSet	
Nucleus Number	1226	
Description	Programs the digital board settings into the boot EEPROM on the digital board.	
Technical	<ul style="list-style-type: none"> - Evaluate user input. - Set-up IIC-bus. - Write data to boot EEPROM. - Update checksum. 	
Execution Time	1 second	
User Input	A large hexadecimal value that represents the digital board settings obtained from the DbString.exe program or from a reference set.	
Error	Number	Description
	122600	The settings were successfully programmed.
	122601	User input is invalid.
	122602	IIC access failed.
Example	DS:> 1226 6469616774737462010102000101010101000020080000 122600: Test OK @	

Nucleus Name	DS_SYS_SettingsDisplay	
Nucleus Number	1228	
Description	Show the settings that are programmed in the BROM on the digital board.	
Technical	<ul style="list-style-type: none"> - Set-up IIC-bus. - Read Digital Board Settings from boot EEPROM. - Display the settings. 	
Execution Time	1 second	
User Input	None.	
Error	Number	Description
	122800	The settings were successfully displayed.
	122801	IIC access failed.
	122802	Invalid settings

Example	DS:> 1228 Settings ID: 6D7920626F61726400020300010101020101000020080000 Board name: my board Hardware ID: 0 Codec IC: PNX7100_MF2 Video Input Processor IC: SAA7118 Progressive Scan Deinterlacer IC: None Progressive Scan Denc IC: ADV7196 I-Link physical layer circuit IC: PDI1394P25 I-Link link layer circuit IC: PDI1394P40 Audio clock: Clock scheme 1 Bit engine connector: available IDE connector 1: available IDE connector 2: not available PCI connector: not available RAM size 32MByte ROM size (NOR FLASH bank 1) 8MByte ROM size (NOR FLASH bank 2) Not available ROM size (NAND FLASH) Not available Bit Engine: AV 2.0 122800: Test OK @
---------	---

Nucleus Name	DS_SYS_SettingsGet	
Nucleus Number	1229	
Description	Get the digital board diversity settings string that is programmed in the BROM on the digital board.	
Technical	<ul style="list-style-type: none"> - Set-up IIC-bus. - Read Digital Board Settings from boot EEPROM. - Read System Settings from boot EEPROM. - Display the settings. 	
Execution Time	1 second	
User Input	None.	
Error	Number	Description
	122900	The settings were successfully displayed.
	122901	IIC access failed.
	122902	The settings are invalid
Example	DS:> 1229 122900: 6D7920626F61726400020300010101020101000020080000 Test OK @	

Nucleus Name	DS_SYS_AudioLoopThroughStart	
Nucleus Number	1230	
Description	Description: The audio input is routed from the an input to all outputs. Input is set with the routing nucleus 1113. All outputs are enabled.	
Technical	<ul style="list-style-type: none"> - Encode the audio to AC3 in memory - Decode the AC3 in memory to audio on the outputs 	
Execution Time	1second buffer time and 30 seconds playing.	
User Input	None.	
Error	Number	Description
	123000	AudioLoopthroughStart succeeded
	123001	Resetting the audio decoder failed
	123002	Resetting the audio encoder failed
	123003	Encoding the audio failed
	123004	Decoding the audio failed
Example	DS:> 1230 123000: Test OK @	

Nucleus Name	DS_SYS_AudioLoopThroughStop	
Nucleus Number	1231	
Description	Stop routing the audio input to all the outputs	
Technical	<ul style="list-style-type: none"> - Send the 'Mute' command to the audio decoder 	
Execution Time	Less than 1 second.	
User Input	-	
Error	Number	Description
	123100	AudioLoopthroughStop succeeded

	123101	Resetting the audio decoder failed
	123102	Resetting the audio encoder failed
Example	DS:> 1231 123100: Test OK @	

Electronic Program Guide Board (EPGB)

Nucleus Name	DS_EPGB_VersionGet	
Nucleus Number	1300	
Description	Returns the version of the EPG board.	
Technical	<ul style="list-style-type: none"> - Issue the command to get the version of the EPG board to the analogue board - Return the received information to the user 	
Execution Time	3 seconds.	
User Input	None	
Error	Number	Description
	130000	Getting the version succeeded
	130001	Communication with the analog board failed.
	130002	Communication with the epb board failed.
	130003	There was no response from the analogue board.
	130004	No DS errCode known for analogue board error.
Example	DS:> 1300 130000: Version : 6.1.9 Test OK @	

Script

Nucleus Name	DS_IH_ScriptHandler	
Nucleus Number	Script	
Description		
Technical	Execute the included nuclei one by one	
	If a nucleus fails quit and display the failed nucleus on the local display and service port	
Execution Time	16 seconds	
Included tests:	1. DS_ANAB_COMMUNICATIONECHO_NUC 2. DS_DCB_COMMUNICATIONECHO_NUC 3. DS_BROM_COMMUNICATION_NUC 4. DS_SYS_SETTINGSDISPLAY_NUC 5. DS_CHR_DEVTYPEGET_NUC 6. DS_CHR_INT_PIC_NUC 7. DS_CHR_DMA_NUC 8. DS_BROM_WRITEREAD_NUC 9. DS_NVRAM_COMMUNICATION_NUC 10. DS_NVRAM_WRITEREAD_NUC 11. DS_SDRAM_WRITEREADFAST_NUC 12. DS_FLASH_WRITEREAD_NUC 13. DS_FLASH_CHECKSUMPROGRAM_NUC 14. DS_SYS_HARDWAREVERSIONGET_NUC 15. DS_VIP_DEVTYPEGET_NUC 16. DS_VIP_COMMUNICATION_NUC 17. DS_DVIO_LINKDEVTYPEGET_NUC 18. DS_DVIO_PHYDEVTYPEGET_NUC 19. DS_DVIO_LINKCOMMUNICATION_NUC 20. DS_DVIO_PHYCOMMUNICATION_NUC 21. DS_PSCAN_COMMUNICATIONDENC_NUC 22. DS_PSCAN_COMMUNICATIONDEINTERLACER_NUC 23. DS_BE_COMMUNICATIONECHO_NUC 24. DS_ANAB_COMMUNICATIONIICNVRAM_NUC 25. DS_ANAB_COMMUNICATIONIICTUNER_NUC 26. DS_ANAB_COMMUNICATIONIICSOUNDPROCESSOR_NUC 27. DS_ANAB_COMMUNICATIONIICAVSELECTOR_NUC 28. DS_ANAB_CHECKSUMPROGRAM_NUC	
User Input	None	

Example	<pre> DS:> script Executing User/Dealer script. Busy executing NUC1100 1-28 Hello Analogue Board Busy executing NUC1000 2-28 Busy executing NUC200 3-28 Busy executing NUC1228 4-28 Settings ID: 4C4541440D00000000030300010101020101000020080000 Board name: LEAD Hardware ID: 0 Codec IC: PNX7100_MF3 Video Input Processor IC: SAA7118 Progressive Scan Deinterlacer IC: None Progressive Scan Denc IC: ADV7196 I-Link physical layer circuit IC: PDI1394P25 I-Link link layer circuit IC: PDI1394P40 Audio clock: Clock scheme 1 Bit engine connector: available IDE connector 1: available IDE connector 2: not available PCI connector: not available RAM size 32MByte ROM size (NOR FLASH bank 1) 8MByte ROM size (NOR FLASH bank 2) Not available ROM size (NAND FLASH) Not available Bit Engine: AV 2.0 Busy executing NUC100 5-28 Device ID 7100 Codec ID PNX7100_MF3 F-BCU (0x0102) 1.0 INTC (0x011d) 1.0 PCI-XIO(0x0113) 1.0 SIF (0x013b) 1.0 EJTAG (0x0104) 0.0 S-BCU (0x0102) 1.0 BOOT (0x010a) 1.0 CONFIG (0x013f) 1.0 RESET (0x0123) 1.0 DEBUG (0x0116) 0.0 UART0 (0x0107) 0.1 UART1 (0x0107) 0.1 UART2 (0x0107) 0.1 UART3 (0x0107) 0.1 I2C0 (0x0105) 0.1 I2C1 (0x0105) 0.1 GPIO (0x013c) 1.0 SYNC (0x013a) 1.0 DISP0 (0xa015) 0.2 DISP1 (0xa00f) 0.0 OSD (0x0136) 0.1 SPU (0xa00e) 0.0 MIXER (0x0137) 1.0 DENC (0x0138) 0.1 CCIR (0x0139) 1.0 VDEC (0x0133) 0.1 PARSER (0xa00d) 0.0 DV (0xa00c) 0.0 BEI (0xa00a) 0.0 IDE (0xa009) 0.0 SGDX (0xa008) 0.0 BYTE (0xa00b) 0.0 OUTPUT (0xa003) 0.0 ACOMP (0xa000) 0.0 VFE (0xa001) 0.0 VCOMP (0xa002) 0.0 SCR (0x0000) 0.0 SIFF (0xa011) 0.0 WMD (0xa010) 0.0 AUDIO0 (0xa015) 0.2 AUDIO1 (0xa00f) 0.0 PSCAN (0xa018) 0.0 Busy executing NUC114 6-28 Busy executing NUC115 7-28 Busy executing NUC201 8-28 Busy executing NUC300 9-28 Busy executing NUC301 10-28 Busy executing NUC401 11-28 Busy executing NUC501 12-28 Busy executing NUC503 13-28 BootCode checksum is: 0xBABEB432, which is correct Diagnostics checksum is: 0xBABED22B, which is correct Download checksum is: 0xBABE025F, which is correct Application checksum is: 0xBABE2825, which is correct Busy executing NUC1200 14-28 Hardware ID = 00 Busy executing NUC600 15-28 Found SAA7118 </pre>
---------	--

Example	Busy executing NUC601 16-28 Busy executing NUC700 17-28 Device type of the link layer IC: ffc00301 Busy executing NUC701 18-28 Device type of the phy layer IC: 0 Busy executing NUC702 19-28 Busy executing NUC703 20-28 Busy executing NUC801 21-28 Busy executing NUC808 22-28 The IIC acknowledge was not received, which is correct Busy executing NUC900 23-28 Busy executing NUC1101 24-28 Busy executing NUC1102 25-28 Busy executing NUC1104 26-28 Busy executing NUC1105 27-28 Busy executing NUC1111 28-28 BootCode checksum is: 0xBABE6240, which is correct Diagnostics checksum is: 0xBABEDC9A, which is correct Download checksum is: 0xBABEA6B7, which is correct Application checksum is: 0xBABE5968, which is correct PASS DS:>
---------	--

5.3.4 Menu Mode Interface Digital Board 1.5, Empress

Activation
Plug the recorder to the mains and the following text will appear on the screen of the terminal (program):

```

DVD Video Recorder Diagnostic Software version 48
Basic SDRAM Data bus test passed
Basic SDRAM Address bus test passed
Basic SDRAM Device test passed

(M) enu, (C) ommand or (S) 2B-interface? [M] : @ M ↵

Main Menu

1. Digital Board    ->
2. Analogue Board  ->
3. Front Panel     ->
4. Basic Engine    ->
5. DVI            ->
6. Progressive Scan Board ->
7. Loop tests     ->
8. Log           ->
9. Scripts       ->

Select>

```

Figure 5-12

The first line indicates that the Diagnostic software has been activated and contains the version number. The next lines are the successful result of the SDRAM interconnection test and the basic SDRAM test. The last line allows the user to choose between the three possible interface forms. If pressing M has made a choice for Menu Interface, the Main Menu will appear.












5.4 Nuclei Error Codes

DVIO 1.8 Error Codes












Error Code	Id	Description	Hardware
0	0x00	DVIOC_ERR_DDS_OK	No Error
6	0x06	DVIOC_ERR_DDS_UNKNOWN	Unknown Error(including UART communication error)
17	0x11	DVIOC_ERR_DDS_TNF_1	Link chip incorrect responding
18	0x12	DVIOC_ERR_DDS_TNF_2	No link register access or link reset failed
23	0x17	DVIOC_ERR_DDS_TNF_7	Link reset failed
38	0x26	DVIOC_ERR_DDS_TNF_16	Expecting no 1394 node with GUID connectivity, while detecting connection
39	0x27	DVIOC_ERR_DDS_TNF_17	Expecting 1394 node with GUID connectivity, while not detecting connection
48	0x30	DVIOC_ERR_DDS_UPINTRAM A	Internal ram problem in address lines
50	0x32	DVIOC_ERR_DDS_UPEXTRA MA	External ram problem in address lines
51	0x33	DVIOC_ERR_DDS_UPEXTRA MD	External ram problem in data lines
58	0x3A	DVIOC_ERR_DDS_ROMCHK	Checksum of codespace 0x0000-0x1f80, 0x2000-0xeffd is not correct
244	0xF4	DVIOC_ERR_LINK_HWPHY	PHY chip not responding(PHY down report received)
245	0xF5	DVIOC_ERR_LINK_HWLINK	LINK chip not responding

6. Block Diagrams, Waveforms, Wiring Diagram.


Overall Block Diagram Digital Board 1.5 Empress

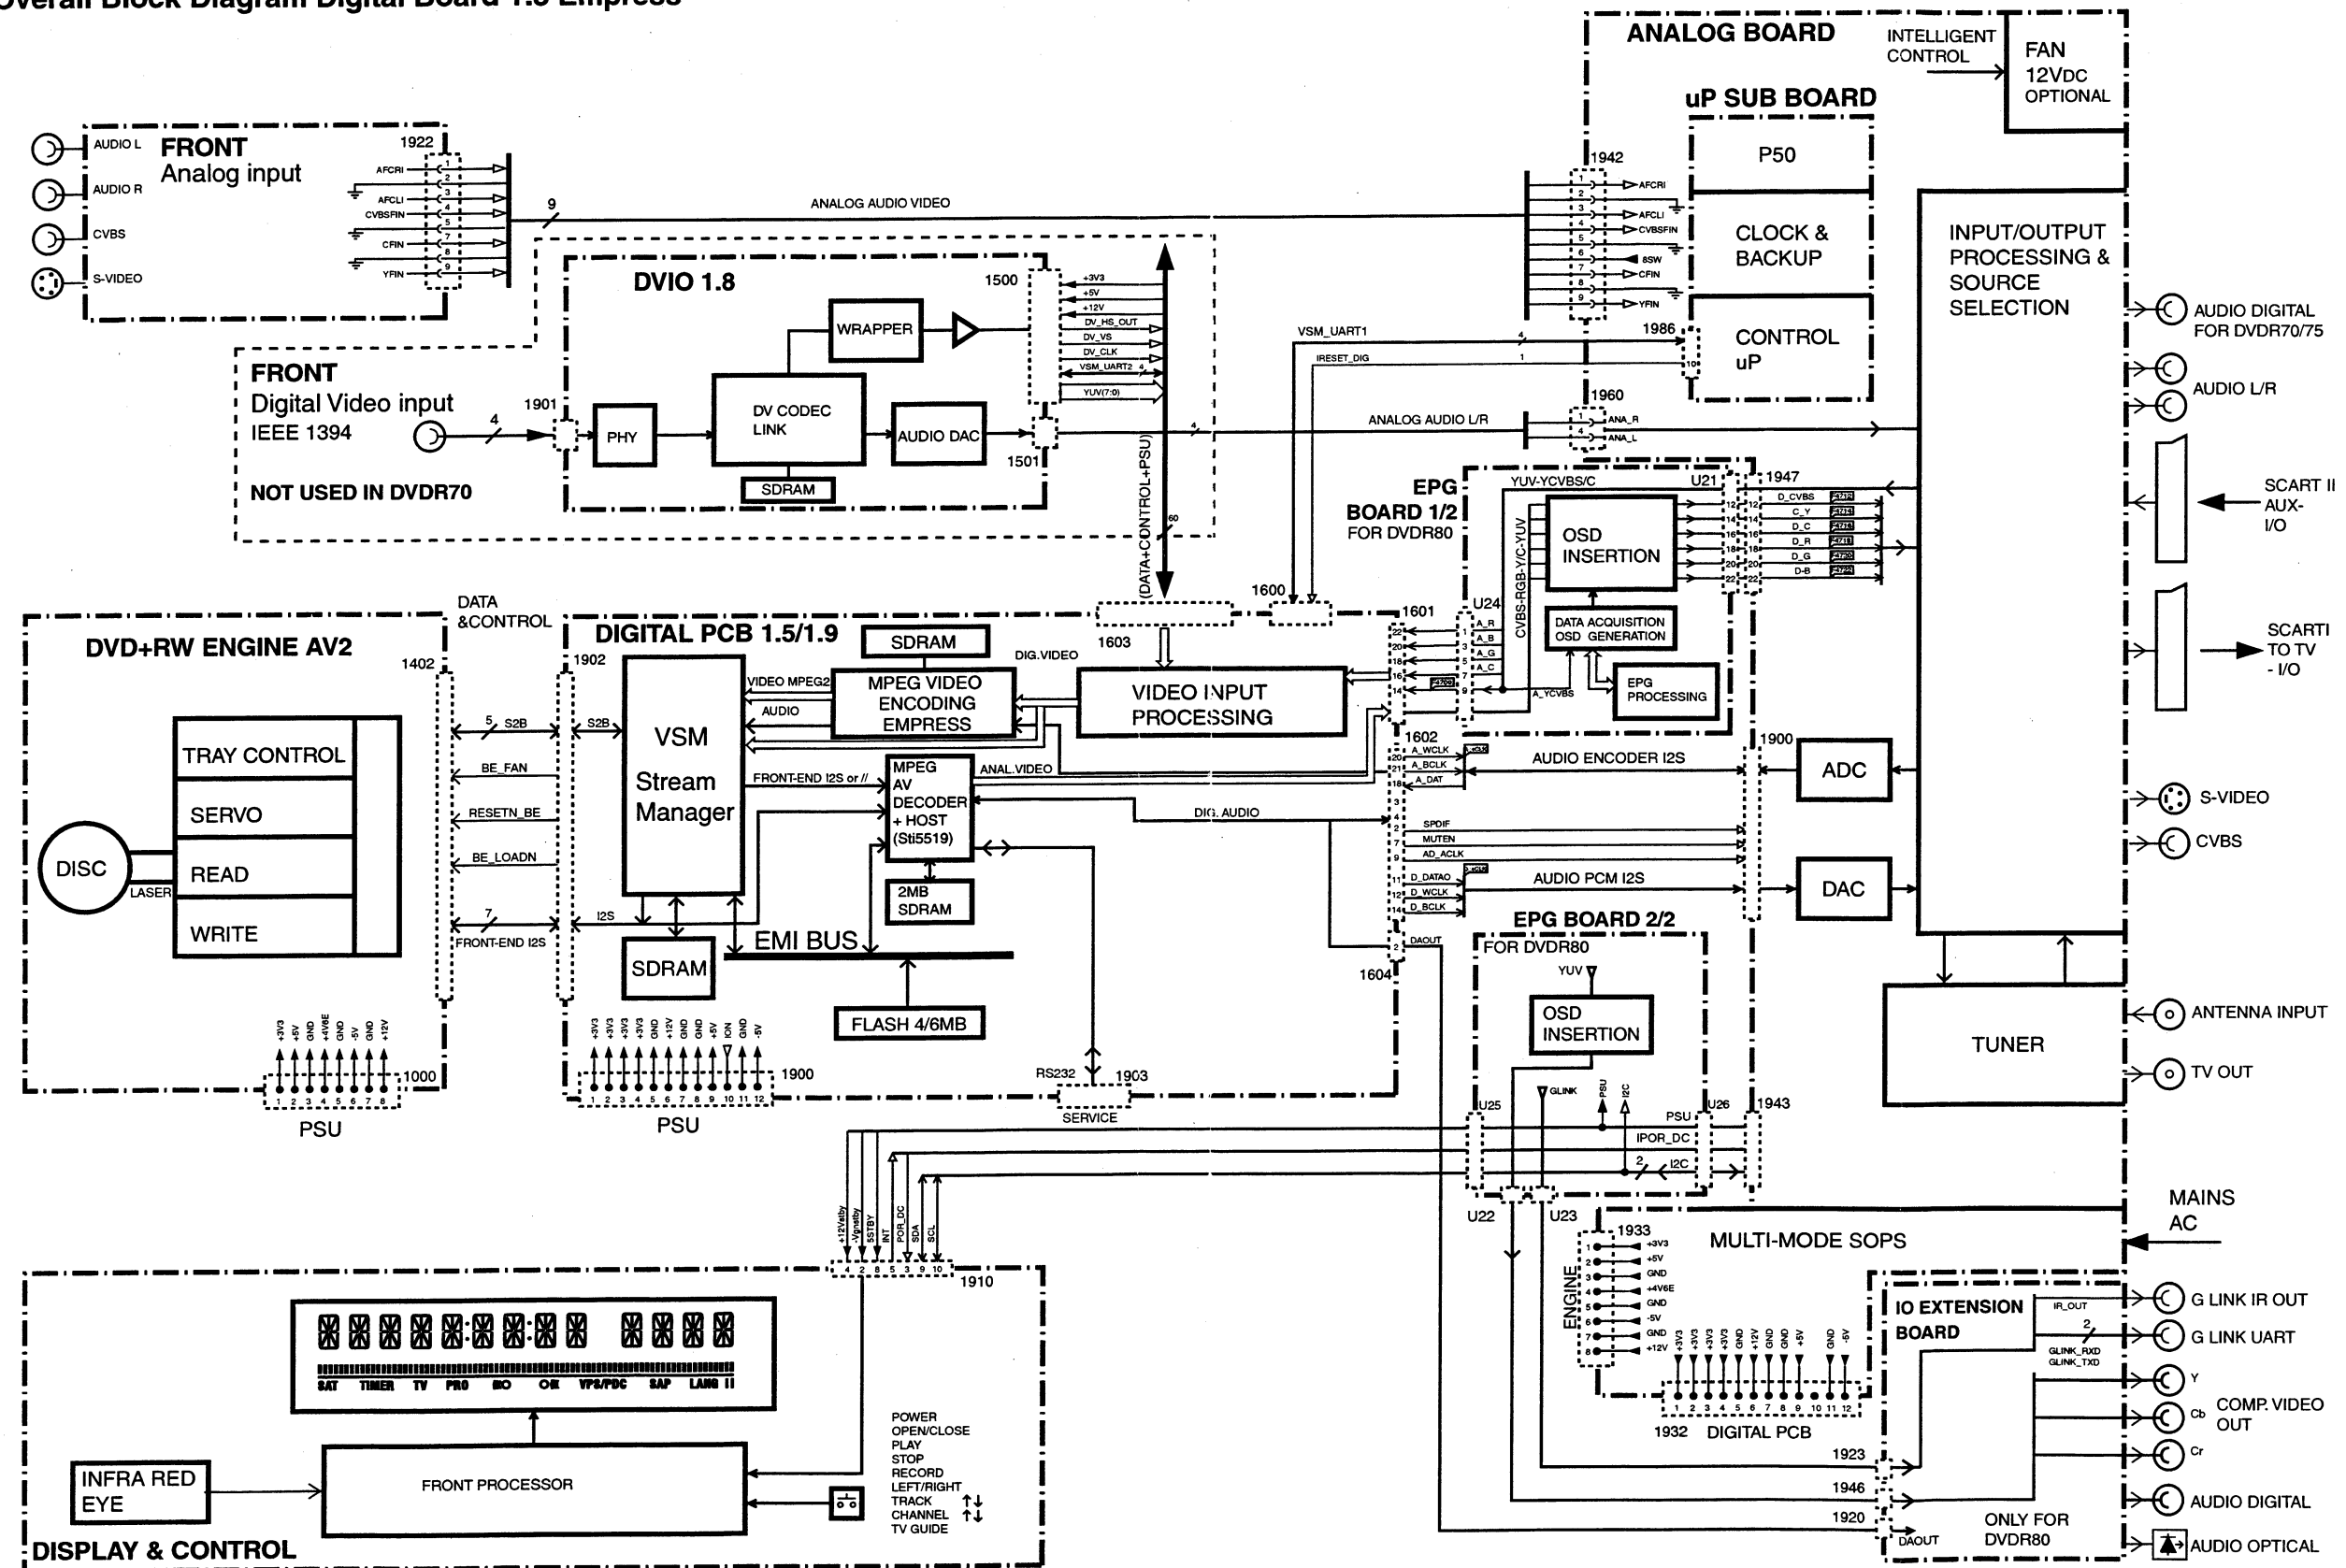

Overall Block Diagram Digital Board 2.1 Chrysalis

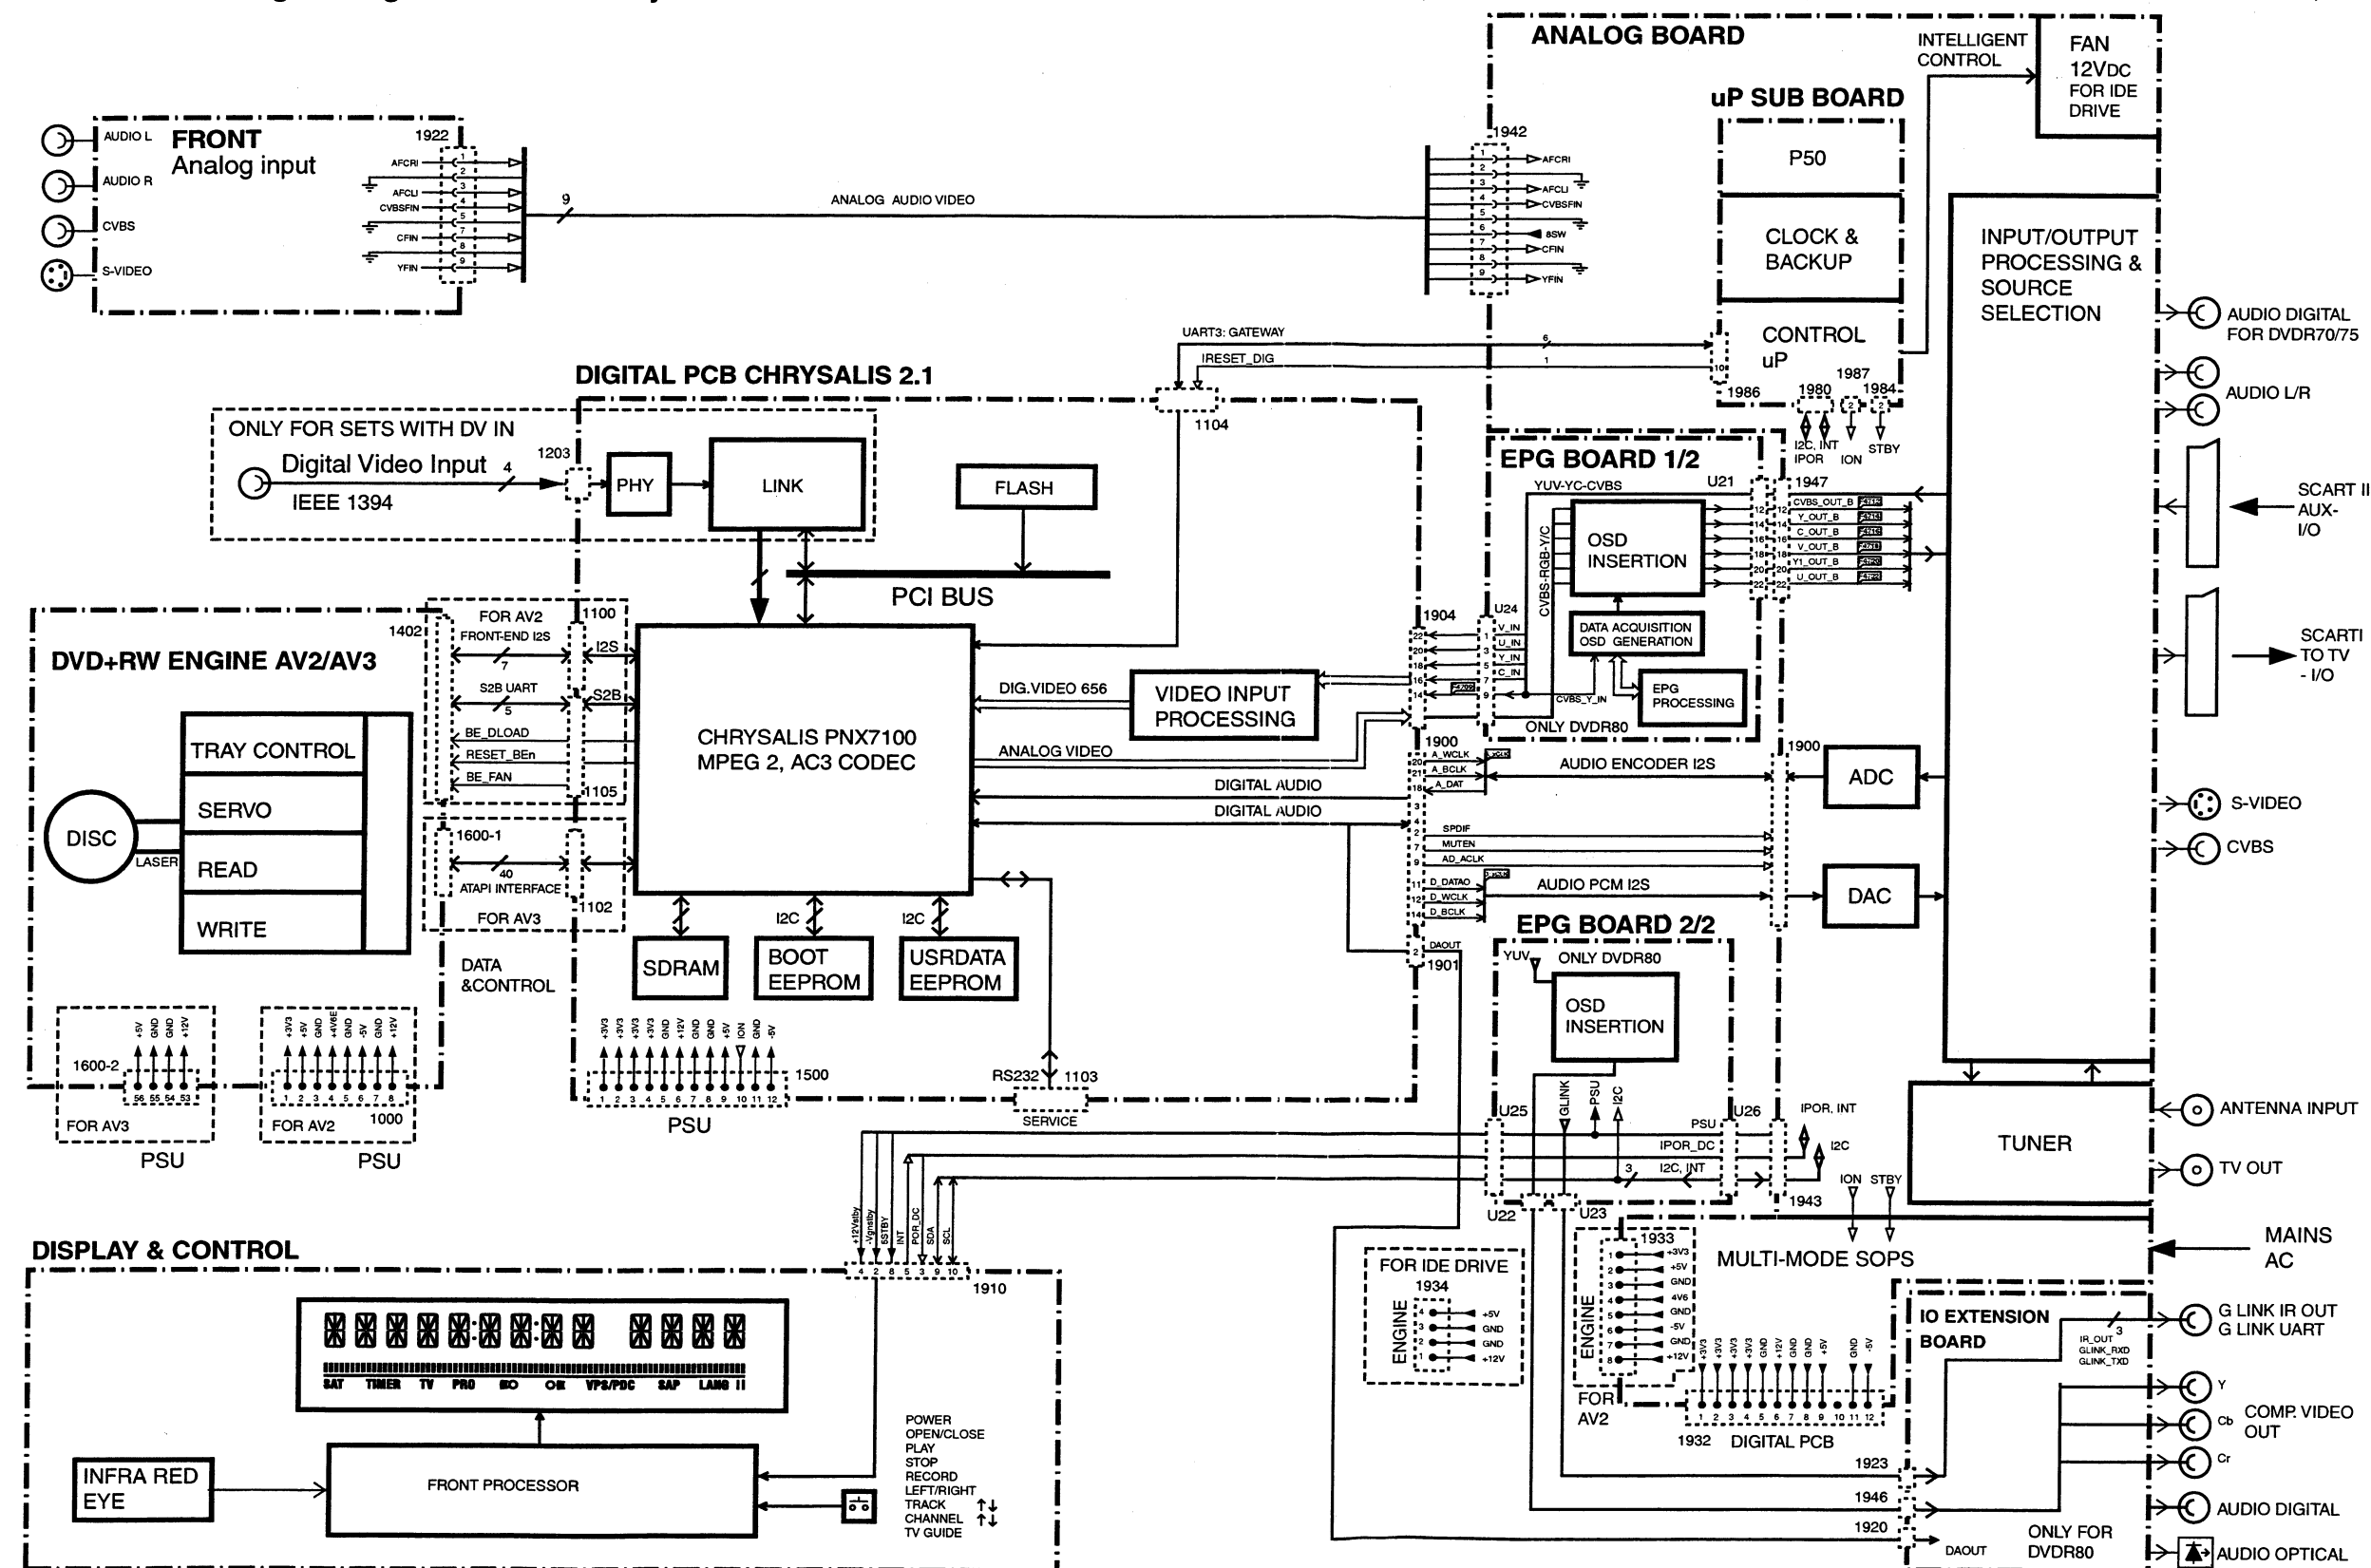TR 10002_001
050503

Control Block Diagram Analog Board, uP Board








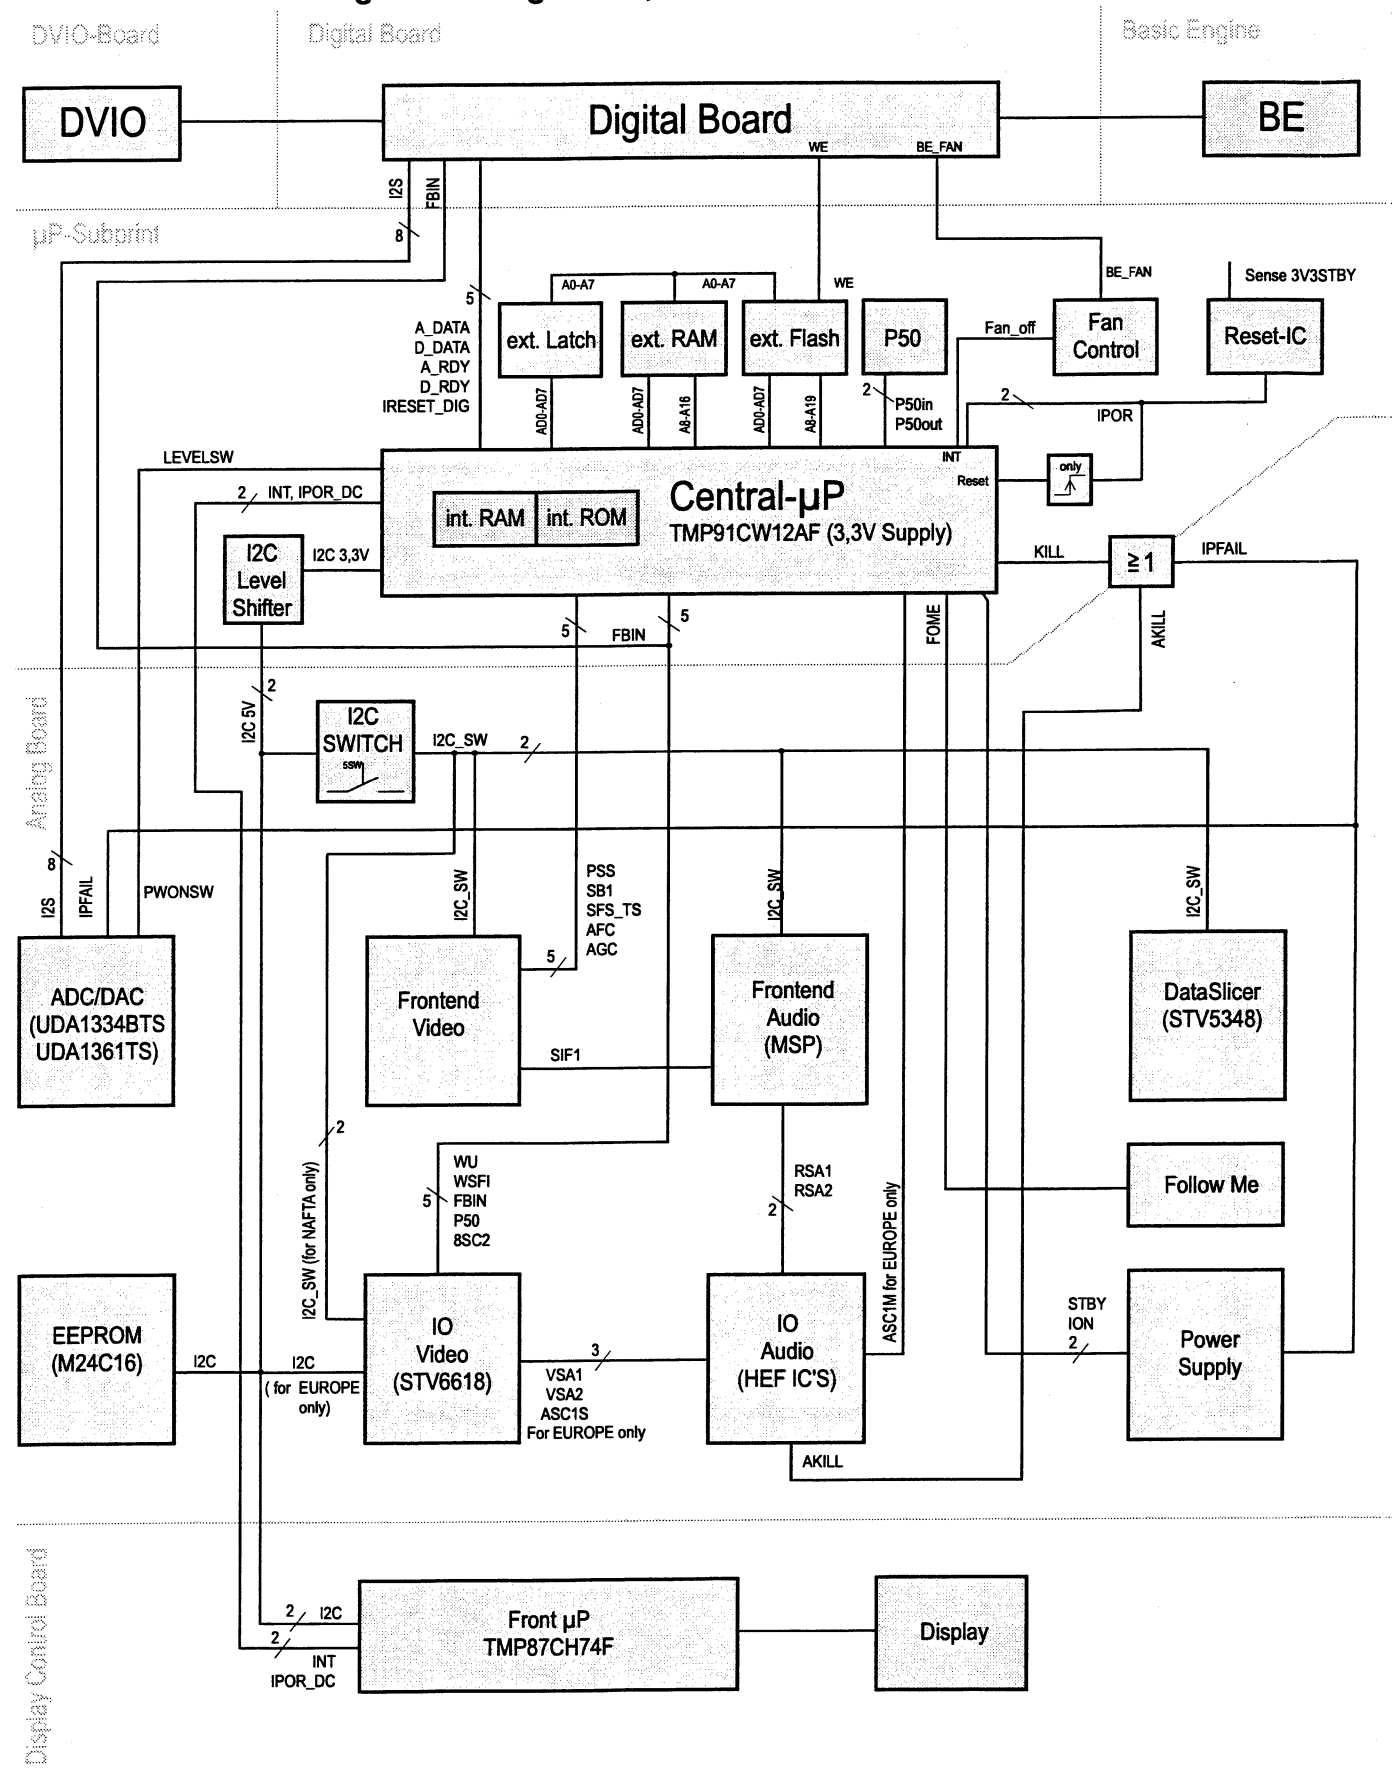
TR 01019_001
130502

TR 06005_002
110303


Waveforms

Waveforms Analog Board


Waveforms Display Board

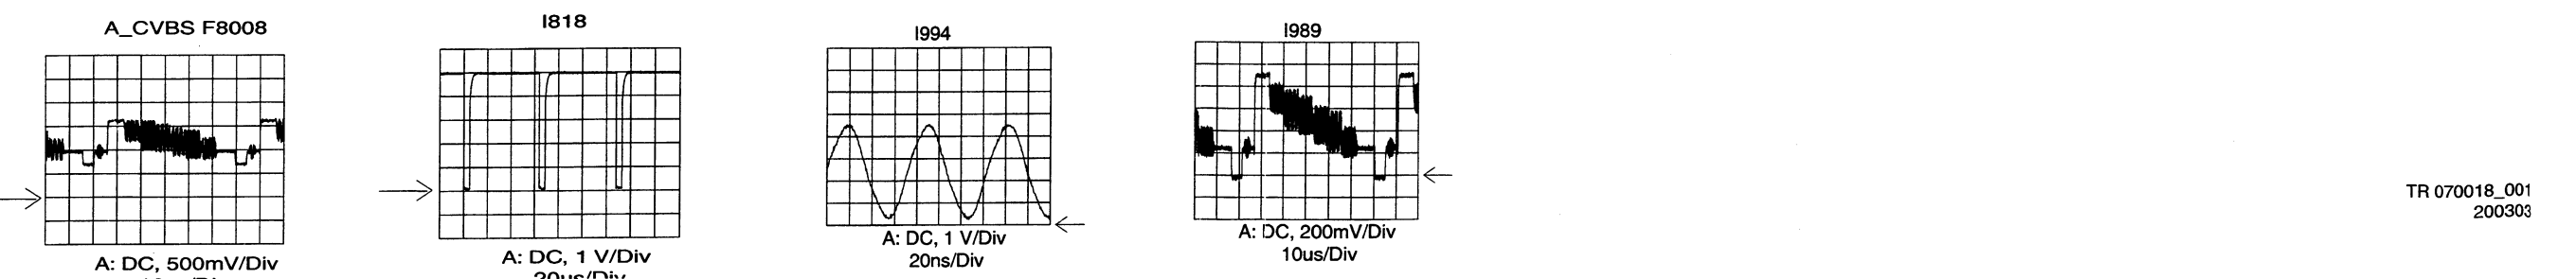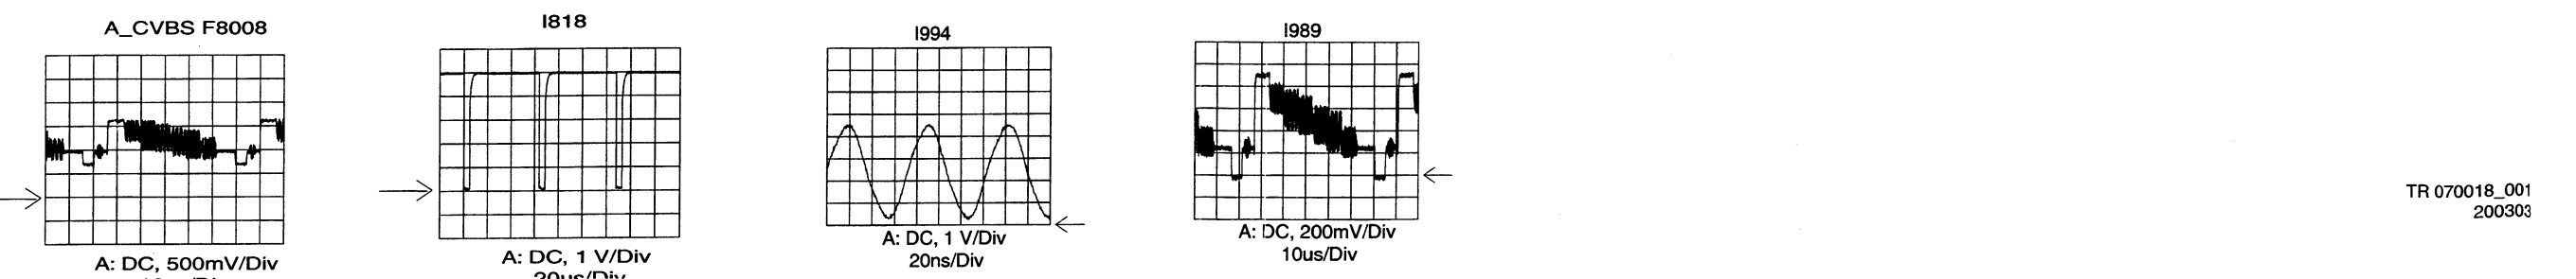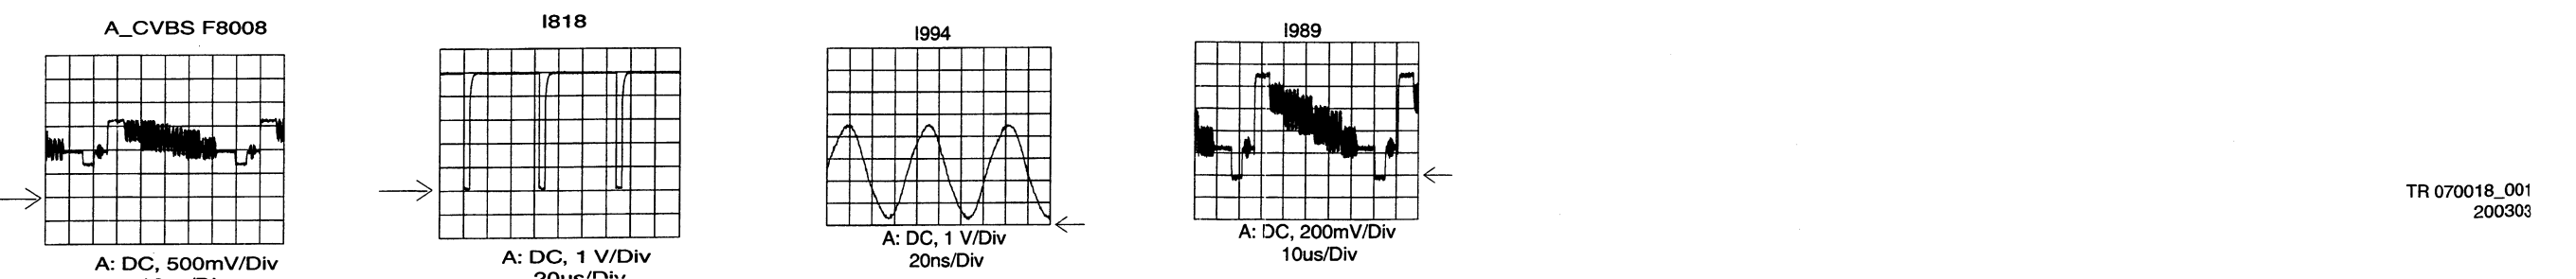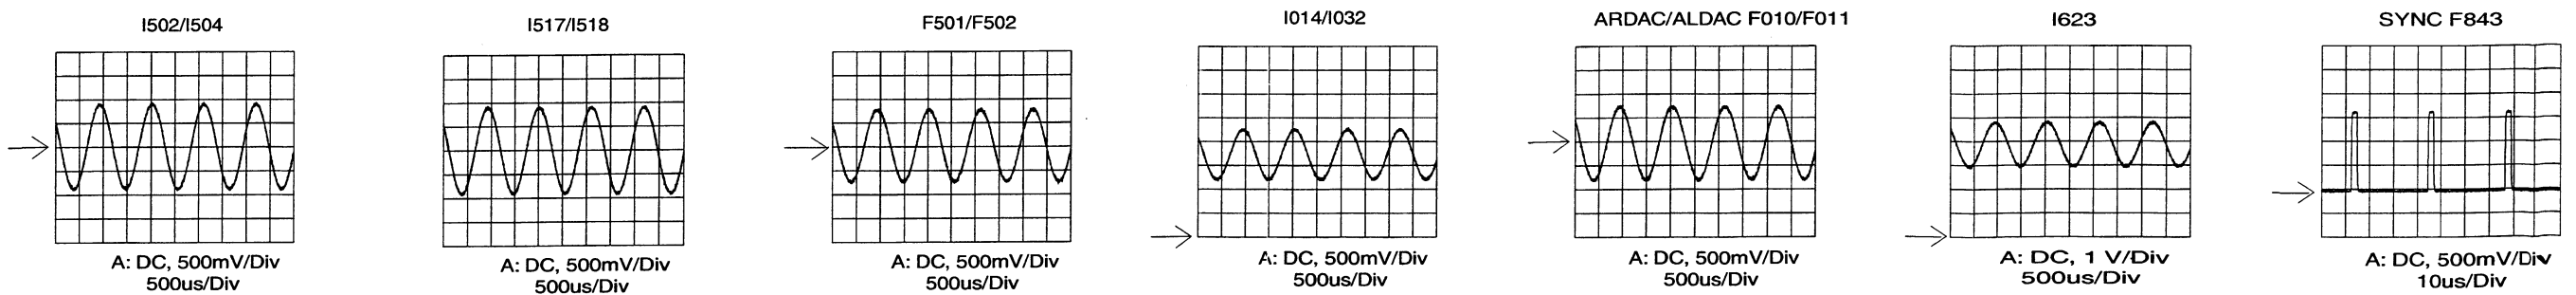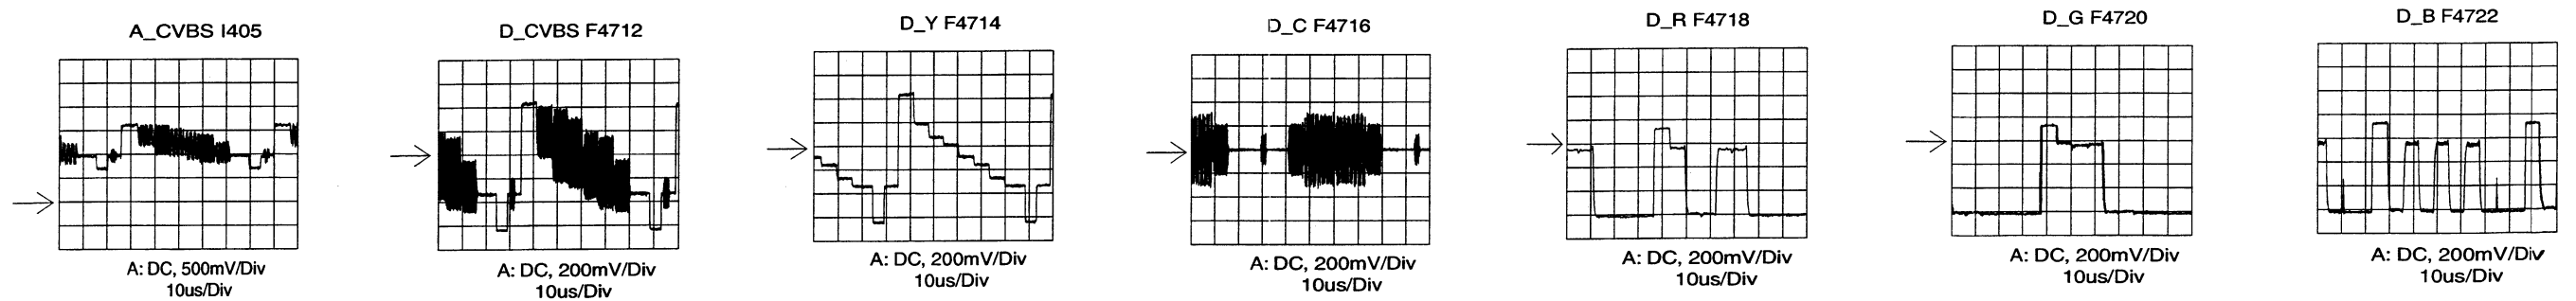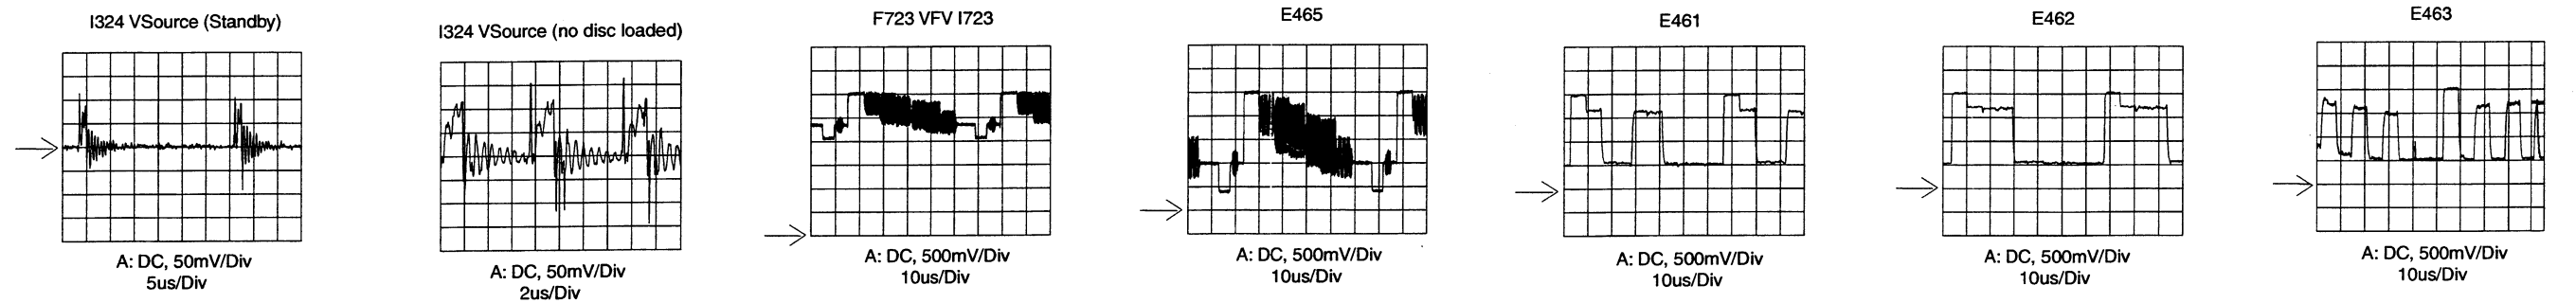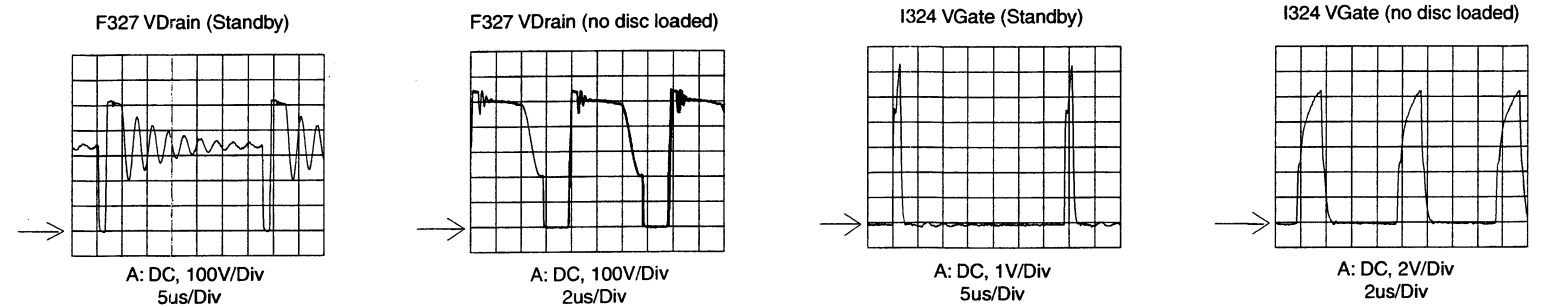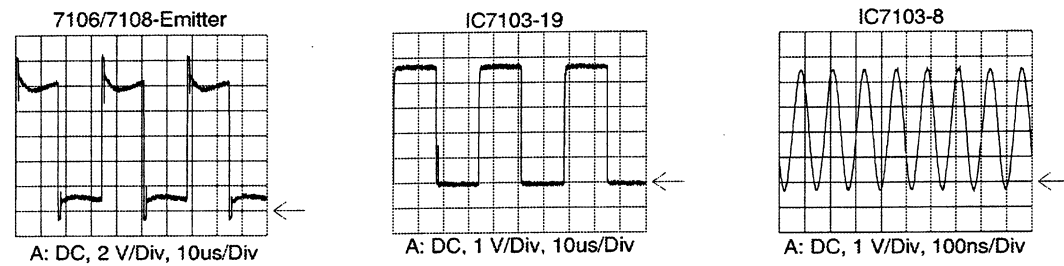


Waveforms Digital Board 1.5

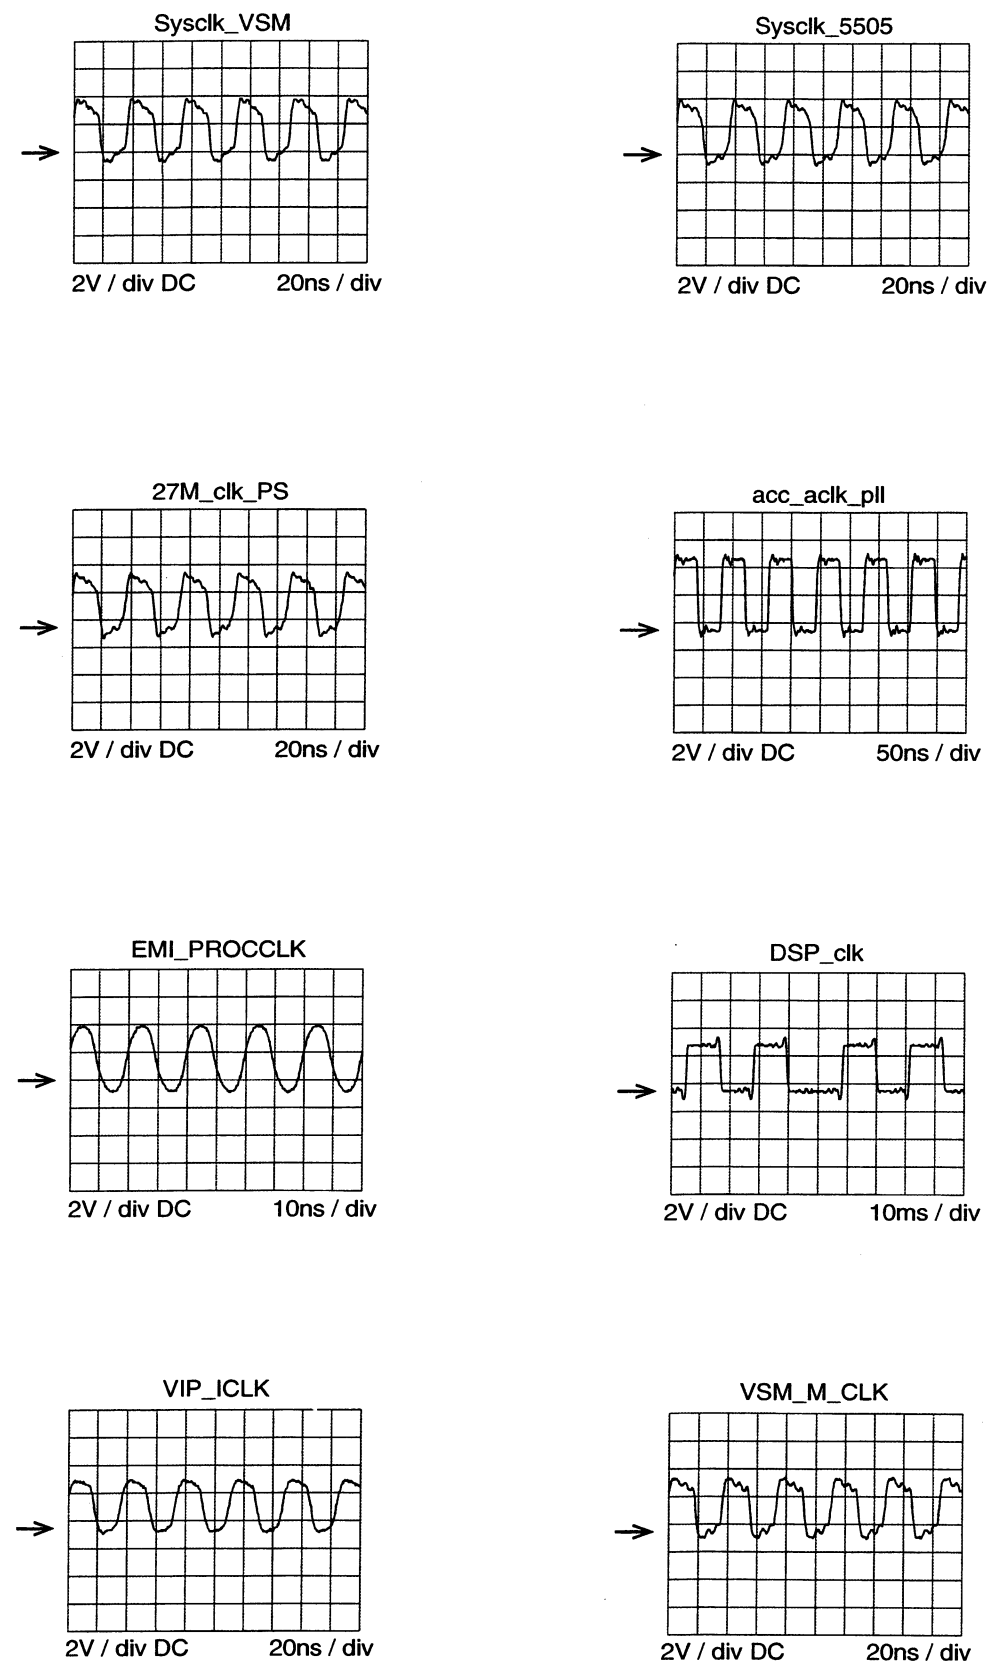CL 16532145_053.eps
031201


Waveforms Digital Board 1.5

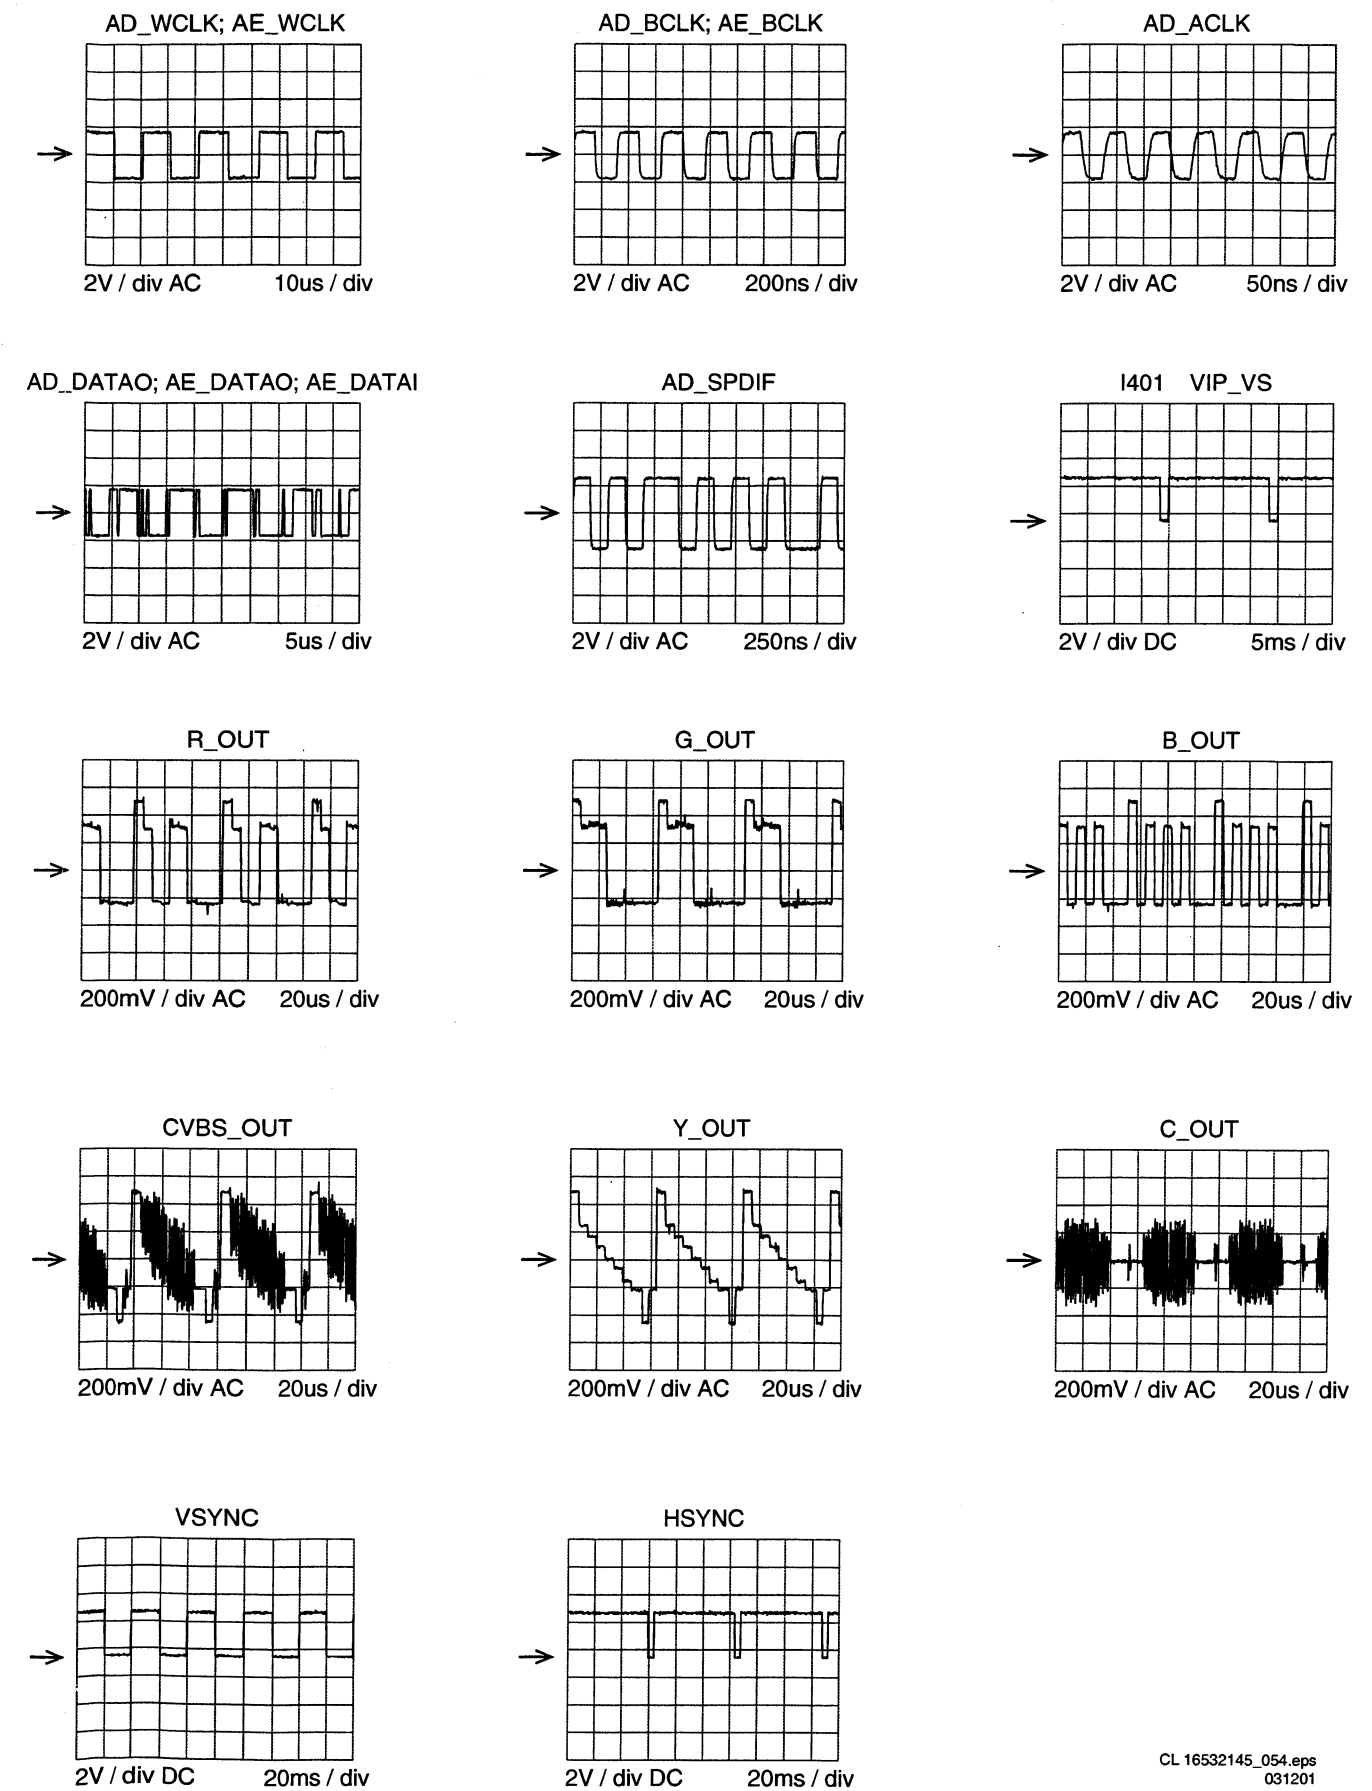CL 16532145_054.eps
031201























Waveforms Digital Board 1.5

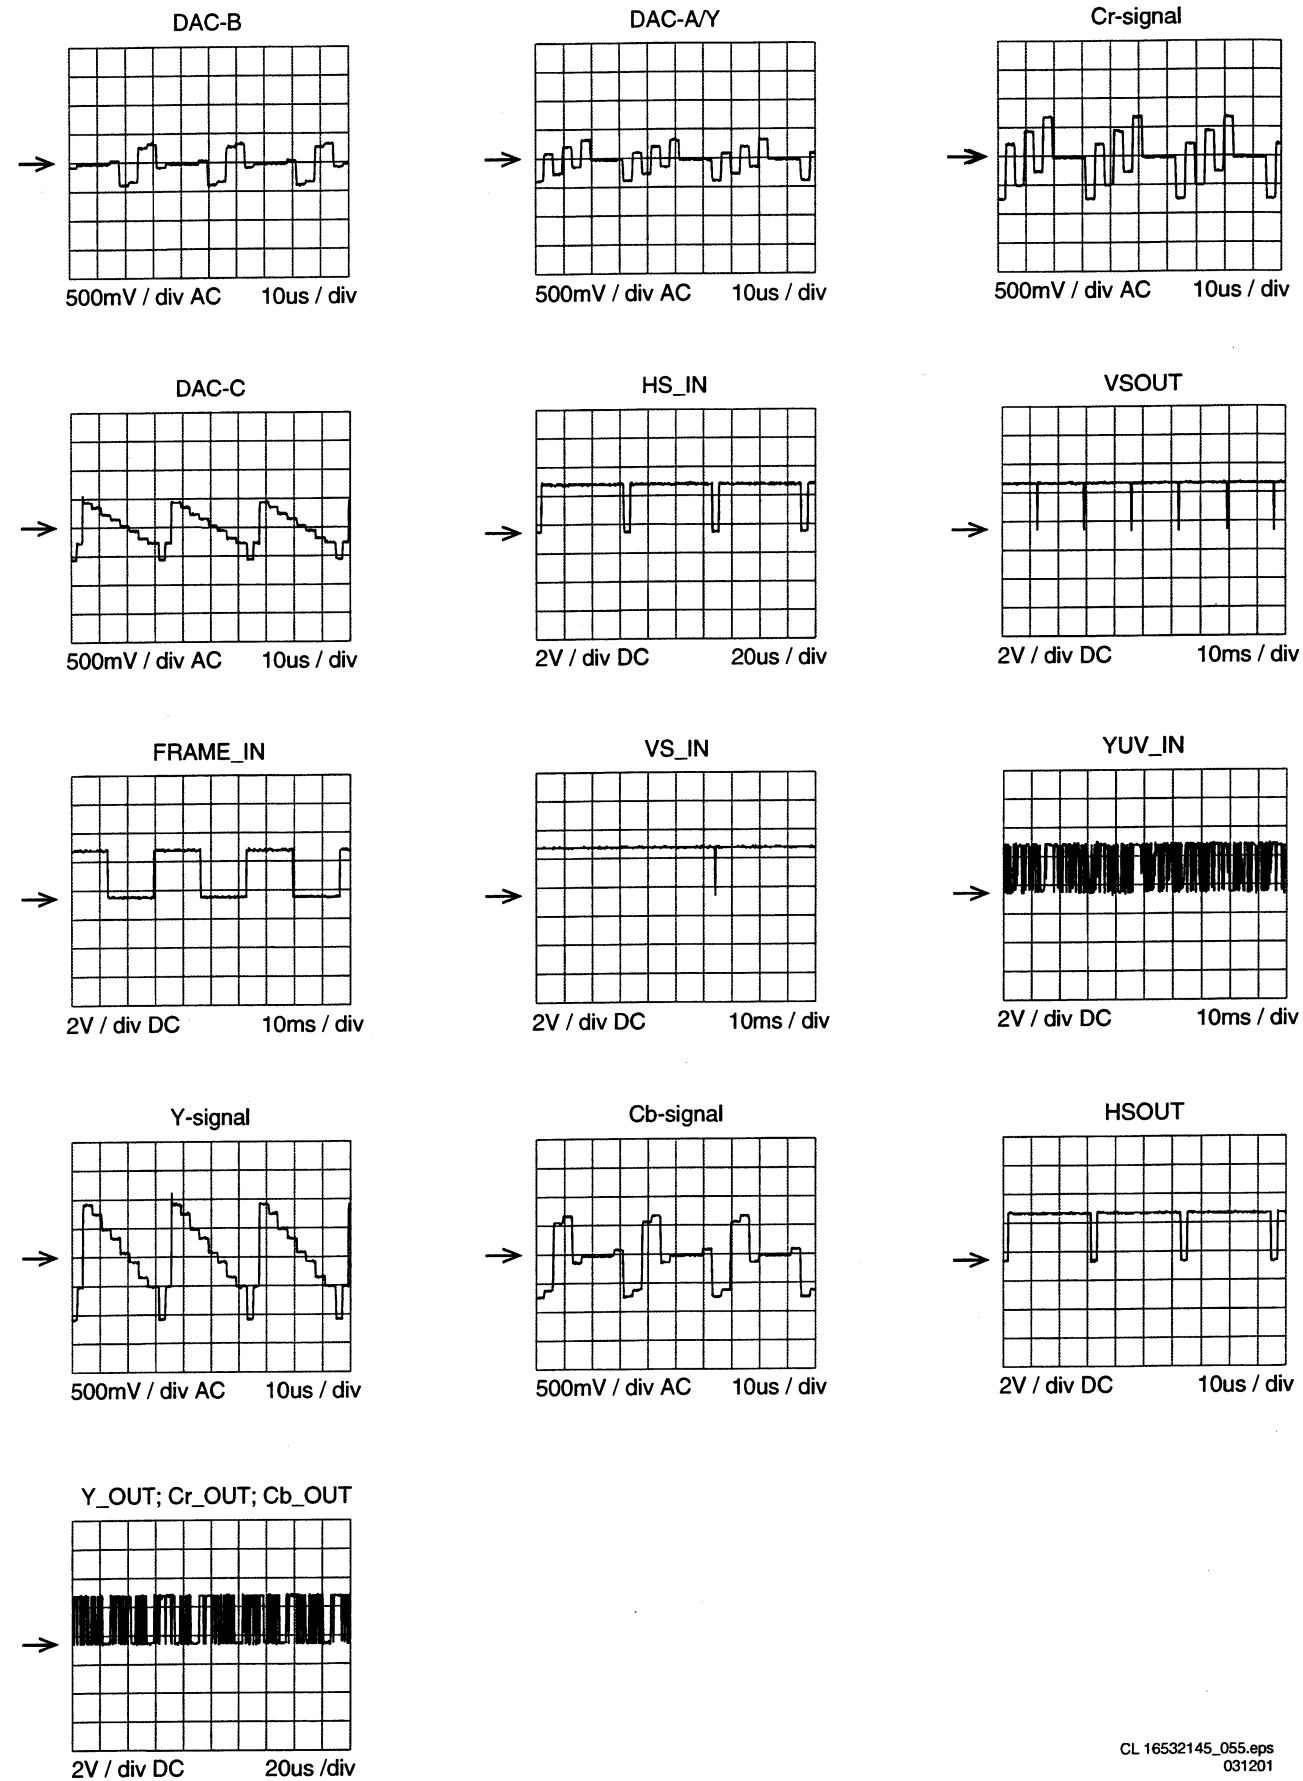


Waveforms DVIO

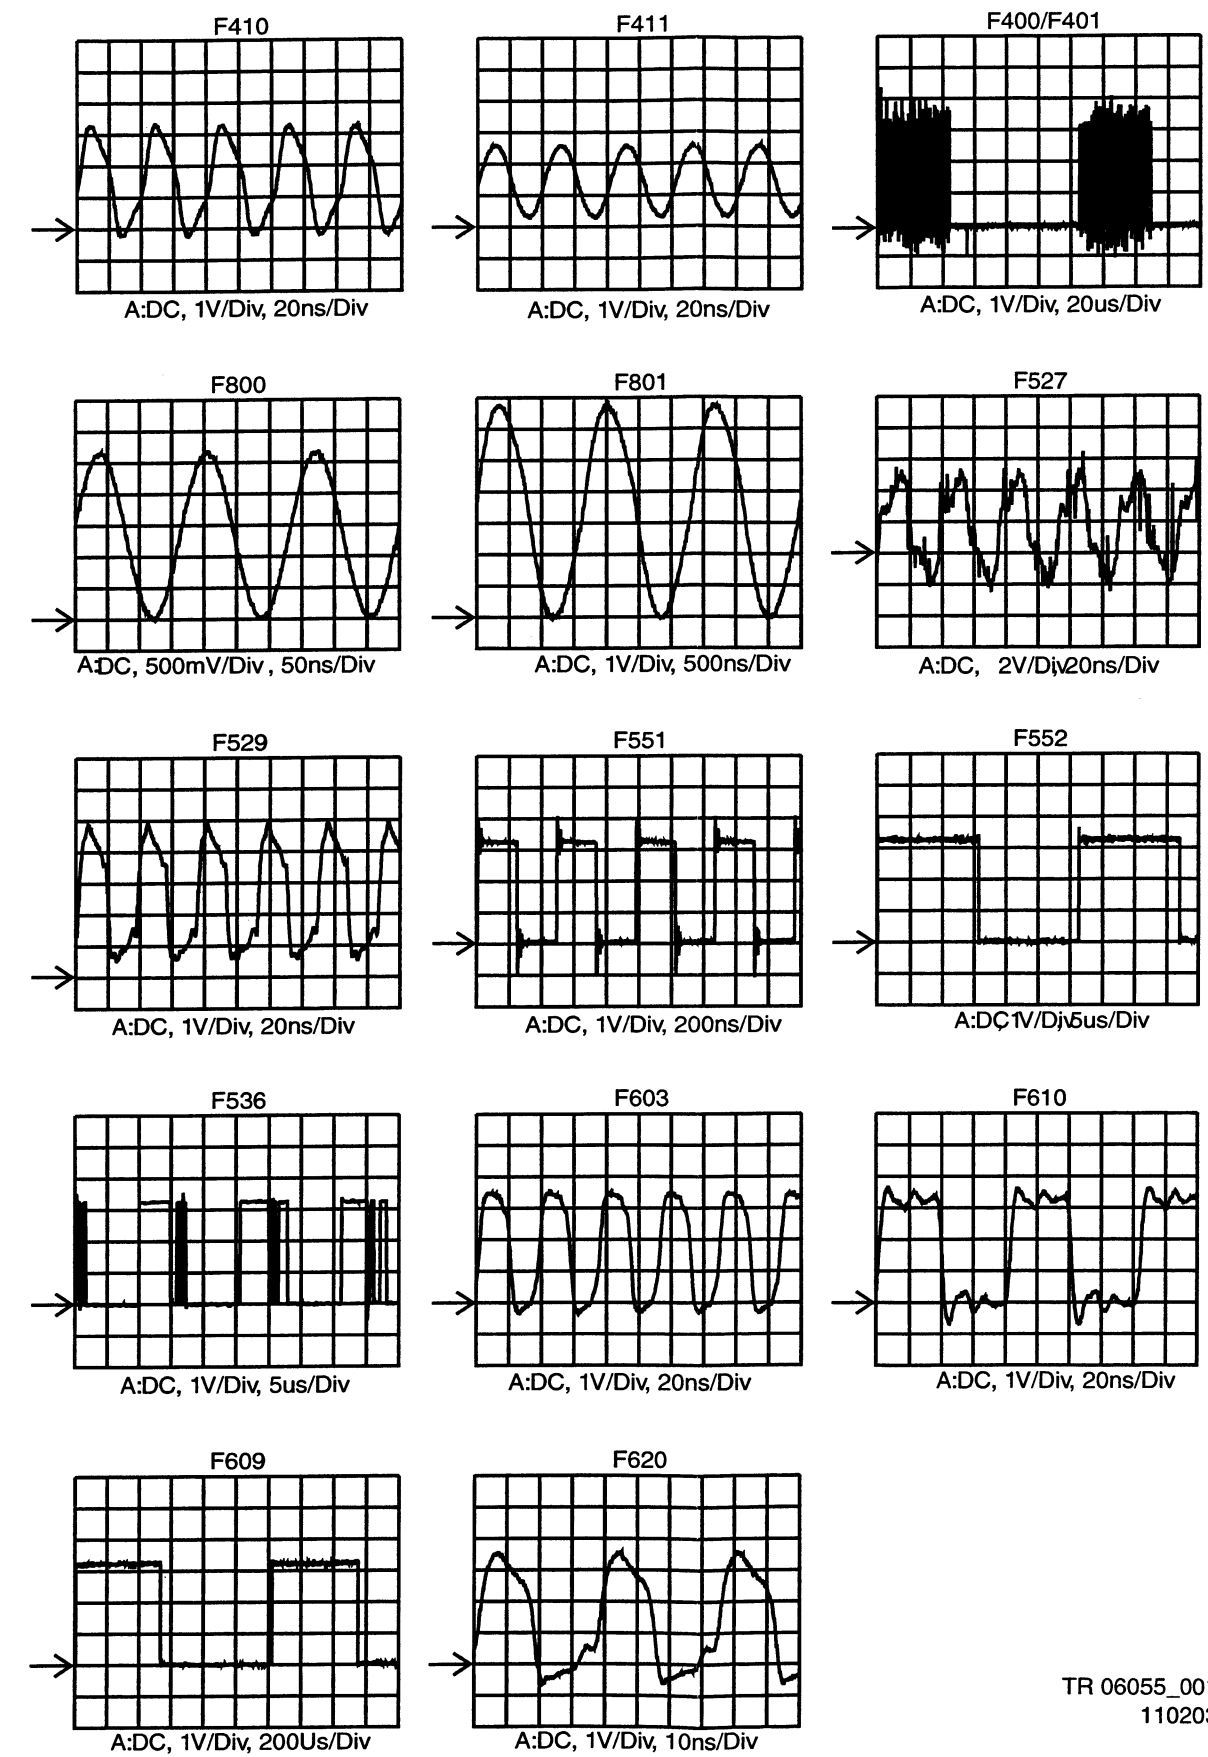CL 16532145_055.eps
031201TR 06055_001
110203


Waveforms Digital Board Chrysalis 2.1

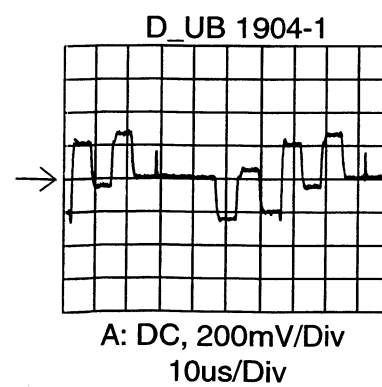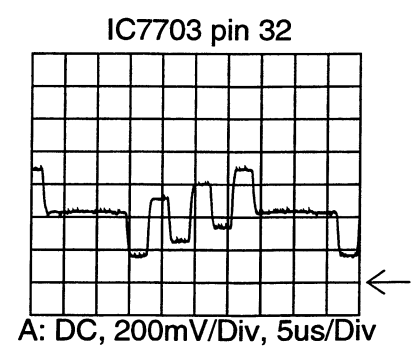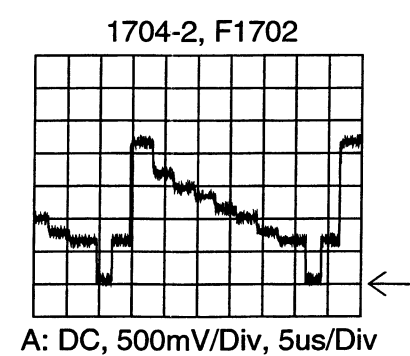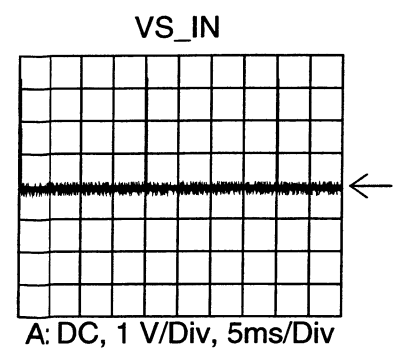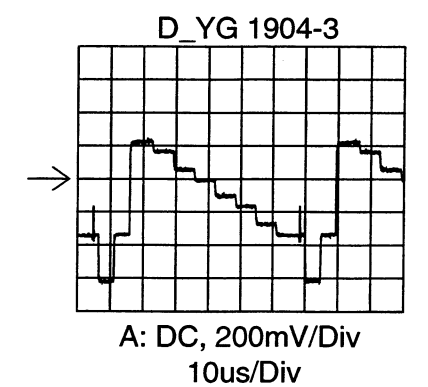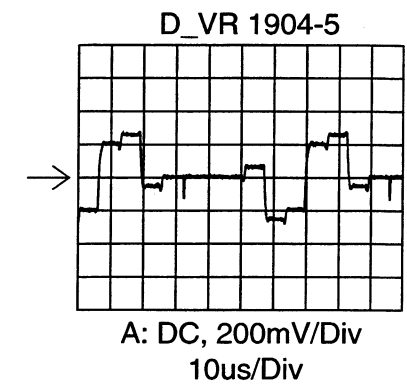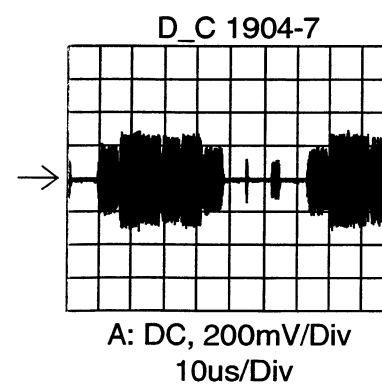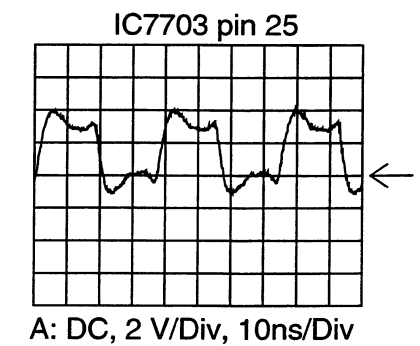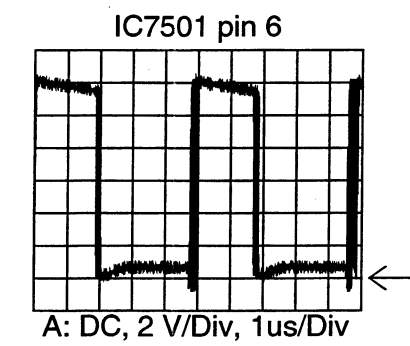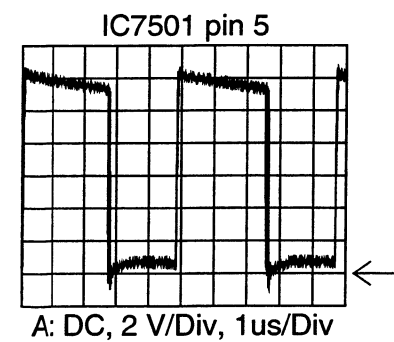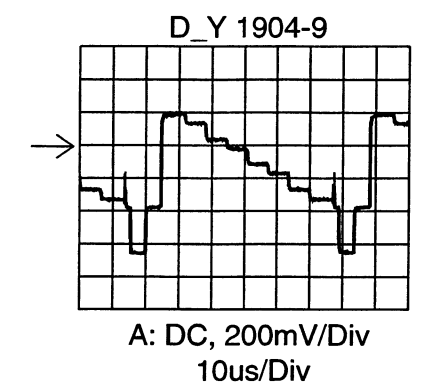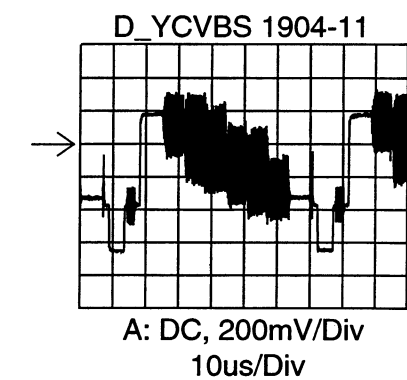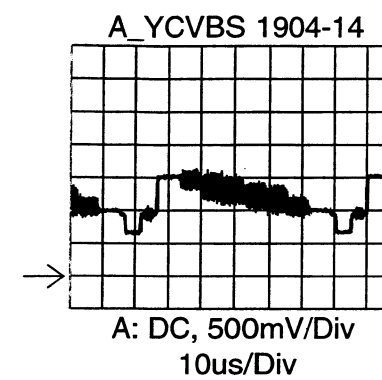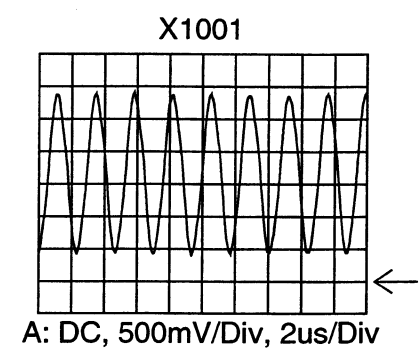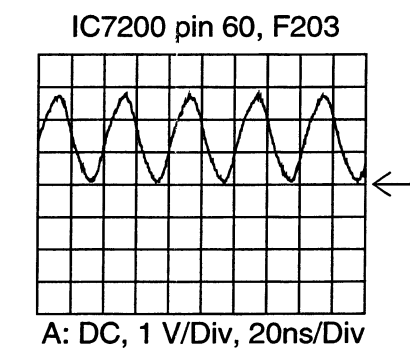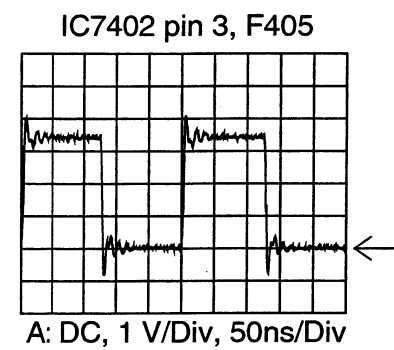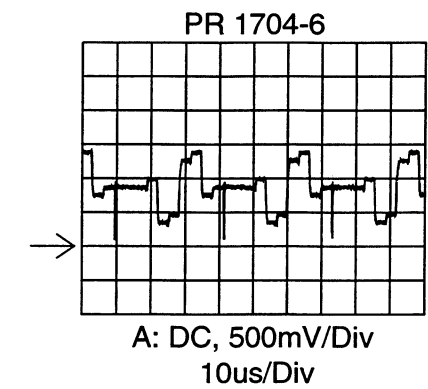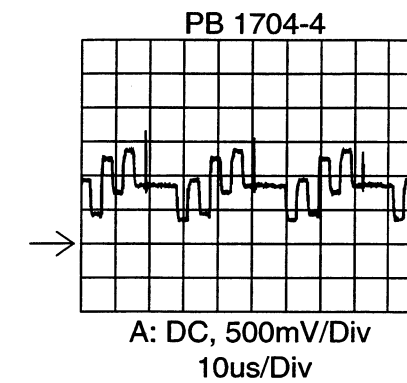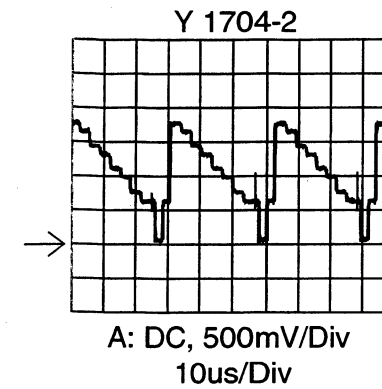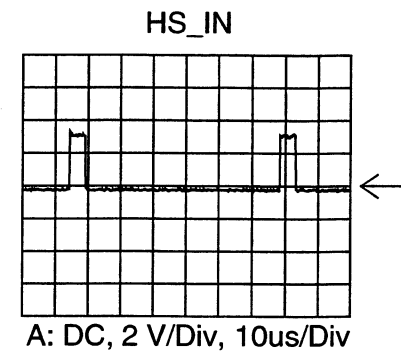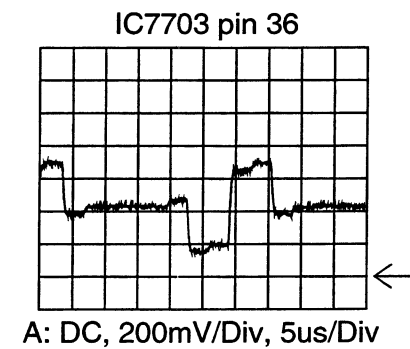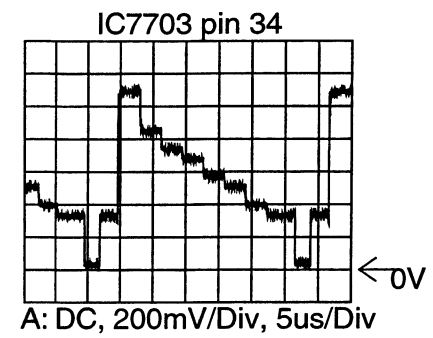

Test points overview Analog Board

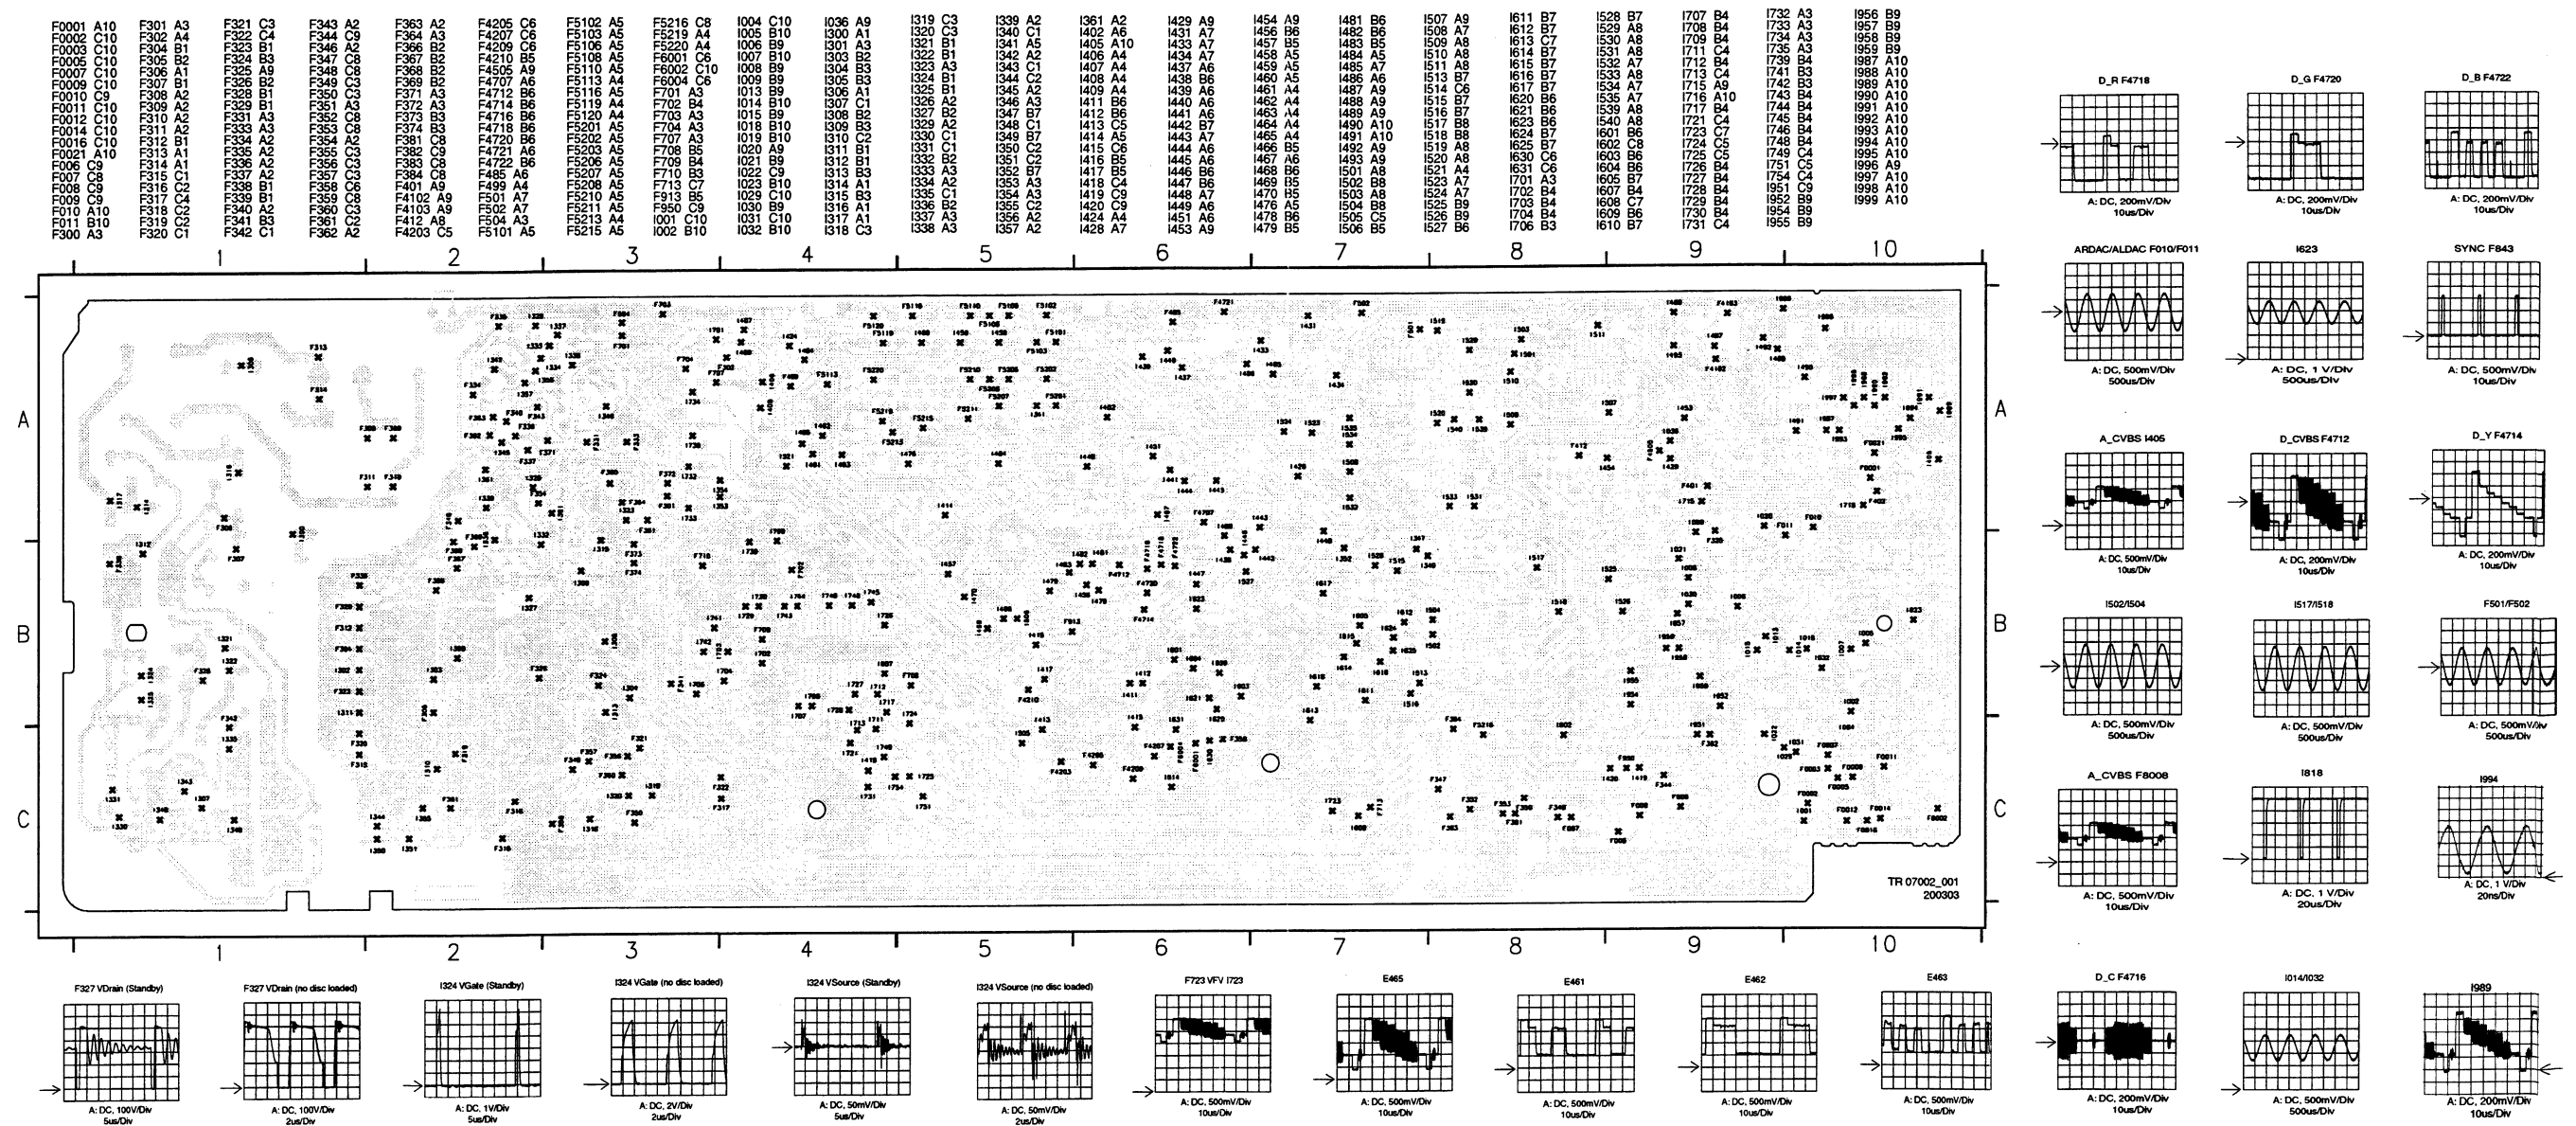


Test points overview UP Sub Board

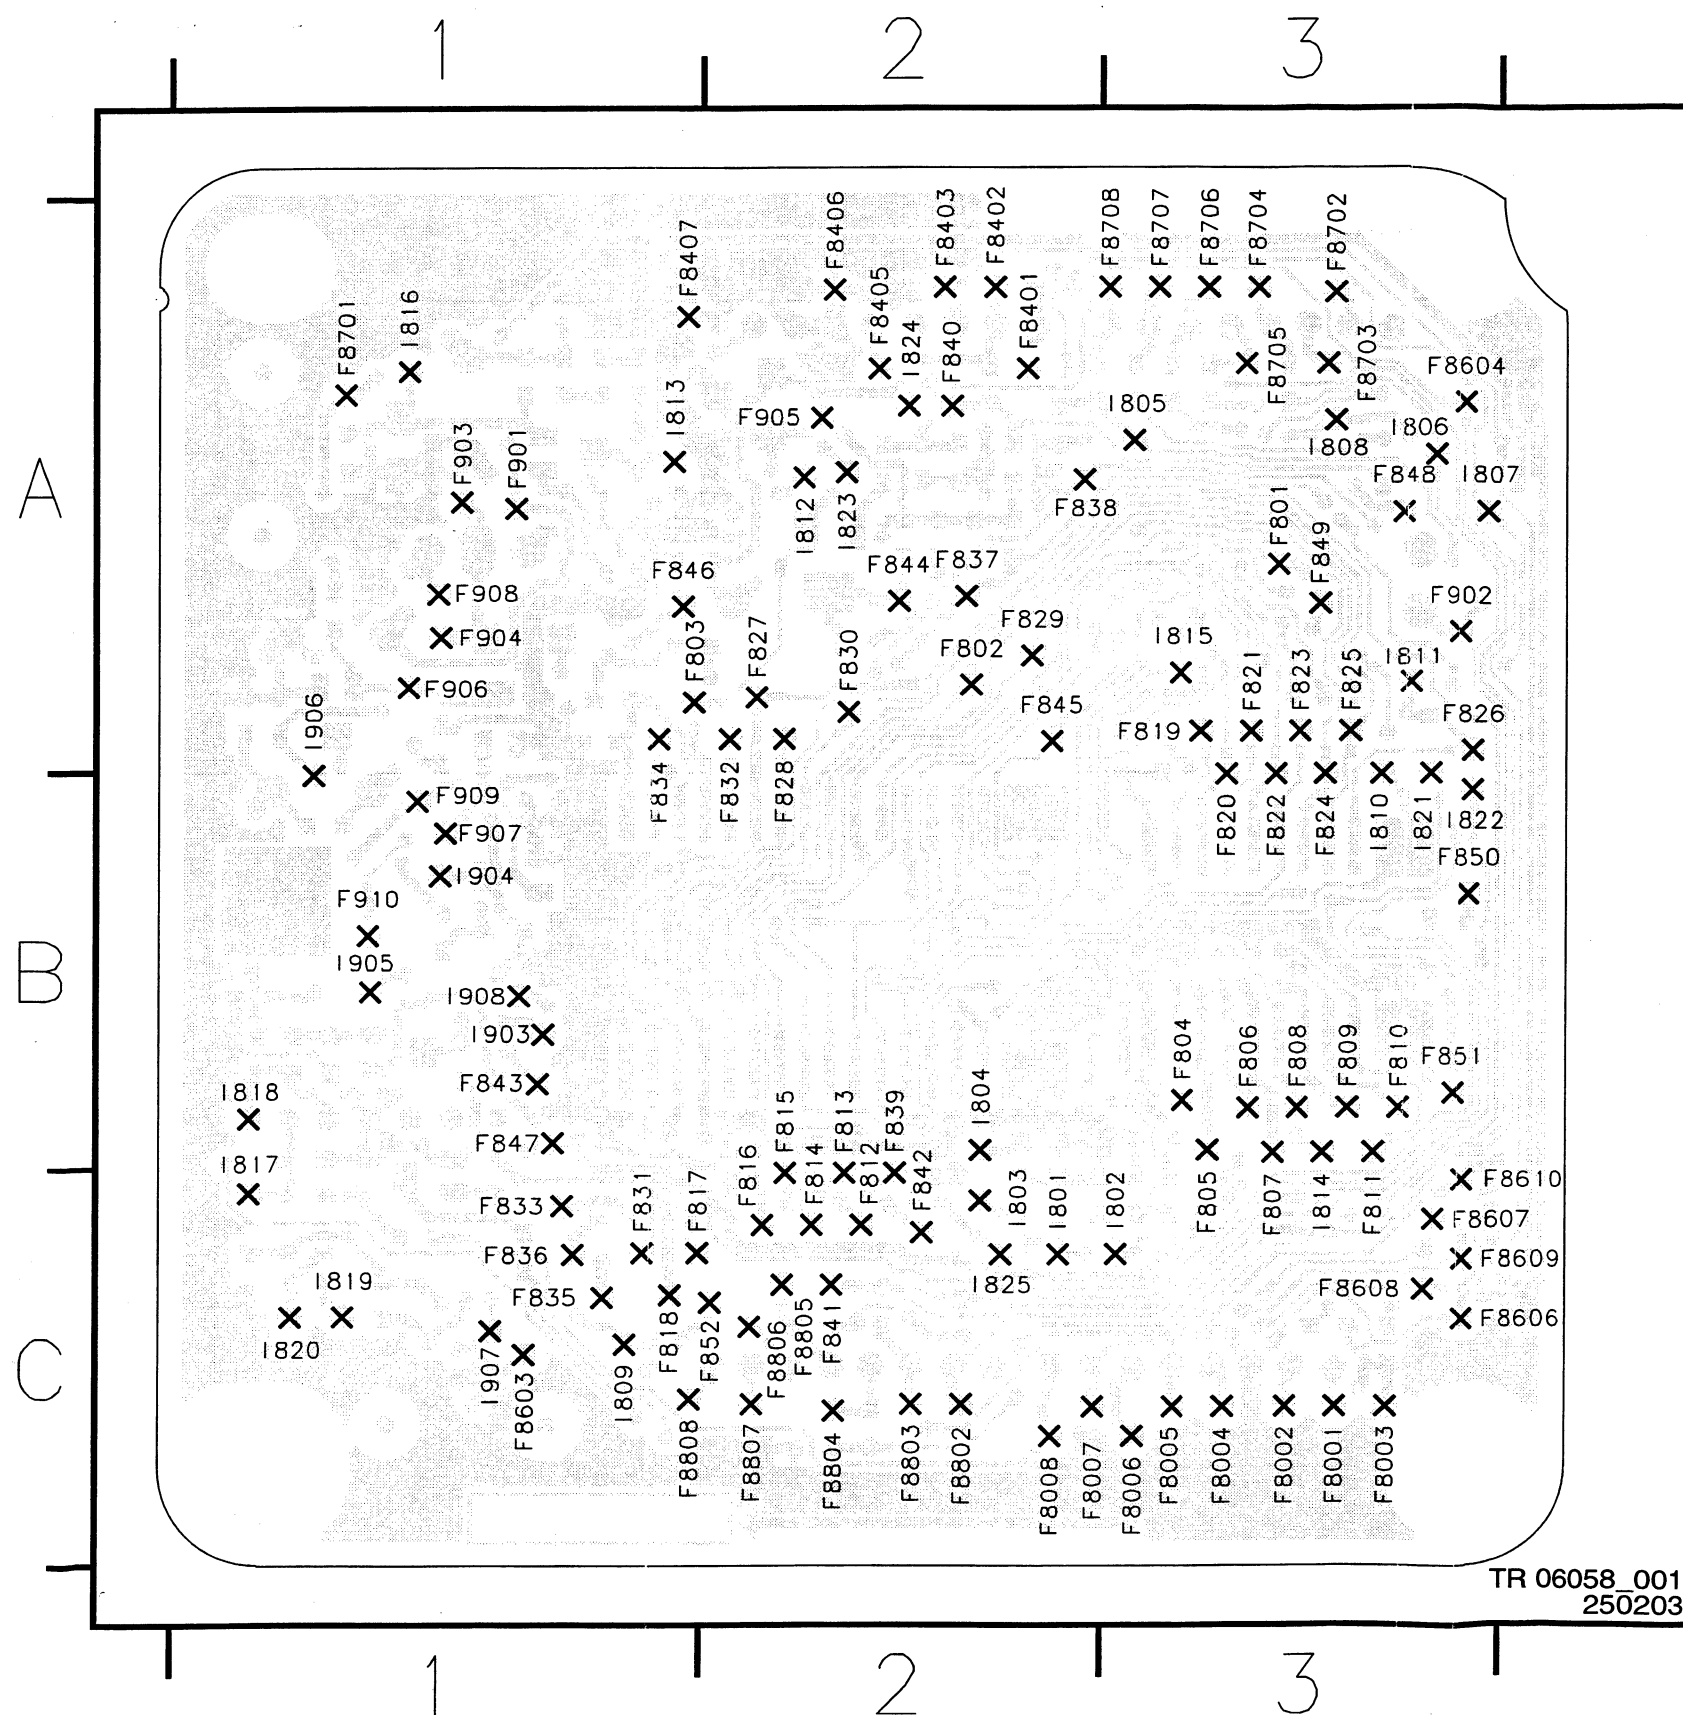TR 06058_001
250203

F8001 C3	F831 C1	F8610 C3	I808 A3
F8002 C3	F832 A2	F8701 A1	I809 C1
F8003 C3	F833 C1	F8702 A3	I810 B3
F8004 C3	F834 A1	F8703 A3	I811 A3
F8005 C3	F835 C1	F8704 A3	I812 A2
F8006 C3	F836 C1	F8705 A3	I813 A1
F8007 C2	F837 A2	F8706 A3	I814 B3
F8008 C2	F838 A2	F8707 A3	I815 A3
F801 A3	F839 C2	F8708 A3	I816 A1
F802 A2	F840 A2	F8802 C2	I817 C1
F803 A1	F8401 A2	F8803 C2	I818 B1
F804 B3	F8402 A2	F8804 C2	I819 C1
F805 B3	F8403 A2	F8805 C2	I820 C1
F807 B3	F8406 A2	F8806 C2	I821 B3
F812 C2	F8407 A1	F8807 C2	I822 B3
F813 C2	F841 C2	F8808 C1	I823 A2
F814 C2	F842 C2	F901 A1	I824 A2
F815 C2	F843 B1	F902 A3	I825 C2
F816 C2	F844 A2	F903 A1	I903 B1
F817 C1	F845 A2	F904 A1	I904 B1
F818 C1	F846 A1	F905 A2	I905 B1
F819 A3	F847 B1	F906 A1	I906 B1
F820 B3	F848 A3	F907 B1	I907 C1
F821 A3	F849 A3	F908 A1	I908 B1
F822 B3	F850 B3	F909 B1	
F823 A3	F851 B3	F910 B1	
F824 B3	F852 C2	I801 C2	
F825 A3	F8603 C1	I802 C3	
F826 A3	F8604 A3	I803 C2	
F827 A2	F8606 C3	I804 B2	
F828 A2	F8607 C3	I805 A3	
F829 A2	F8608 C3	I806 A3	
F830 A2	F8609 C3	I807 A3	

Test points overview DIVIO Board

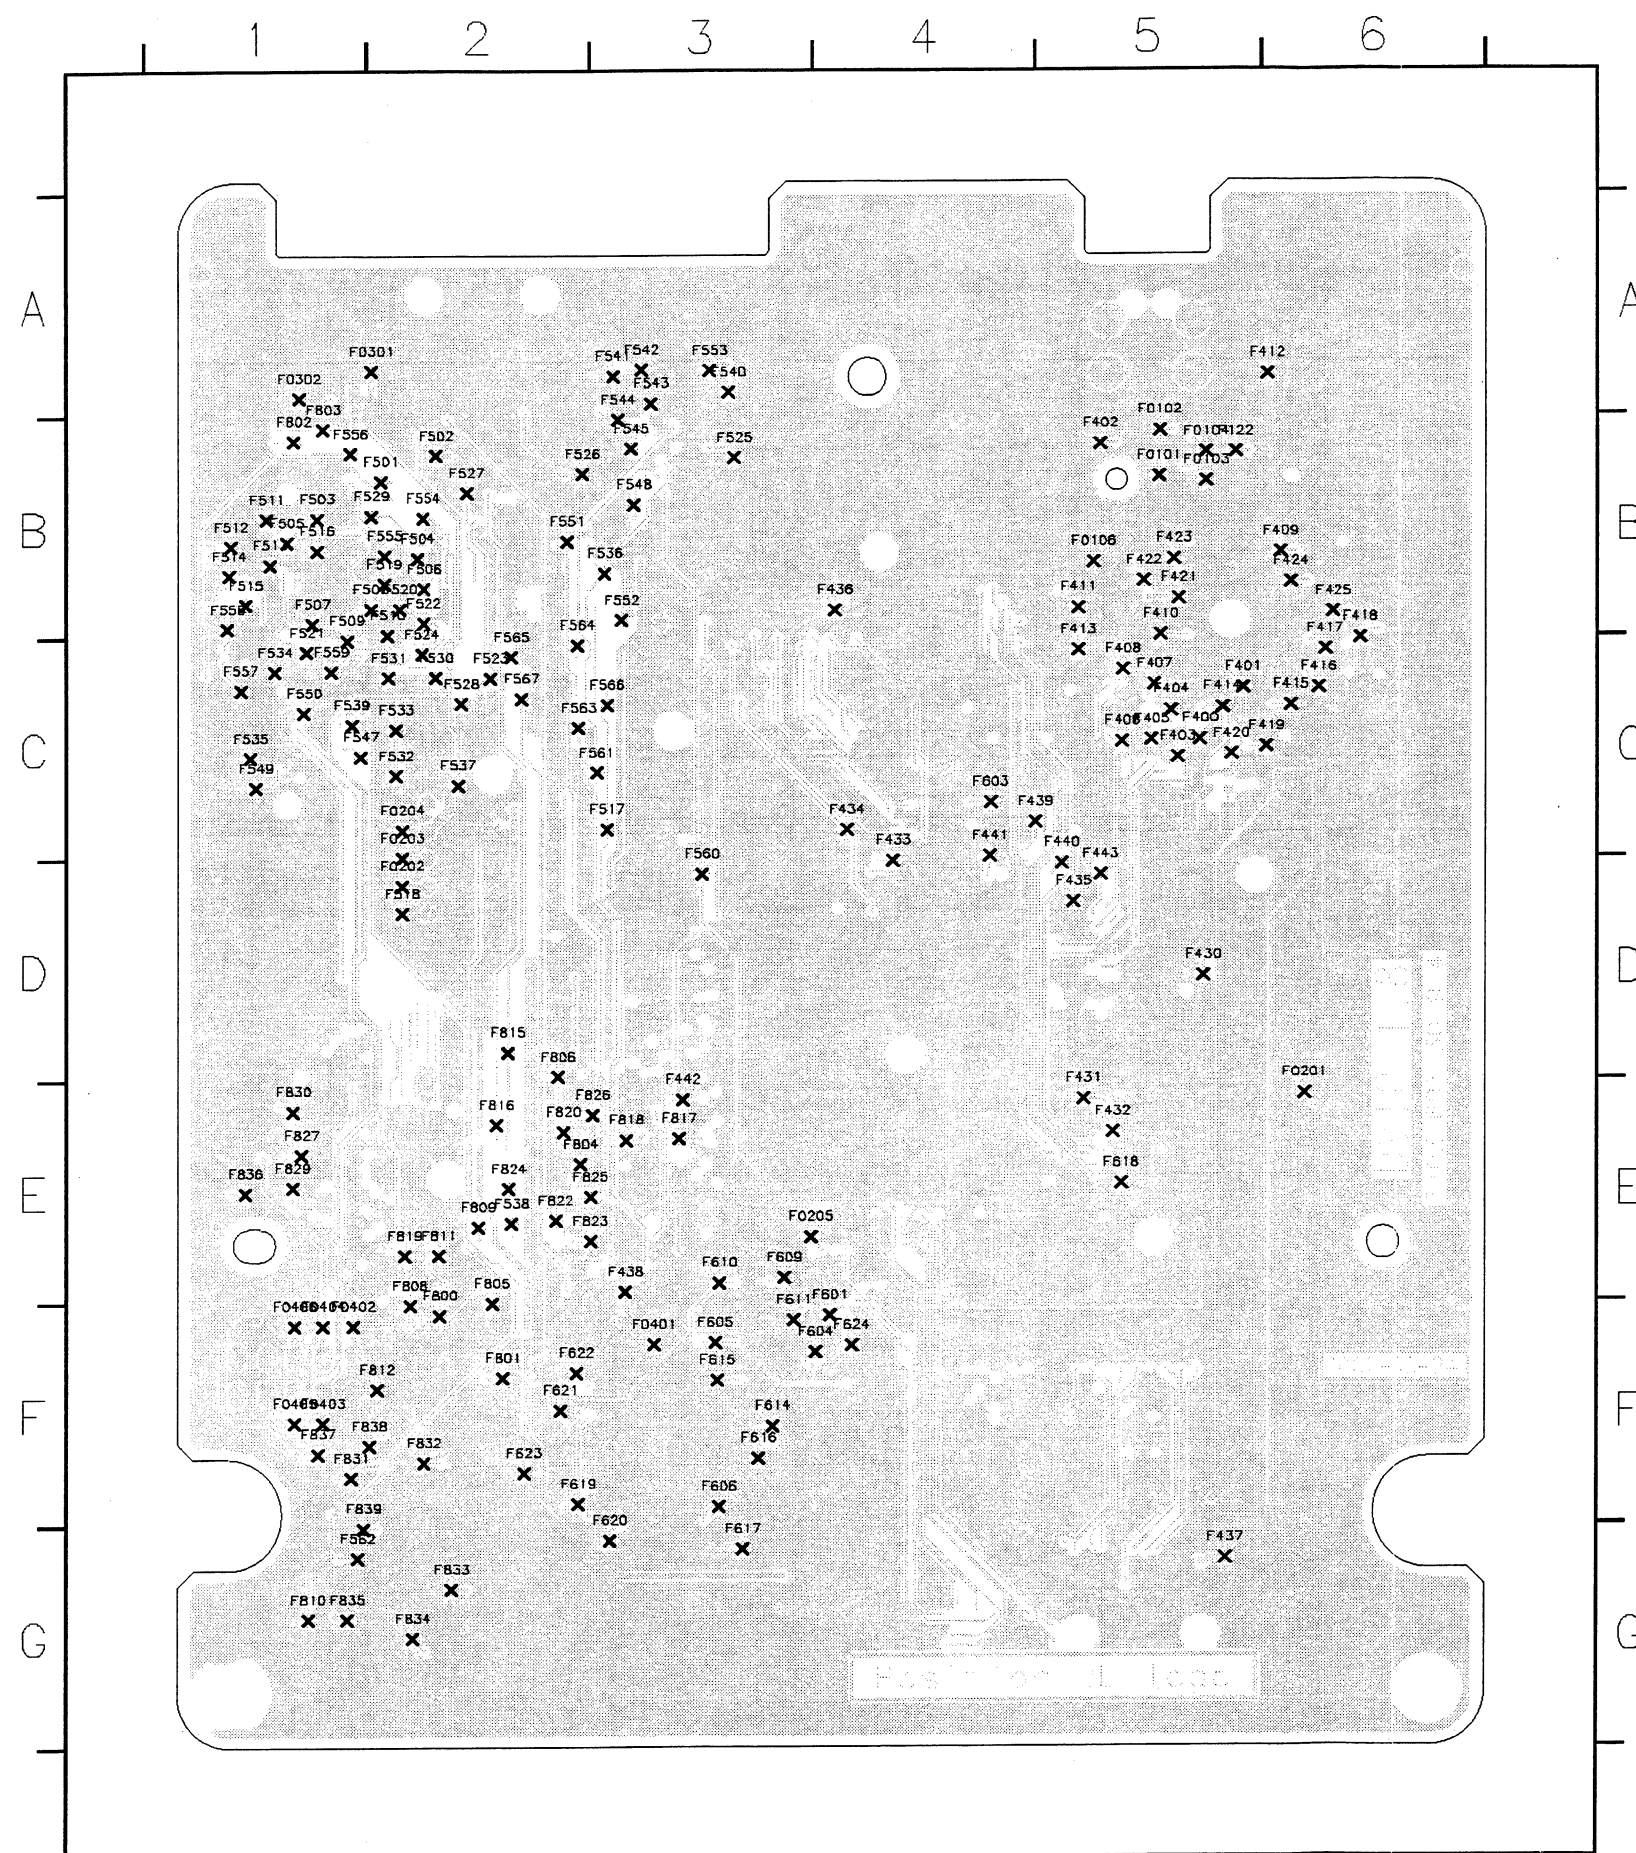


F0101 B5	F503 B1	F565 C2
F0102 B5	F504 B2	F566 C3
F0103 B5	F505 B1	F567 C2
F0104 B5	F506 B2	F601 F4
F0106 B5	F507 B1	F603 C4
F0201 E6	F508 B2	F604 F4
F0202 D2	F509 C1	F605 F3
F0203 C2	F510 B2	F606 F3
F0204 C2	F511 B1	F609 E3
F0205 E3	F512 B1	F610 E3
F0301 A2	F513 B1	F611 F3
F0302 A1	F514 B1	F614 F3
F0401 F3	F515 B1	F615 F3
F0402 F1	F516 B1	F616 F3
F0403 F1	F517 C3	F617 G3
F0404 F1	F518 D2	F618 E5
F0405 F1	F519 B2	F619 F2
F0406 F1	F520 B2	F620 G3
F122 B5	F521 C1	F621 F2
F400 C5	F522 B2	F622 F2
F401 C5	F523 C2	F623 F2
F402 B5	F524 C2	F624 F4
F403 C5	F525 B3	F800 F2
F404 C5	F526 B2	F801 F2
F405 C5	F527 B2	F802 B1
F406 C5	F528 C2	F803 B1
F407 C5	F529 B2	F804 E2
F408 C5	F530 C2	F805 F2
F409 B6	F531 C2	F806 D2
F410 B5	F532 C2	F808 F2
F411 B5	F533 C2	F809 E2
F412 A6	F534 C1	F810 G1
F413 C5	F535 C1	F811 E2
F414 C5	F536 B3	F812 F2
F415 C6	F537 C2	F815 D2
F416 C6	F538 E2	F816 E2
F417 C6	F539 C1	F817 E3
F418 C6	F540 A3	F818 E3
F419 C6	F541 A3	F819 E2
F420 C5	F542 A3	F820 E2
F421 B5	F543 A3	F822 E2
F422 B5	F544 B3	F823 E3
F423 B5	F545 B3	F824 E2
F424 B6	F547 C1	F825 E3
F425 B6	F548 B3	F826 E3
F430 D5	F549 C1	F827 E1
F431 E5	F550 C1	F829 E1
F432 E5	F551 B2	F830 E1
F433 D4	F552 B3	F831 F1
F434 C4	F553 A3	F832 F2
F435 D5	F554 B2	F833 G2
F436 B4	F555 B2	F834 G2
F437 G5	F556 B1	F835 G1
F438 E3	F557 C1	F836 E1
F439 C5	F558 B1	F837 F1
F440 D5	F559 C1	F838 F2
F441 C4	F560 D3	F839 G1
F442 E3	F561 C3	
F443 D5	F562 G1	
F501 B2	F563 C2	
F502 B2	F564 C2	

TR03021_001
090802


Layout Digital Board (Mapping Testlands)

F214	A3	I175	A3	I300	A2	I610	A5	I720	B3	I880	C3
F247	A2	I176	A3	I301	A2	I611	B5	I721	B2	I881	C3
F248	A2	I177	A3	I302	A2	I612	A5	I722	B3	I882	C3
F249	A2	I178	A3	I303	B2	I613	B5	I723	B2	I883	C2
F250	A2	I179	A3	I304	B3	I614	A5	I724	B2	I884	C2
F264	A2	I180	A3	I305	B3	I615	B5	I725	B3	I900	B4
F265	A3	I181	A3	I306	A3	I616	A5	I726	B2	I901	B4
F931	A4	I182	B3	I307	B3	I617	A5	I727	B2	I902	B4
F932	A4	I183	A2	I308	A3	I618	C4	I728	A1	I903	B4
F933	A5	I184	A3	I309	B3	I619	A5	I729	A1	I904	B2
F934	A4	I186	A3	I400	A4	I621	A1	I730	A1	I905	A4
F935	A4	I187	A3	I401	A4	I622	A1	I731	A1	I906	A4
I100	A4	I188	A3	I402	B4	I623	A1	I732	B2	I907	A4
I101	C5	I200	A2	I403	A4	I624	A1	I733	B2	I908	A5
I102	C5	I201	B3	I404	B4	I625	A1	I734	B1	I909	B4
I103	B4	I202	A5	I405	B4	I626	A1	I735	B1	I911	B3
I104	B4	I203	A3	I406	B4	I627	B4	I800	C4	I912	A3
I105	B3	I204	C3	I407	A4	I628	C4	I801	C3	I913	B3
I106	B3	I205	A2	I408	A5	I629	A5	I802	C3	I915	B3
I107	B3	I206	A4	I409	A4	I630	C4	I803	C3	I916	B3
I108	B3	I207	A2	I410	A4	I631	C4	I805	C3	I917	B3
I109	B4	I208	B3	I412	B4	I632	C4	I806	C3	I918	A5
I110	B3	I209	B4	I413	A4	I633	B4	I807	C3	I919	B3
I111	A2	I210	A2	I414	B4	I634	C4	I808	C2	I920	B3
I112	B5	I211	A2	I415	B4	I635	C5	I809	C2	I921	A5
I113	B5	I212	A2	I416	B4	I636	C4	I810	C3	I922	A5
I114	B5	I213	A2	I500	C5	I637	C5	I811	C3	I923	B3
I115	B5	I215	B5	I501	C5	I638	C5	I812	C2	I924	A4
I116	C3	I216	A1	I502	C5	I639	C5	I813	C2	I925	B3
I117	C3	I217	A2	I503	C5	I640	C5	I814	C1	I926	A5
I118	C4	I218	A2	I504	C5	I641	B5	I815	B2	I927	A5
I119	C4	I219	A1	I505	C5	I642	A5	I816	B2	I928	A5
I120	A4	I220	A1	I506	C5	I643	A5	I817	B2	I930	B3
I121	A3	I221	B2	I507	C5	I644	A5	I818	C2	I931	A5
I122	B3	I222	B2	I508	C5	I645	B5	I819	C3	I932	B2
I123	A2	I223	A2	I509	C5	I646	C4	I820	C3	I933	B3
I124	B4	I224	A1	I510	B5	I647	A5	I821	C3		
I125	A2	I225	A2	I511	C4	I649	C5	I822	C3		
I126	A3	I226	A2	I512	C5	I650	B4	I823	C3		
I127	A2	I227	A2	I513	B5	I651	B5	I824	B2		
I128	A4	I228	A2	I514	B4	I652	B5	I825	B2		
I129	A2	I229	B5	I515	C5	I653	B5	I826	C3		
I130	B3	I230	A2	I516	C5	I654	B4	I827	C3		
I131	A3	I231	A2	I517	C5	I655	B4	I828	C3		
I132	B1	I232	A2	I518	C4	I656	B5	I829	C3		
I133	A3	I233	A2	I519	C5	I657	C4	I830	C3		
I134	A3	I234	A4	I520	C4	I658	C4	I831	C3		
I136	A3	I235	A4	I521	C4	I659	C3	I832	C3		
I137	A2	I236	B4	I522	C4	I660	B5	I833	C3		
I138	A3	I237	A2	I523	C4	I661	B5	I834	B3		
I140	A3	I238	A2	I524	C4	I662	C5	I835	B3		
I141	A4	I239	B5	I525	C5	I663	B4	I836	B2		
I142	A3	I240	A4	I526	C5	I664	B5	I837	C3		
I143	B4	I241	B2	I527	C5	I665	C4	I838	C3		
I145	A3	I242	B1	I528	C4	I666	C5	I839	C3		
I147	B4	I243	B1	I529	C5	I667	B5	I840	C3		
I149	B3	I244	A2	I530	C5	I668	B4	I841	C3		
I152	B3	I245	A1	I531	C5	I669	B4	I842	C3		
I153	B5	I246	A2	I532	C5	I670	A5	I843	C2		
I154	B3	I251	A1	I533	C4	I671	B5	I844	C2		
I155	B3	I252	A2	I535	C5	I700	B2	I845	C2		
I156	A3	I253	A2	I536	C4	I701	B1	I846	B3		
I157	A3	I254	A1	I537	C5	I702	B1	I847	B2		
I158	B4	I255	A1	I538	C4	I703	C2	I848	B2		
I159	A5	I256	A2	I540	C5	I704	C2	I849	B2		
I160	B3	I257	C5	I543	C5	I705	C2	I850	B2		
I161	B3	I258	A2	I551	C5	I706	C2	I851	B1		
I162	C4	I259	A2	I552	C4	I707	C2	I852	B1		
I163	A3	I260	A1	I553	C4	I708	C2	I868	C2		
I164	B4	I261	A1	I555	C4	I709	C1	I869	C2		
I165	A3	I262	A1	I600	A5	I710	B3	I870	B2		
I166	B4	I263	A1	I601	A5	I711	C2	I871	C3		
I167	A3	I264	A2	I602	A5	I712	C2	I872	C3		
I168	C5	I265	B5	I603	C5	I713	A1	I873	B2		
I169	A3	I266	A2	I604	A5	I714	C2	I874	C2		
I170	A3	I267	A2	I605	A5	I715	C2	I875	C2		
I171	A3	I268	B2	I606	A5	I716	B3	I876	C3		
I172	A3	I269	B2	I607	A5	I717	B3	I877	C2		
I173	A3	I270	A2	I608	A5	I718	B3	I878	C3		
I174	A3	I271	B1	I609	B5	I719	B3	I879	C3		


Display Panel

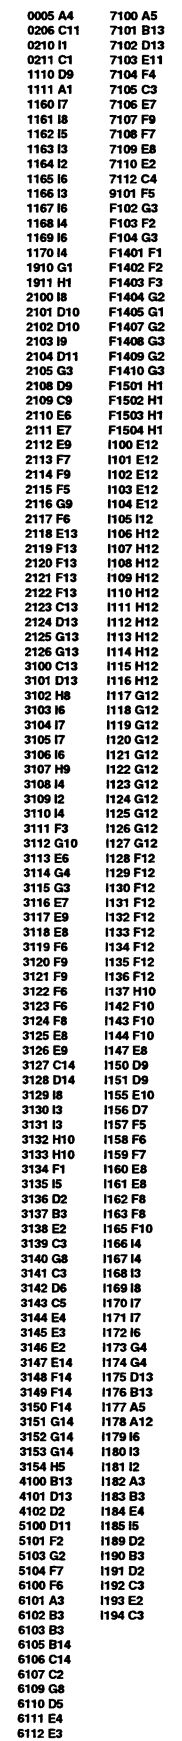


Front Connector (FC)

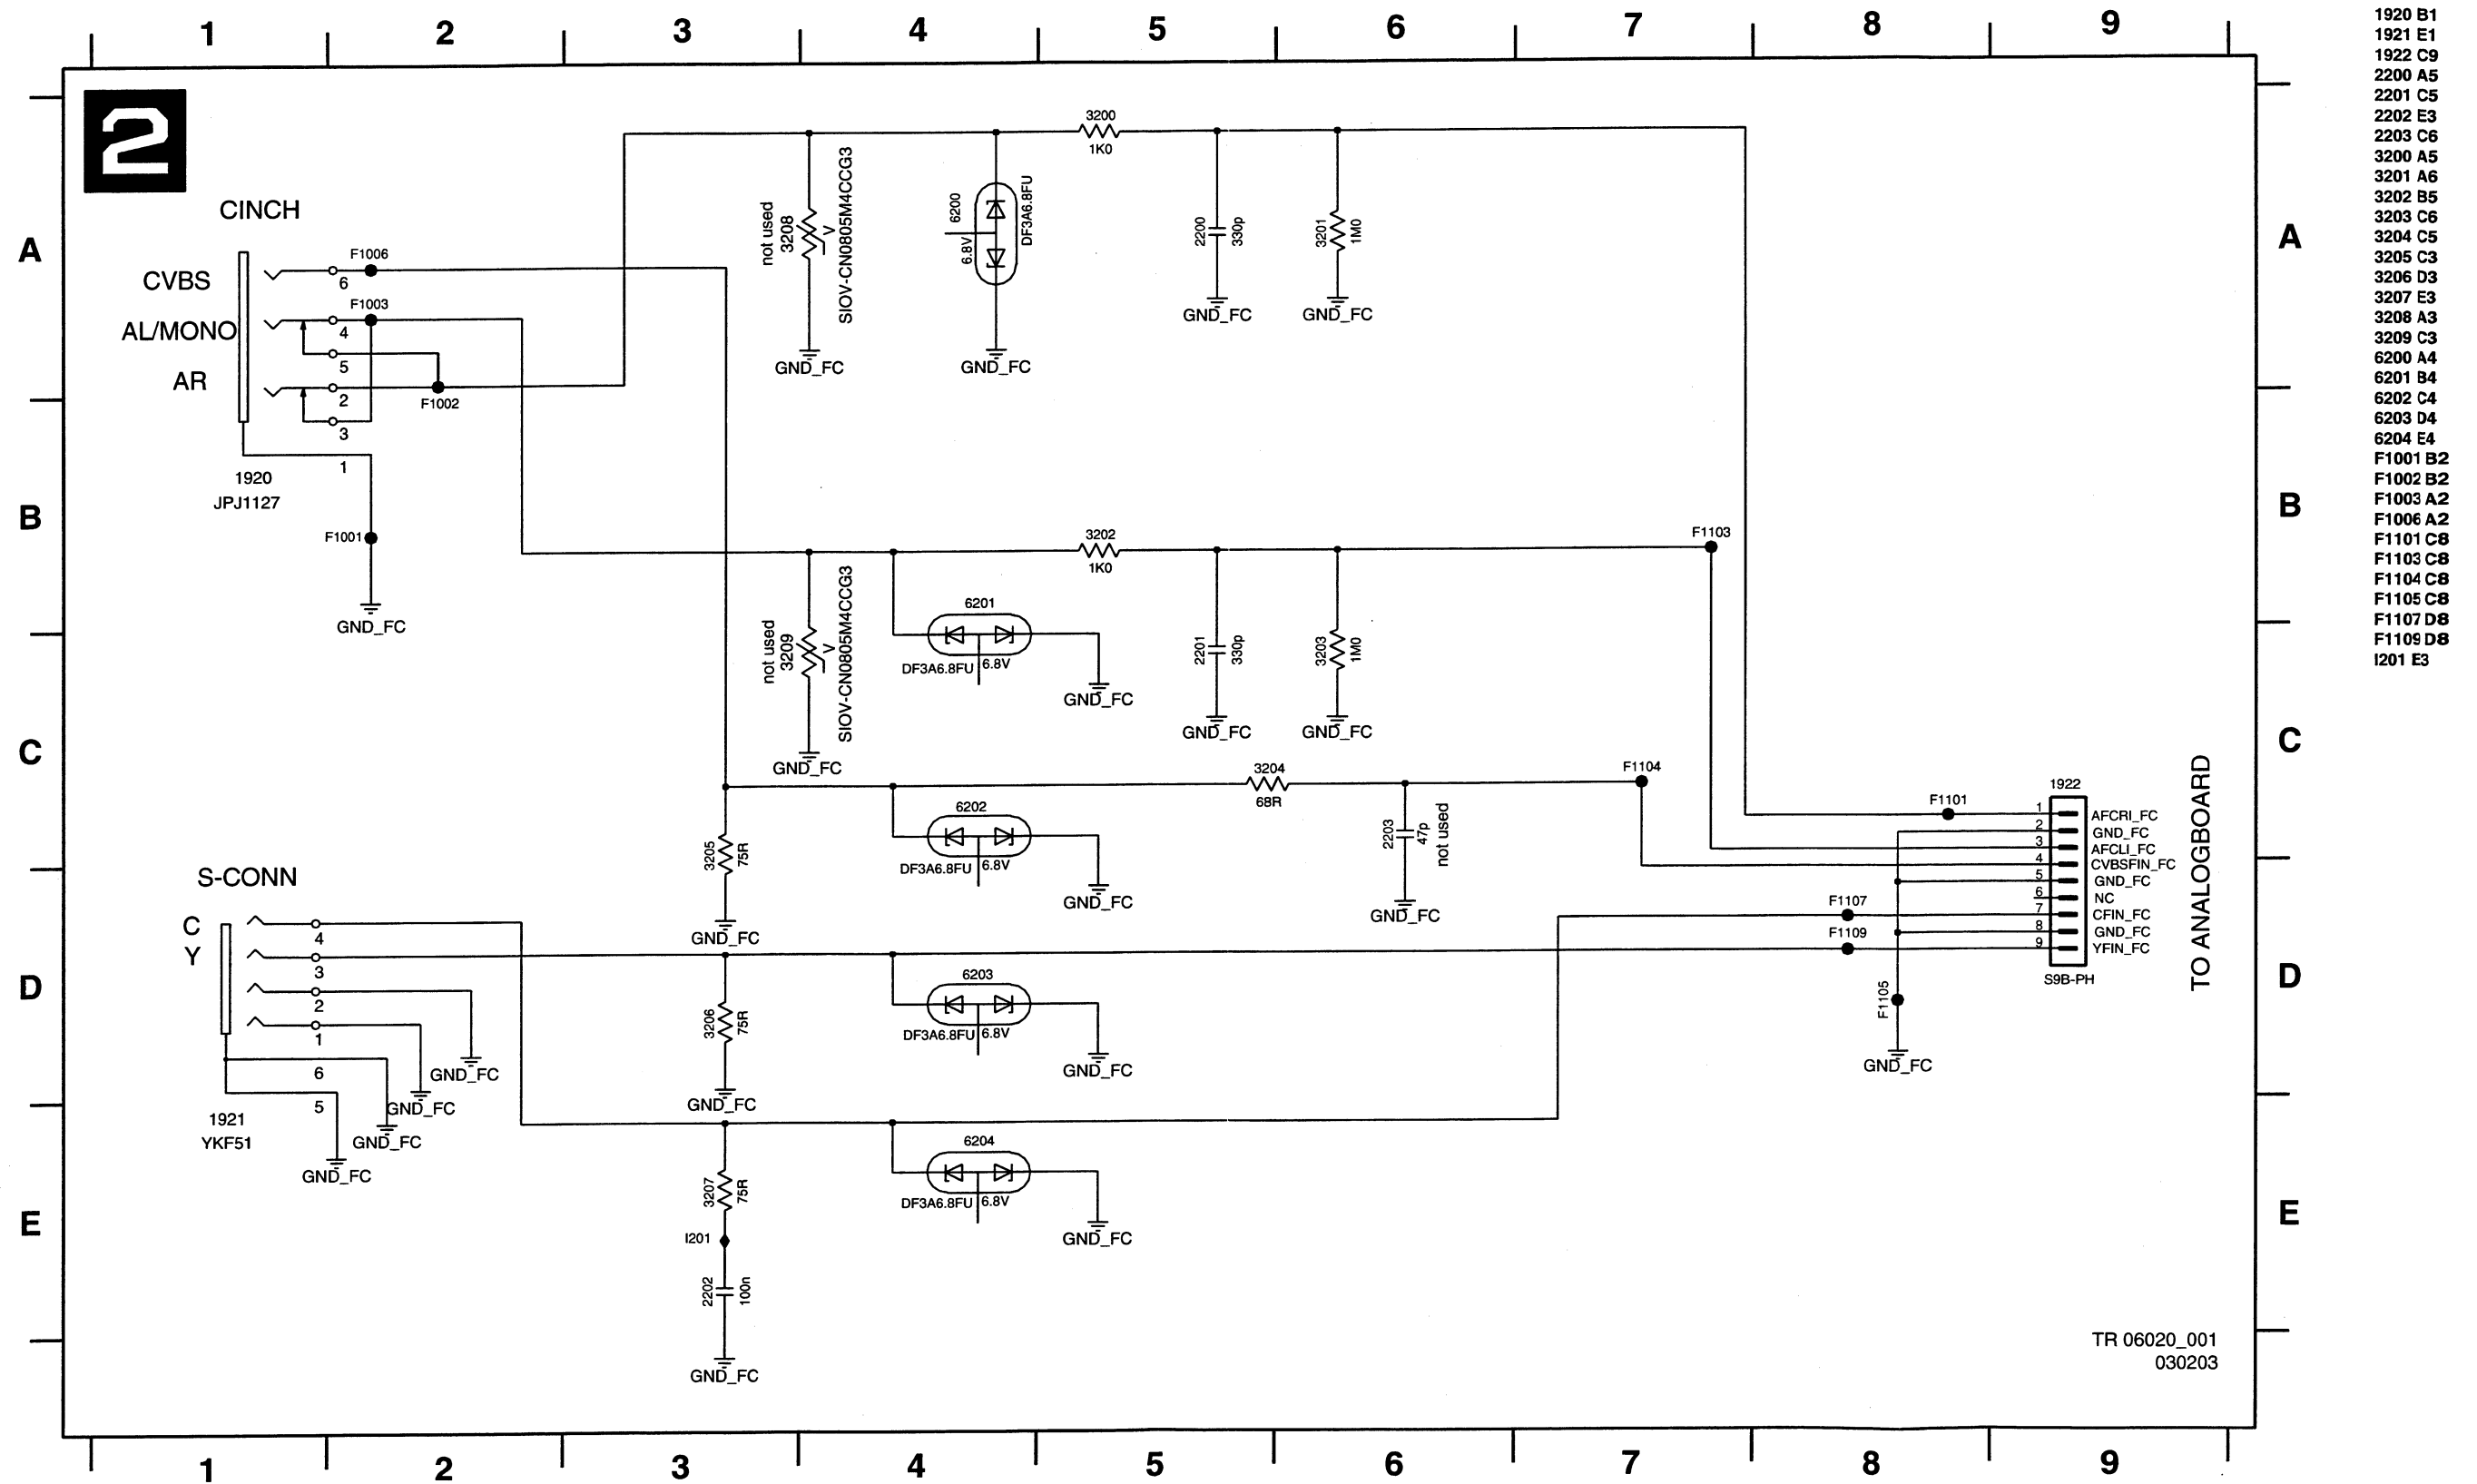

Layouts Display Panel

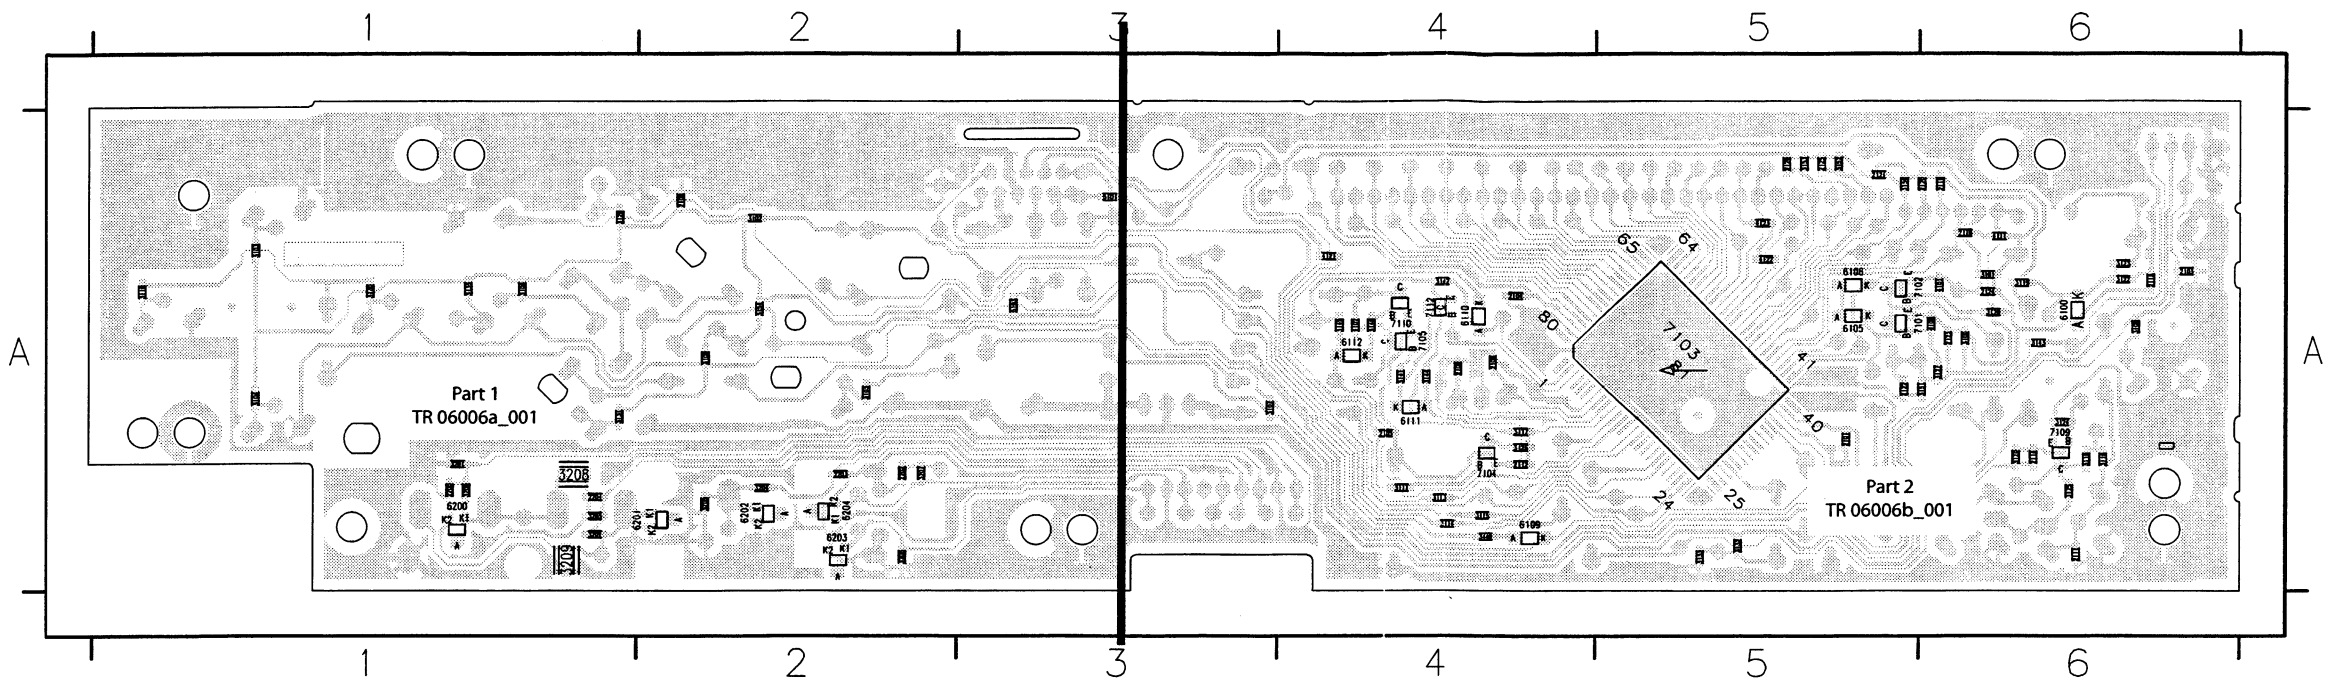


2100	A2	3115	A4	3207	A2
1001	A5	1116	A6	2008	A1
1003	A6	1117	A6	2009	A1
1004	A4	1118	A6	2010	A6
1005	A4	1119	A6	2011	A6
1006	A4	1120	A6	2012	A6
1007	A4	1121	A6	2013	A6
1008	A4	1122	A6	2014	A6
1009	A4	1123	A6	2015	A6
1010	A4	1124	A6	2016	A6
1011	A4	1125	A6	2017	A6
1012	A4	1126	A6	2018	A6
1013	A4	1127	A6	2019	A6
1014	A4	1128	A6	2020	A6
1015	A4	1129	A6	2021	A6
1016	A4	1130	A6	2022	A6
1017	A4	1131	A6	2023	A6
1018	A4	1132	A6	2024	A6
1019	A4	1133	A6	2025	A6
1020	A4	1134	A6	2026	A6
1021	A4	1135	A6	2027	A6
1022	A4	1136	A6	2028	A6
1023	A4	1137	A6	2029	A6
1024	A4	1138	A6	2030	A6
1025	A4	1139	A6	2031	A6
1026	A4	1140	A6	2032	A6
1027	A4	1141	A6	2033	A6
1028	A4	1142	A6	2034	A6
1029	A4	1143	A6	2035	A6
1030	A4	1144	A6	2036	A6
1031	A4	1145	A6	2037	A6
1032	A4	1146	A6	2038	A6
1033	A4	1147	A6	2039	A6
1034	A4	1148	A6	2040	A6
1035	A4	1149	A6	2041	A6
1036	A4	1150	A6	2042	A6
1037	A4	1151	A6	2043	A6
1038	A4	1152	A6	2044	A6
1039	A4	1153	A6	2045	A6
1040	A4	1154	A6	2046	A6
1041	A4	1155	A6	2047	A6
1042	A4	1156	A6	2048	A6
1043	A4	1157	A6	2049	A6
1044	A4	1158	A6	2050	A6
1045	A4	1159	A6	2051	A6
1046	A4	1160	A6	2052	A6
1047	A4	1161	A6	2053	A6
1048	A4	1162	A6	2054	A6
1049	A4	1163	A6	2055	A6
1050	A4	1164	A6	2056	A6
1051	A4	1165	A6	2057	A6
1052	A4	1166	A6	2058	A6
1053	A4	1167	A6	2059	A6
1054	A4	1168	A6	2060	A6
1055	A4	1169	A6	2061	A6
1056	A4	1170	A6	2062	A6
1057	A4	1171	A6	2063	A6
1058	A4	1172	A6	2064	A6
1059	A4	1173	A6	2065	A6
1060	A4	1174	A6	2066	A6
1061	A4	1175	A6	2067	A6
1062	A4	1176	A6	2068	A6
1063	A4	1177	A6	2069	A6
1064	A4	1178	A6	2070	A6
1065	A4	1179	A6	2071	A6
1066	A4	1180	A6	2072	A6
1067	A4	1181	A6	2073	A6
1068	A4	1182	A6	2074	A6
1069	A4	1183	A6	2075	A6
1070	A4	1184	A6	2076	A6
1071	A4	1185	A6	2077	A6
1072	A4	1186	A6	2078	A6
1073	A4	1187	A6	2079	A6
1074	A4	1188	A6	2080	A6
1075	A4	1189	A6	2081	A6
1076	A4	1190	A6	2082	A6
1077	A4	1191	A6	2083	A6
1078	A4	1192	A6	2084	A6
1079	A4	1193	A6	2085	A6
1080	A4	1194	A6	2086	A6
1081	A4	1195	A6	2087	A6
1082	A4	1196	A6	2088	A6
1083	A4	1197	A6	2089	A6
1084	A4	1198	A6	2090	A6
1085	A4	1199	A6	2091	A6
1086	A4	1200	A6	2092	A6
1087	A4	1201	A6	2093	A6
1088	A4	1202	A6	2094	A6
1089	A4	1203	A6	2095	A6
1090	A4	1204	A6	2096	A6
1091	A4	1205	A6	2097	A6
1092	A4	1206	A6	2098	A6
1093	A4	1207	A6	2099	A6
1094	A4	1208	A6	2100	A6
1095	A4	1209	A6	2101	A6
1096	A4	1210	A6	2102	A6
1097	A4	1211	A6	2103	A6
1098	A4	1212	A6	2104	A6
1099	A4	1213	A6	2105	A6
1100	A4	1214	A6	2106	A6
1101	A4	1215	A6	2107	A6
1102	A4	1216	A6	2108	A6
1103	A4	1217	A6	2109	A6
1104	A4	1218	A6	2110	A6
1105	A4	1219	A6	2111	A6
1106	A4	1220	A6	2112	A6
1107	A4	1221	A6	2113	A6
1108	A4	1222	A6	2114	A6
1109	A4	1223	A6	2115	A6
1110	A4	1224	A6	2116	A6
1111	A4	1225	A6	2117	A6
1112	A4	1226	A6	2118	A6
1113	A4	1227	A6	2119	A6
1114	A4	1228	A6	2120	A6
1115	A4	1229	A6	2121	A6
1116	A4	1230	A6	2122	A6
1117	A4	1231	A6	2123	A6
1118	A4	1232	A6	2124	A6
1119	A4	1233	A6	2125	A6
1120	A4	1234	A6	2126	A6
1121	A4	1235	A6	2127	A6
1122	A4	1236	A6	2128	A6
1123	A4	1237	A6	2129	A6
1124	A4	1238	A6	2130	A6
1125	A4	1239	A6	2131	A6
1126	A4	1240	A6	2132	A6
1127	A4	1241	A6	2133	A6
1128	A4	1242	A6	2134	A6
1129	A4	1243	A6	2135	A6
1130	A4	1244	A6	2136	A6
1131	A4	1245	A6	2137	A6
1132	A4	1246	A6	2138	A6
1133	A4	1247	A6	2139	A6
1134	A4	1248	A6	2140	A6
1135	A4	1249	A6	2141	A6
1136	A4	1250	A6	2142	A6
1137	A4	1251	A6	2143	A6
1138	A4	1252	A6	2144	A6
1139	A4	1253	A6	2145	A6
1140	A4	1254	A6	2146	A6
1141	A4	1255	A6	2147	A6
1142	A4	1256	A6	2148	A6
1143	A4	1257	A6	2149	A6
1144	A4	1258	A6	2150	A6
1145	A4	1259	A6	2151	A6
1146	A4	1260	A6	2152	A6
1147	A4	1261	A6	2153	A6
1148	A4	1262	A6	2154	A6
1149	A4	1263	A6	2155	A6
1150	A4	1264	A6	2156	A6
1151	A4	1265	A6	2157	A6
1152	A4	1266	A6	2158	A6
1153	A4	1267	A6	2159	A6
1154	A4	1268	A6	2160	A6
1155	A4	1269	A6	2161	A6
1156	A4	1270	A6	2162	A6
1157	A4	1271	A6	2163	A6
1158	A4	1272	A6	2164	A6
1159	A4	1273	A6	2165	A6
1160	A4	1274	A6	2166	A6
1161	A4	1275	A6	2167	A6
1162	A4	1276	A6	2168	A6
1163	A4	1277	A6	2169	A6
1164	A4	1278	A6	2170	A6
1165	A4	1279	A6	2171	A6
1166	A4	1280	A6	2172	A6
1167	A4	1281	A6	2173	A6
1168	A4	1282	A6	2174	A6
1169	A4	1283	A6	2175	A6
1170	A4	1284	A6	2176	A6
1171	A4	1285	A6	2177	A6
1172	A4	1286	A6	2178	A6
1173	A4	1287	A6	2179	A6
1174	A4	1288	A6	2180	A6
1175	A4	1289	A6	2181	A6
1176	A4	1290	A6	2182	A6
1177	A4	1291	A6	2183	A6
1178	A4	1292	A6	2184	A6
1179	A4	1293	A6	2185	A6
1180	A4	1294	A6	2186	A6
1181	A4	1295	A6	2187	A6
1182	A4	1296	A6	2188	A6
1183	A4	1297	A6	2189	A6
1184	A4	1298	A6	2190	A6
1185	A4	1299	A6	2191	A6
1186	A4	1300	A6	2192	A6
1187	A4	1301	A6	2193	A6
1188	A4	1302	A6	2194	A6
1189	A4	1303	A6	2195	A6
1190	A4	1304	A6	2196	A6
1191	A4	1305	A6	2197	A6
1192	A4	1306	A6	2198	A6
1193	A4	1307	A6	2199	A6
1194	A4	1308	A6	2200	A6
1195	A4	1309	A6	2201	A6
1196	A4	1310	A6	2202	A6
1197	A4	1311	A6	2203	A6
1198	A4	1312	A6	2204	A6
1199	A4	1313	A6	2205	A6
1200	A4	1314	A6	2206	A6

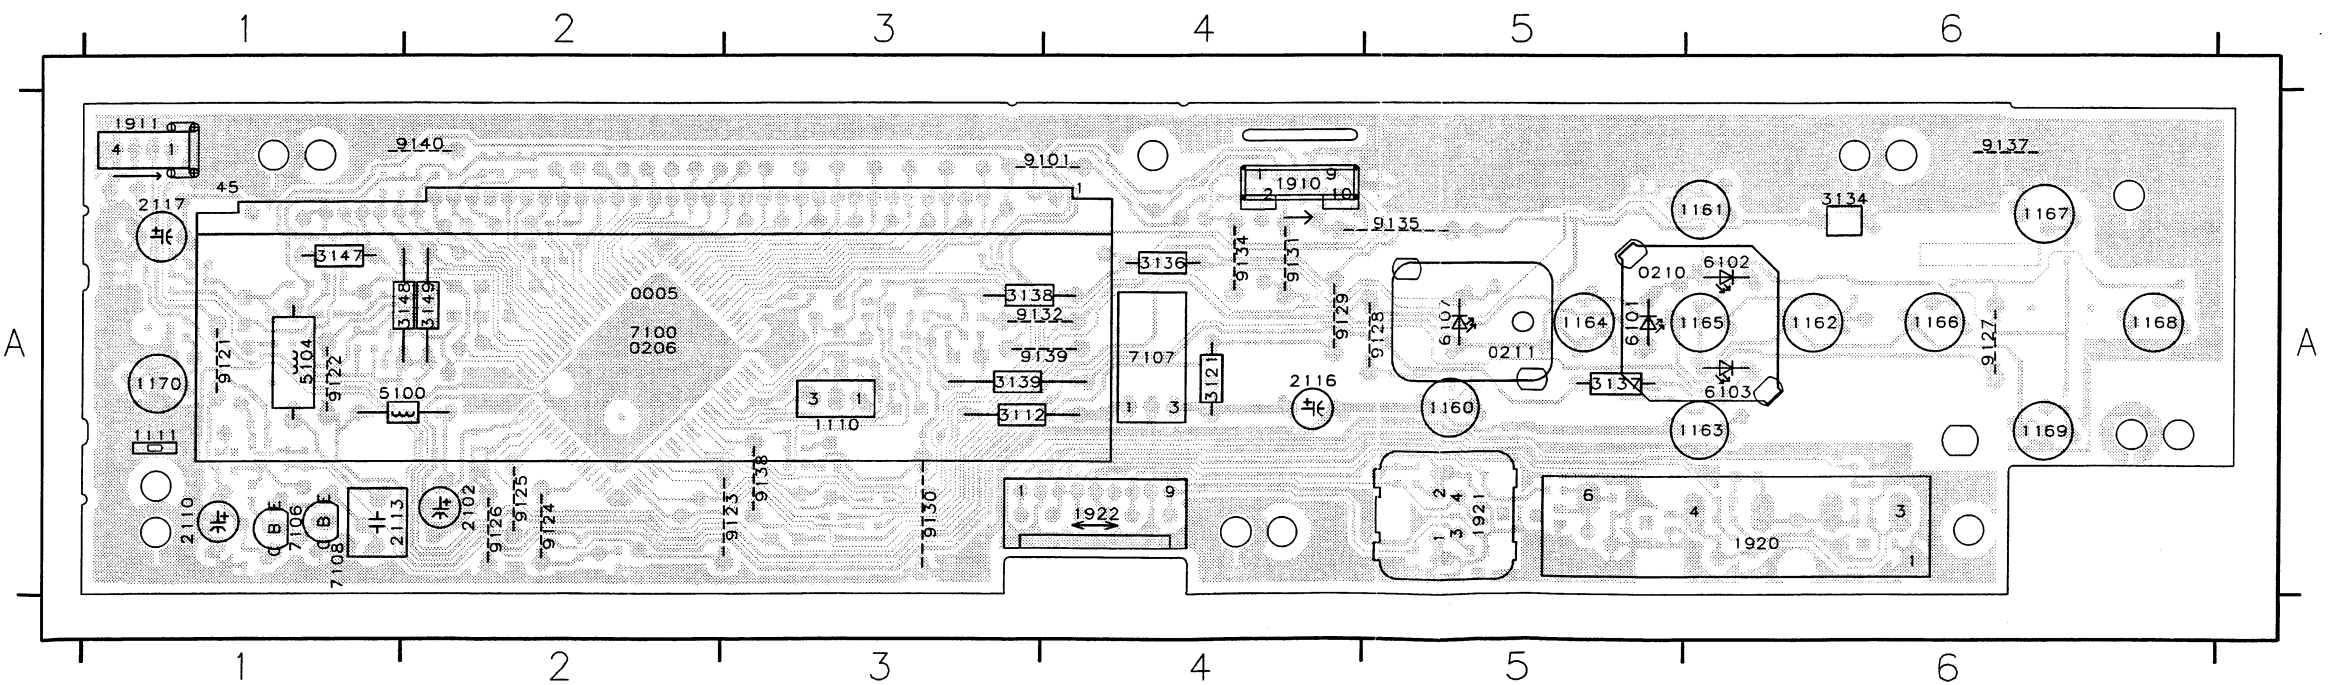


0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0000	0
------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	---

Layout Display Panel (Part 1 Bottom View)

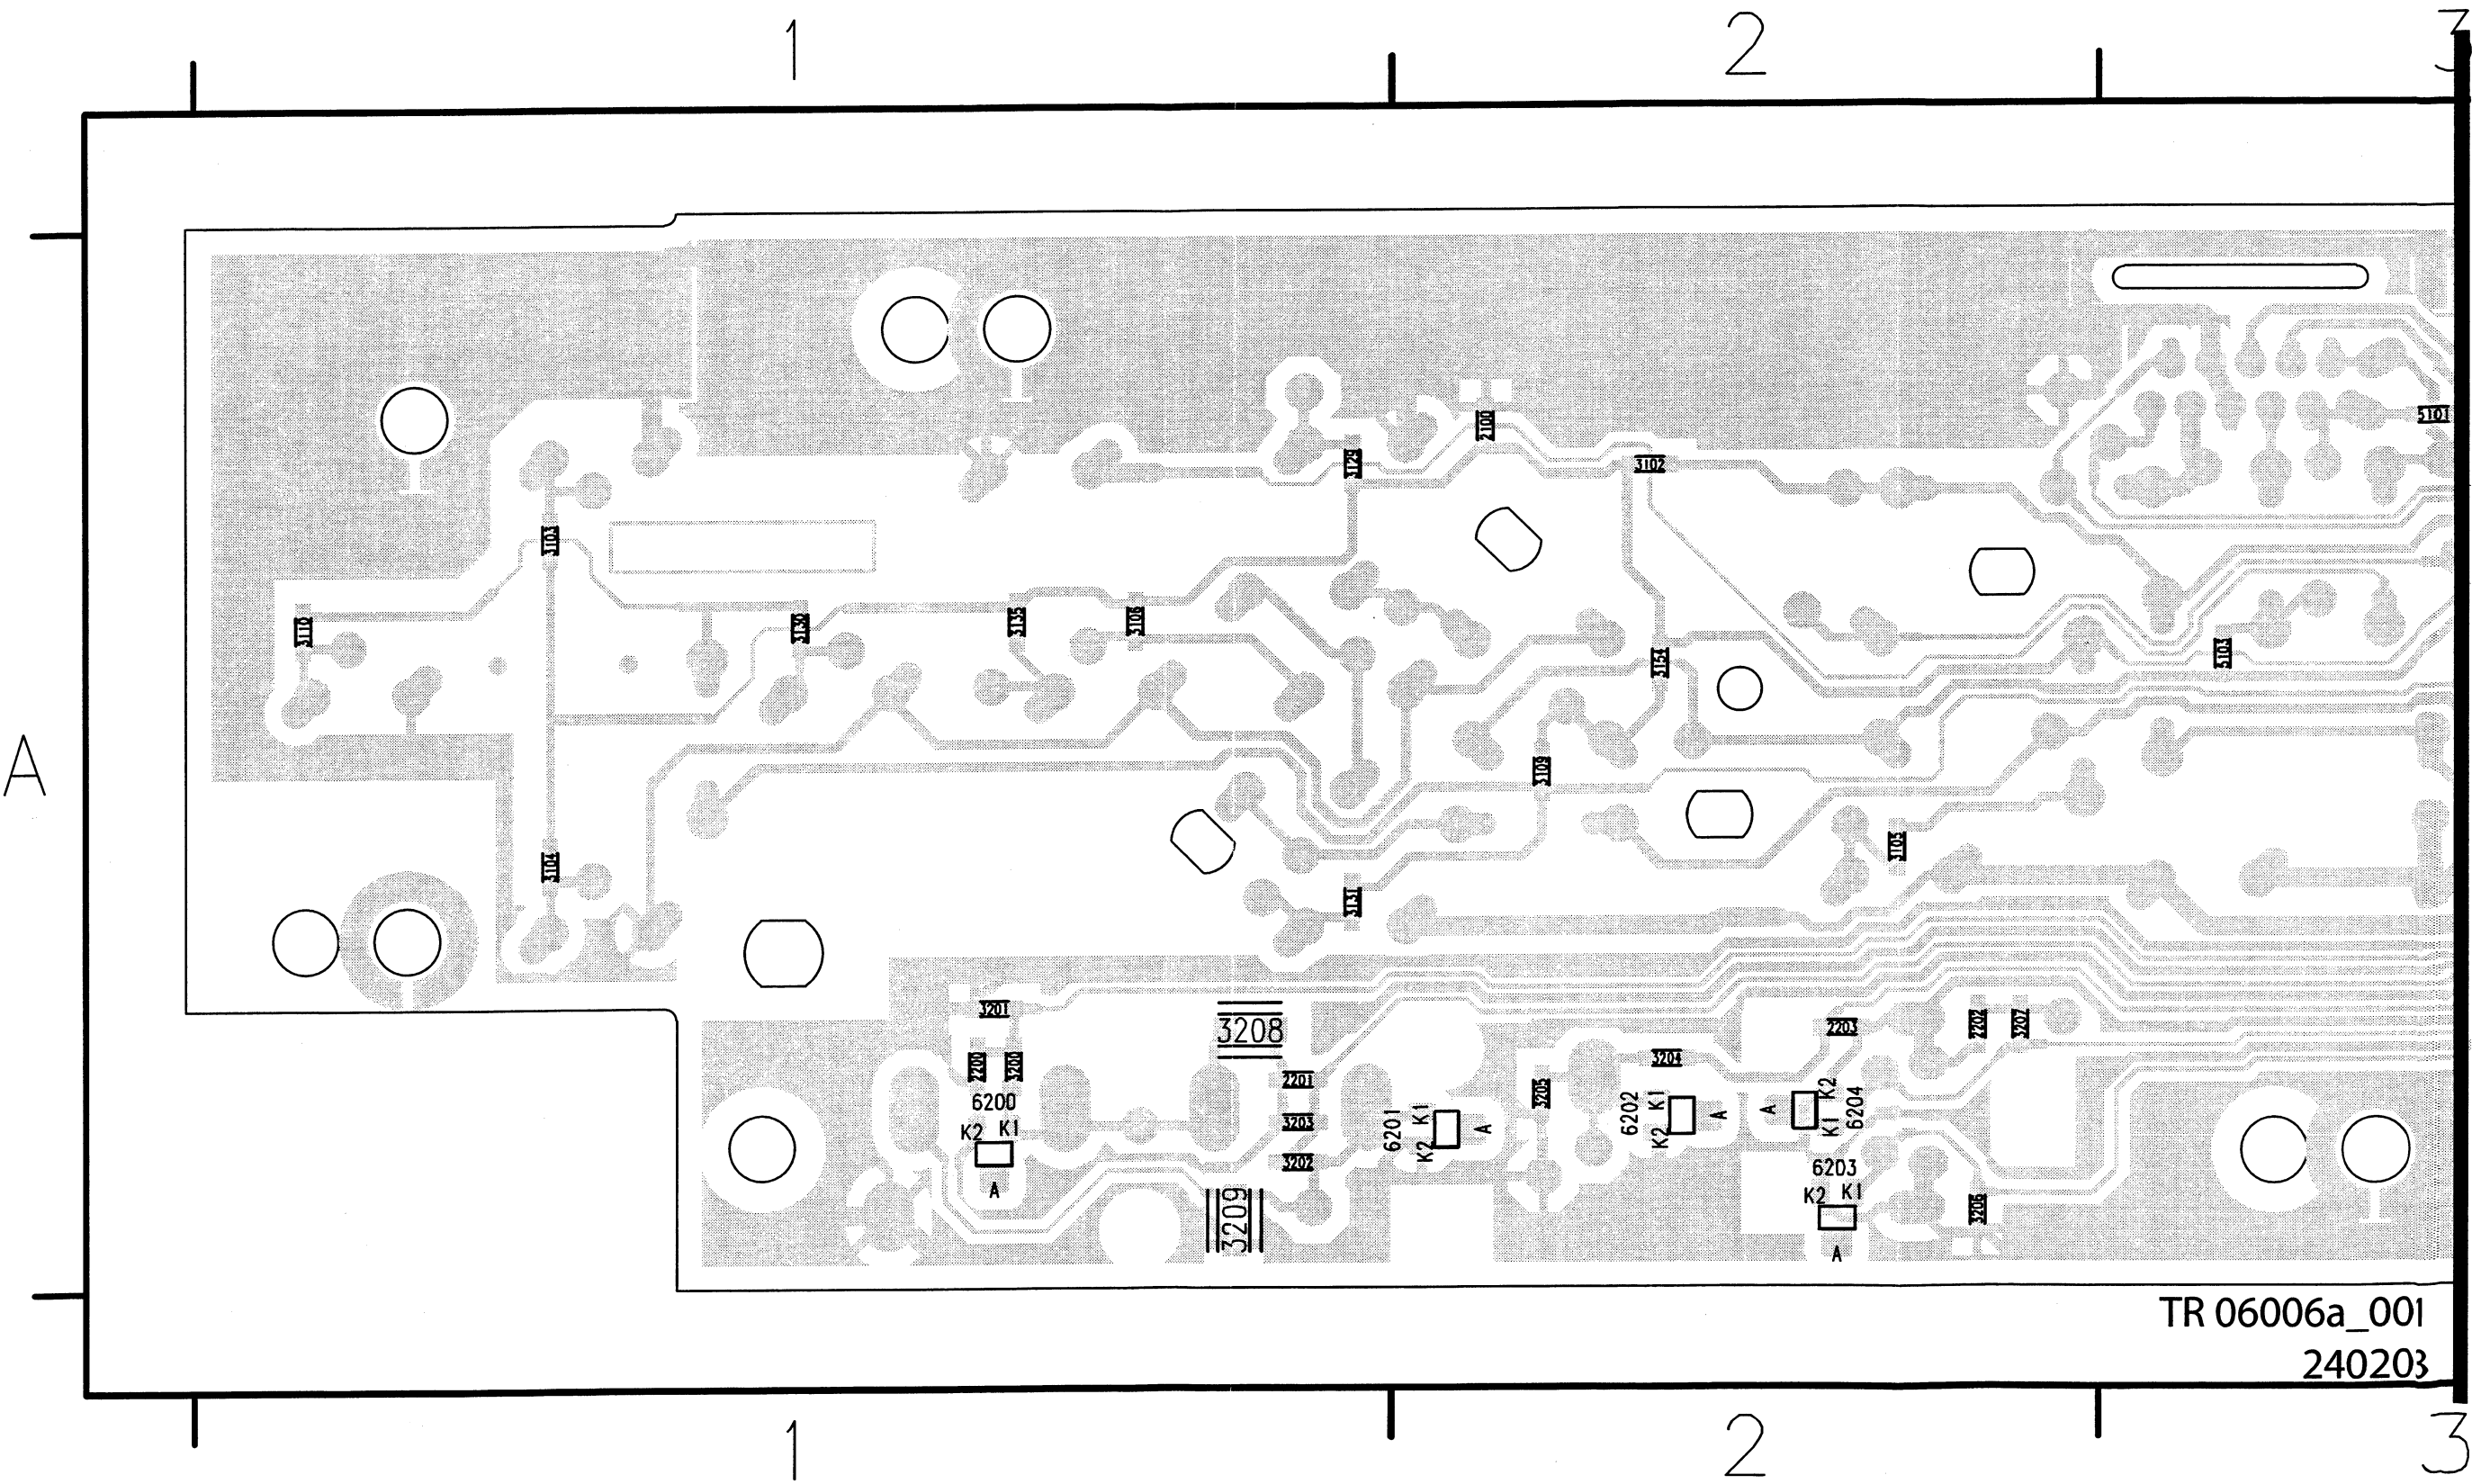


TR 06006a_001
240203

Layout Display Panel (Part 2 Bottom View)






Layout Standby Panel

1130 C1	1931 A4	3301 A3	3303 B3	3305 B2	7301 B2	F3002 B1	F3004 B1	F3103 B4
1930 A1	3300 B1	3302 A3	3304 B3	7300 A2	F3001 B1	F3003 B1	F3101 A4	I300 B1

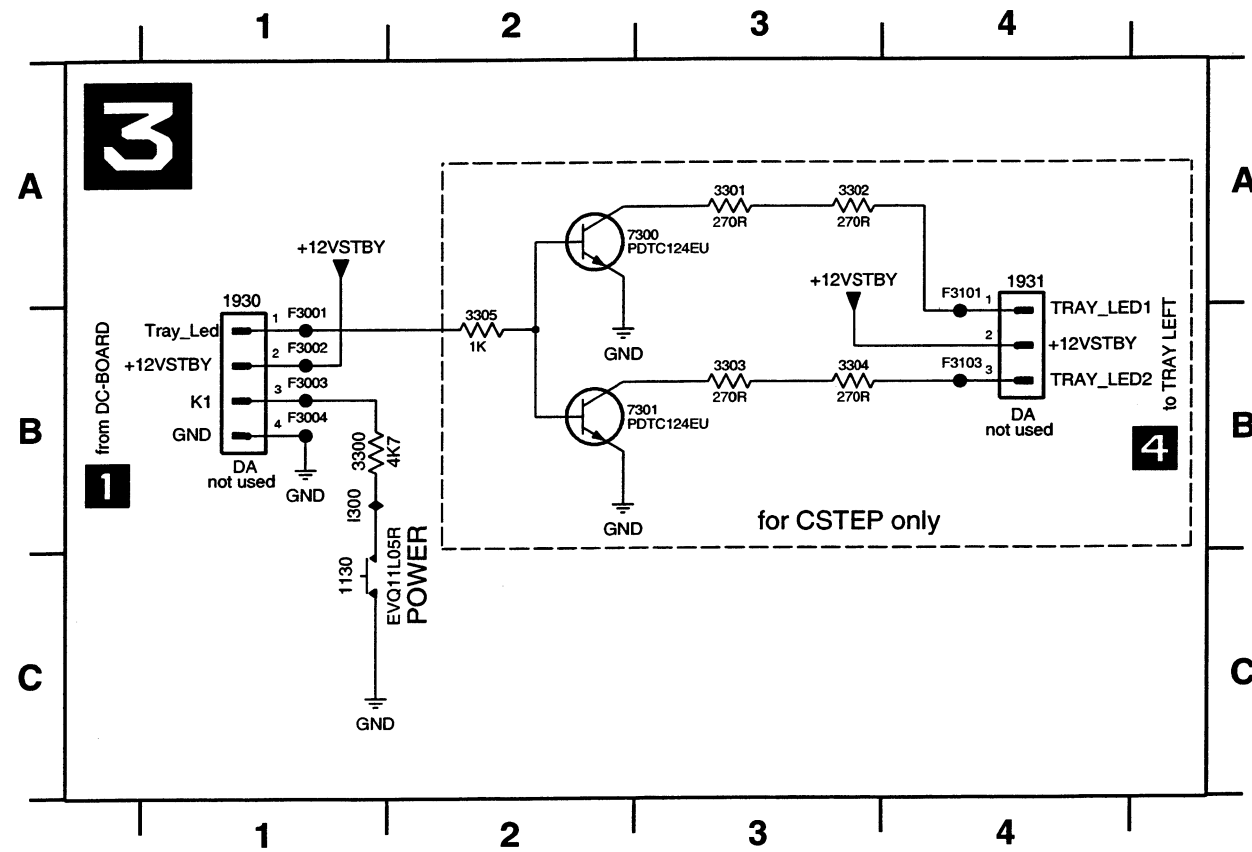


TR 07003_001
110303

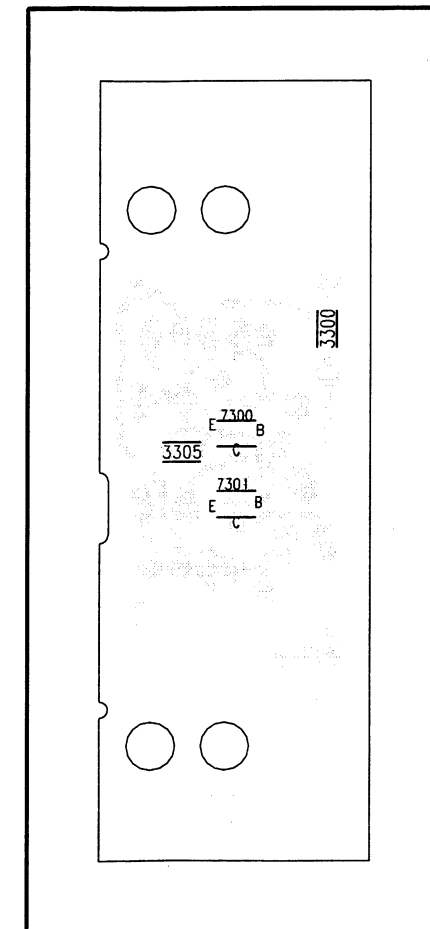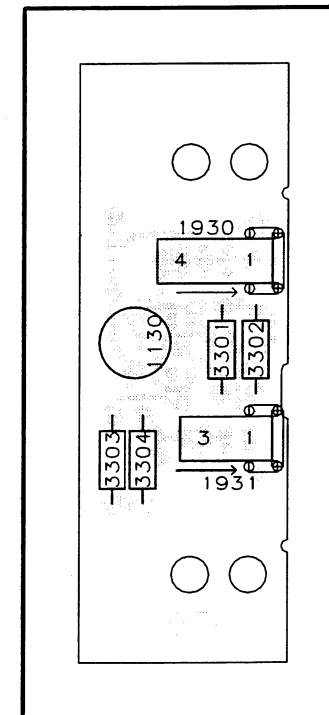

3300	--
3305	--
7300	--
7301	--


TR 06007_001
030203

Tray Left Panel (TRL)

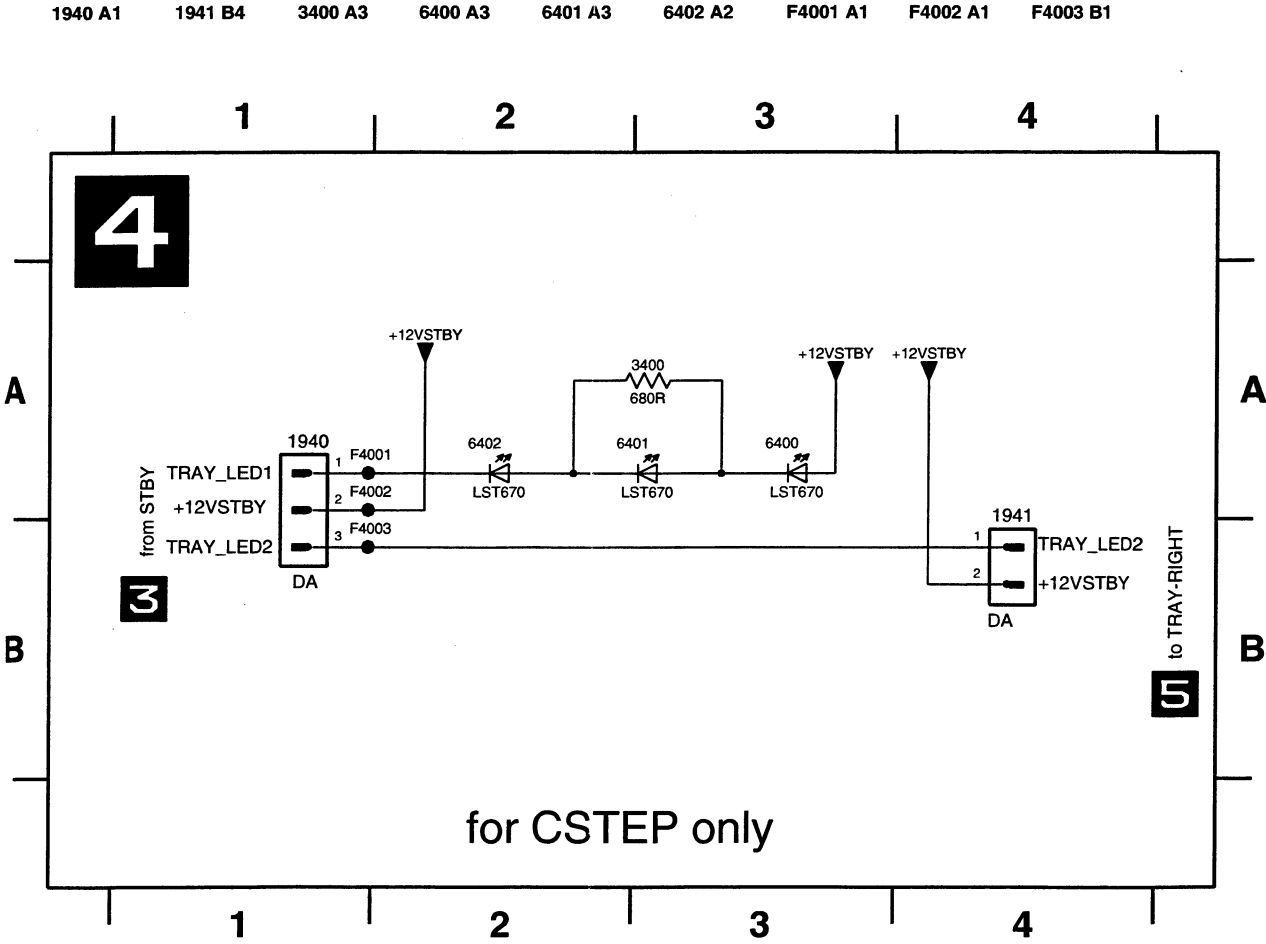


TR 06021_001
030203

Layout Tray Left Panel

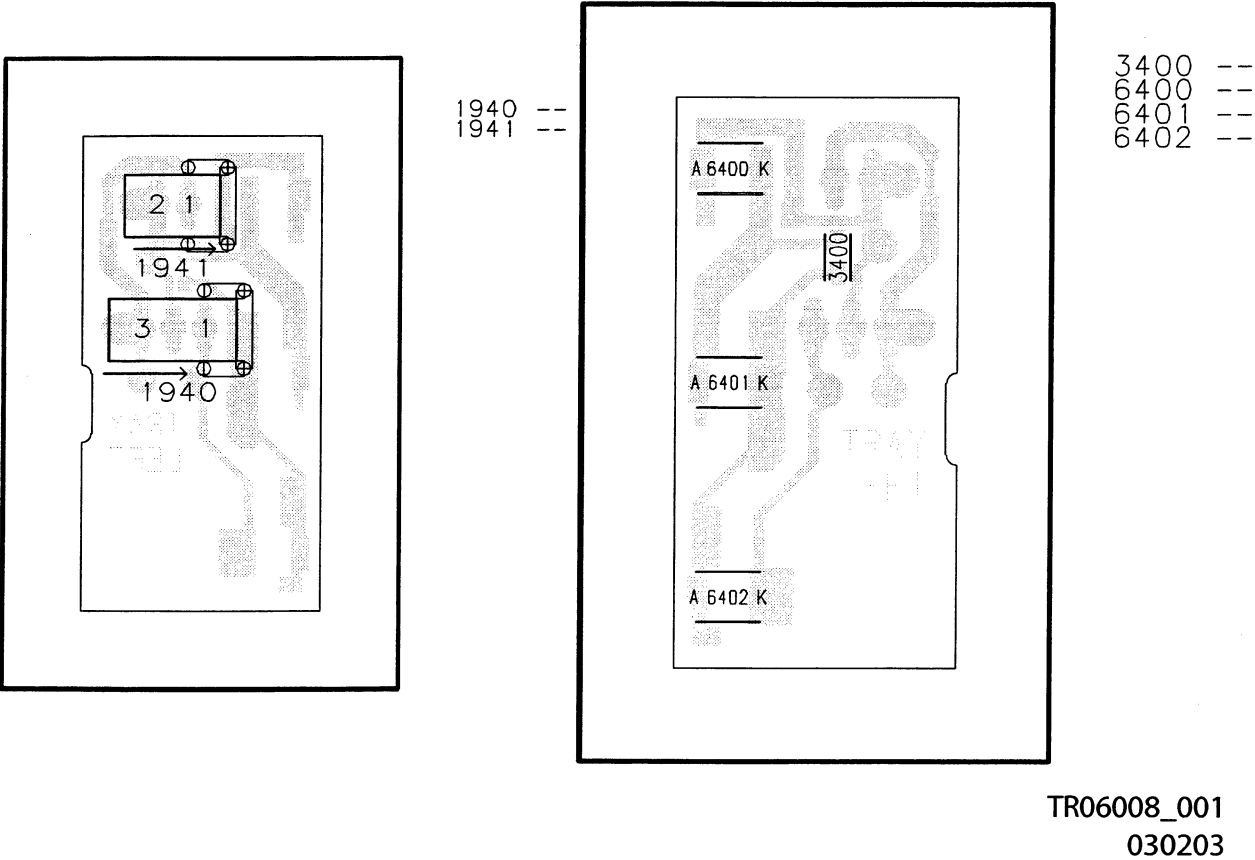


Tray Right Panel (TRR)

Layout Tray Right Panel

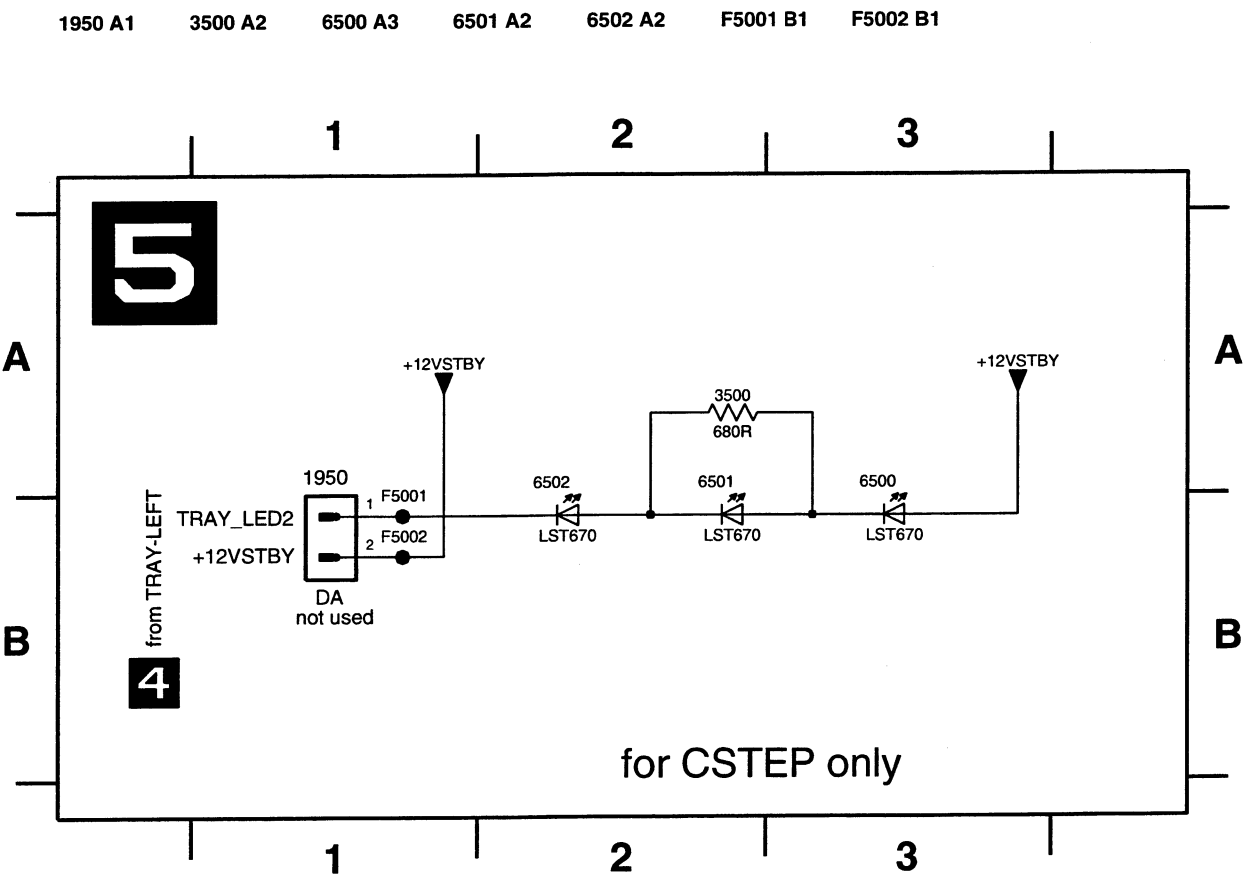


TR 06022_001
030203

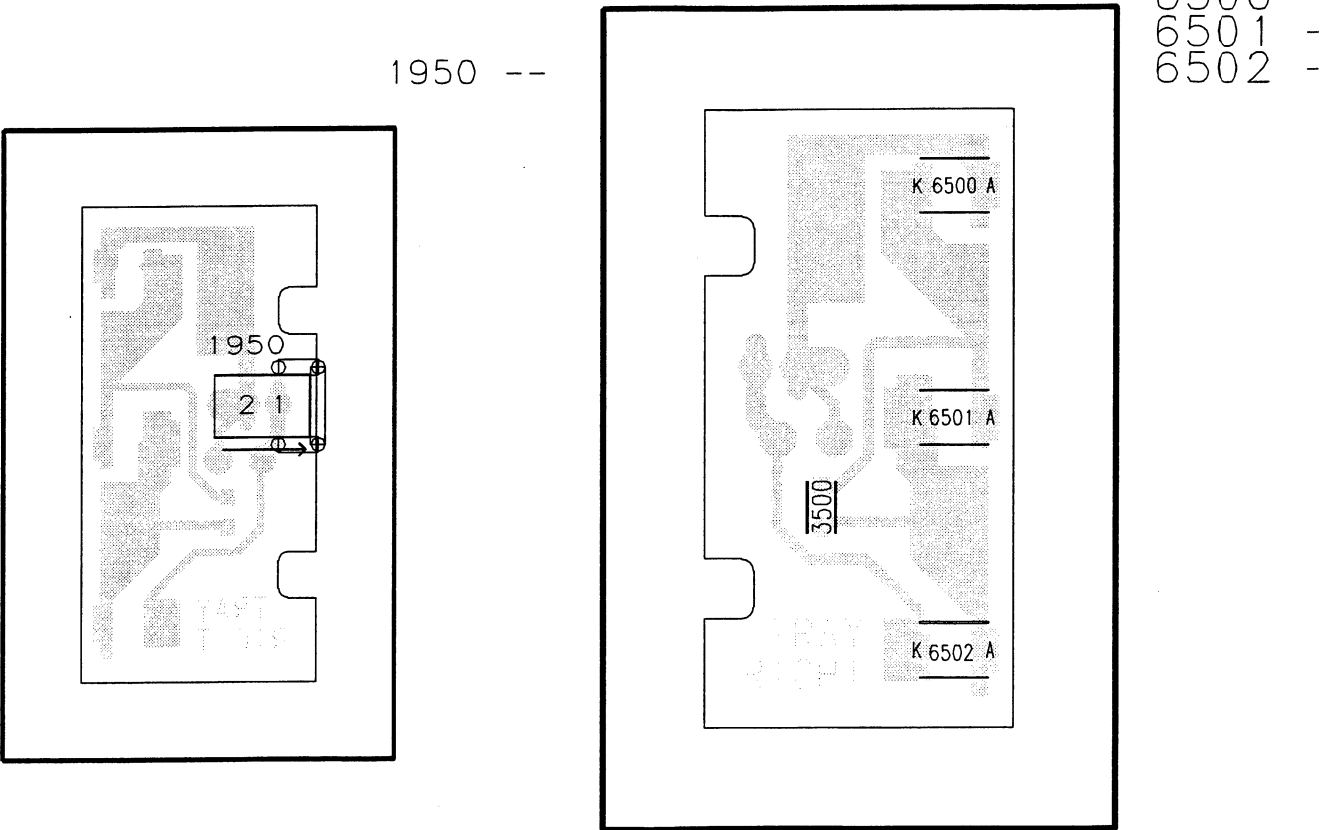


TR06009_001
030203

11	AC1	1704	F14	2719	B5	2723	B8	2728	C11	2732	F1	2736	G2	2742	F8	3704	F1	3715	B11	3720	B9	3727	G1	3731	F13	3735	F14	3739	F10	3743	G8	3758	G6	5705	B4	5713	D11	6705	F5	7705	D6	7712	H4	7717	G7	7703	D7	7709	C6	1702	B6	1707	D7	1712	C9	1717	A9	1725	F13	1729	F5	1739	F5	1733	F1	1741	D4	1745	A8	1751	D13
12	AC7	1705	C1	2720	B4	2724	B10	2728	C12	2732	F3	2737	E15	3701	A7	3705	C14	3715	B12	3724	B8	3728	G1	3732	F15	3736	F15	3740	F9	3744	G8	4700	E4	5709	B11	5714	G14	7701	A10	7708	H6	7713	D12	9701	D4	9700	A4	1703	B5	1708	T7	1726	E10	1730	F5	1734	G1	1742	D5	1746	B9	1754	D13								
13	AC2	1706	F14	2721	B5	2725	D3	2730	C9	2734	D4	2740	F8	3702	A2	3710	A9	3716	B5	3725	E12	3729	G1	3733	G4	3737	E6	3741	D14	3745	H5	4701	G5	5710	B6	5703	C5	7702	D15	7710	C8	7714	H6	9701	E2	9707	E3	1704	C5	1709	C8	1715	G1	1723	F15	1727	E8	1731	H4	1735	G1	1743	E7	1748	C9	1754	D13				
14	AC7	2713	A3	2722	B8	2727	C8	2731	C9	2735	G1	2741	F4	3703	A3	3711	A4	3717	E12	3726	C5	3730	D5	3734	F15	3738	E6	3742	F6	3746	H6	5704	A2	5711	C10	6704	E5	7704	C8	7711	F14	7716	D14	9702	C11	1708	B11	1701	B2	1706	E6	1711	C9	1716	G1	1724	F14	1728	E9	1732	B3	1739	H6	1744	E7	1749	D12				

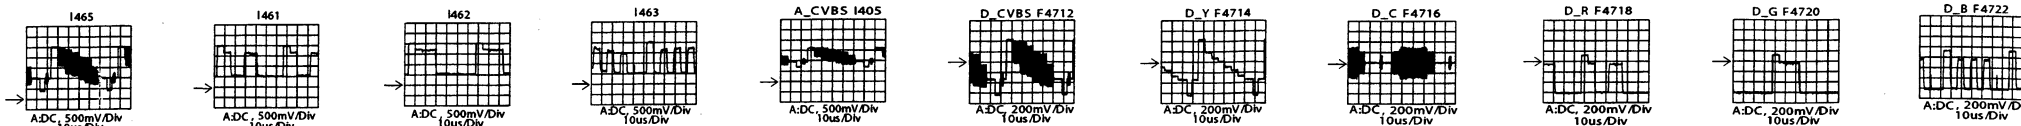


[illegible]

Analog Board: IN/Out Audio (IOA)






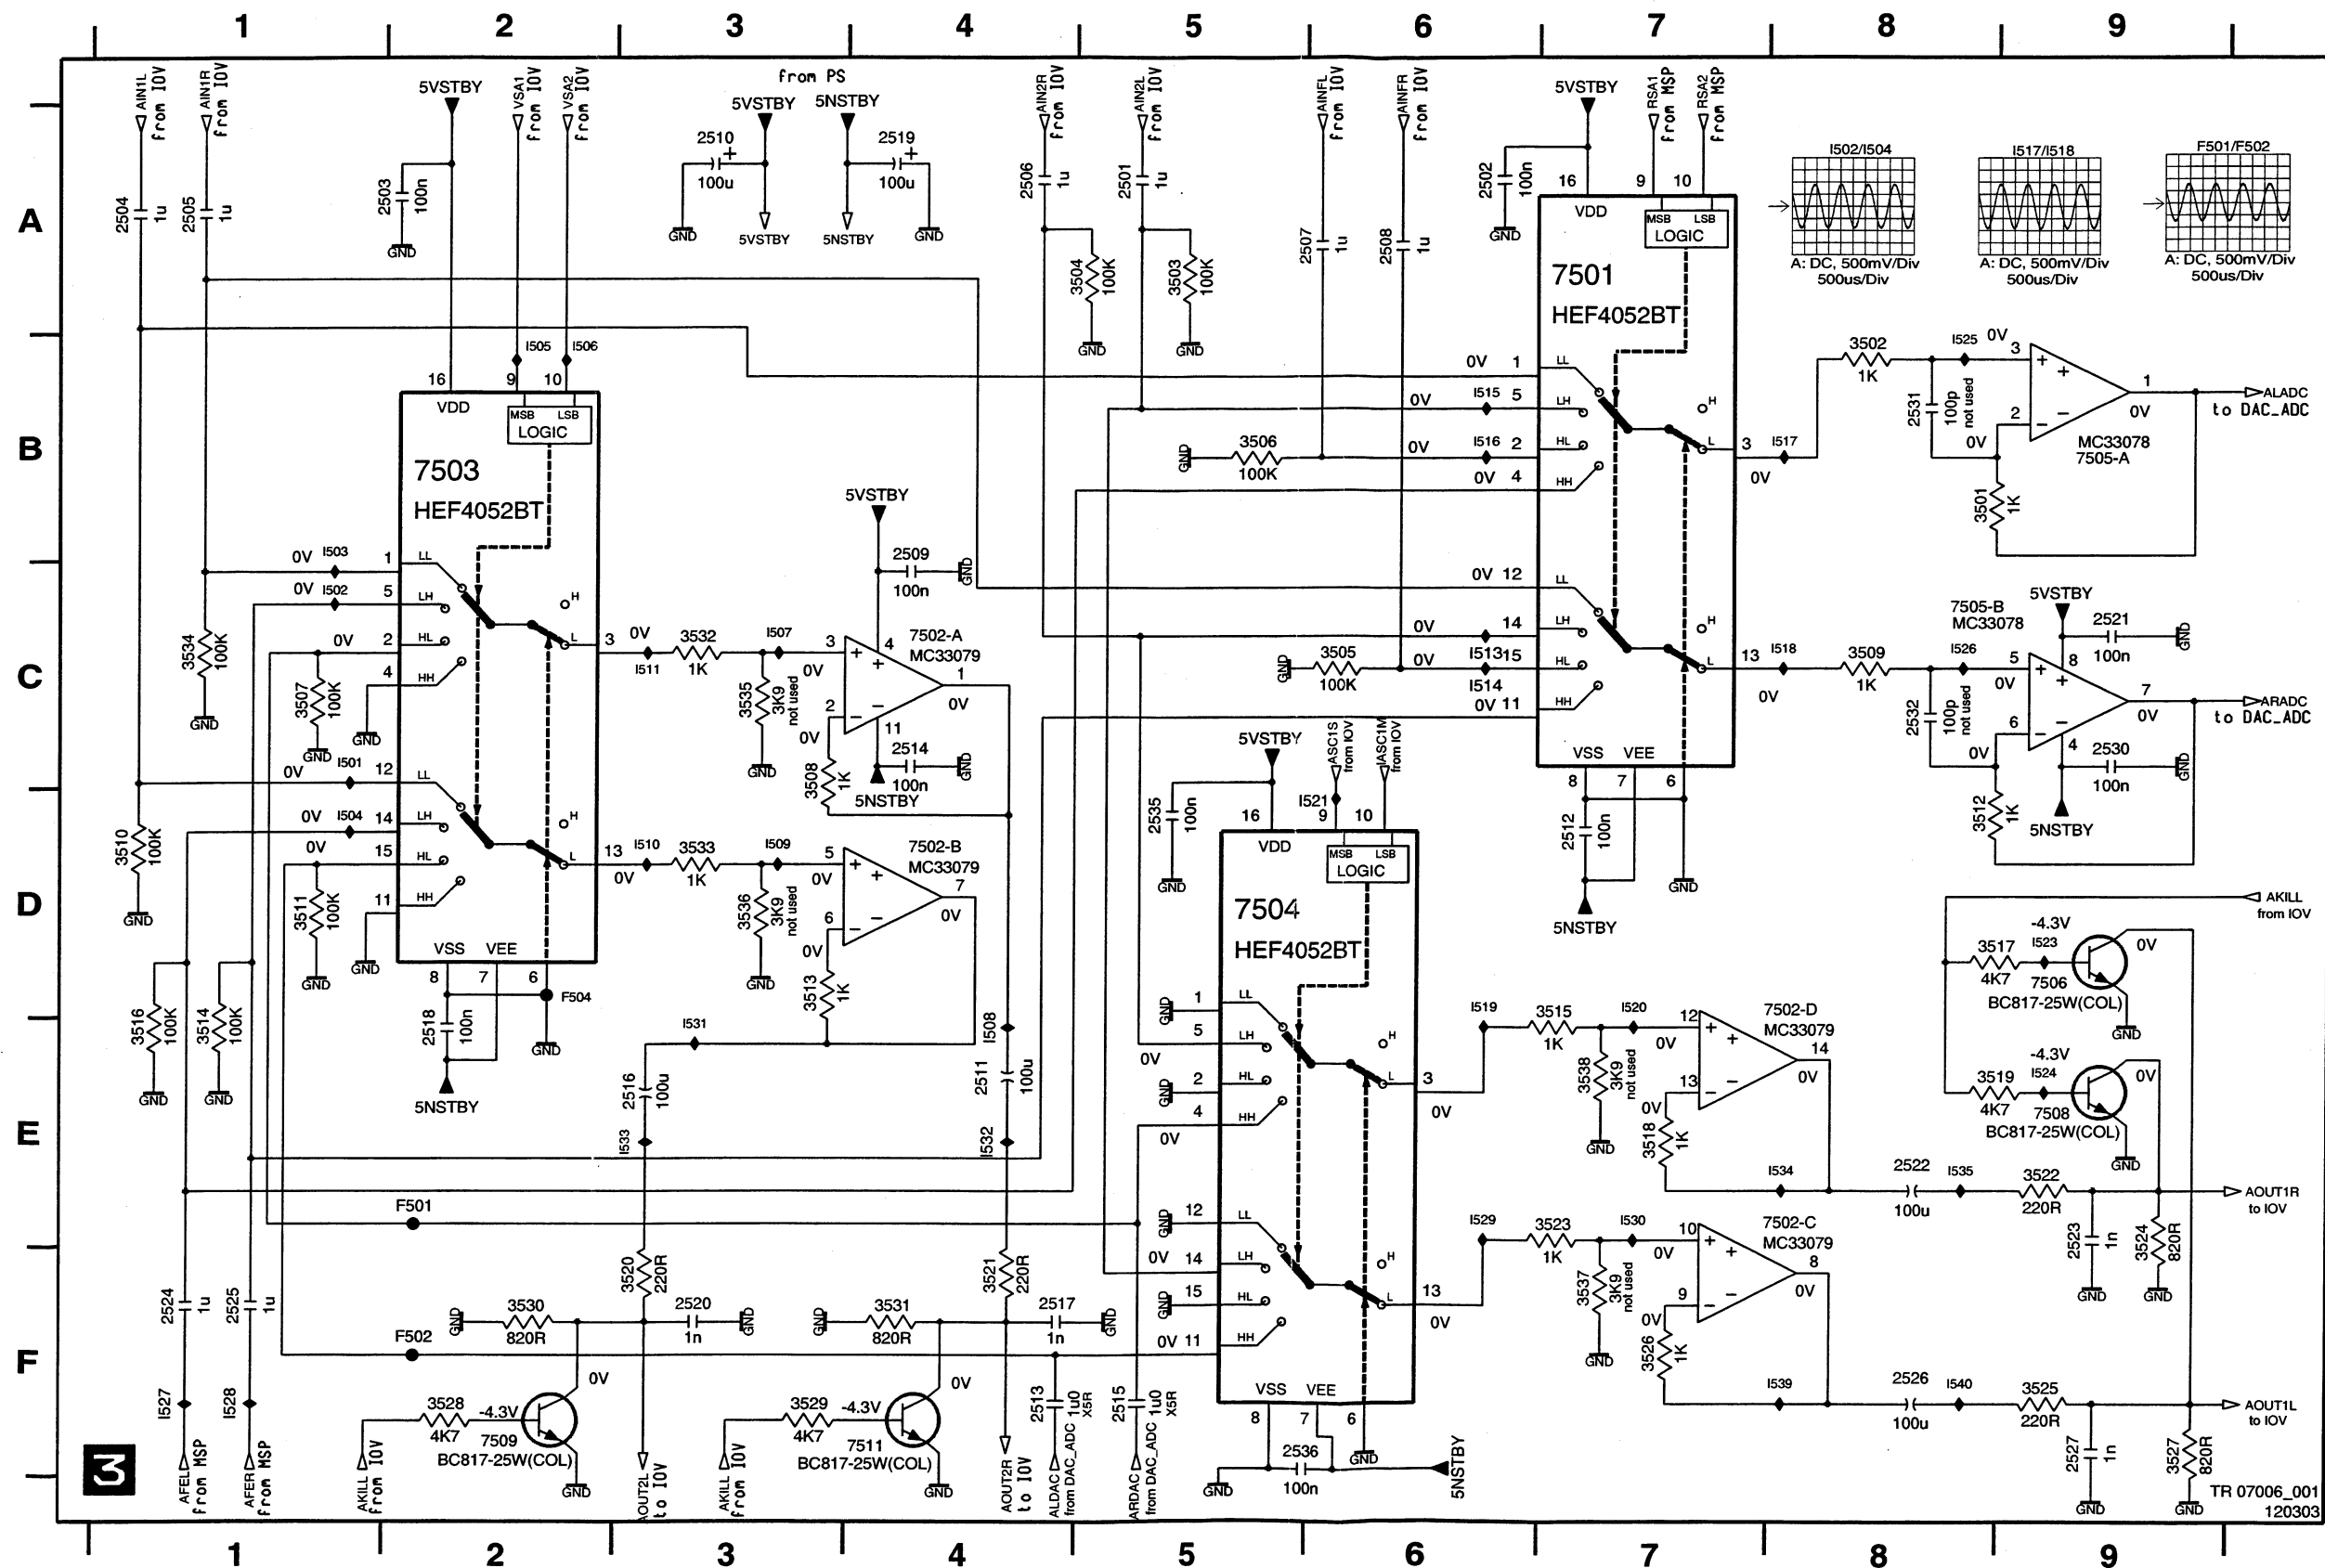


2501 A5 I503 B1
2502 A6 I504 D1
2503 A2 I505 B2
2504 A1 I506 B2
2505 A1 I507 C3
2506 A4 I508 E4
2507 A6 I509 D3
2508 A6 I510 D3
2509 B4 I511 C3
2510 A3 I513 C6
2511 E4 I514 C6
2512 D7 I515 B6
2513 F4 I516 B6
2514 C4 I517 B8
2515 F5 I518 C8
2516 E3 I519 D6
2517 F4 I520 D7
2518 E2 I521 D6
2519 A4 I523 D9
2520 F3 I524 E9
2521 C9 I525 B8
2522 E8 I526 C8
2523 E9 I527 F1
2524 F1 I528 F1
2525 F1 I529 E6
2526 F8 I530 E7
2527 F9 I531 E3
2530 C9 I532 E4
2531 B8 I533 E3
2532 C8 I534 E8
2535 D5 I535 E8
2536 F5 I539 F8
3501 B8 I540 F8
3502 B8 I540 F8
3503 A5 I540 F8
3504 A5 I540 F8
3505 C6 I540 F8
3506 B5 I540 F8
3507 C1 I540 F8
3508 C3 I540 F8
3509 C8 I540 F8
3510 D1 I540 F8
3511 D1 I540 F8
3512 D8 I540 F8
3513 D3 I540 F8
3514 E1 I540 F8
3515 D7 I540 F8
3516 E1 I540 F8
3517 D8 I540 F8
3518 E7 I540 F8
3519 E8 I540 F8
3520 F3 I540 F8
3521 F4 I540 F8
3522 E9 I540 F8
3523 E7 I540 F8
3524 E9 I540 F8
3525 F9 I540 F8
3526 F7 I540 F8
3527 F9 I540 F8
3528 F2 I540 F8
3529 F3 I540 F8
3530 F2 I540 F8
3531 F4 I540 F8
3532 C3 I540 F8
3533 D3 I540 F8
3534 C1 I540 F8
3535 C3 I540 F8
3536 D3 I540 F8
3537 F7 I540 F8
3538 E7 I540 F8
7501 A7 I540 F8
7502-A C4 I540 F8
7502-B D4 I540 F8
7502-C E7 I540 F8
7502-D D7 I540 F8
7503 B2 I540 F8
7504 D5 I540 F8
7505-A B9 I540 F8
7505-B C8 I540 F8
7506 D9 I540 F8
7508 E9 I540 F8
7509 F2 I540 F8
7511 F4 I540 F8
F501 E2 I540 F8
F502 F2 I540 F8
F504 D2 I540 F8
I501 C1 I540 F8
I502 C1 I540 F8


Analog Board: Power Supply (PS)

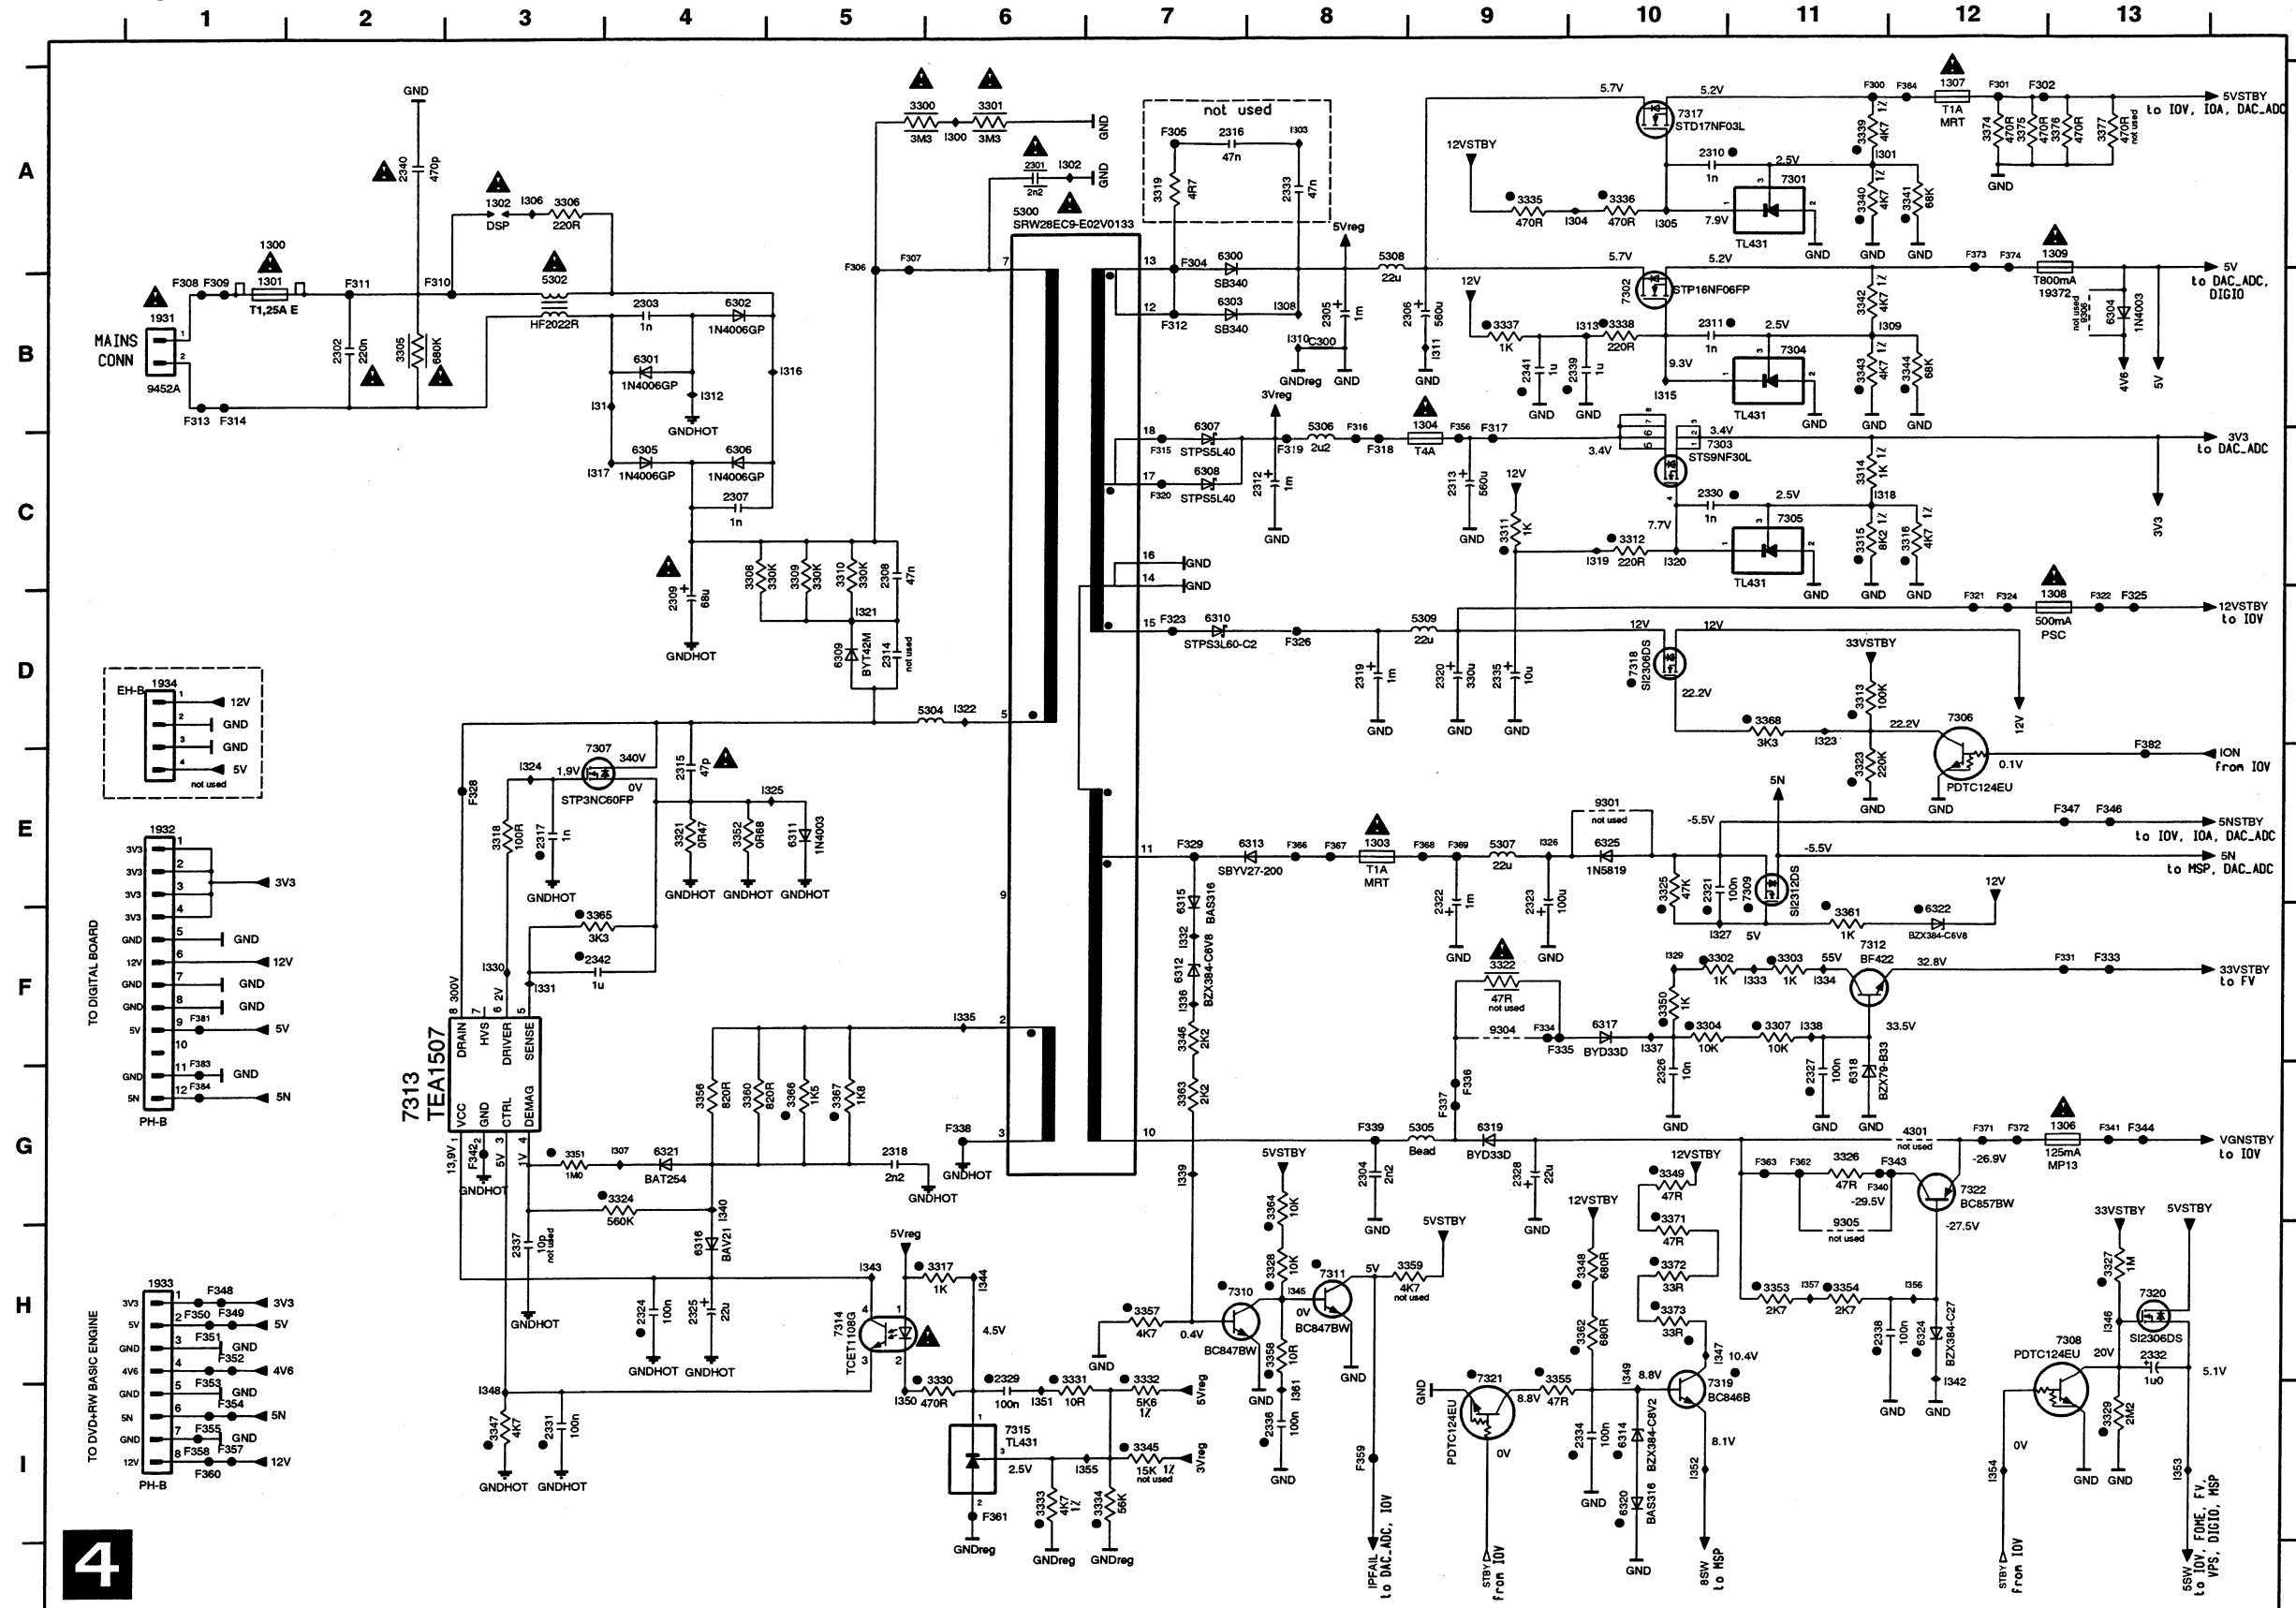

1300 A1	3364 G8	F351 H1
1301 B1	3365 F3	F352 H1
1302 A3	3366 G5	F353 H1
1303 E8	3367 G5	F354 H1
1304 C9	3368 D11	F355 H1
1306 G13	3371 H10	F356 C9
1307 A12	3372 H10	F357 H1
1308 D13	3373 H10	F358 H1
1309 A13	3374 A12	F359 H1
1311 B1	3375 A12	F360 H1
1312 E1	3376 A13	F361 H1
1313 H1	3377 A13	F362 G11
1314 D1	4301 G12	F363 G11
1315 A6	5300 A6	F364 A12
1316 B2	5302 B3	F365 E8
1317 B4	5304 D6	F366 E8
1318 G8	5305 G9	F367 E9
1319 B8	5306 C8	F368 E9
1320 B9	5307 E9	F371 G12
1321 C4	5308 A8	F372 G12
1322 C5	5309 D9	F373 A12
1323 D4	6300 A7	F374 A12
1324 A10	6301 B4	F375 F1
1325 B10	6302 B4	F376 E13
1326 C8	6303 B7	F377 G1
1327 C9	6304 B13	F378 G1
1328 D5	6305 C4	F379 A6
1329 E4	6306 C4	F380 A11
1330 A7	6307 C7	F381 A6
1331 E9	6308 C7	F382 A6
1332 G5	6309 D5	F383 A10
1333 D8	6310 D7	F384 A10
1334 D9	6311 E5	F385 A3
1335 E10	6312 F7	F386 G4
1336 E9	6313 E8	F387 B8
1337 E9	6314 H10	F388 B12
1338 H4	6315 E7	F389 B12
1339 H4	6316 H4	F390 B9
1340 G10	6317 F10	F391 B4
1341 G11	6318 G11	F392 B10
1342 G9	6319 G9	F393 B10
1343 I6	6320 H0	F394 B10
1344 C10	6321 G4	F395 B5
1345 A8	6322 F12	F396 C3
1346 H10	6323 H13	F397 C11
1347 A8	6324 H12	F398 C11
1348 A11	6325 E10	F399 C10
1349 A11	7301 A11	F400 C10
1350 D9	7302 B10	F401 D5
1351 E8	7303 C10	F402 D6
1352 H8	7304 B11	F403 D11
1353 H11	7305 C11	F404 E3
1354 B10	7306 D12	F405 E5
1355 A2	7307 E3	F406 E9
1356 B9	7308 H13	F407 F10
1357 F3	7309 E11	F408 F10
1358 A5	7310 H7	F409 F3
1359 A6	7311 H8	F410 F3
1360 F10	7312 F11	F411 F7
1361 F11	7313 G2	F412 F11
1362 F10	7314 H5	F413 F11
1363 B2	7315 I6	F414 F6
1364 A3	7316 A10	F415 F7
1365 F11	7317 D10	F416 F10
1366 C4	7318 H10	F417 F10
1367 C5	7319 H10	F418 F11
1368 C5	7320 H13	F419 G7
1369 C5	7321 I9	F420 G4
1370 C9	7322 G12	F421 H12
1371 C10	9301 E10	F422 H5
1372 D11	9304 F9	F423 H3
1373 C11	9305 H11	F424 H8
1374 C11	9306 B13	F425 H13
1375 C12	C300 B8	F426 H10
1376 H6	F300 A11	F427 H10
1377 E3	F301 A12	F428 H10
1378 A7	F302 A12	F429 H10
1379 E4	F304 A7	F430 H16
1380 F9	F305 A7	F431 H10
1381 E11	F306 A5	F432 H10
1382 G4	F307 A5	F433 H12
1383 E10	F308 B1	F434 H12
1384 G11	F309 B1	F435 H12
1385 H13	F310 B2	F436 H11
1386 H8	F311 B2	F437 H11
1387 H3	F312 B7	F438 B1
1388 I6	F313 B1	F439 C7
1389 I6	F314 B1	F440 C8
1390 I6	F315 C7	F441 C9
1391 A9	F316 C8	F442 C8
1392 A10	F317 C9	F443 C8
1393 B9	F318 C8	F444 C7
1394 B10	F319 C8	F445 D12
1395 A11	F320 C7	F446 D13
1396 A11	F321 D12	F447 D7
1397 A12	F322 D7	F448 D12
1398 B11	F323 D7	F449 D13
1399 B12	F324 D12	F450 E3
1400 I7	F325 E3	F451 E7
1401 F7	F326 E7	F452 F13
1402 I3	F327 F13	F453 F13
1403 H10	F328 F9	F454 F9
1404 G10	F329 G9	F455 G9
1405 F10	F330 G3	F456 G9
1406 G3	F331 G3	F457 G8
1407 H11	F332 G8	F458 G8
1408 H11	F333 G8	F459 G8
1409 H11	F334 G11	F460 G11
1410 H11	F335 G11	F461 G11
1411 H11	F336 G12	F462 G12
1412 H11	F337 G12	F463 G12
1413 H11	F338 G13	F464 G13
1414 H11	F339 H8	F465 E13
1415 H11	F340 G4	F466 E13
1416 H11	F341 G13	F467 E13
1417 H11	F342 G3	F468 H1
1418 H11	F343 G12	F469 H1
1419 H11	F344 G13	F470 H1
1420 H11	F345 E13	F471 H1
1421 H11	F346 H1	F472 H1
1422 H11	F347 H1	F473 H1
1423 H11	F348 H1	F474 H1
1424 H11	F349 H1	F475 H1
1425 H11	F350 H1	F476 H1



Analog Board: Multi Sound Processing (MSP)

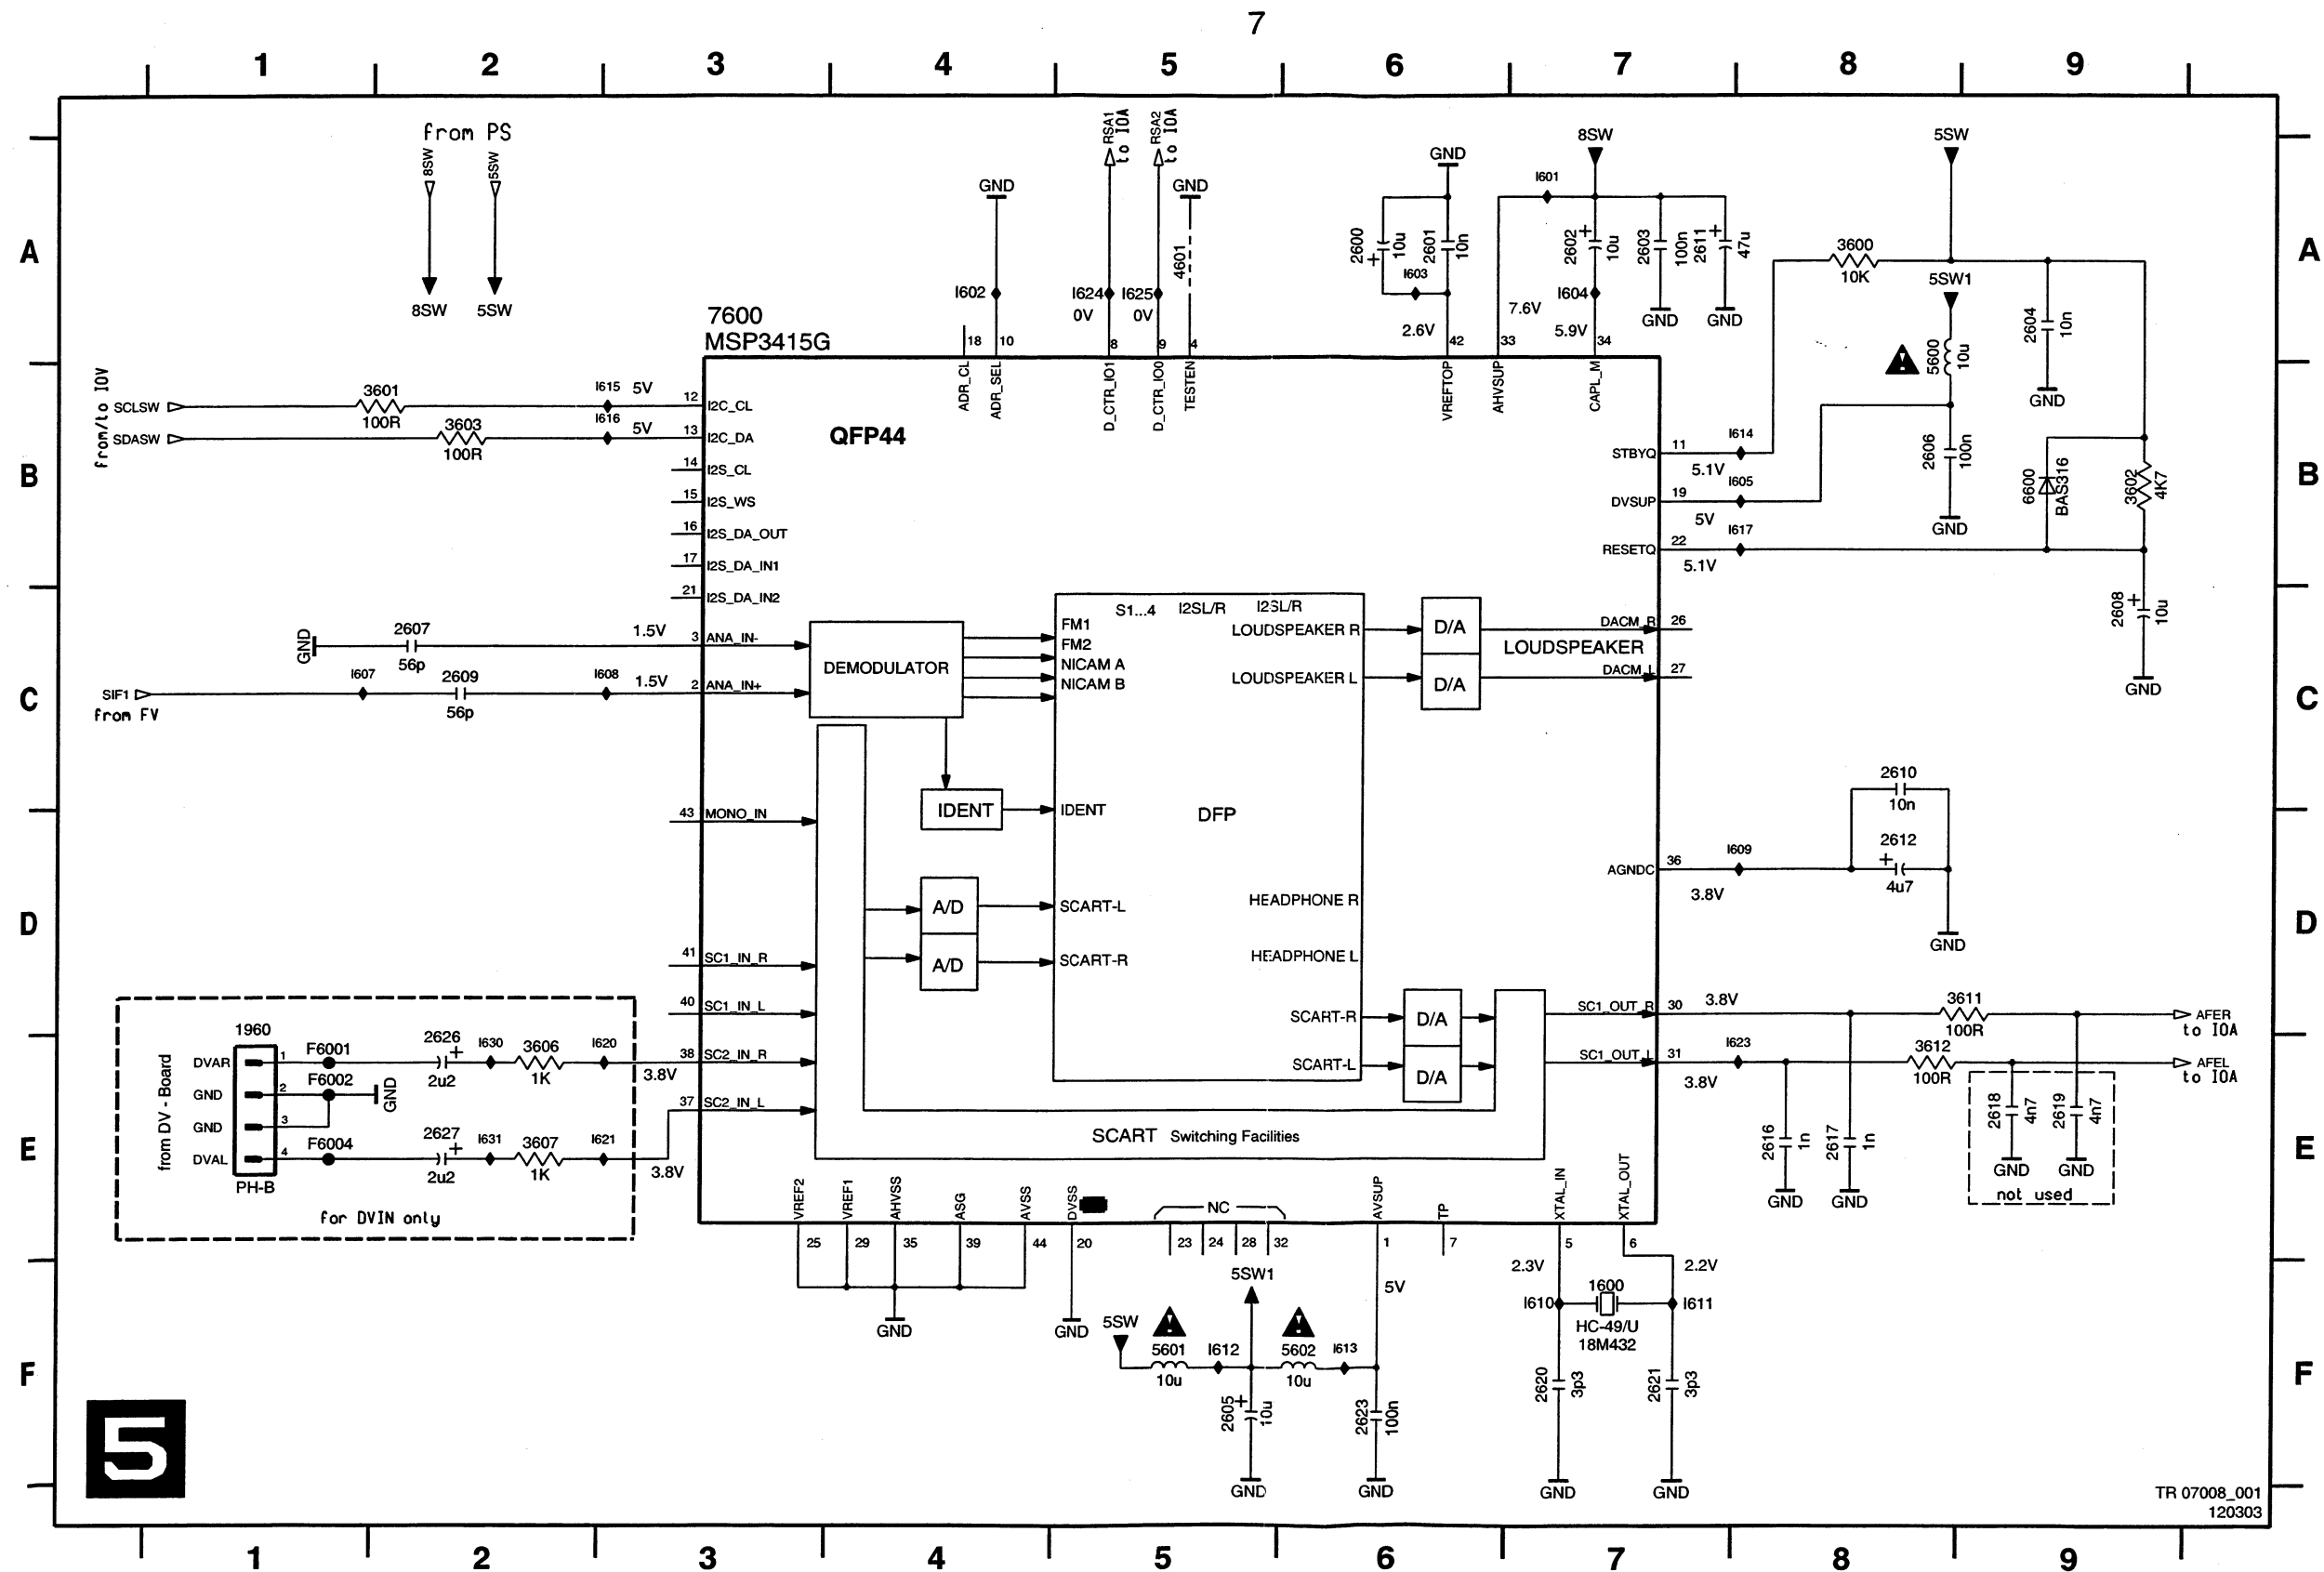


1600 F7
1960 E1
2600 A6
2601 A6
2602 A7
2603 A7
2604 A9
2605 F5
2606 B8
2607 C2
2608 C9
2609 C2
2610 C8
2611 A7
2612 D8
2616 E8
2617 E8
2618 E9
2619 E9
2620 F7
2621 F7
2623 F6
2626 E2
2627 E2
3600 A8
3601 B2
3602 B9
3603 B2
3606 E2
3607 E2
3611 D9
3612 E8
4601 A5
5600 A8
5601 F5
5602 F6
6600 B9
7600 A3
F6001 E1
F6002 E1
F6004 E1
I601 A7
I602 A4
I603 A6
I604 A7
I605 B8
I607 C1
I608 C3
I609 D8
I610 F7
I611 F7
I612 F5
I613 F6
I614 B8
I615 B3
I616 B3
I617 B8
I620 E3
I621 E3
I623 E8
I624 A5
I625 A5
I630 E2
I631 E2

TR 07008_001
120303

1951 A4	2585 C3	2590 A3	3582 D2	5580 A2	7580-A C2	7580-D C3	F4102 A4	I488 C2	I491 D2
2580 A3	2586 D3	3580 A3	3584 C1	5581 A1	7580-B C3	7580-E D3	F4103 A4	I489 C3	I492 C3
2581 A1	2587 D2	3581 C2	3585 C3	6580 C4	7580-C C3	7580-F D3	I487 A3	I490 C1	I493 B4




Analog Board 603 3033: Audio Converter (DAC_ADC)

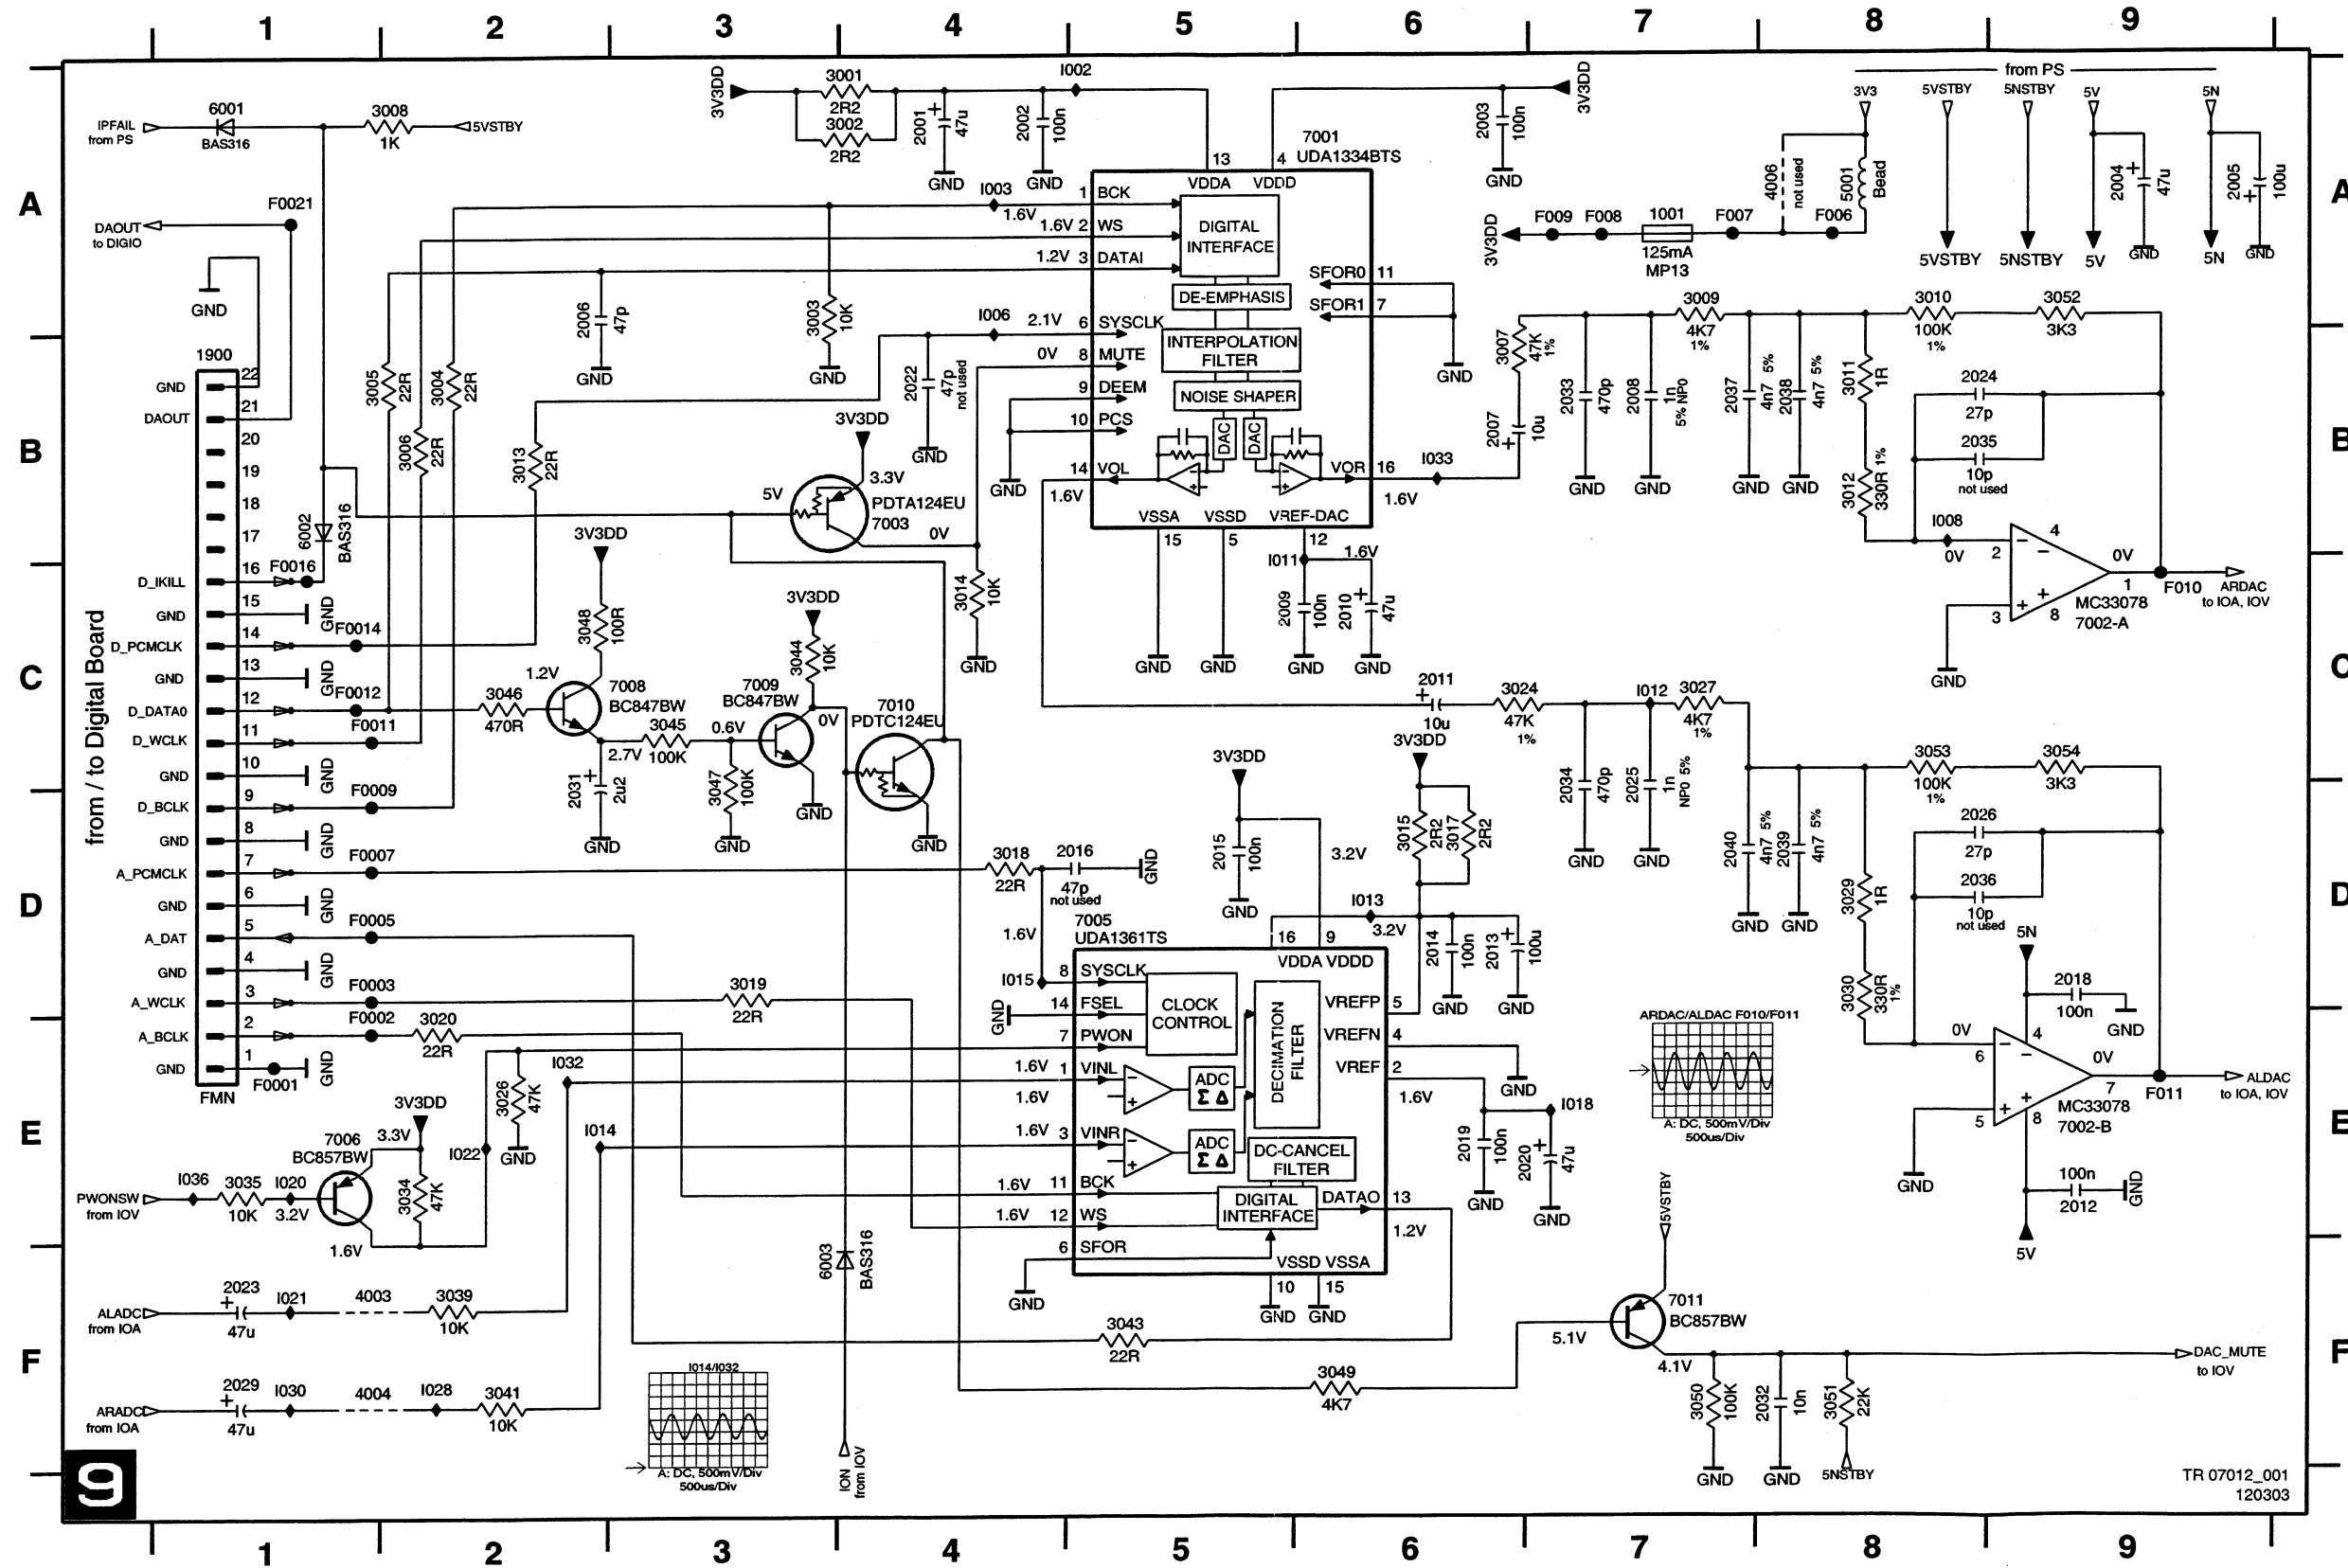


1001 A7	4003 F1
1900 B1	4004 F1
2001 A4	4006 A8
2002 A4	5001 A8
2003 A6	6001 A1
2004 A9	6002 B1
2005 A9	6003 F3
2006 A2	7001 A6
2007 B6	7002-A C9
2008 B7	7002-B E9
2009 C5	7003 B4
2010 C6	7005 D5
2011 C6	7006 E1
2012 E9	7008 C2
2013 D6	7009 C3
2014 D6	7010 C4
2015 D5	7011 F7
2016 D5	F0001 E1
2018 D9	F0002 E1
2019 E6	F0003 D1
2020 E7	F0005 D1
2022 B4	F0007 D1
2023 F1	F0009 D1
2024 B8	F0011 C1
2025 D7	F0012 C1
2026 D8	F0014 C1
2029 F1	F0016 C1
2031 D2	F0021 A1
2032 F8	F006 A8
2033 B7	F007 A7
2034 D7	F008 A7
2035 B8	F009 A7
2036 D8	F010 C9
2037 B7	F011 E9
2038 B8	I002 A5
2039 D8	I003 A4
2040 D7	I006 A4
3001 A4	I008 B8
3002 A4	I011 C5
3003 A3	I012 C7
3004 B2	I013 D6
3005 B1	I014 E2
3006 B2	I015 D4
3007 B6	I018 E7
3008 A2	I020 E1
3009 A7	I021 F1
3010 A8	I022 E2
3011 B8	I028 F2
3012 B8	I030 F1
3013 B2	I032 E2
3014 C4	I033 B6
3015 D6	I036 E1
3017 D6	
3018 D4	
3019 D3	
3020 E2	
3024 C6	
3026 E2	
3027 C7	
3029 D8	
3030 D8	
3034 E2	
3035 E1	
3039 F2	
3041 F2	
3043 F5	
3044 C3	
3045 C3	
3046 C2	
3047 D3	
3048 C2	
3049 F6	
3050 F7	
3051 F8	
3052 A9	
3053 C8	
3054 C9	

TR 07012_001
120303

Layout Analog Board 603 3033 (Overview Bottom View)

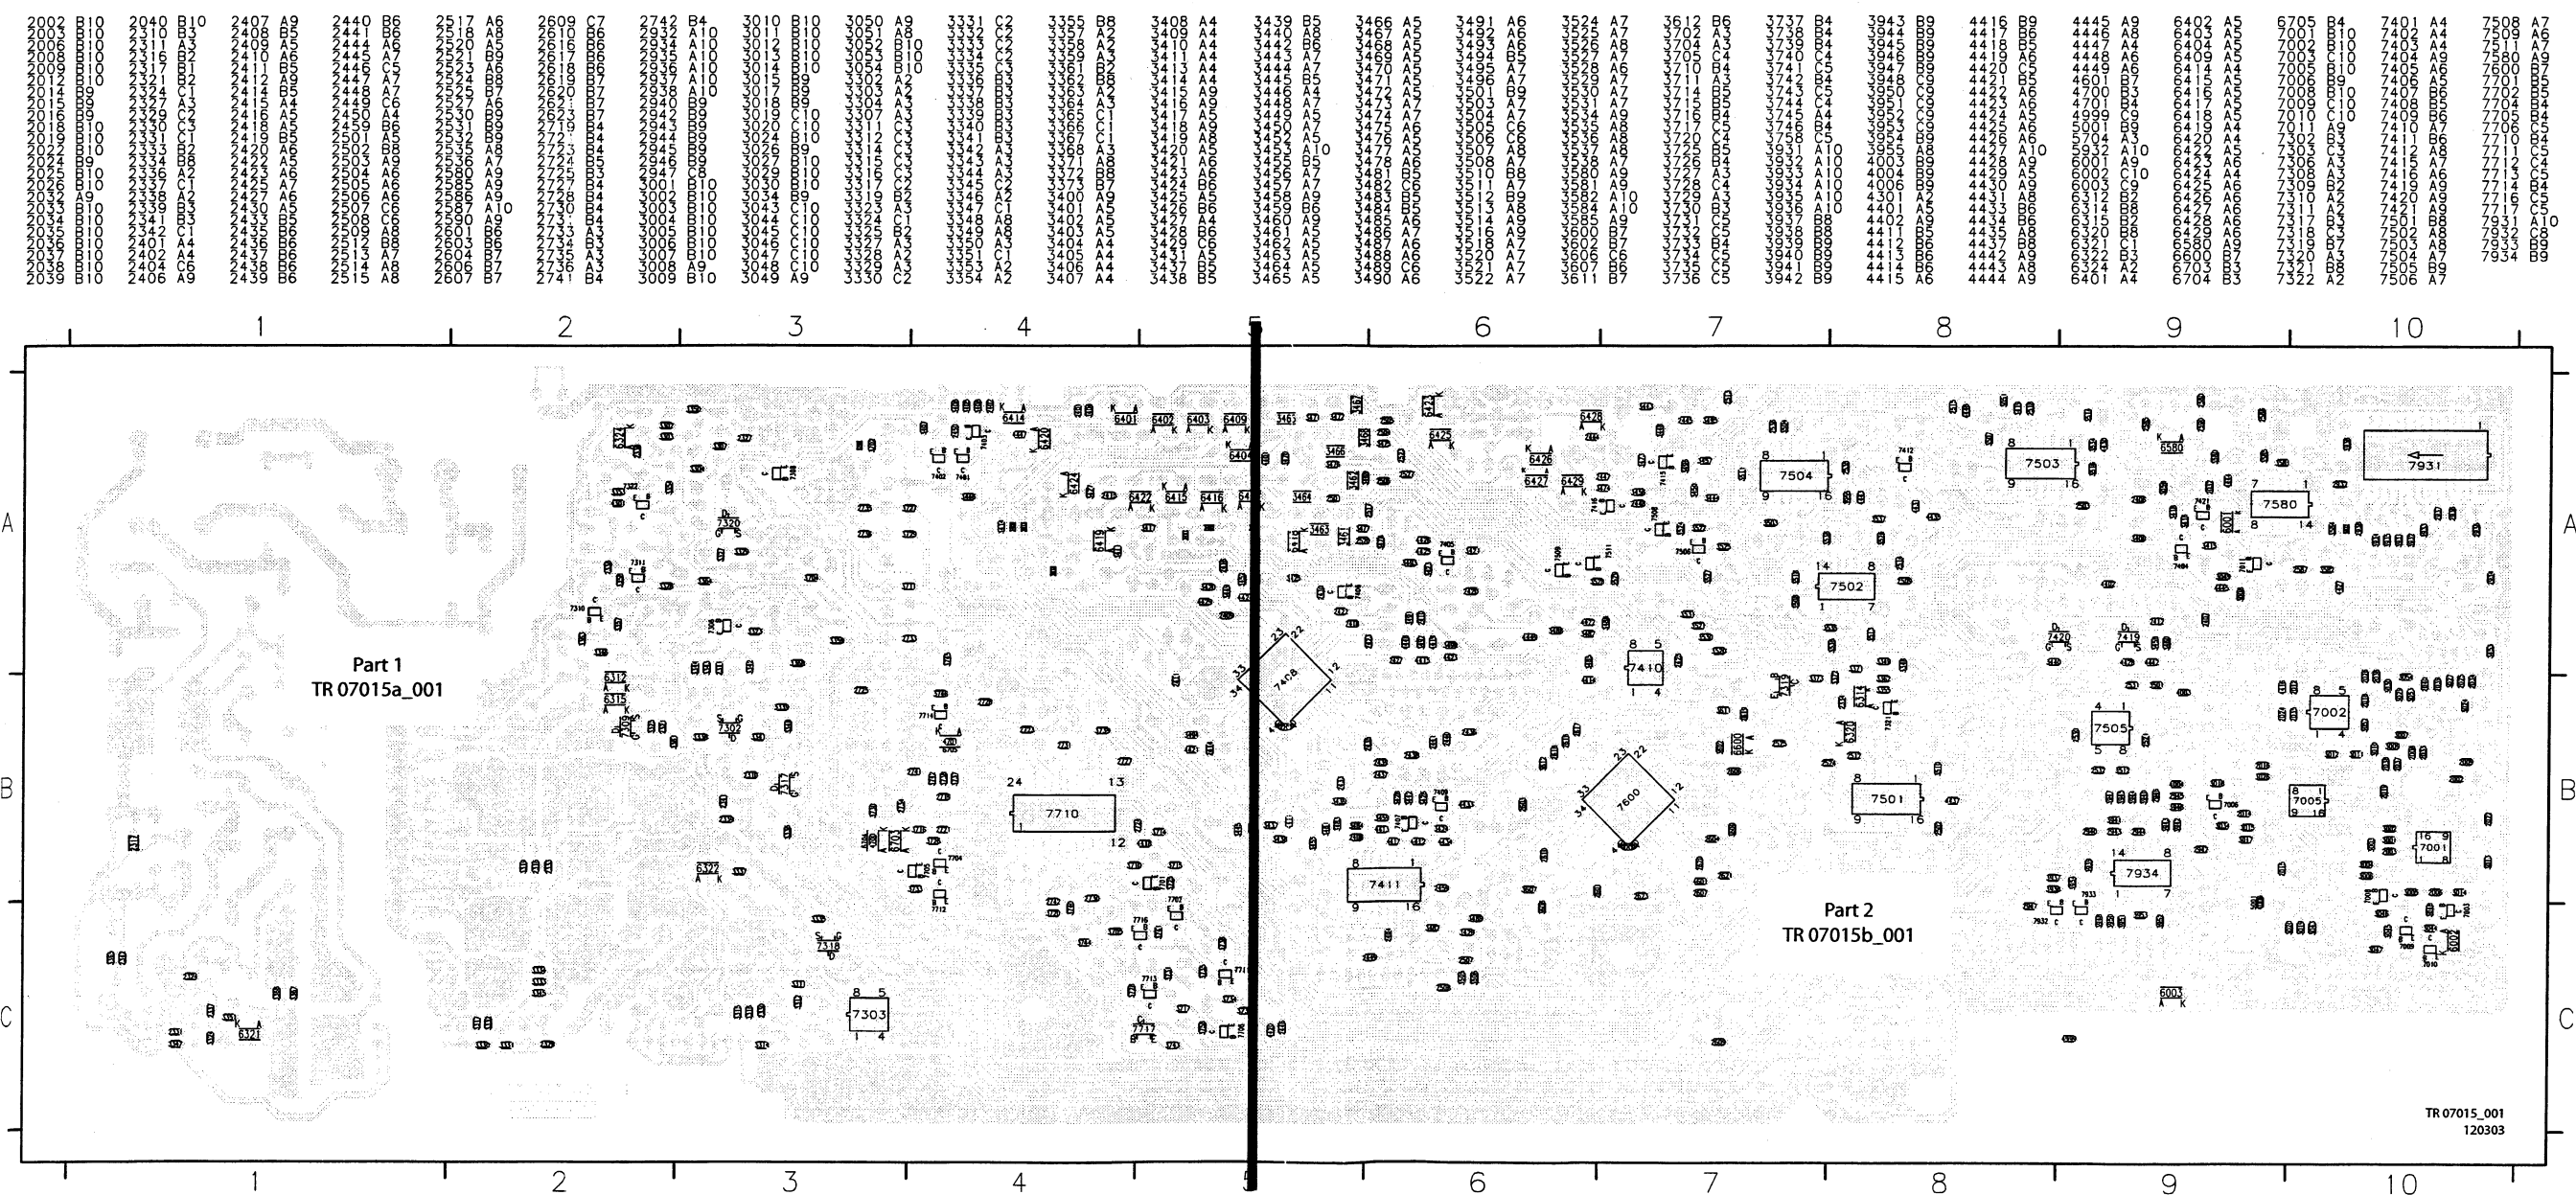


Layout Analog Board 603 3033 (Part 1 Bottom View)

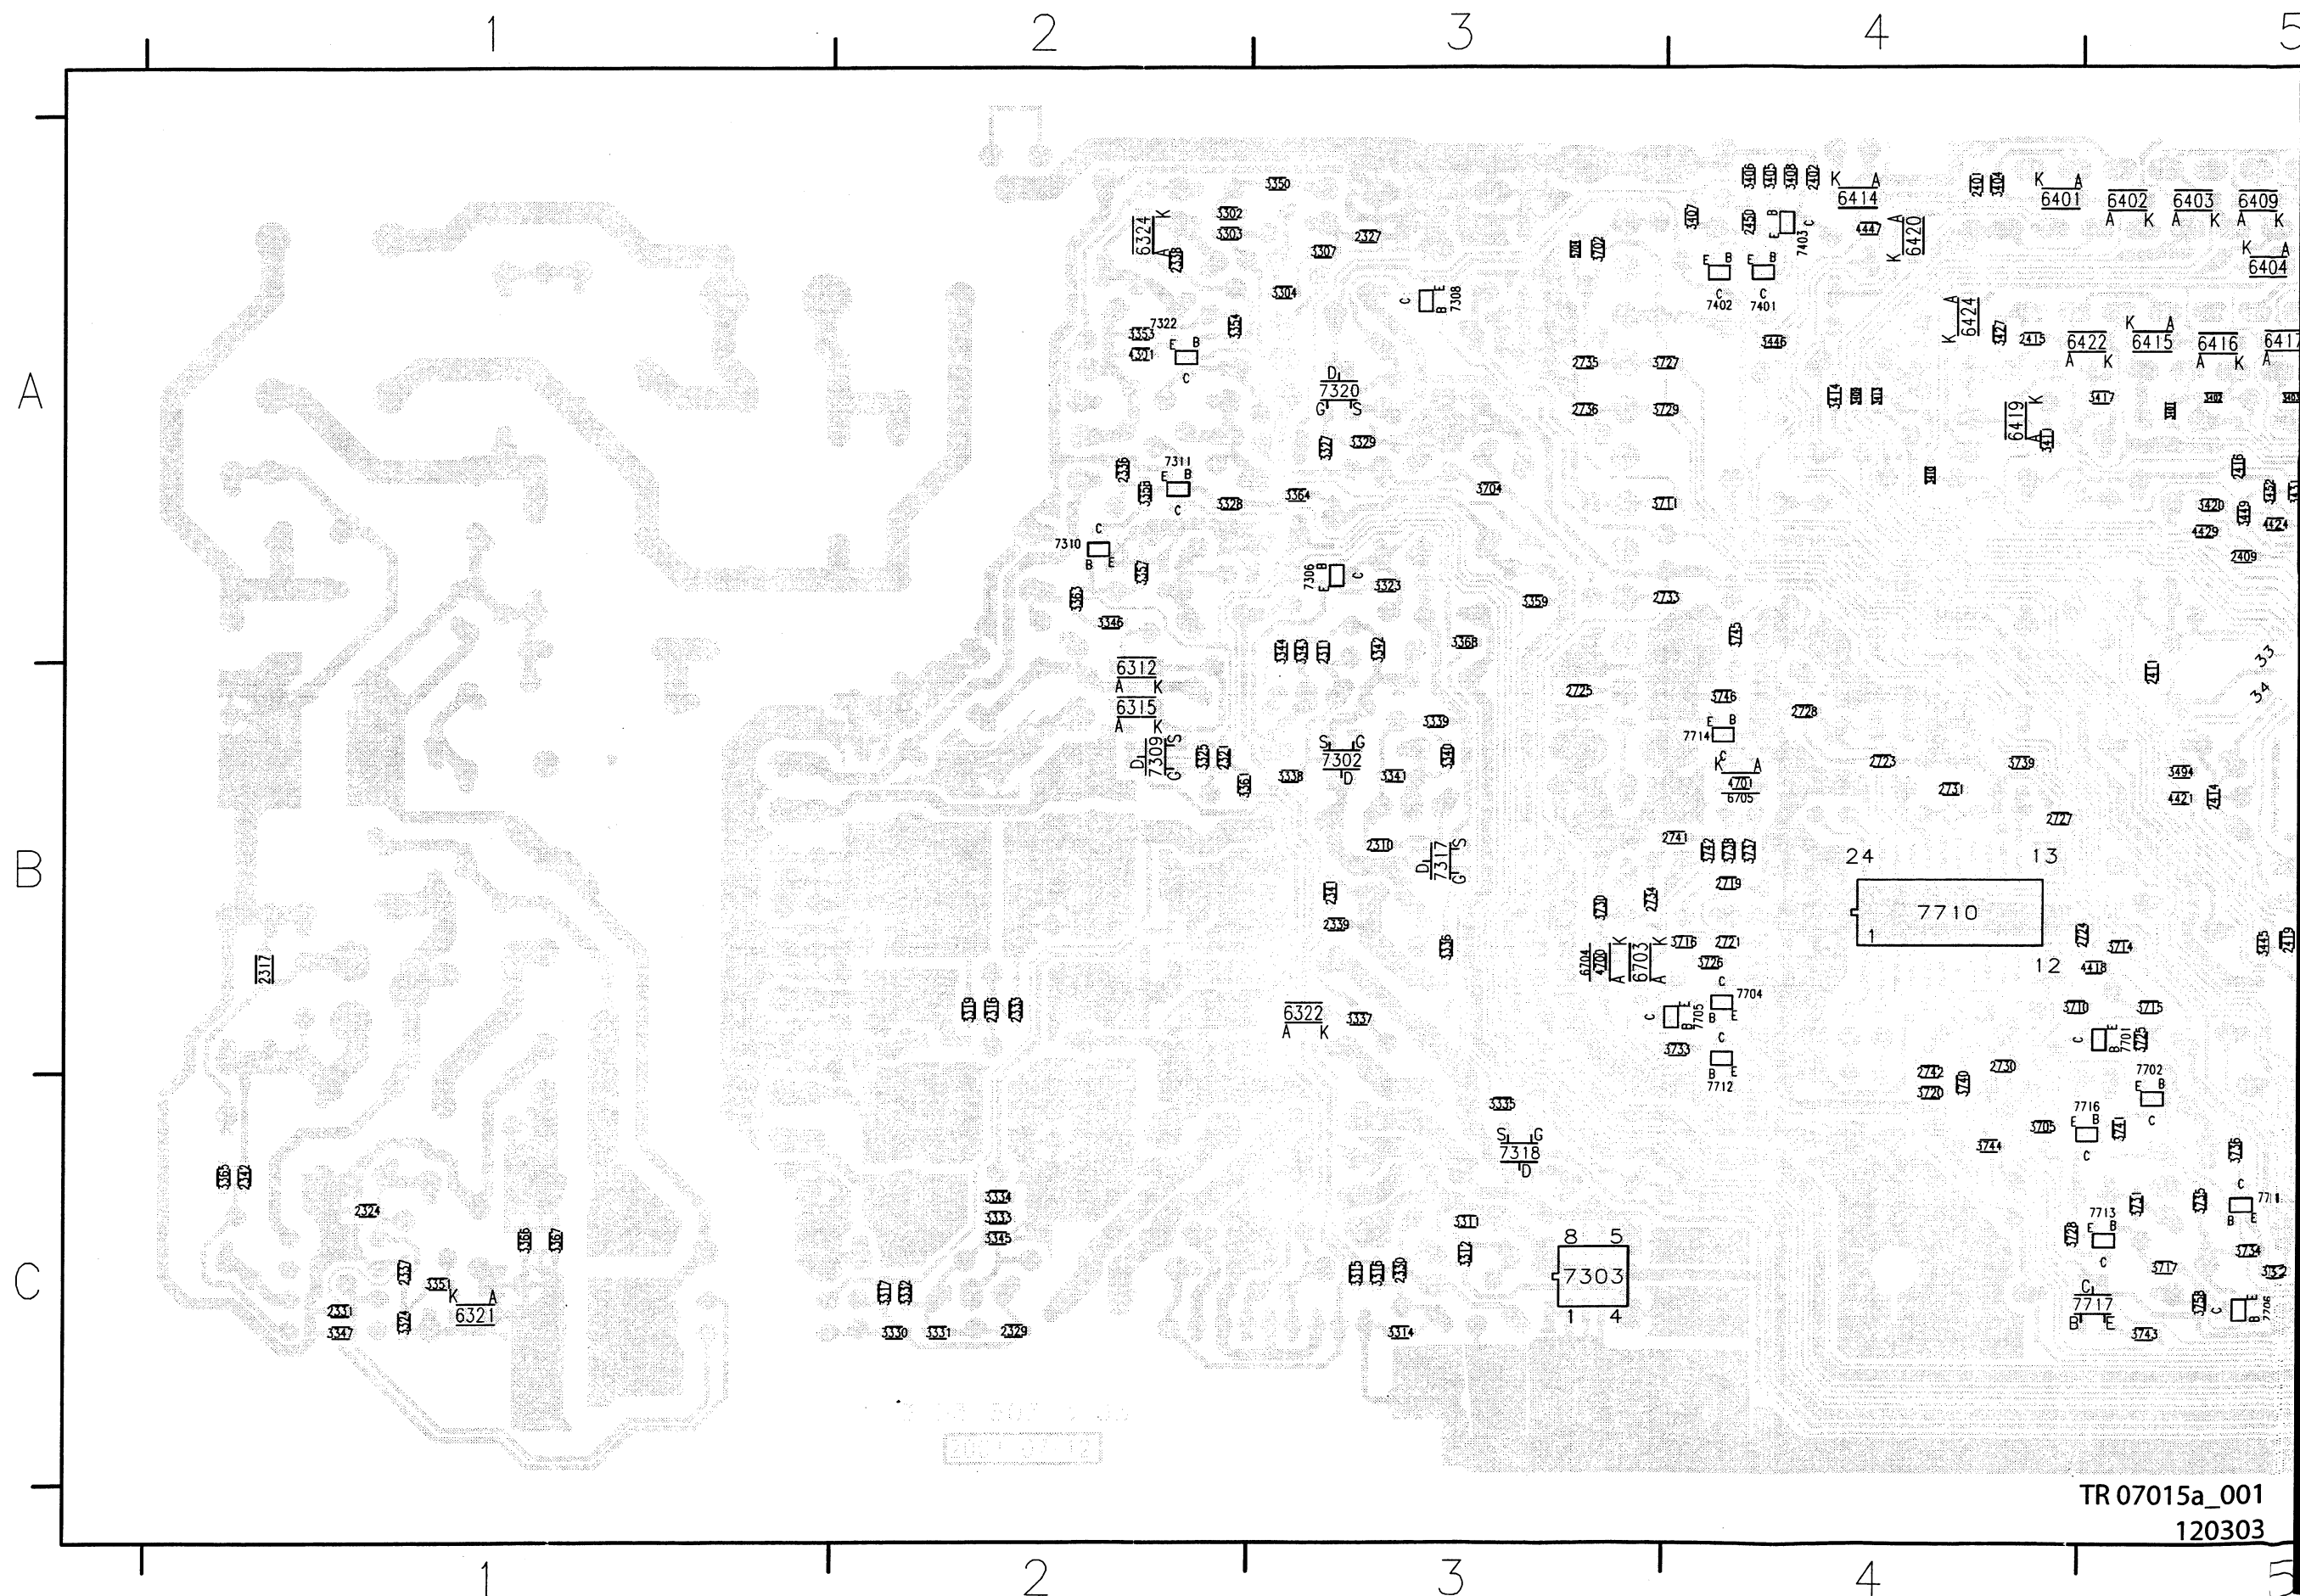


TR 07015a_001
120303

Layout Analog Board 603 3033 (Part 2 Bottom View)

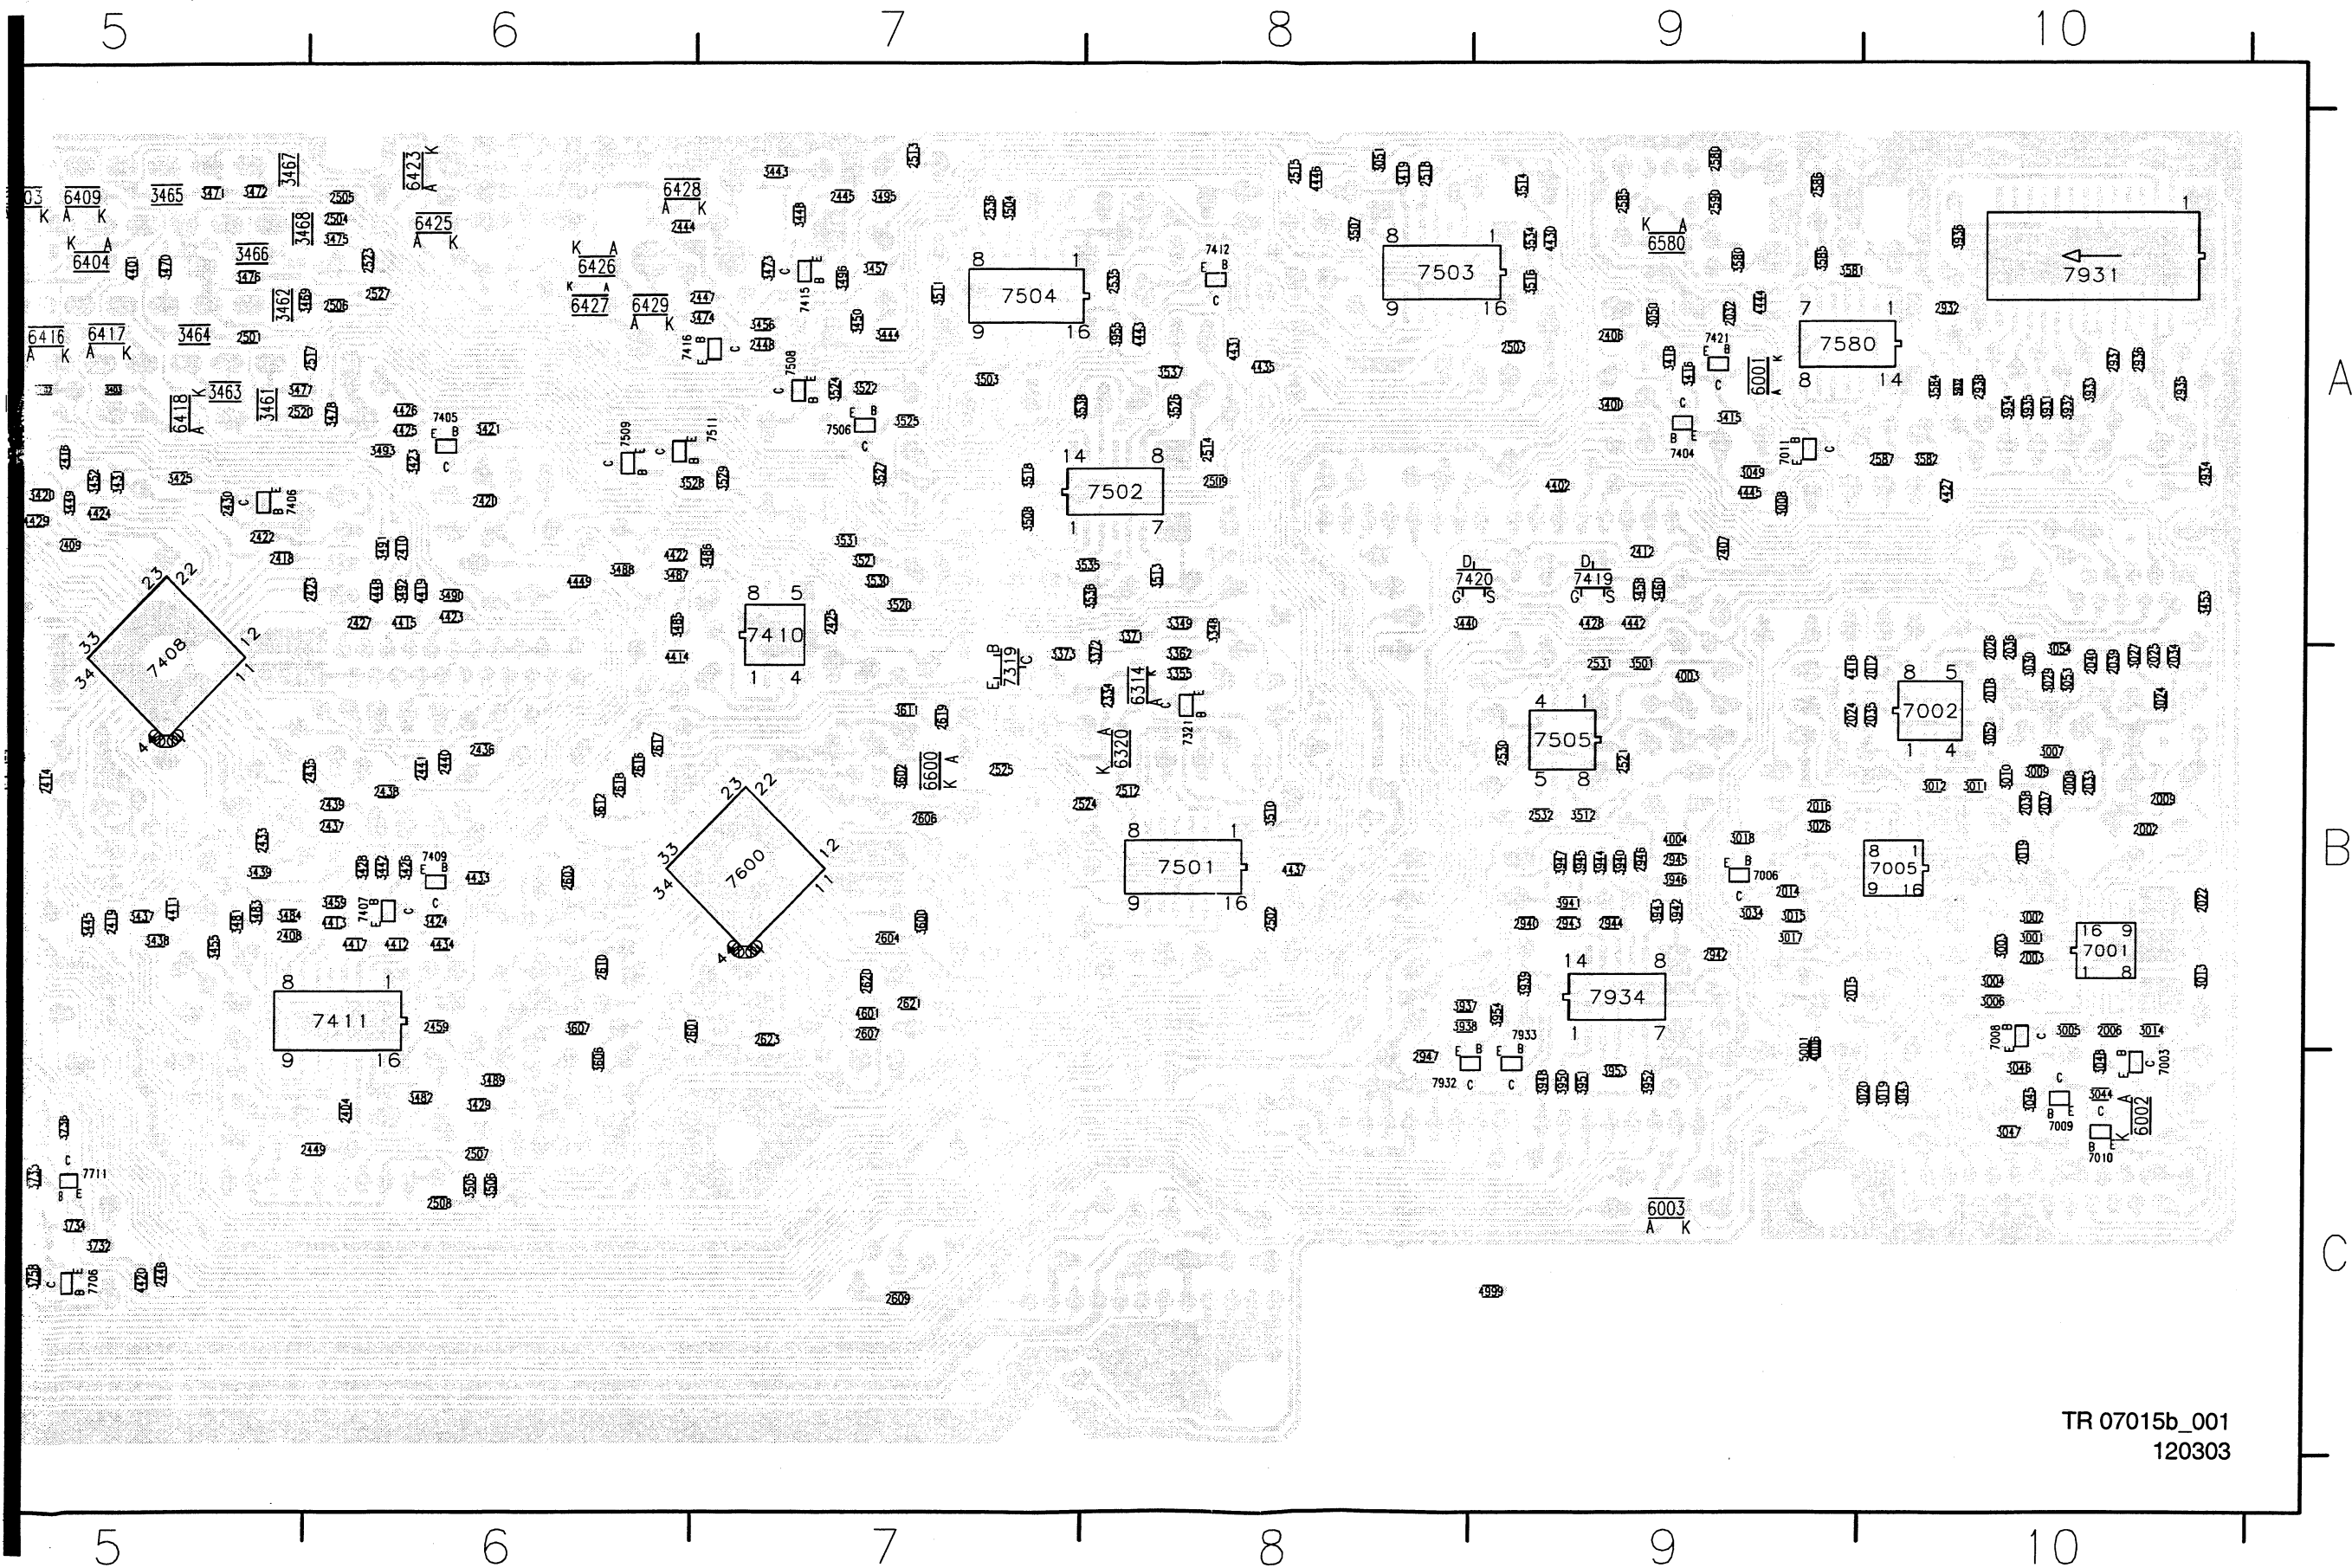


TR 07015b_001
120303


TR 07016_00
12030



Layout Analog Board 603 3028 (Overview Bottom View)

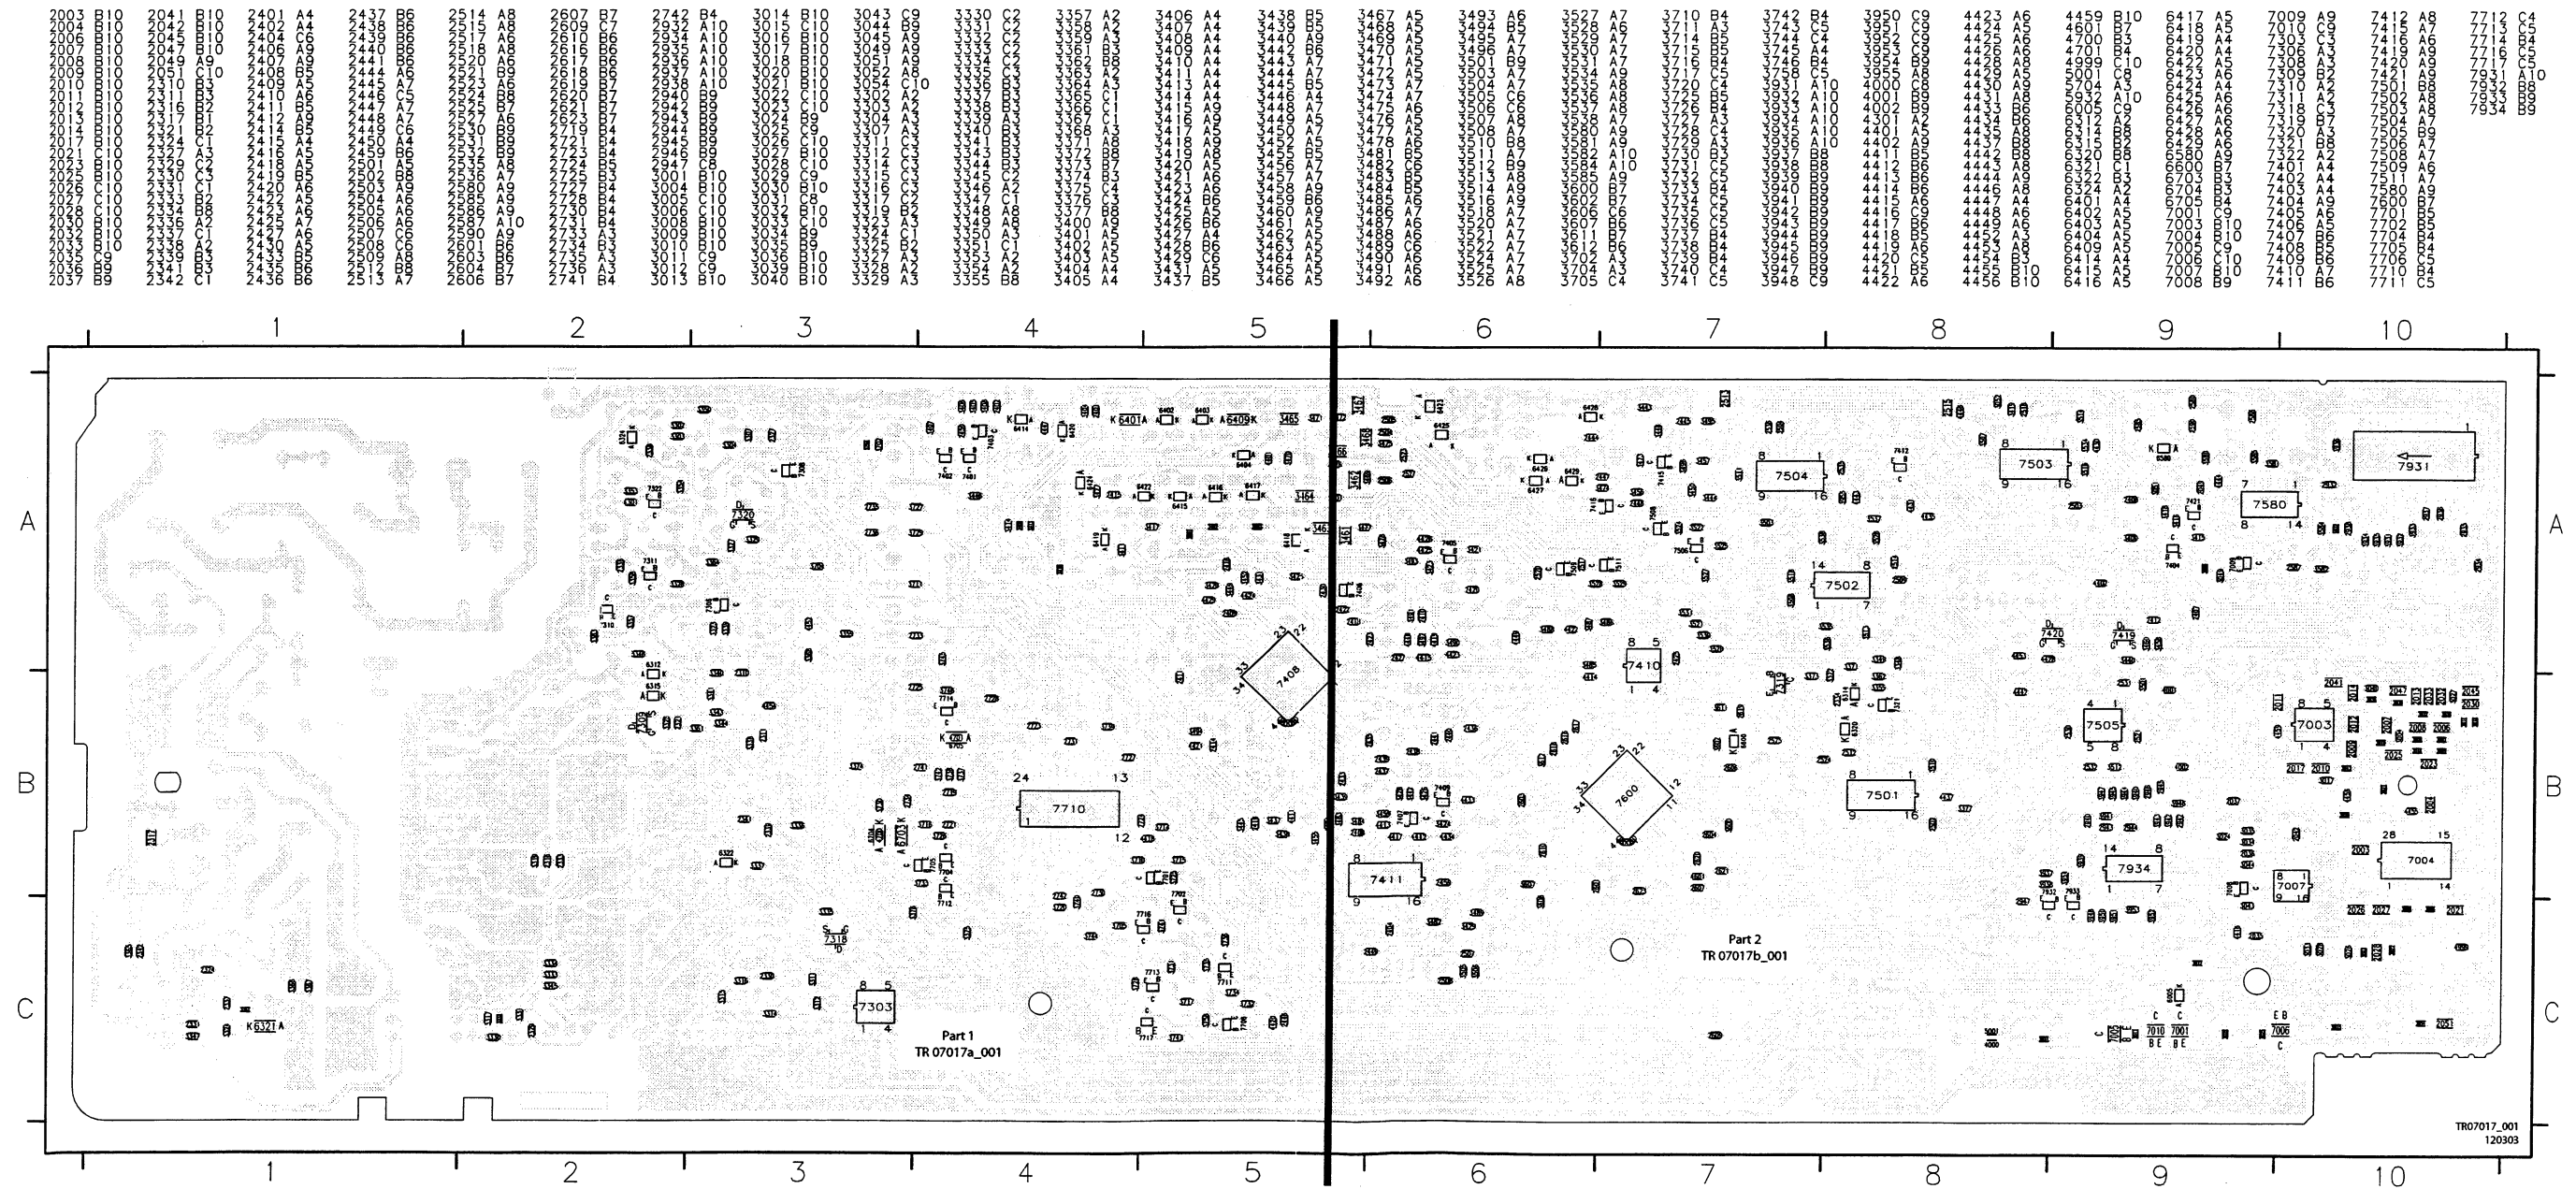


Layout Analog Board 603 3028 (Part 1 Bottom View)

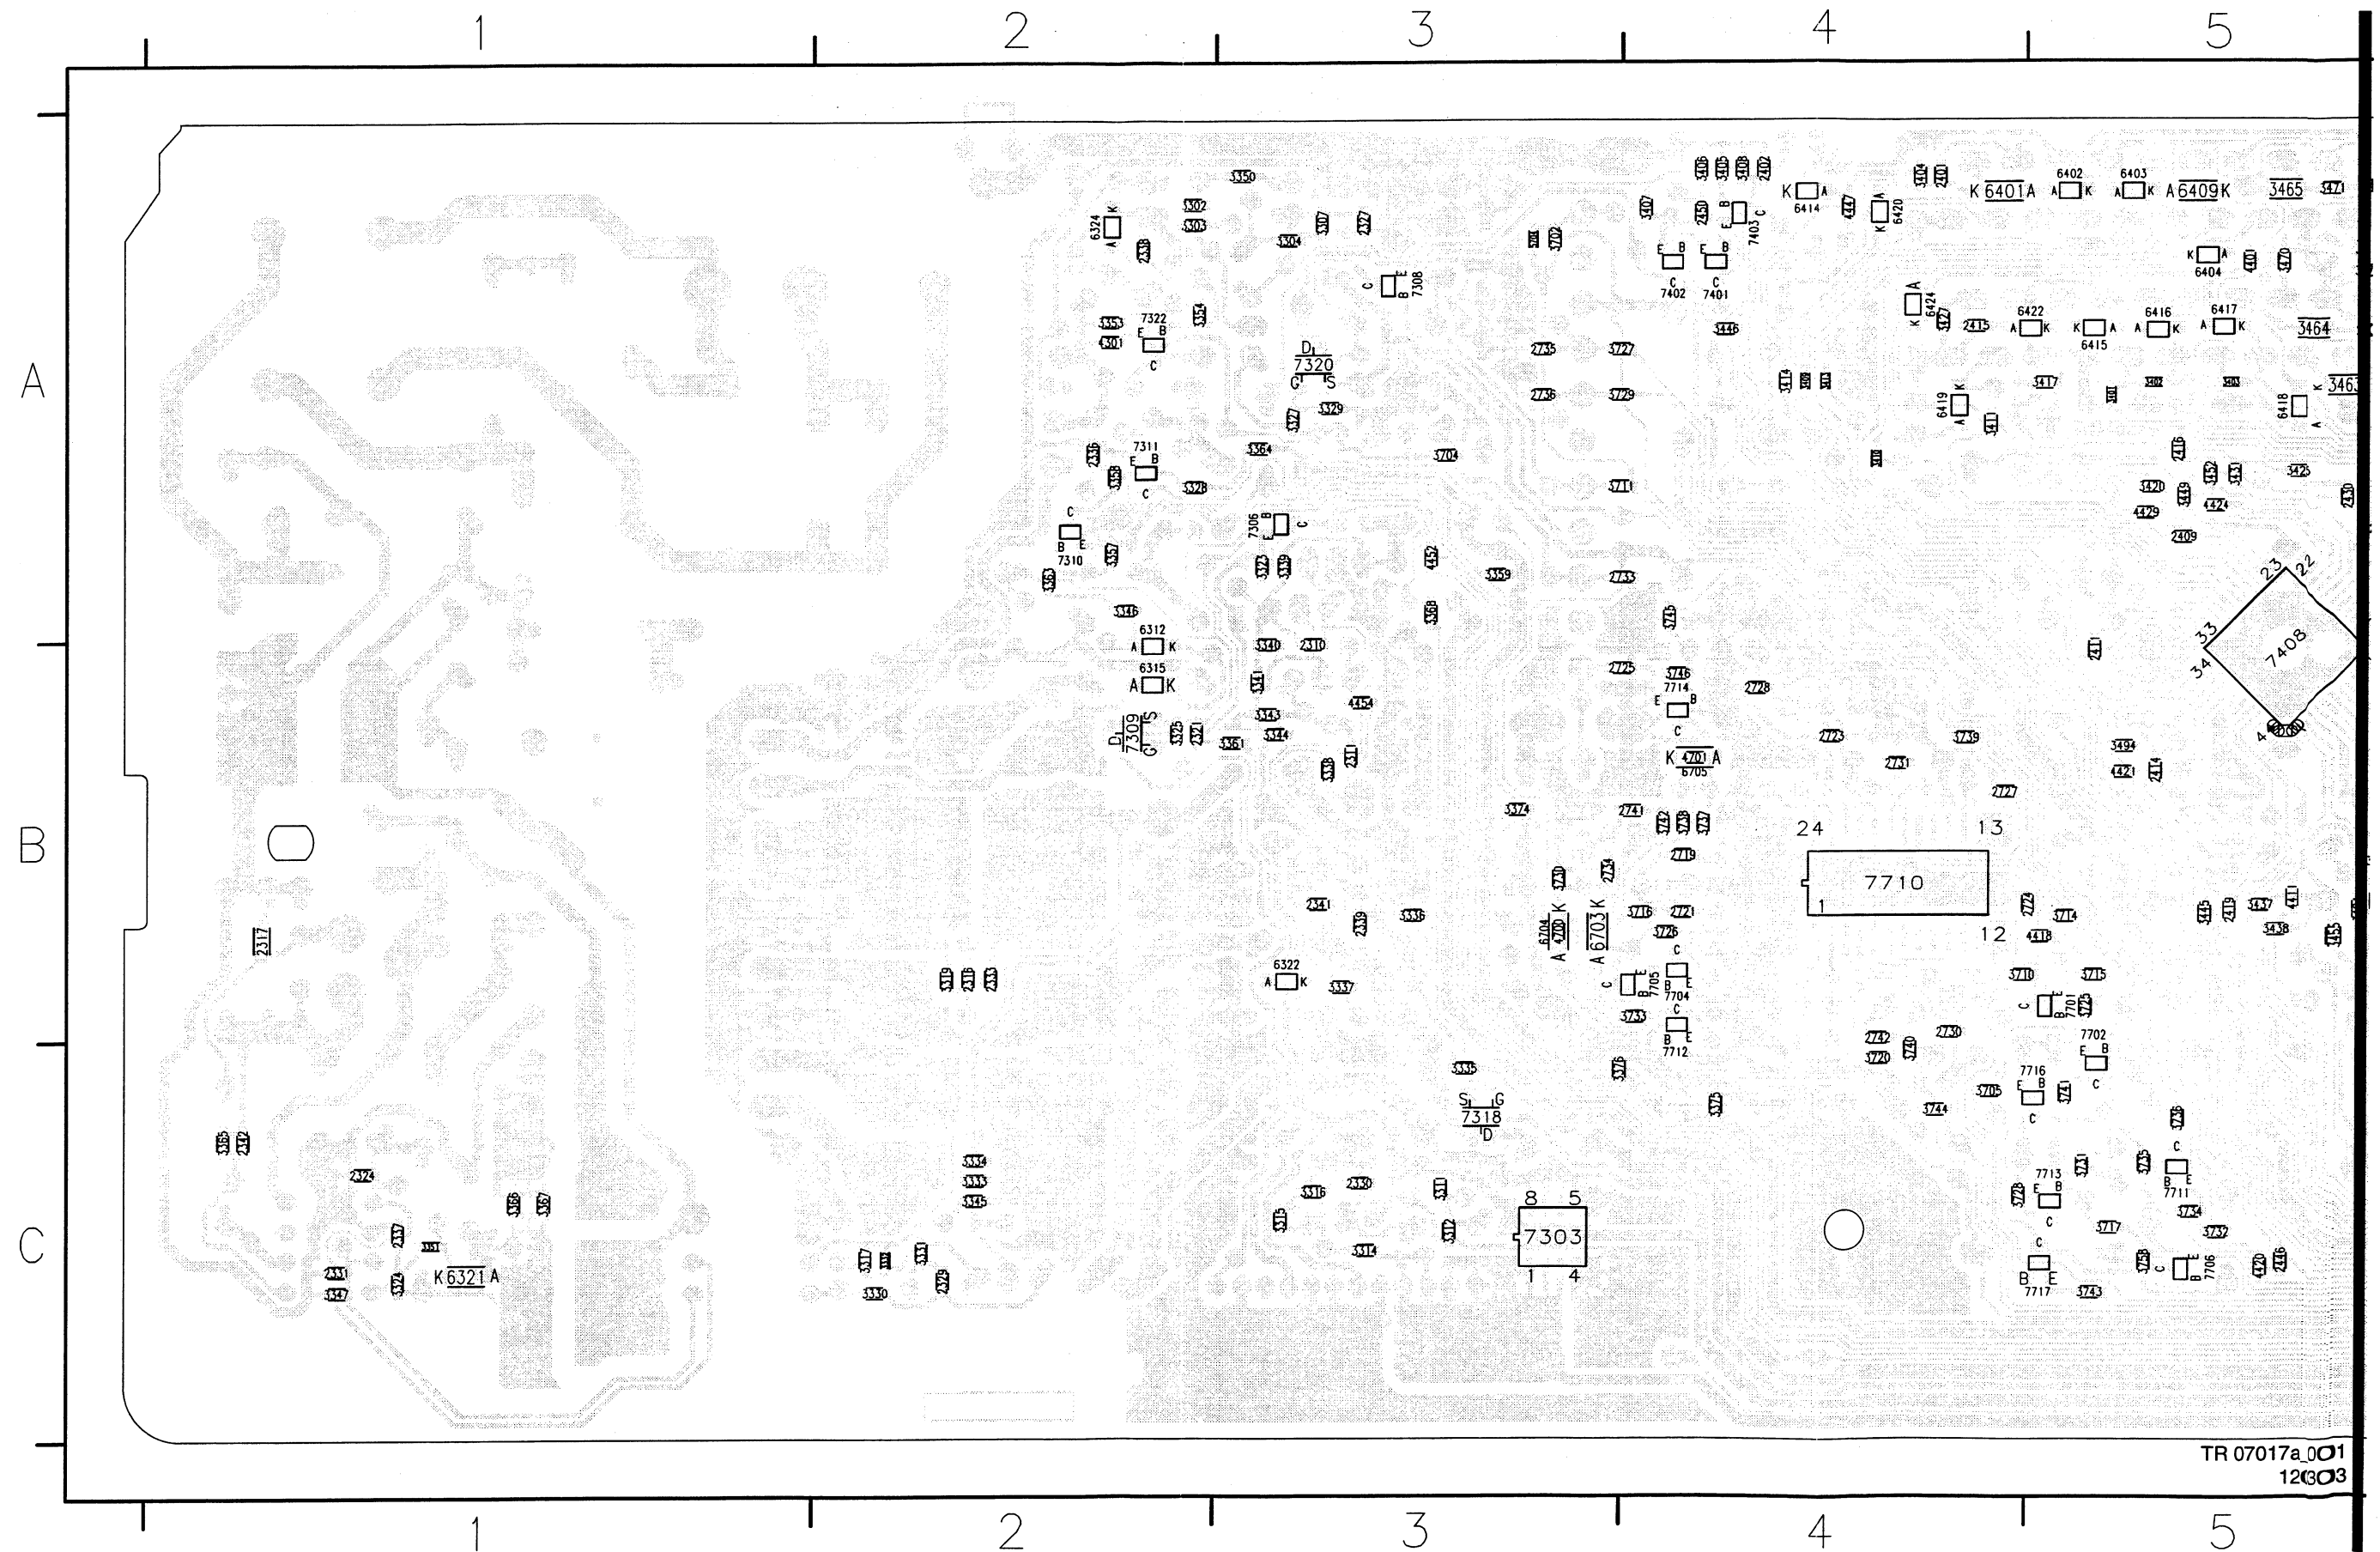

TR 07017a_001
12003

Layout Analog Board 603 3028 (Part 2 Bottom View)

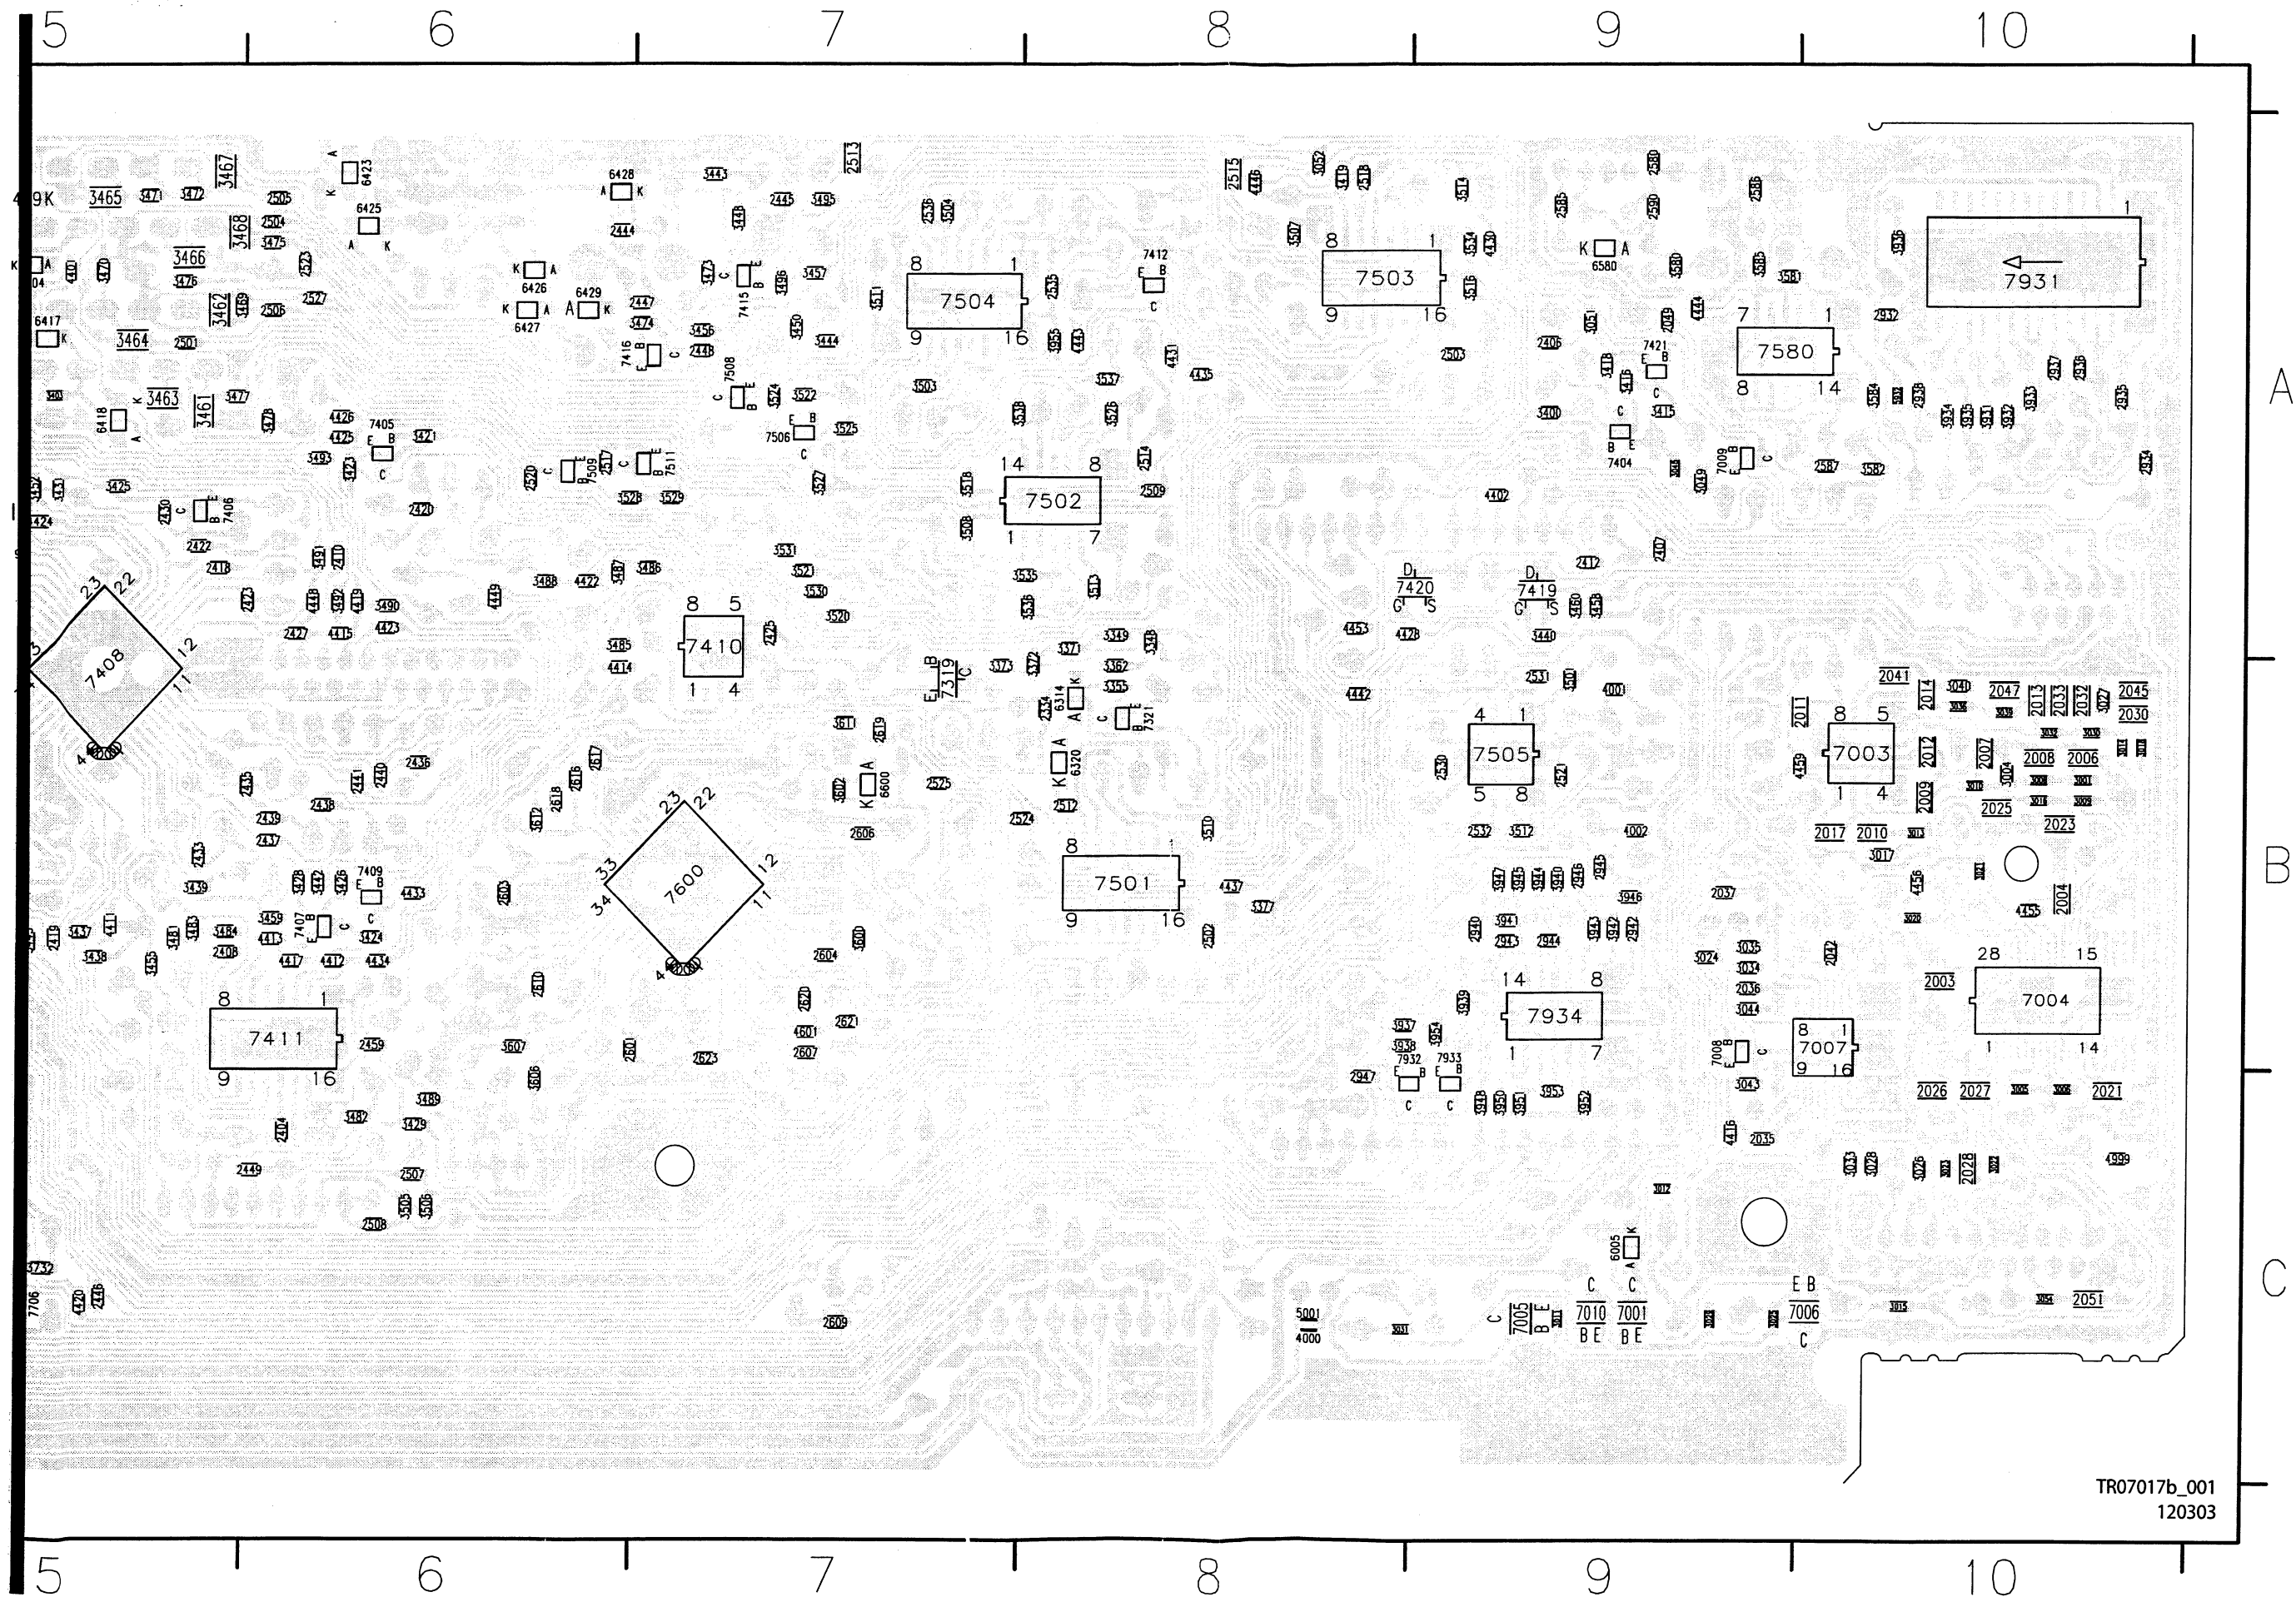


TR07017b_001
120303

1

UP Sub Board: Fan Control (FACO)


1301 B4	3915 B3	3922 C1	3929 A4	4902 D3	7902-3 C4	7908 B1	F905 A1	I904 C2
1901 A4	3916 D1	3923 E1	3930 A4	4903 D3	7902-4 D4	7909 B4	F906 A2	I905 C2
2911 D1	3917 C1	3924 A2	3931 A4	6901 E3	7903 A1	7910 B3	F907 A2	I906 E2
2912 B3	3918 B2	3925 D1	3932 B4	6902 A1	7904 A3	F901 A4	F908 B4	I907 E4
2913 B4	3919 C1	3926 A2	3933 B4	6903 C3	7905 A3	F902 A4	F909 C3	I908 D1
3913 B2	3920 E1	3927 D2	3934 A4	7902-1 C2	7906 A1	F903 B4	F910 E3	
3914 C4	3921 E4	3928 C3	4901 A1	7902-2 D2	7907 A2	F904 B4	I903 C2	

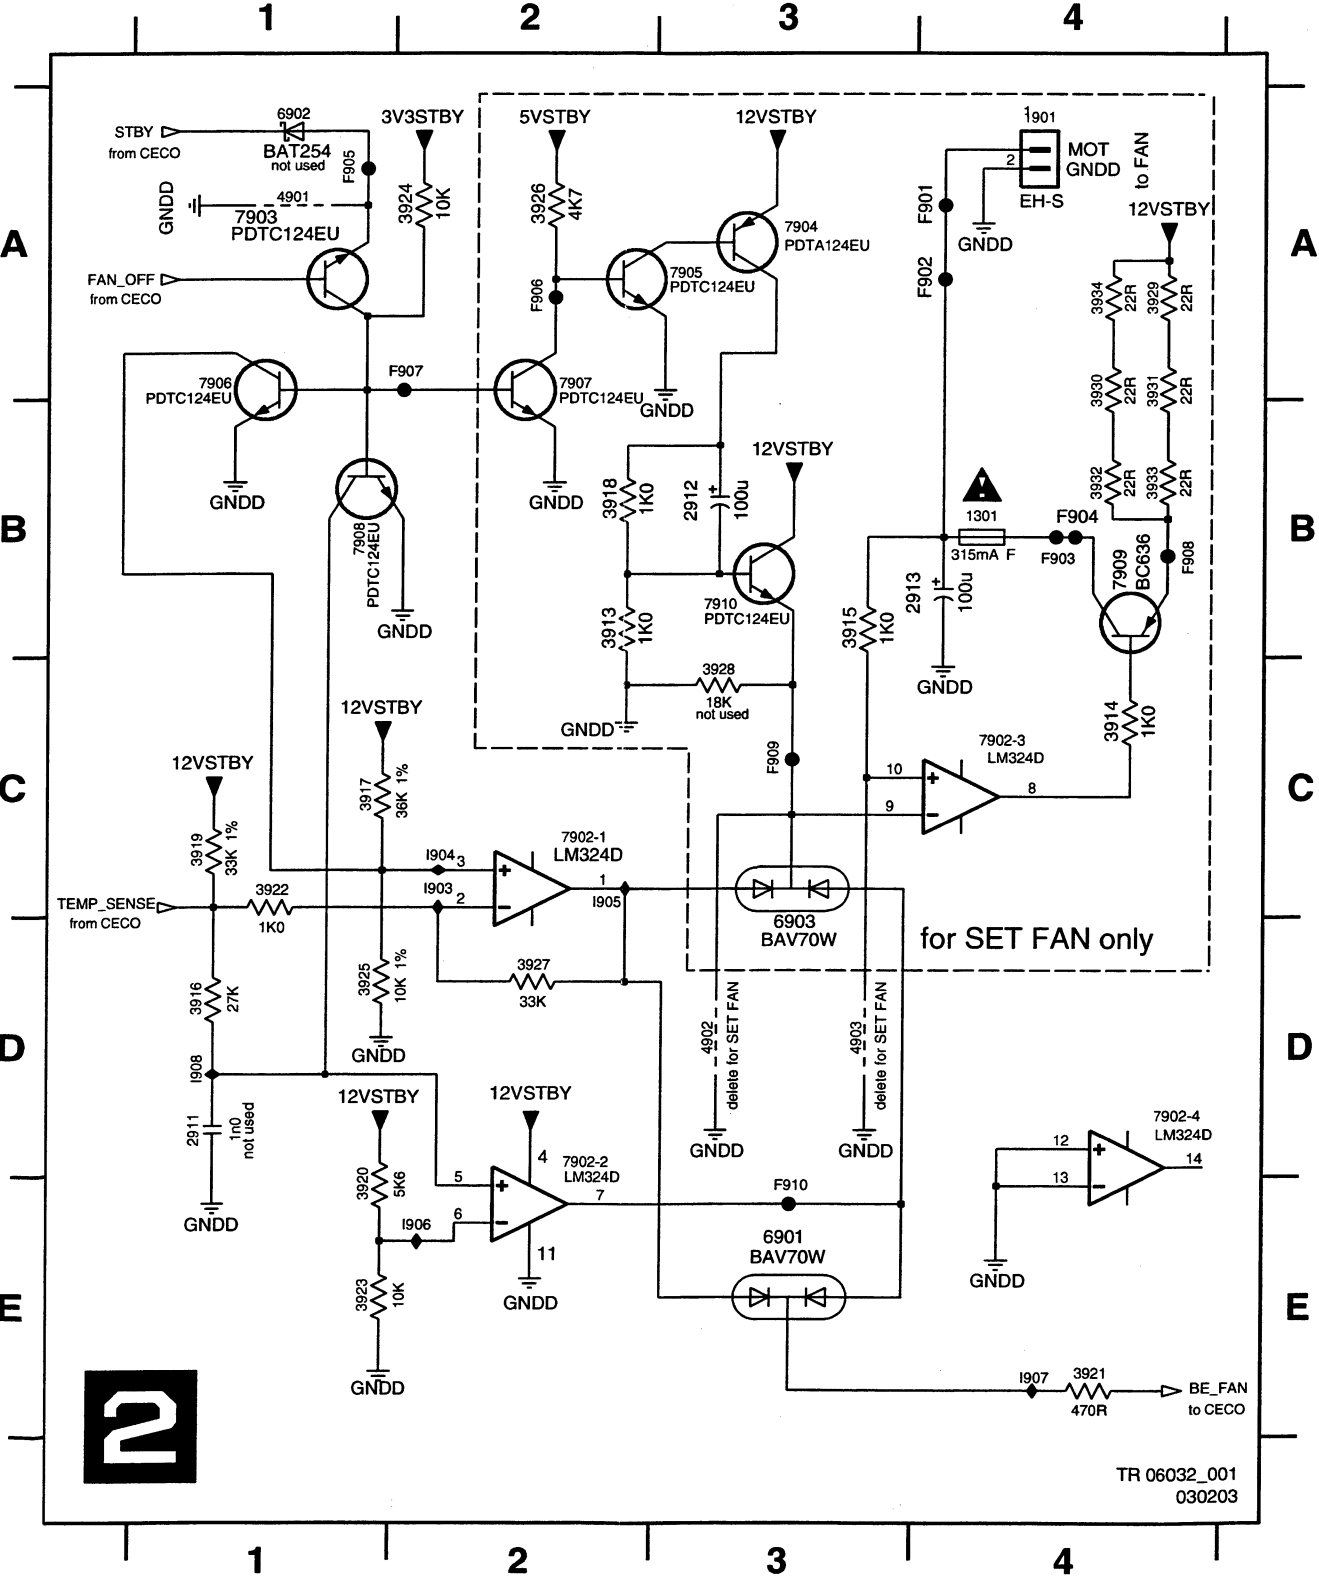

[illegible]


Layout UP Sub Board (Bottom View)

1301 A1	2824 C1	3822 A2	3856 C1	3886 C1	6801 A1
2801 C2	2825 B1	3823 A2	3862 A1	3888 C1	6902 A2
2802 C2	2827 C1	3826 C2	3863 A1	3913 A1	7801 B3
2803 B3	2831 A3	3827 A3	3864 A1	3917 B1	7803 B2
2806 A3	2911 A1	3829 C2	3865 A1	3918 B1	7807 A2
2808 A1	3807 A1	3833 A2	3866 A1	3920 B1	7816 A1
2809 B2	3809 A2	3836 A3	3867 A1	3923 A1	7817 C1
2810 C3	3810 A2	3845 A3	3868 B1	3925 B1	7818 B1
2811 C3	3813 A2	3846 C2	3869 C1	3926 A1	7905 A1
2812 A2	3814 A2	3847 C3	3870 B1	3928 B1	7906 B1
2813 C2	3815 A2	3848 C3	3871 B1	4901 A2	7907 A1
2814 B2	3818 A2	3850 C2	3872 B1	4902 B1	
2822 A1	3820 A2	3851 C2	3873 B1	5801 A1	
2823 C1	3821 A2	3854 A3	3885 C1	5803 A2	

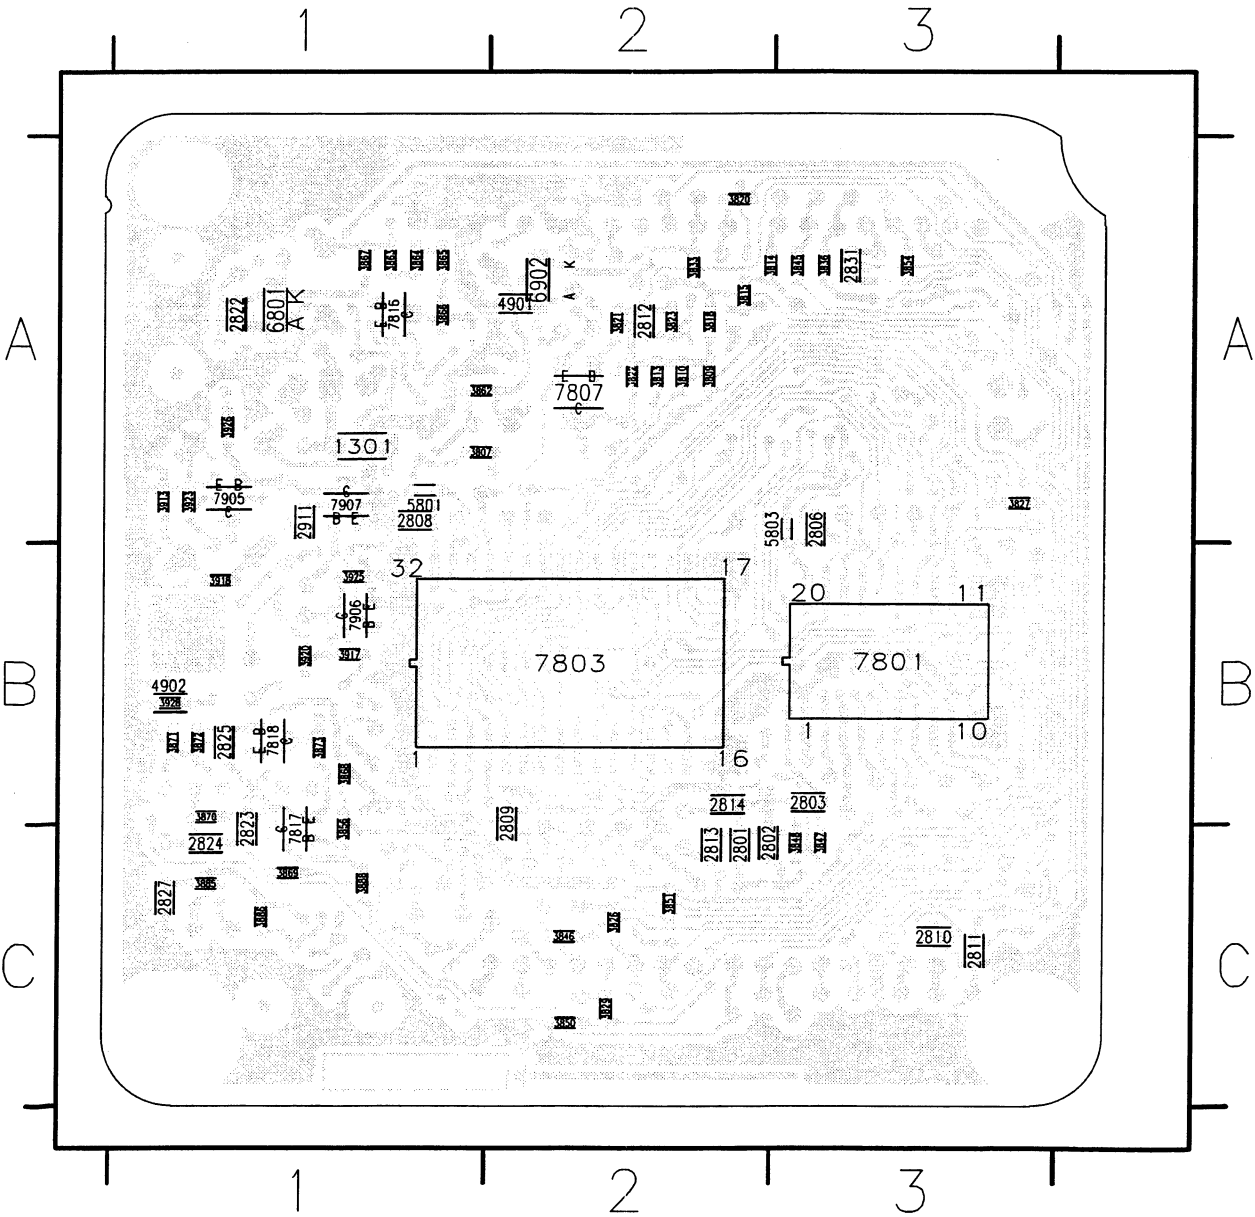


TR 06013_001
040203

DVIO Board: 1394 Interface

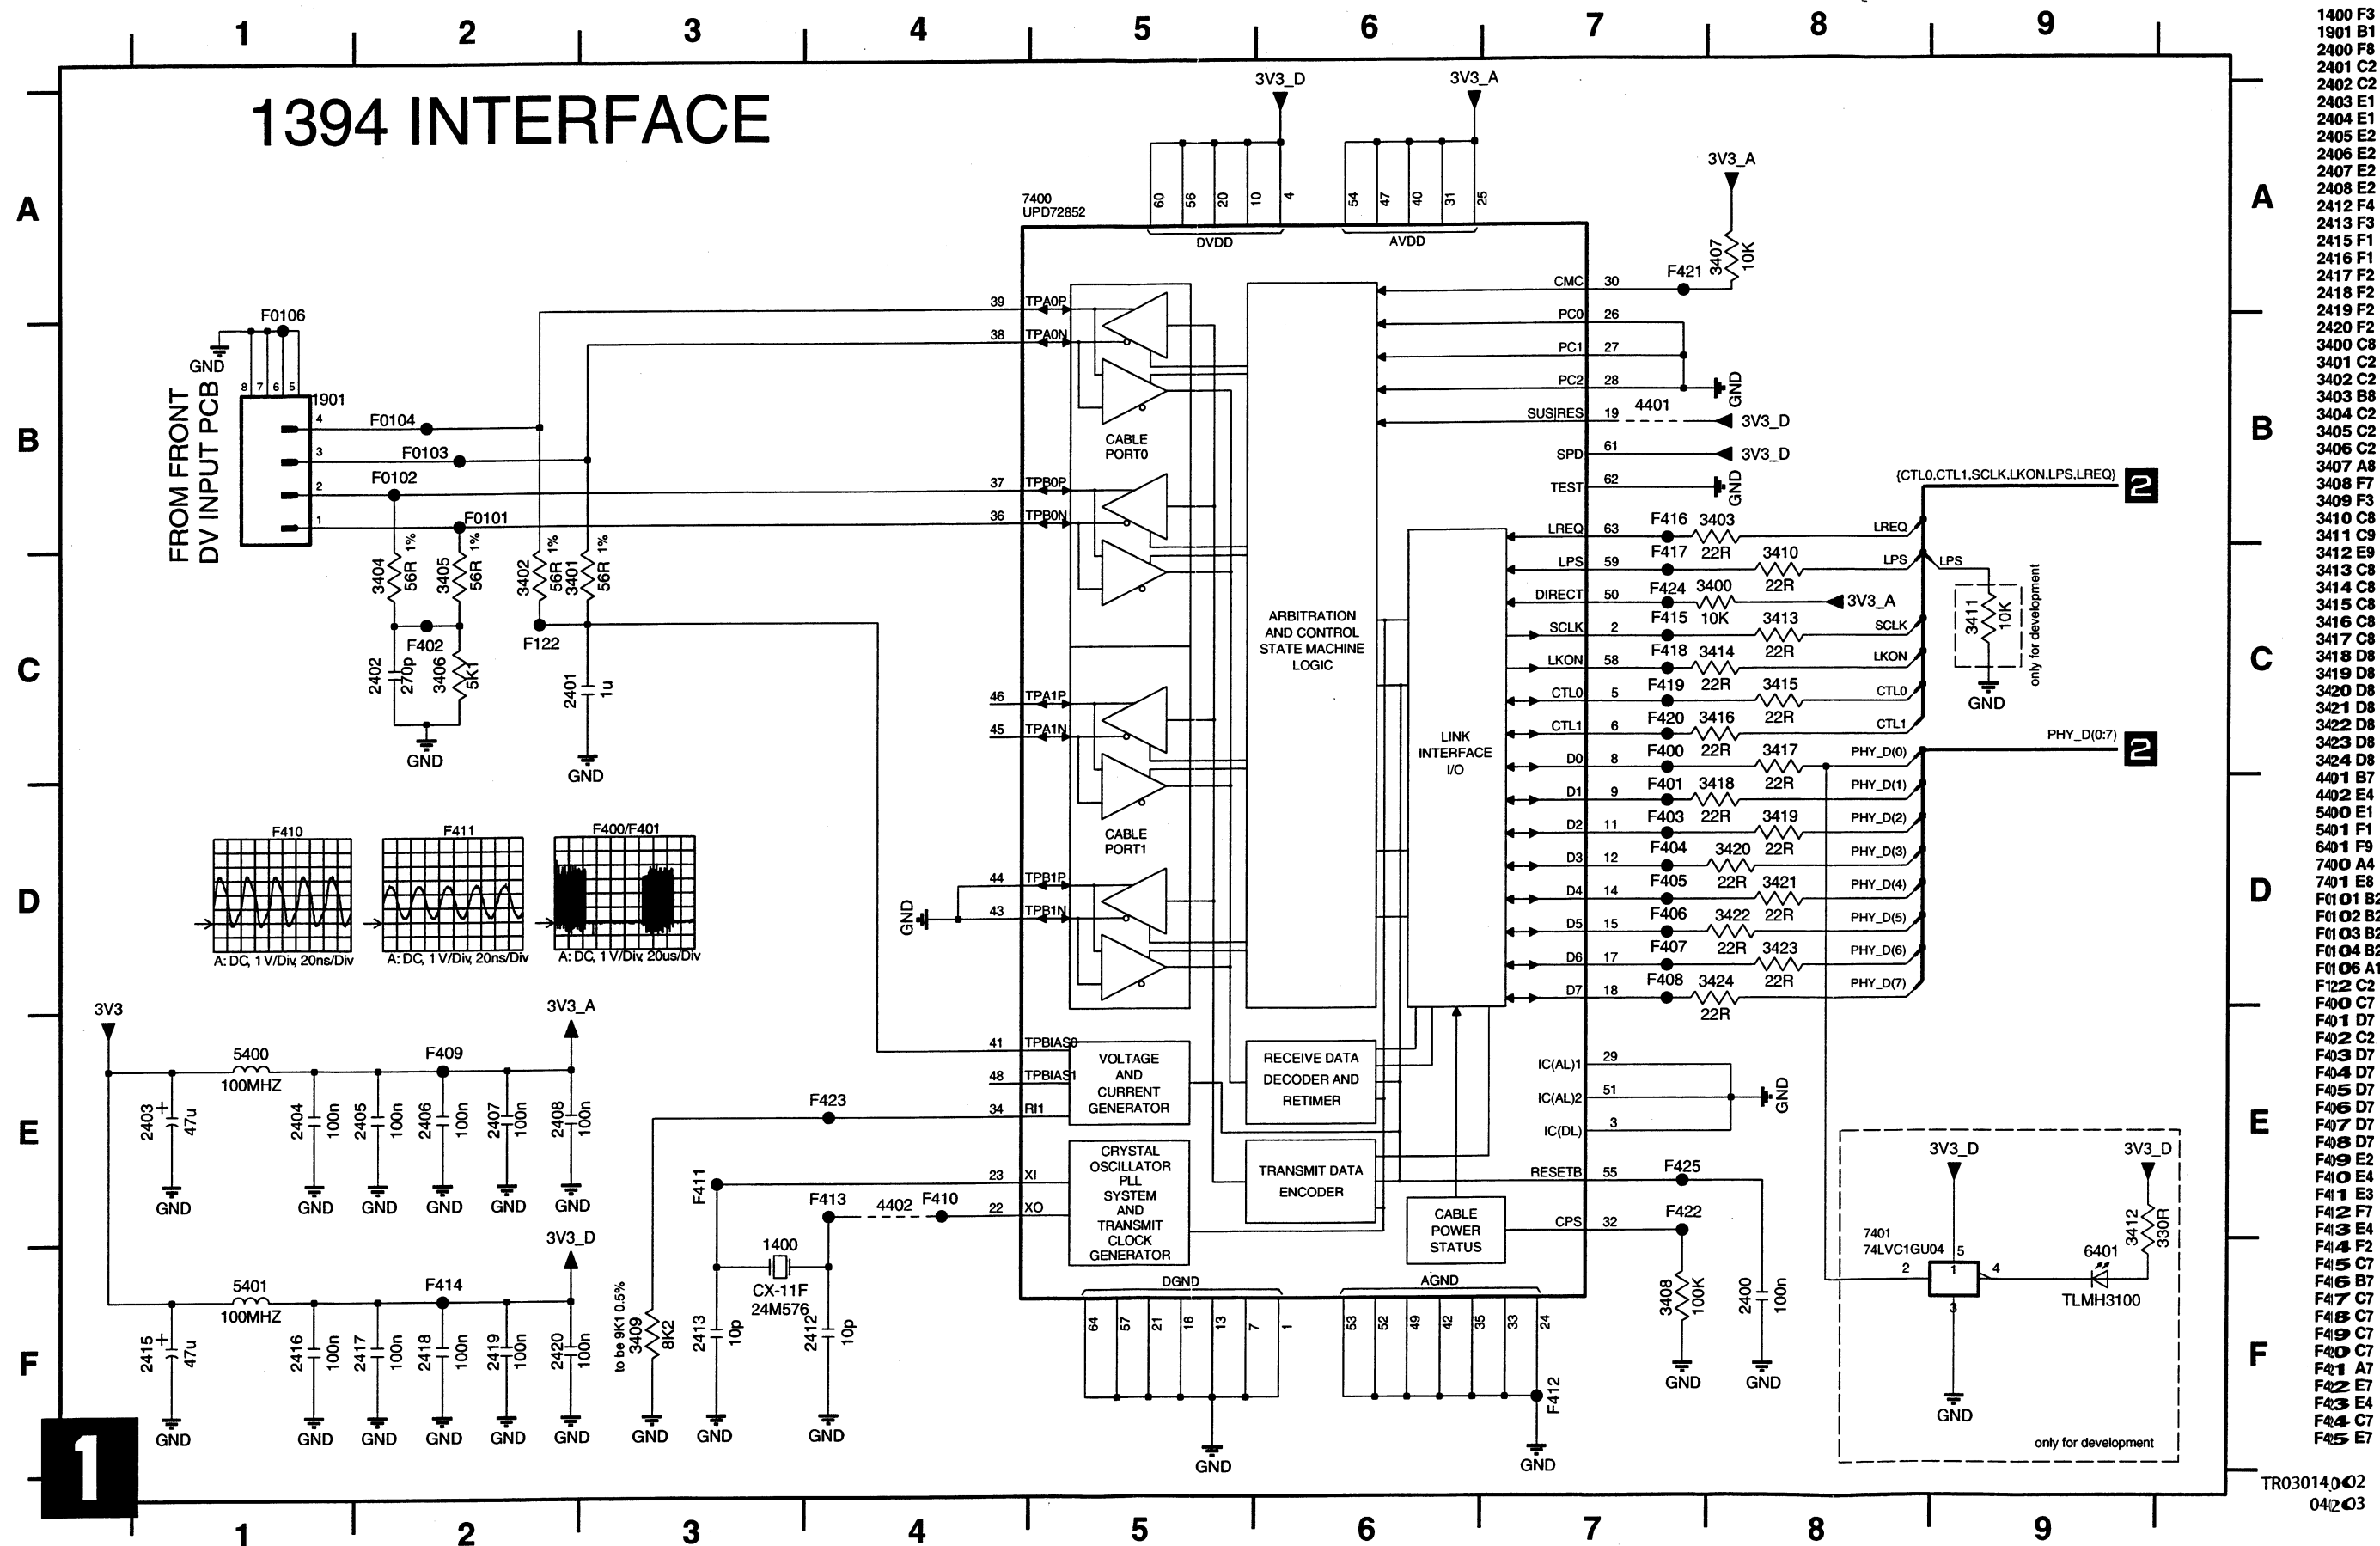

TR03014002
04203

DVIO Board: Link+Codec

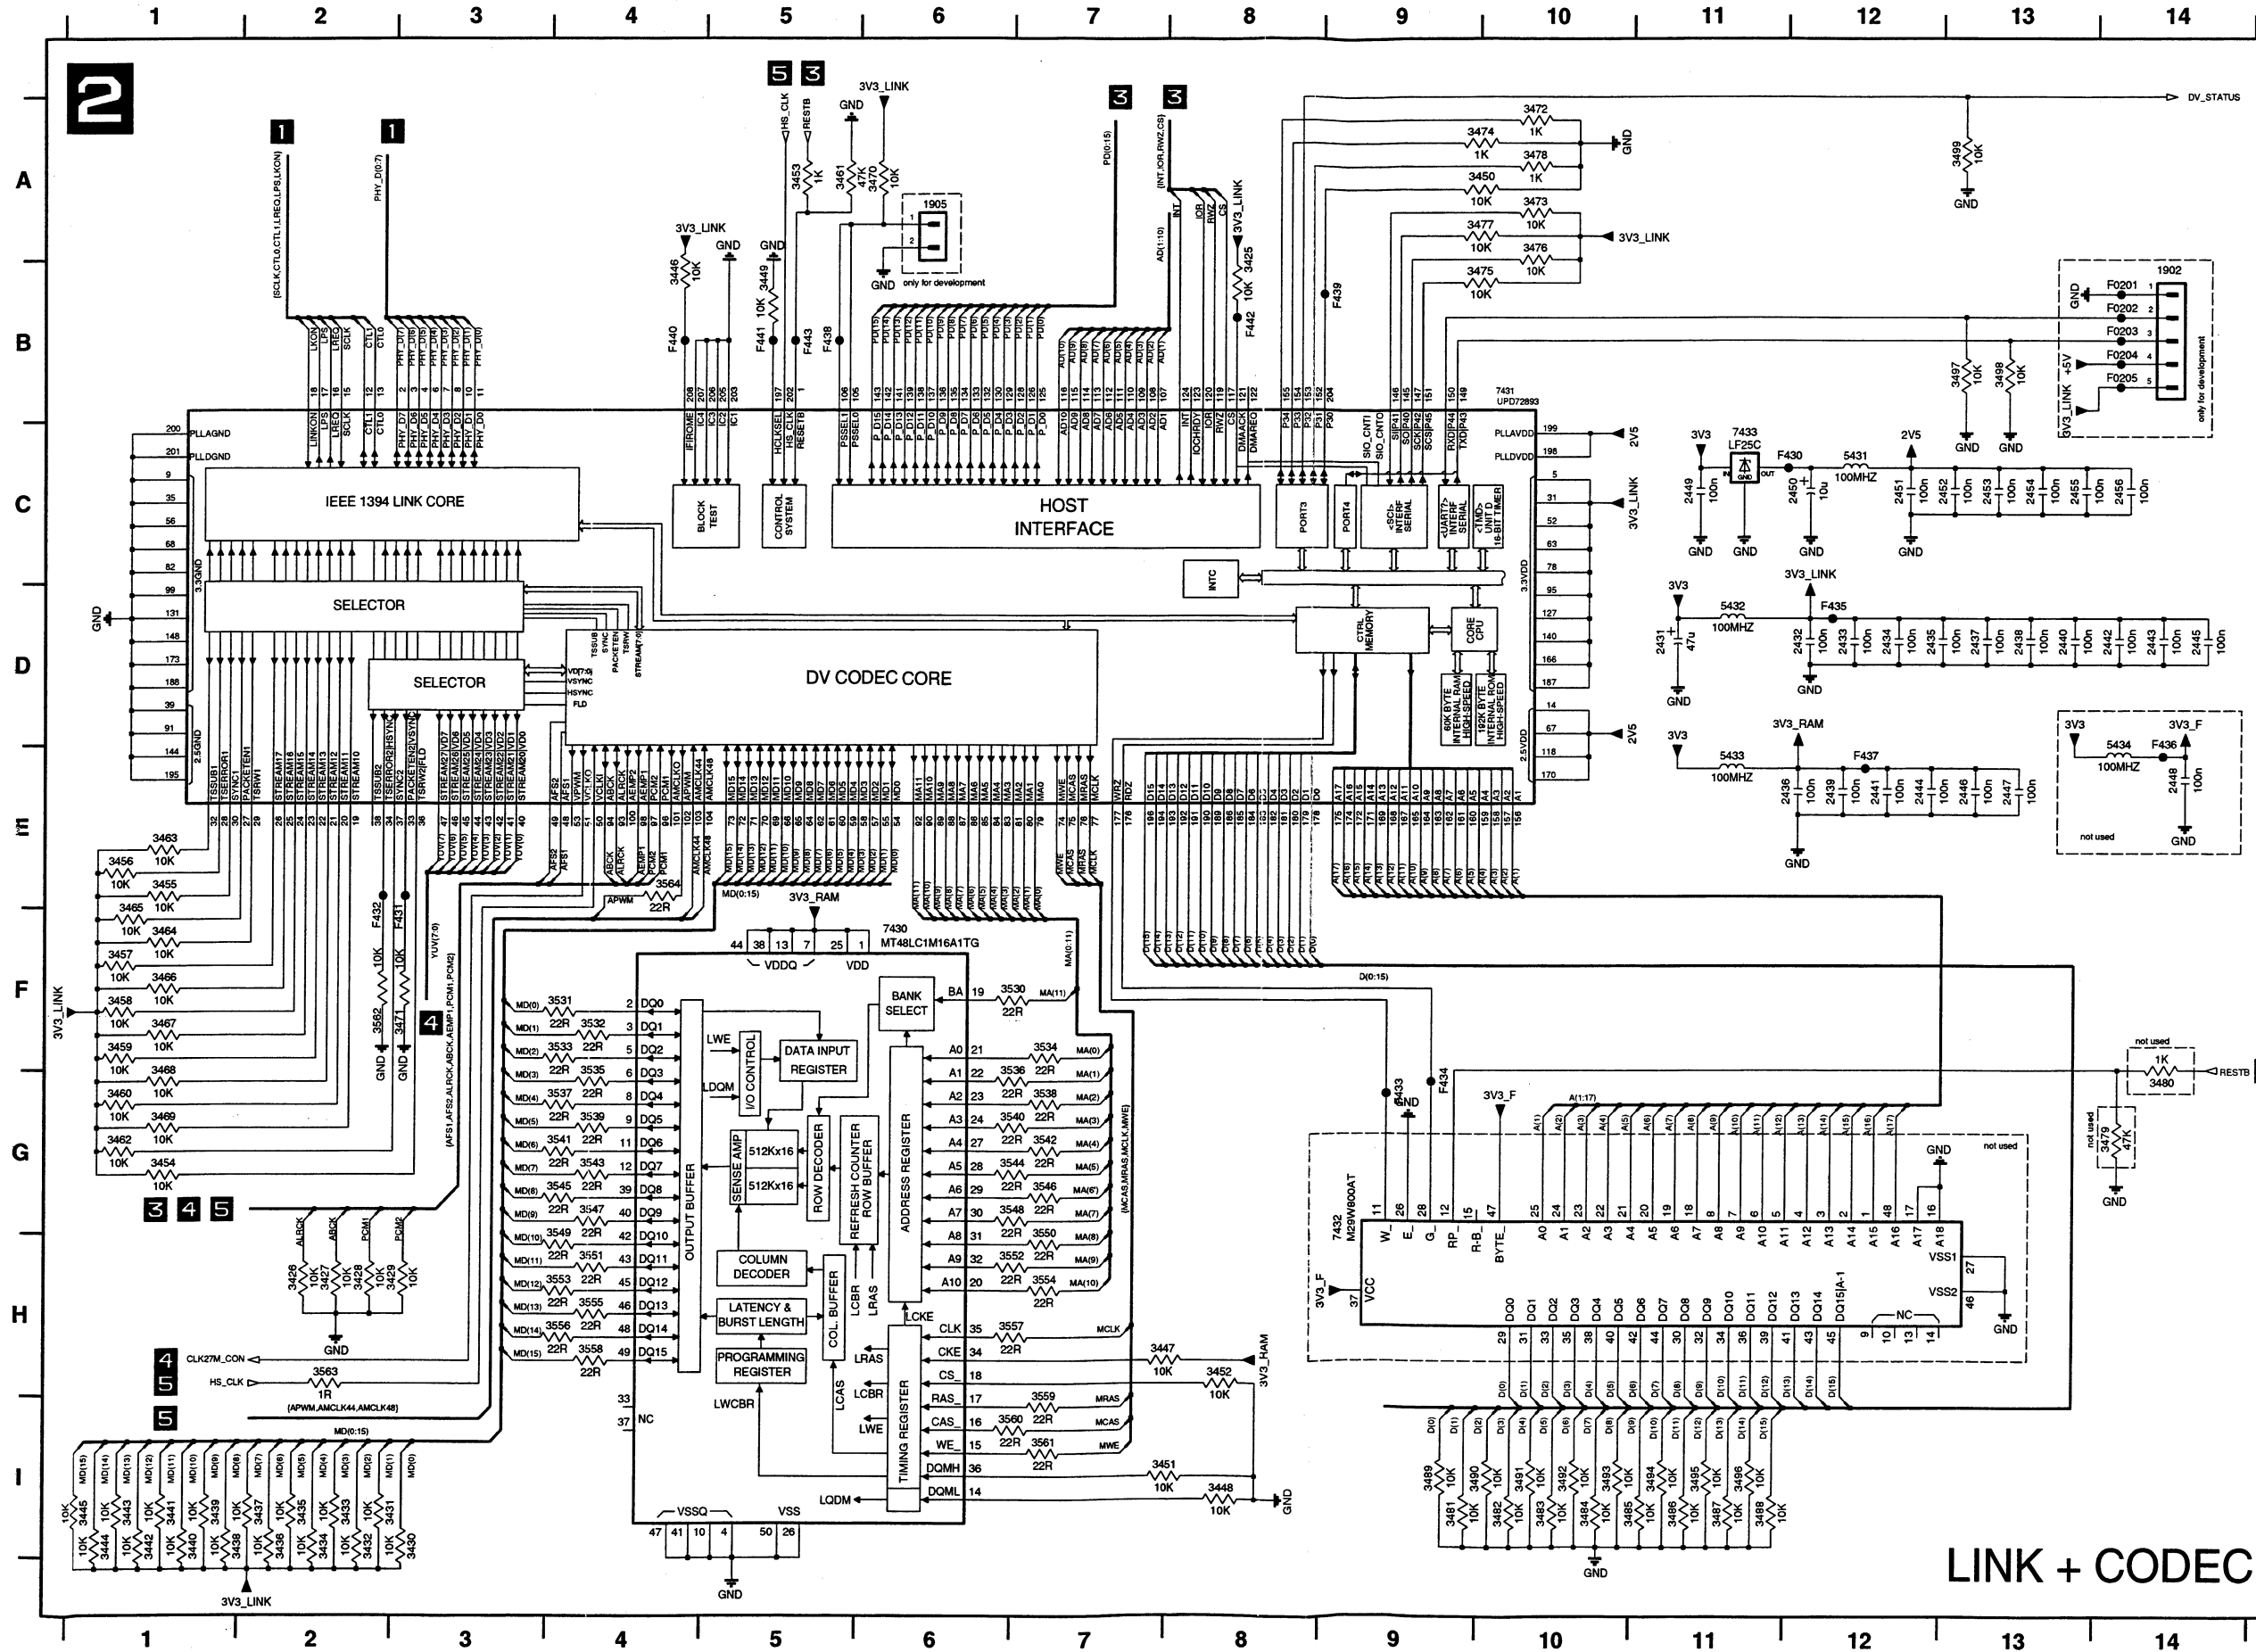

1902 B14 3558 H4
1905 A6 3559 I7
2431 D11 3560 I7
2432 D12 3561 I7
2433 D12 3562 F2
2434 D12 3563 H2
2435 D12 3564 E4
2436 E12 5431 C12
2437 D13 5432 D11
2438 D13 5433 E11
2439 E12 5434 E14
2440 D13 7430 F6
2441 E12 7431 B10
2442 D14 7432 H9
2443 D14 7433 C11
2444 E12 F0201 B14
2445 D14 F0202 B14
2446 E13 F0203 B14
2447 D14 F0204 B14
2448 E14 F0205 B14
2449 C11 F430 C12
2450 C12 F431 F3
2451 C12 F432 F2
2452 C13 F433 G9
2453 C13 F434 G9
2454 C13 F435 D12
2455 C13 F436 E14
2456 C14 F437 E12
2457 A8 F438 B5
2458 H2 F439 B9
2459 H2 F440 B4
2460 H2 F441 B5
2461 B8 F442 B8
2462 B5 F443 B5


3530 F7
3531 F4
3532 F4
3533 F4
3534 F7
3535 G4
3536 G7
3537 G4
3538 G7
3539 G4
3540 G7
3541 G4
3542 G7
3543 G4
3544 G7
3545 G4
3546 G7
3547 G4
3548 G7
3549 H4
3550 H7
3551 H4
3552 H7
3553 H4
3554 H7
3555 H4
3556 H4
3557 H7

LINK + CODEC

TR03015_001
090702


DVIO Board: uP-Part

uP- Part

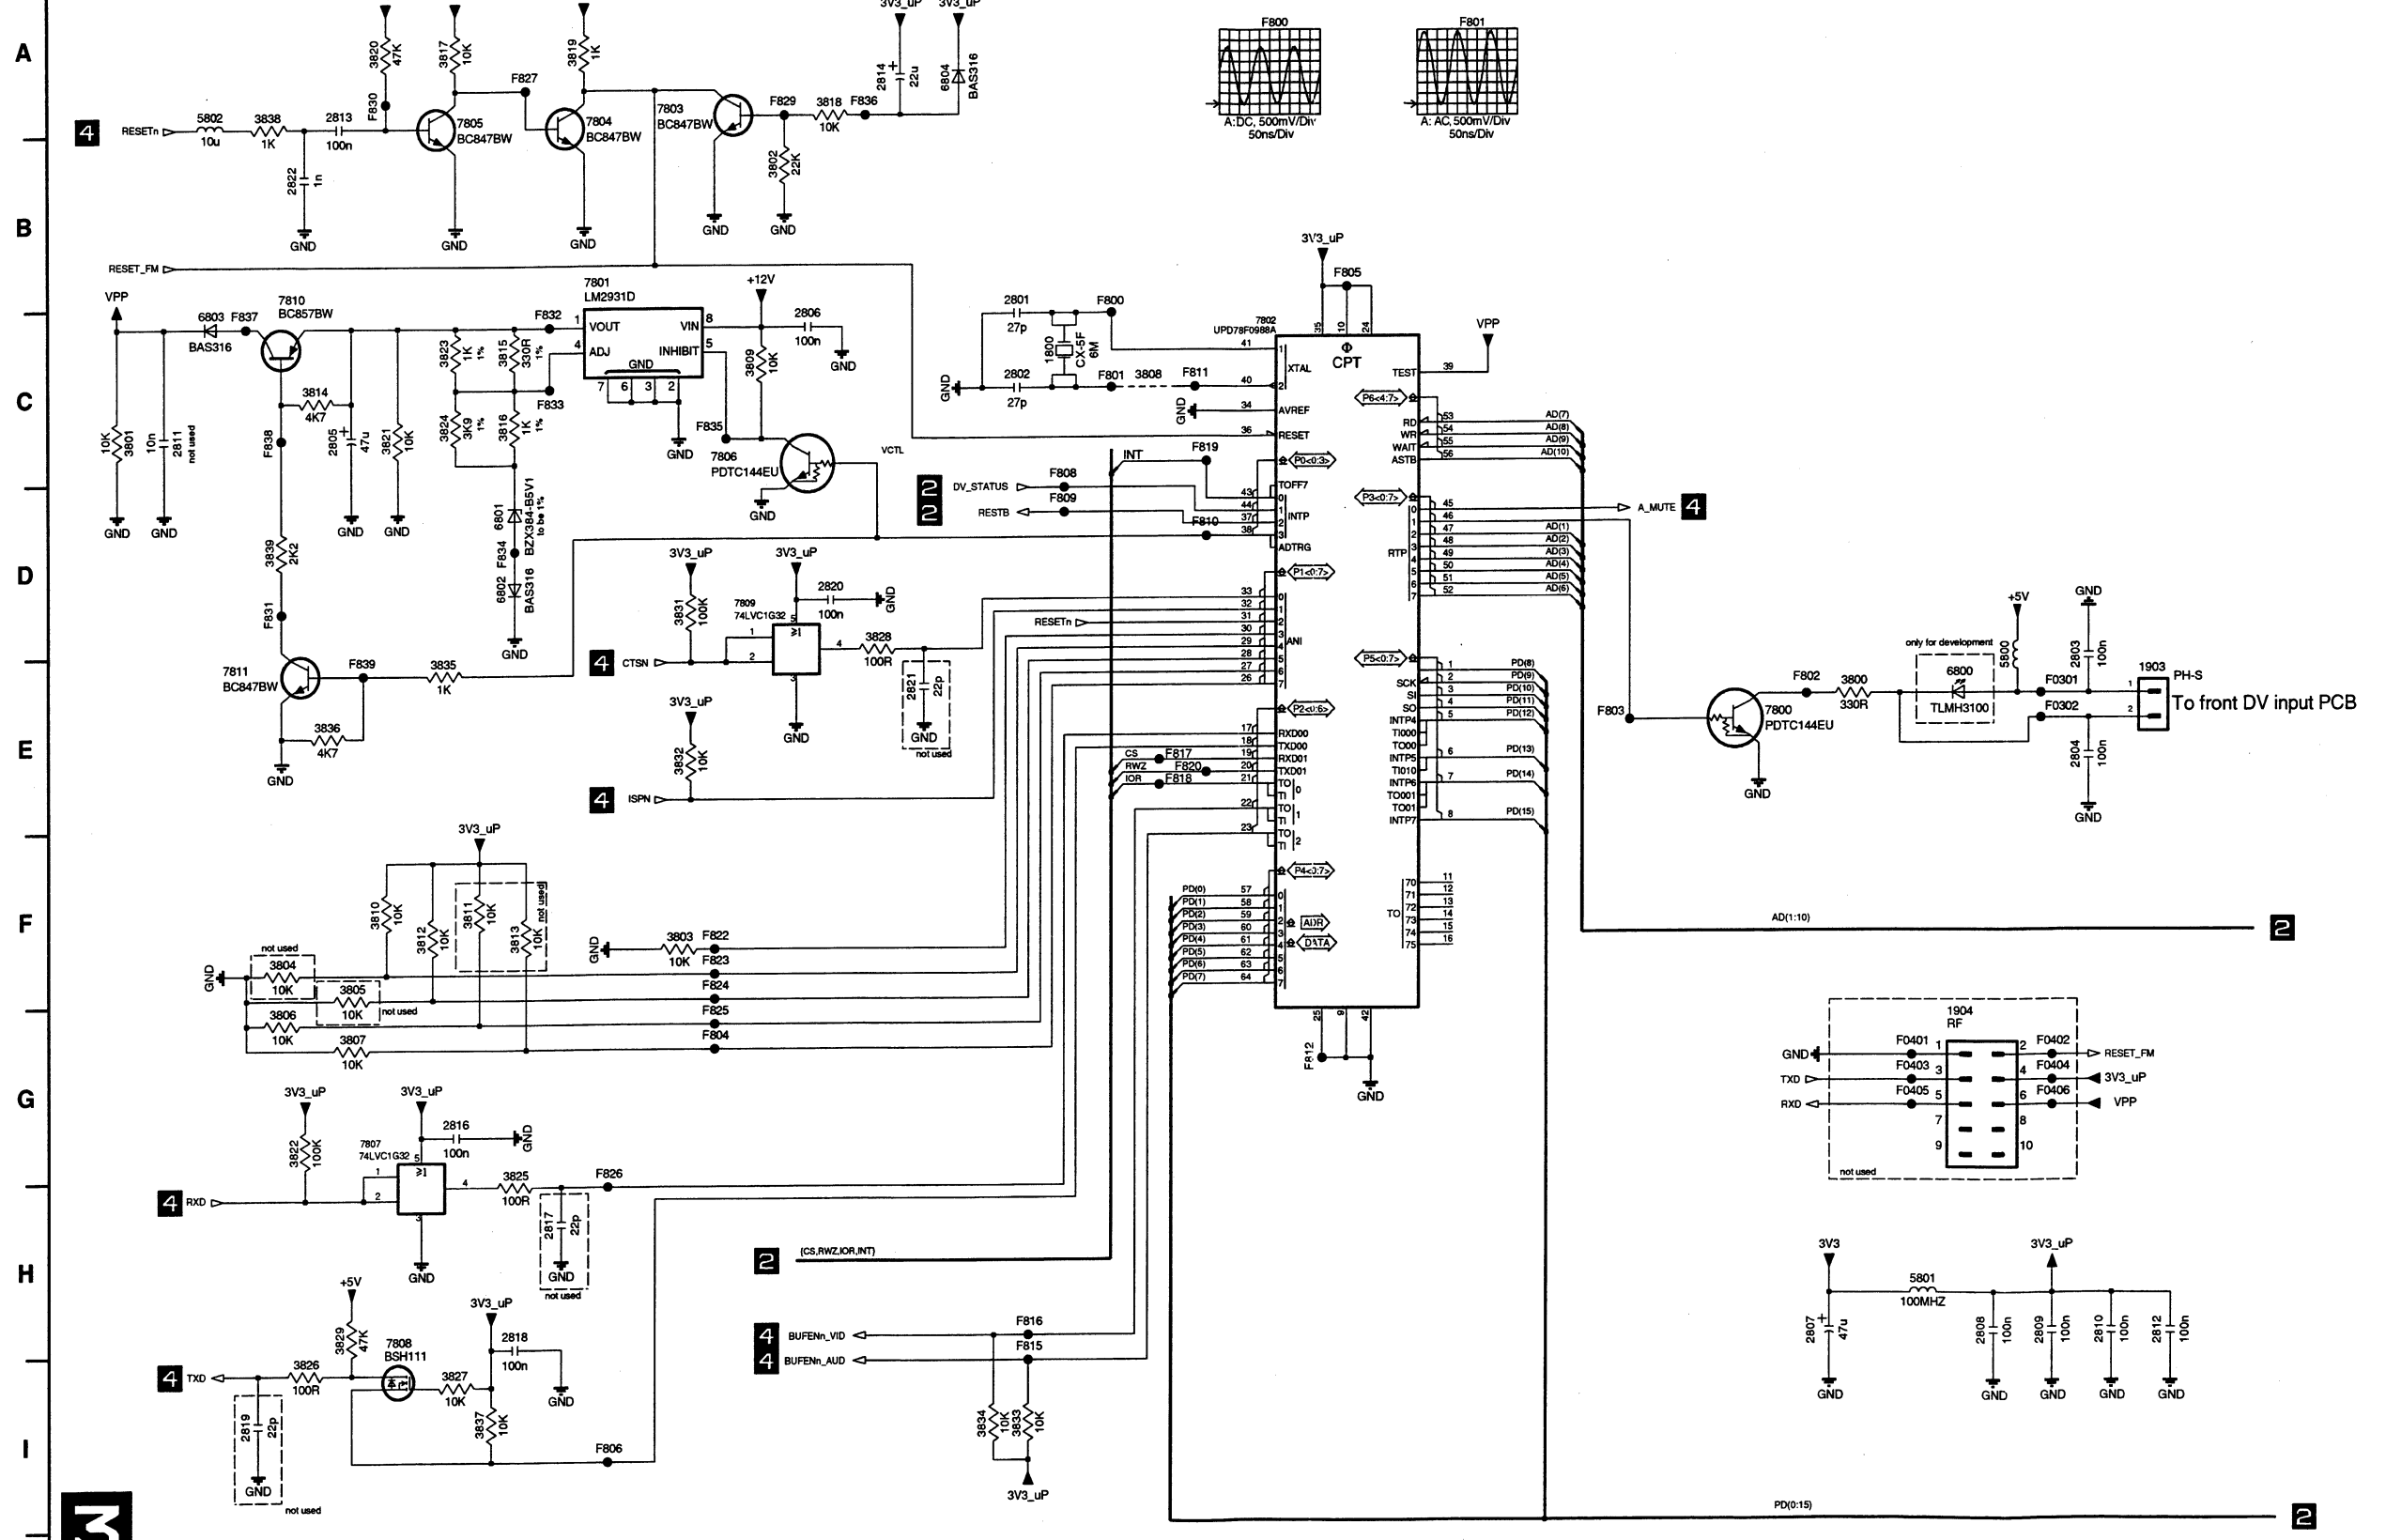

- 1800 C6
- 1903 E13
- 1904 G12
- 2801 B6
- 2802 C6
- 2803 E13
- 2804 E13
- 2805 C2
- 2806 C5
- 2807 H11
- 2808 H12
- 2809 H12
- 2810 H13
- 2811 C1
- 2812 H13
- 2813 A2
- 2814 A5
- 2816 G3
- 2817 H3
- 2819 I2
- 2820 D5
- 2821 E6
- 2822 B2
- 3800 E11
- 3801 C1
- 3802 B5
- 3803 F4
- 3804 F2
- 3805 F2
- 3806 G2
- 3807 G2
- 3808 C7
- 3809 C5
- 3810 F2
- 3811 F2
- 3812 F3
- 3813 F3
- 3814 C2
- 3815 C3
- 3816 C3
- 3817 A3
- 3818 A5
- 3819 A4
- 3820 A2
- 3821 C2
- 3822 G2
- 3823 C3
- 3824 C3
- 3825 G3
- 3826 I2
- 3827 I3
- 3828 D5
- 3829 H2
- 3831 D4
- 3832 E4
- 3833 I6
- 3834 I6
- 3835 E3
- 3836 E2
- 3837 I3
- 3838 A2
- 3839 D2
- 5800 E12
- 5801 H12
- 6800 E12
- 6801 D3
- 6802 D3
- 6803 C1
- 6804 A6
- 7800 E11
- 7801 B4
- 7802 C8
- 7803 A4
- 7804 A4
- 7805 A3
- 7806 C4
- 7807 G2
- 7808 H2
- 7809 D5
- 7810 B2
- 7811 E1
- F0301 E13
- F0302 E13
- F0401 G12
- F0402 G13
- F0403 G12
- F0404 G13
- F0405 G12
- F0406 G13
- F800 B7
- F801 C7
- F802 E11
- F803 E10
- F804 G4
- F805 B8
- F806 I4
- F806 C7
- F809 D7
- F810 D7
- F811 C7
- F812 G8
- F815 H6
- F816 H6
- F817 E7
- F818 E7
- F819 C7
- F820 E7
- F822 F4
- F823 F4
- F824 F4
- F825 G4
- F826 G4
- F827 A3
- F829 A5
- F830 A2
- F831 D2
- F832 C3
- F833 C3
- F834 D3
- F835 C4
- F836 A5

DVIO Board: Interface+DAC

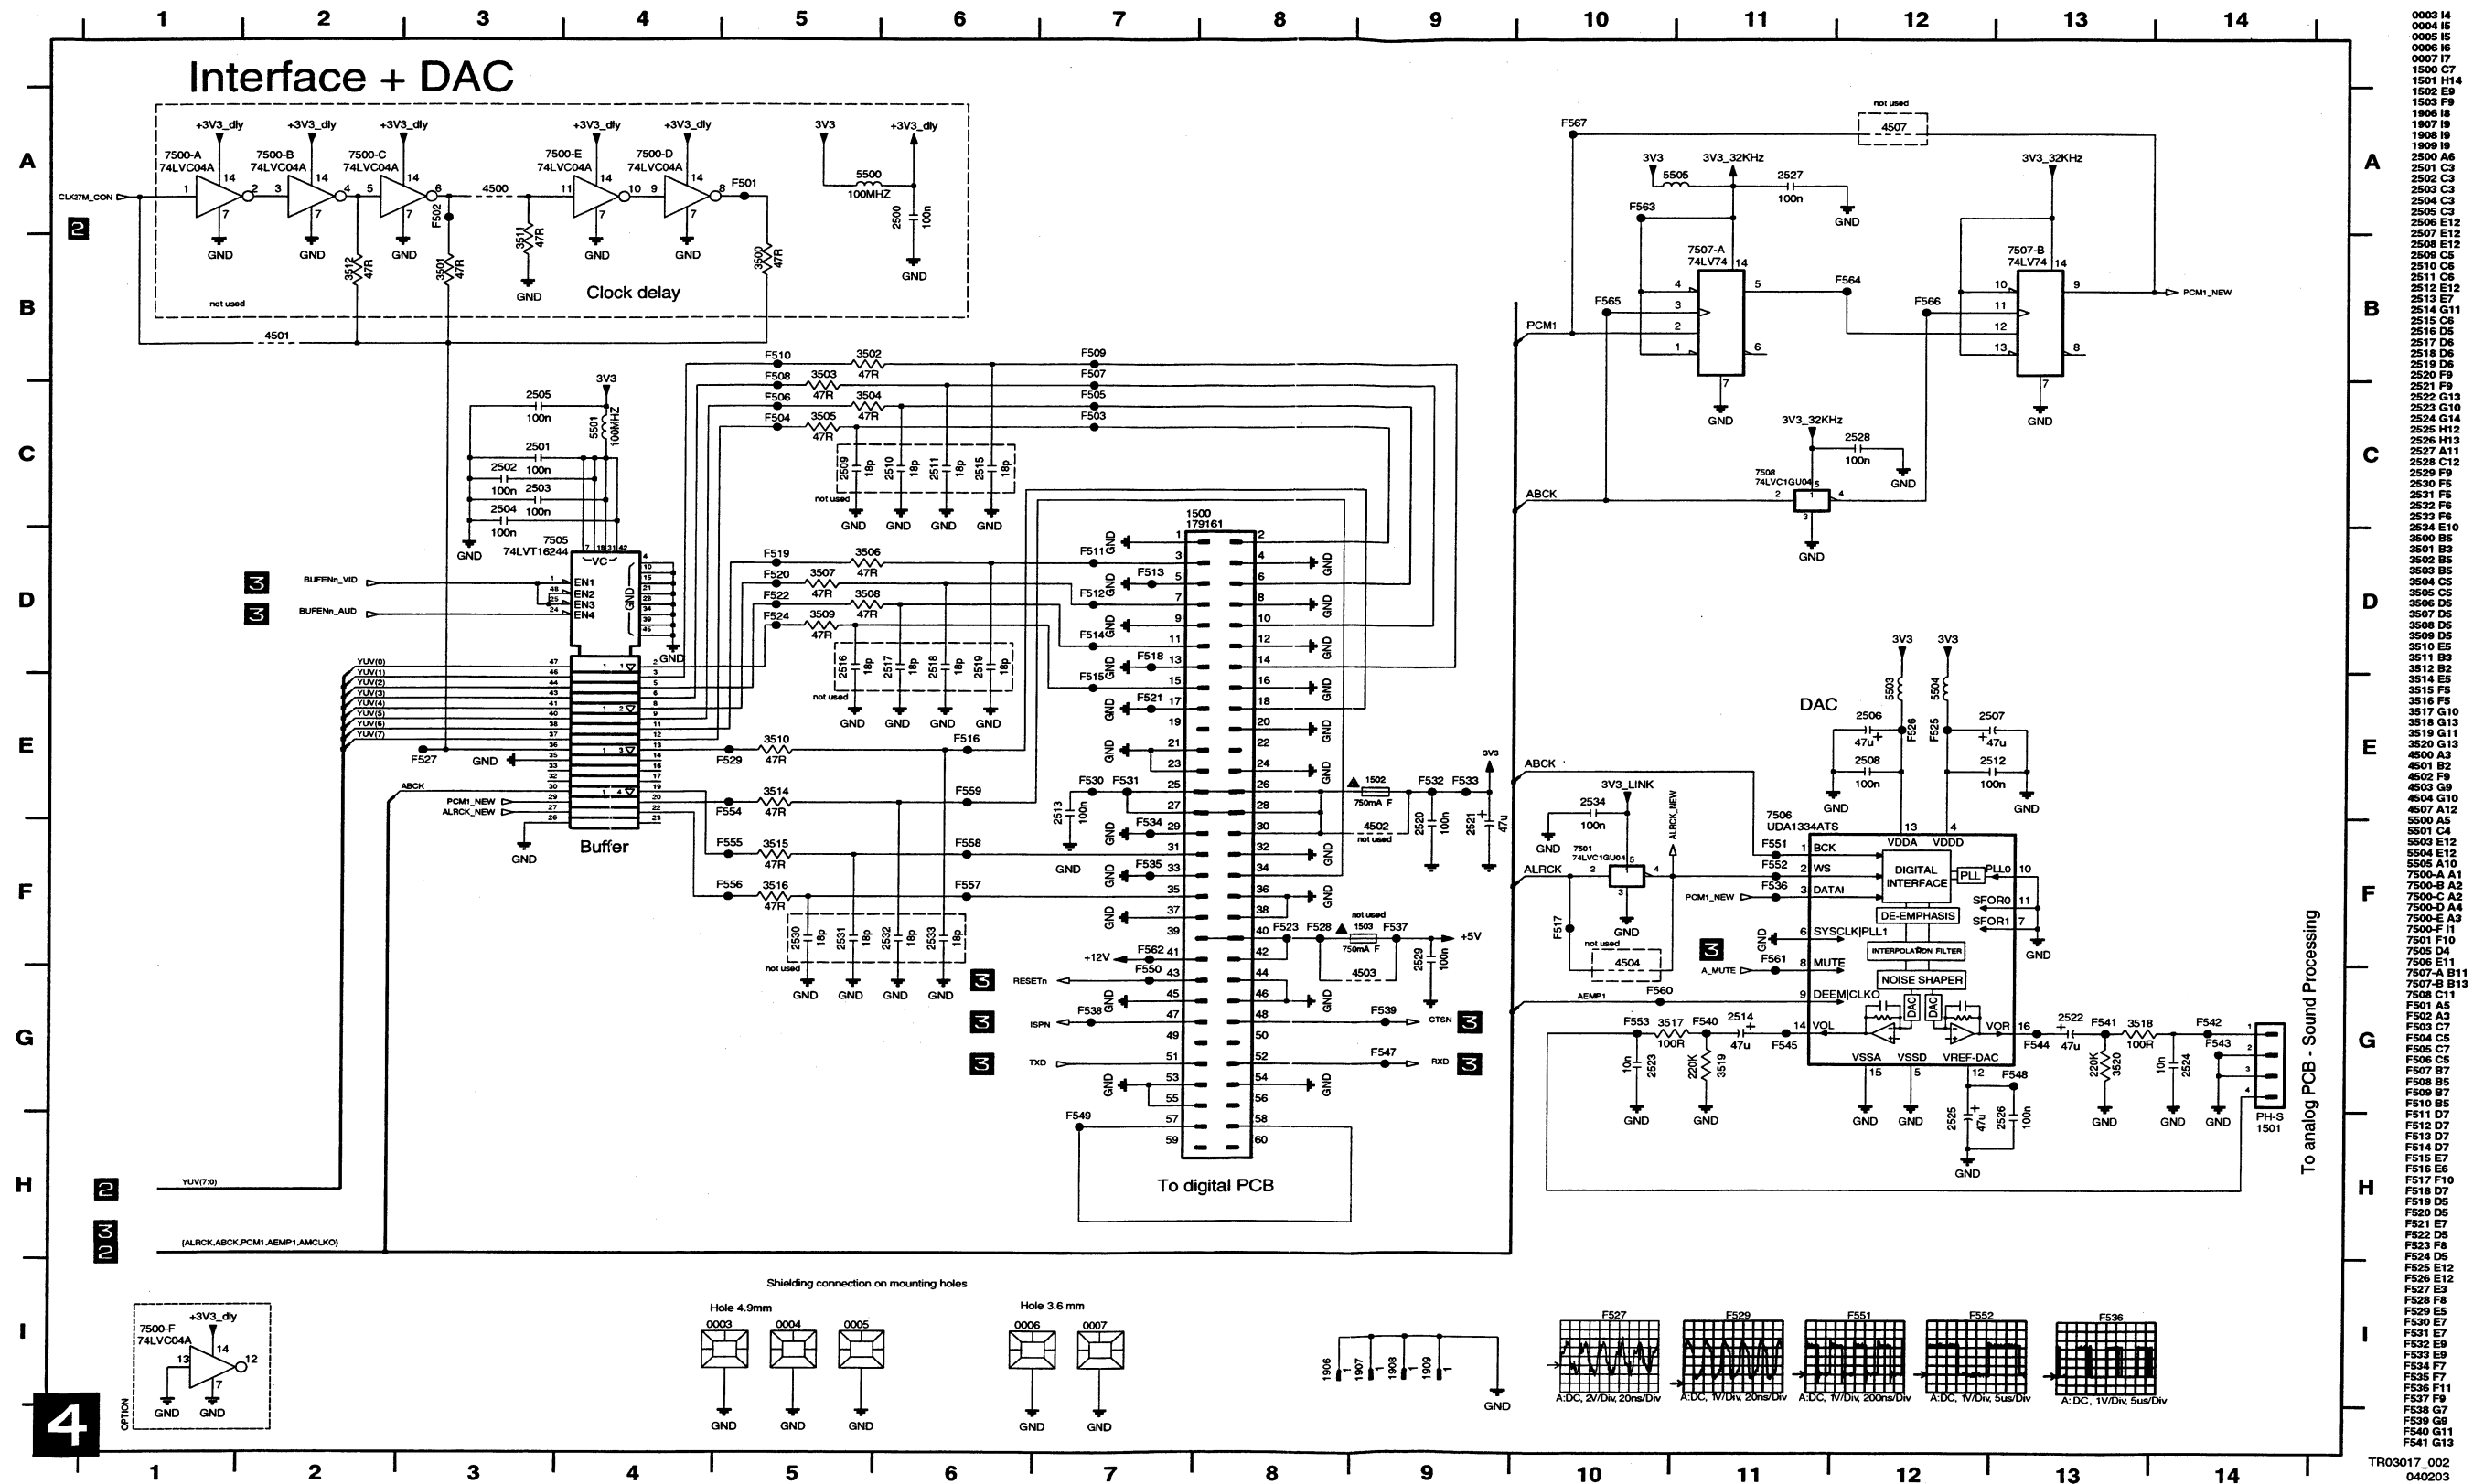

- 0003 I4
- 0004 I5
- 0005 I5
- 0006 I6
- 0007 I7
- 1500 C7
- 1501 H14
- 1502 E9
- 1503 F9
- 1504 B8
- 1507 I9
- 1508 I9
- 1509 I9
- 2500 A6
- 2501 C3
- 2502 C3
- 2503 C3
- 2504 C3
- 2505 C3
- 2506 E12
- 2507 E12
- 2508 E12
- 2509 C5
- 2510 C6
- 2511 C6
- 2512 E12
- 2513 E7
- 2514 G11
- 2515 C8
- 2516 D6
- 2517 D6
- 2518 D6
- 2519 D6
- 2520 F9
- 2521 F9
- 2522 G13
- 2523 G10
- 2524 G14
- 2525 H12
- 2526 H13
- 2527 A11
- 2528 C12
- 2529 F9
- 2530 F5
- 2531 F5
- 2532 F8
- 2533 F6
- 2534 E10
- 3500 B5
- 3501 B3
- 3502 B5
- 3503 B5
- 3504 C5
- 3505 C5
- 3506 D6
- 3507 D6
- 3508 D6
- 3509 D6
- 3510 E5
- 3511 B3
- 3512 B2
- 3513 E5
- 3514 E5
- 3515 F5
- 3516 F5
- 3517 G10
- 3518 G13
- 3519 G11
- 3520 G13
- 4500 A3
- 4501 B2
- 4502 F9
- 4503 G8
- 4504 G10
- 4507 A12
- 5500 A5
- 5501 C4
- 5503 E12
- 5504 E12
- 5505 A10
- 7500-A A1
- 7500-B A2
- 7500-C A2
- 7500-D A4
- 7500-E A3
- 7500-F I1
- 7501 F10
- 7505 D4
- 7506 E11
- 7507-A B11
- 7507-B B13
- 7508 C11
- F501 A5
- F502 A3
- F503 C7
- F504 C5
- F505 C7
- F506 C5
- F507 B7
- F508 B5
- F509 B7
- F510 B5
- F511 D7
- F512 D7
- F513 D7
- F514 D7
- F515 E7
- F516 E6
- F517 F10
- F518 D7
- F519 D5
- F520 D5
- F521 E7
- F522 D5
- F523 F8
- F524 D6
- F525 E12
- F526 E12
- F527 E2
- F528 F8
- F529 E5
- F530 E7
- F531 E7
- F532 E9
- F533 E9
- F534 F7
- F535 F7
- F536 F11
- F537 F9
- F538 G7
- F539 G8
- F540 G11
- F541 G13
- F542 G14
- F543 G14
- F544 G13
- F545 G11
- F546 G9
- F547 G9
- F548 G10
- F549 H7
- F550 G7
- F551 F11
- F552 F11
- F553 F5
- F554 E5
- F555 F5
- F556 F5
- F557 F6
- F558 F6
- F559 E6
- F560 G10
- F561 F11
- F562 F7
- F563 A10
- F564 B12
- F565 B10
- F566 B12
- F567 A10

To analog PCB - Sound Processing

4

TR03017_002 040203


DVIO Board: Clock



TR03018_002
040203

2600 B4
2601 C5
2602 D3
2603 D5
2604 E3
2605 E2
2606 F8
2607 A8
2608 B7
2609 A8
2610 B9
2611 A5
2612 C3
2613 E9
2614 D3
2615 F3
2616 A2
2617 B4
2618 E3
2619 B1
3600 D3
3601 A1
3602 D5
3603 B3
3604 F8
3605 F7
3606 E2
3607 F3
3608 D4
3609 F6
3610 F7
3612 E2
3613 F8
3614 E9
3616 C9
3617 A6
3618 E1
4602 F3
4603 F7
4604 A4
4605 A5
4606 B2
4608 B2
4609 C2
5600 C5
5601 A8
5602 A4
5603 A8
7600 A2
7601 A3
7602 C2
7604 D4
7605 B8
7606-A B5
7606-B D1
7608 F8
F601 D1
F603 A4
F604 F3
F605 D2
F606 F9
F609 D2
F600 B3
F601 D3
F604 D4
F605 F6
F606 F8
F607 F8
F608 B9
F609 B7
F600 B9
F601 B6
F602 C6
F603 B9
F604 F2

Layout DVIO Board (Overview Top View)

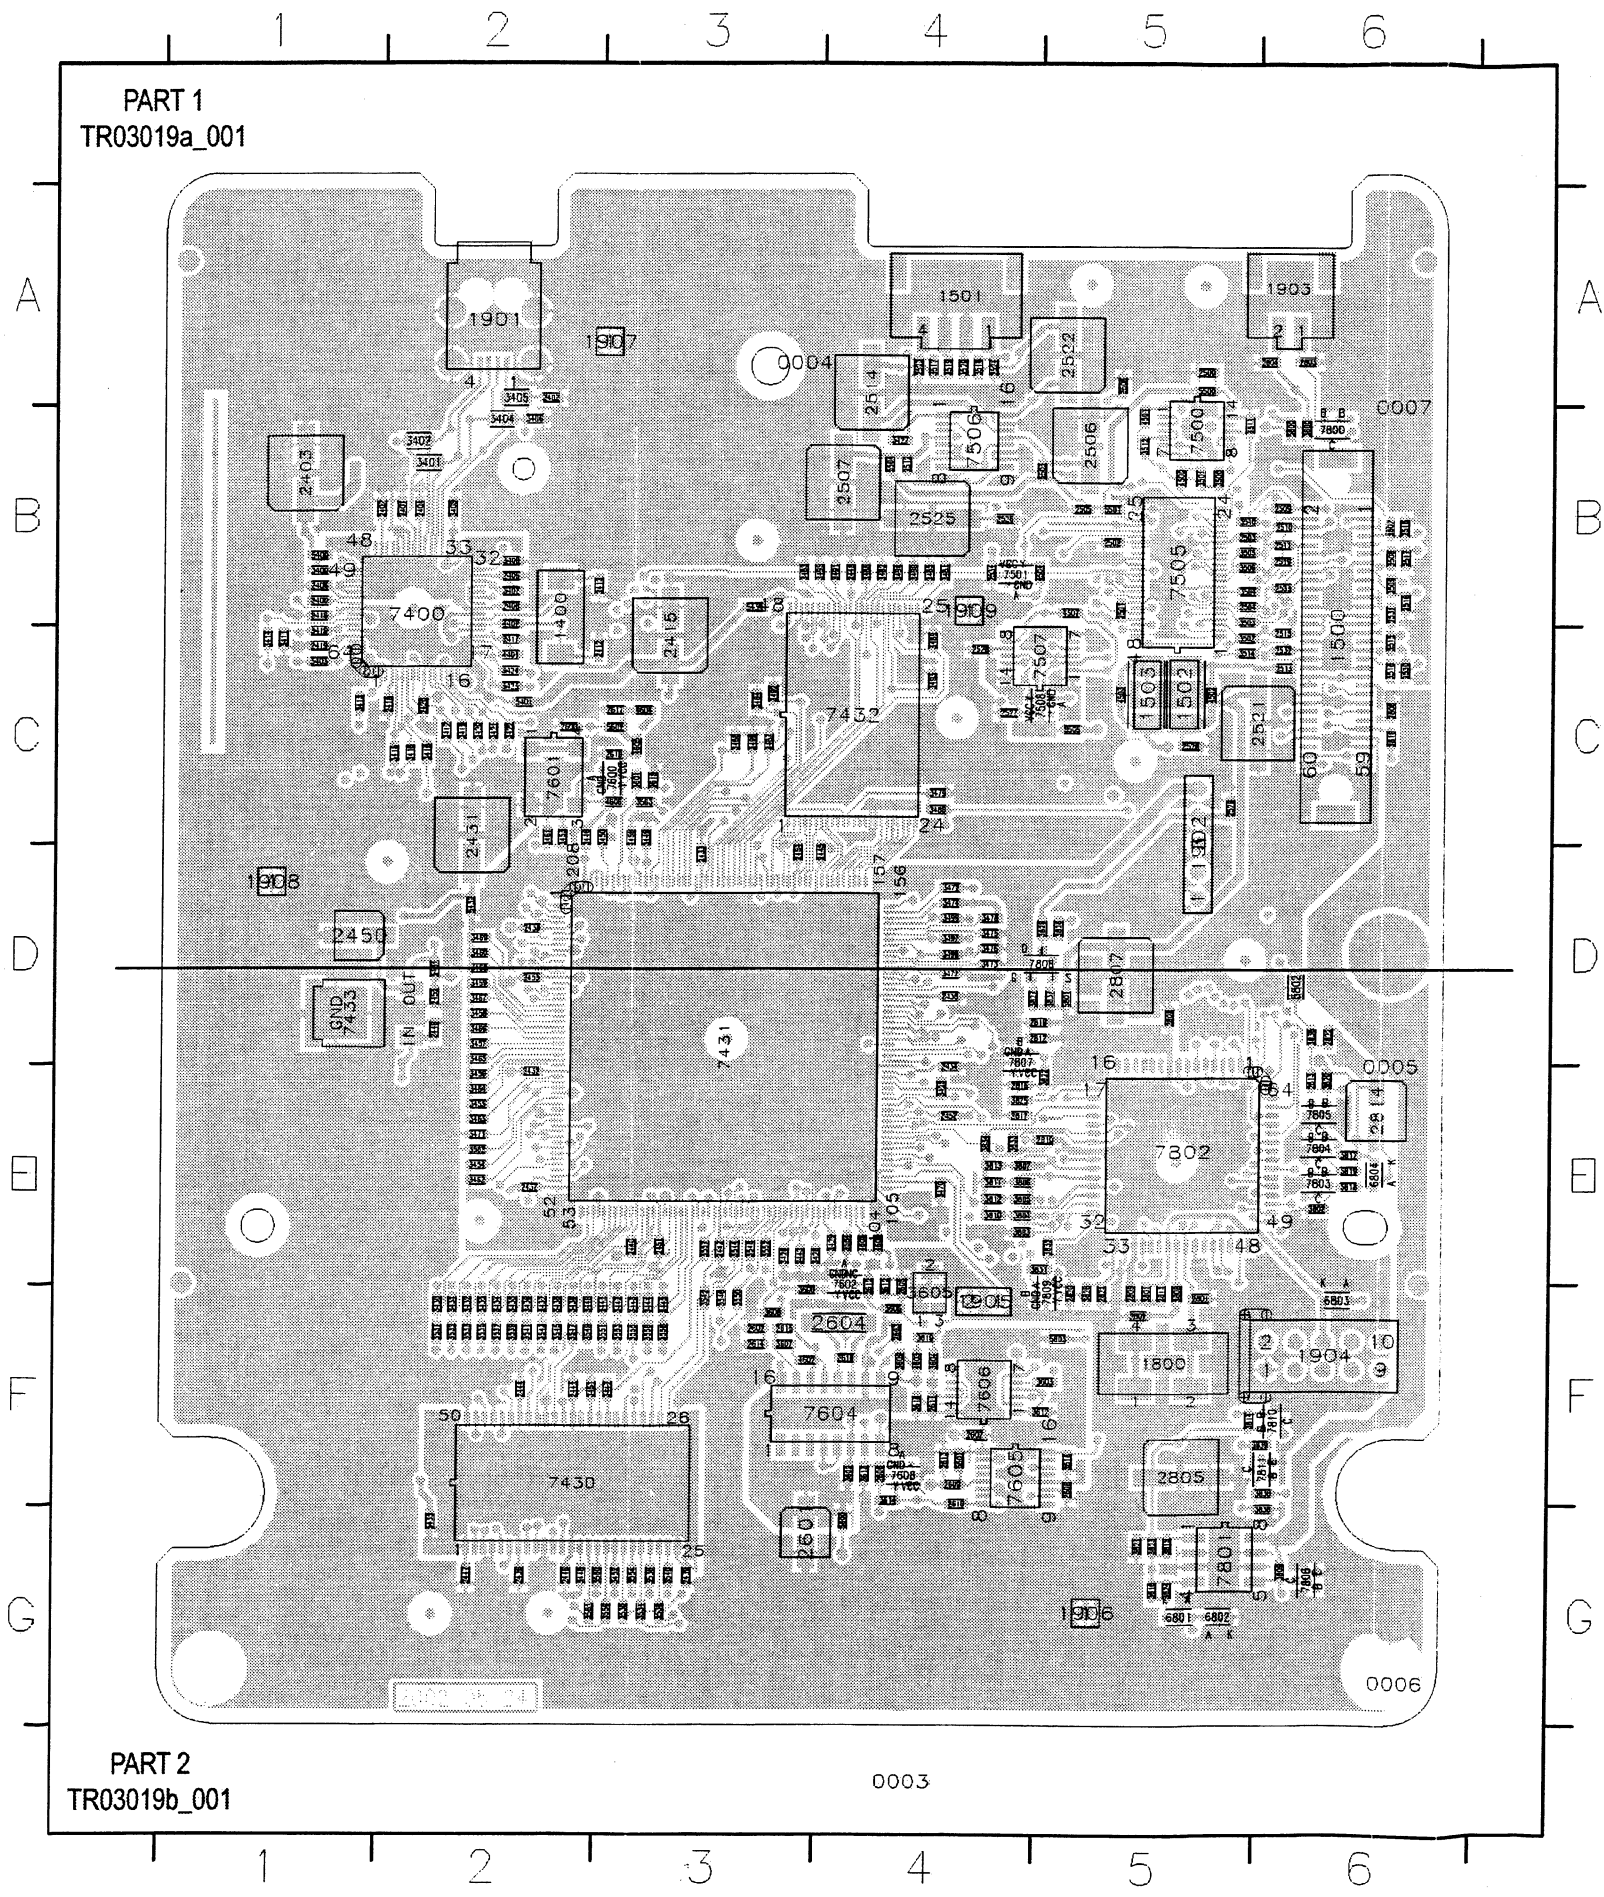


1400 B2	2503 B5	2810 E5	3450 C3	3511 B5	3800 B6	5501 B5
1500 C6	2504 B5	2811 F5	3451 F2	3512 B5	3801 F5	5503 B4
1501 A4	2505 B5	2812 D4	3452 G3	3514 C5	3802 E6	5504 B4
1502 C5	2506 B5	2813 E6	3453 C2	3515 C6	3803 E4	5505 C5
1503 C5	2507 B4	2814 E6	3454 E2	3516 C6	3804 E4	5600 G4
1800 F5	2508 A5	2816 E4	3455 E2	3517 A4	3805 E4	5601 F4
1901 A2	2509 B6	2817 E4	3456 E2	3518 A4	3806 E4	5602 C3
1902 C5	2510 B6	2818 D4	3457 D2	3519 A4	3807 E4	5603 F5
1903 A6	2511 B6	2819 C6	3458 D2	3520 A4	3808 F5	5800 B6
1904 F6	2512 B4	2820 F5	3459 D2	3530 G3	3809 G6	5801 D5
1905 F4	2513 C6	2821 F5	3460 D2	3531 F2	3810 E4	5802 D6
1906 G5	2514 A4	2822 D6	3461 C2	3532 F2	3811 E4	6801 G5
1907 A3	2515 C6	3400 B1	3462 E2	3533 F2	3812 E4	6802 G5
1908 D1	2516 B6	3401 B2	3463 E2	3534 G3	3813 E4	6803 F6
1909 B4	2517 B6	3402 B2	3464 E2	3535 F2	3814 F5	6804 E6
2400 B1	2518 B6	3403 C1	3465 D2	3536 G3	3815 G5	7400 B2
2401 B2	2519 B6	3404 B2	3466 D2	3537 F2	3816 G5	7430 F2
2402 A2	2520 C5	3405 A2	3467 D2	3538 G3	3817 E6	7431 D3
2403 B1	2521 C5	3406 B2	3468 D2	3539 F2	3818 E6	7432 C4
2404 B2	2522 A5	3407 B2	3469 D2	3540 G3	3819 E6	7433 D1
2405 B2	2523 A4	3408 B2	3470 E4	3541 F2	3820 E6	7500 B5
2406 B1	2524 A4	3409 B2	3471 E2	3542 F3	3821 G5	7501 B4
2407 B1	2525 B4	3410 C1	3472 D4	3543 F2	3822 E5	7505 B5
2408 B2	2526 B4	3411 C1	3473 D4	3544 E3	3823 G5	7506 B4
2412 C2	2527 C4	3413 C1	3474 D4	3545 F2	3824 G5	7507 C4
2413 B2	2528 C4	3414 C1	3475 D4	3546 F3	3825 E4	7508 C4
2415 C3	2529 C5	3415 C2	3476 D4	3547 F2	3826 D5	7600 C3
2416 B1	2530 C6	3416 C2	3477 D4	3548 E3	3827 D4	7601 C2
2417 C2	2531 B6	3417 C2	3478 D4	3549 F2	3828 F5	7602 F4
2418 C2	2532 C6	3418 C2	3479 C4	3550 F3	3829 D5	7604 F4
2419 C1	2533 B6	3419 C2	3480 C4	3551 F3	3831 E5	7605 F4
2420 C2	2534 B4	3420 C2	3481 B4	3552 E3	3832 E5	7606 F4
2431 C2	2600 C2	3421 C2	3482 B4	3553 F3	3833 E4	7608 F4
2432 E2	2601 G3	3422 C2	3483 B3	3554 G3	3834 E4	7800 B6
2433 D3	2602 F3	3423 C2	3484 C3	3555 F3	3835 F6	7801 G5
2434 E4	2603 F4	3424 C2	3485 B4	3556 F3	3836 G6	7802 E5
2435 D4	2604 F4	3425 E4	3486 B4	3557 E3	3837 D5	7803 E6
2436 G2	2605 F4	3426 E3	3487 C3	3558 F3	3838 D6	7804 E6
2437 E2	2606 F4	3427 B4	3488 C3	3559 G3	3839 F6	7805 E6
2438 D2	2607 F4	3428 E3	3489 C4	3560 G3	4401 C2	7806 G6
2439 G3	2608 F5	3429 E4	3490 B4	3561 G2	4402 B2	7807 D4
2440 E3	2609 F4	3430 F2	3491 B4	3562 E2	4500 B5	7808 D5
2441 F2	2610 F4	3431 F2	3492 C3	3563 C3	4501 B5	7809 F5
2442 E3	2611 F4	3432 F2	3493 C4	3564 E4	4502 C5	7810 F6
2443 E3	2612 F4	3433 F2	3494 B4	3600 F3	4503 C5	7811 F6
2444 F2	2613 F4	3434 F2	3495 B3	3601 C3	4504 B4	
2445 D3	2614 F3	3435 F2	3496 C3	3602 F4	4507 B5	
2446 G2	2615 F3	3436 F2	3497 D4	3603 F5	4602 F3	
2447 G2	2616 C3	3437 F2	3498 D4	3604 F4	4603 F4	
2448 B4	2617 C3	3438 F2	3499 D4	3605 F4	4604 C3	
2449 D2	2618 F4	3439 F2	3500 B5	3606 F4	4605 C3	
2450 D1	2619 C3	3440 F2	3501 B5	3607 F3	4606 C3	
2451 E3	2801 F5	3441 F3	3502 C5	3608 F3	4608 E4	
2452 E4	2802 F5	3442 F3	3503 B5	3609 F4	4609 E4	
2453 D2	2803 A6	3443 F3	3504 B5	3610 F4	5400 B1	
2454 D3	2804 A6	3444 F3	3505 B5	3612 F4	5401 C2	
2455 D2	2805 F5	3445 F3	3506 B5	3613 F4	5431 D2	
2456 C3	2806 C6	3446 C2	3507 B6	3614 F4	5432 D2	
2500 A5	2807 D5	3447 F3	3508 B6	3616 F5	5433 G2	
2501 B5	2808 D5	3448 G2	3509 B6	3617 F5	5434 B3	
2502 B5	2809 F5	3449 C3	3510 B5	3618 F4	5500 A5	


TR03019_001
160702

Layout DVIO Board (Part 1 Top View)


TR03019a_001
160702

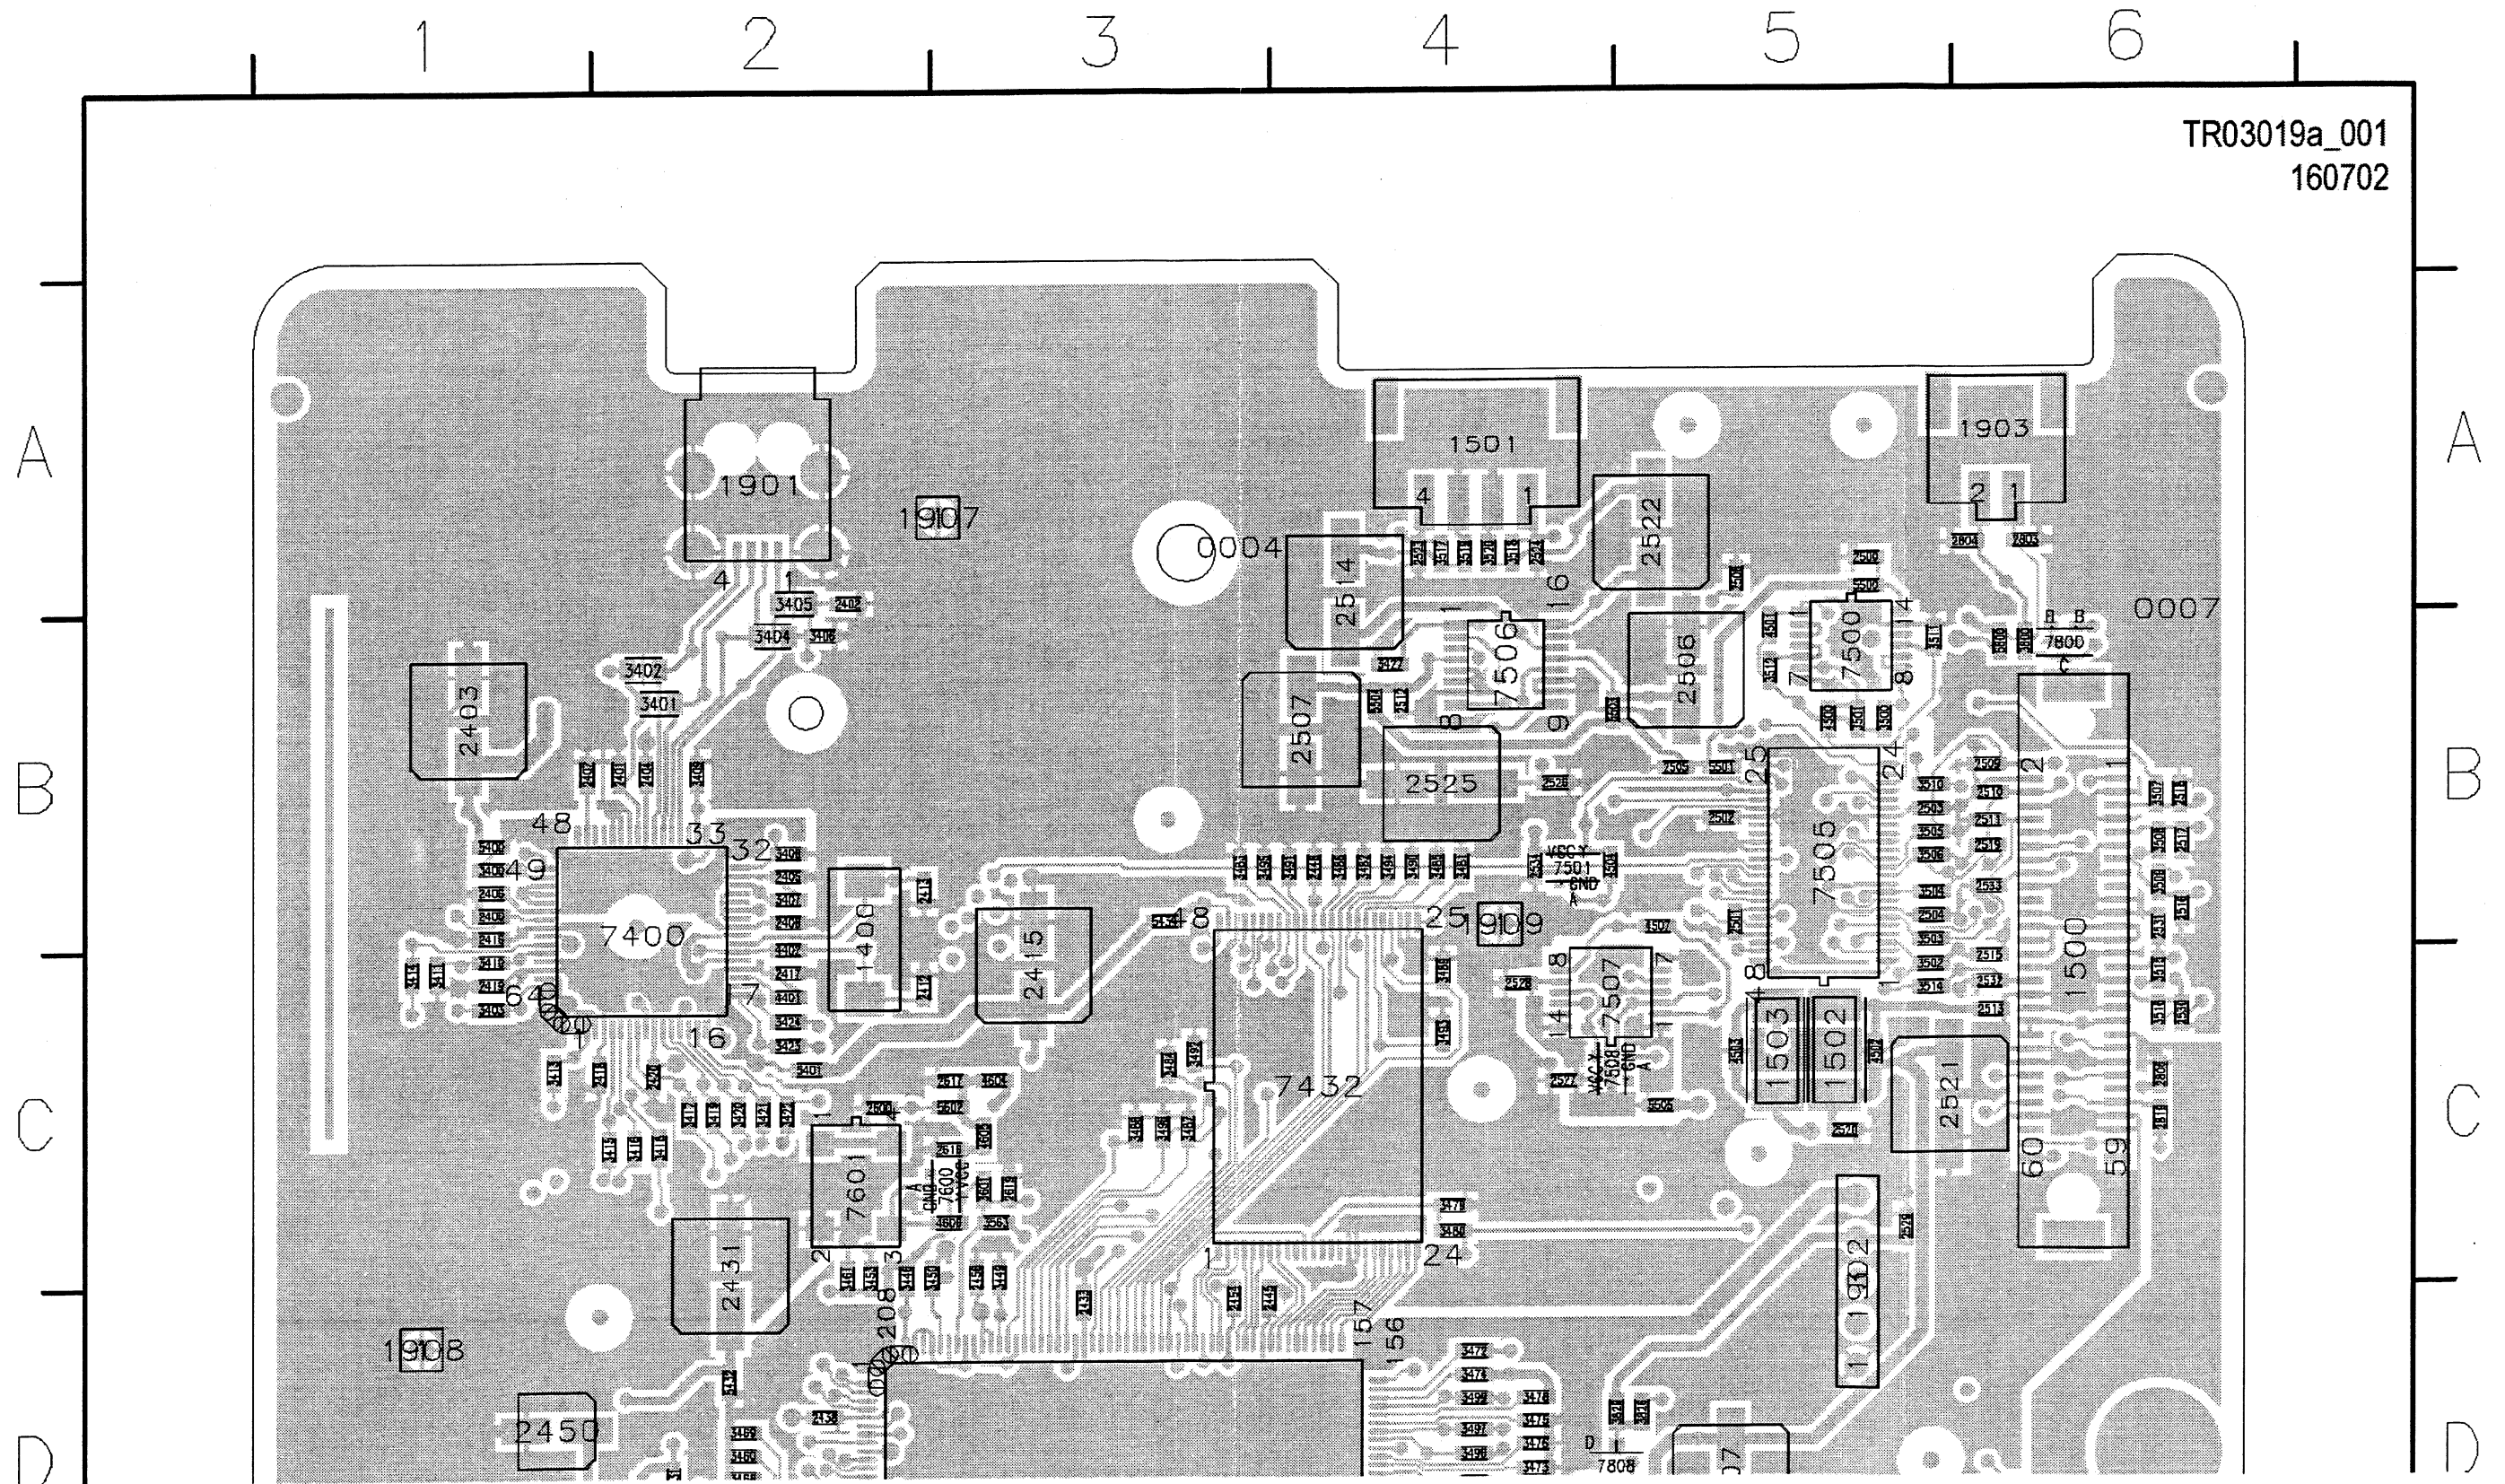


Layout DVIO Board (Part 2 Top View)

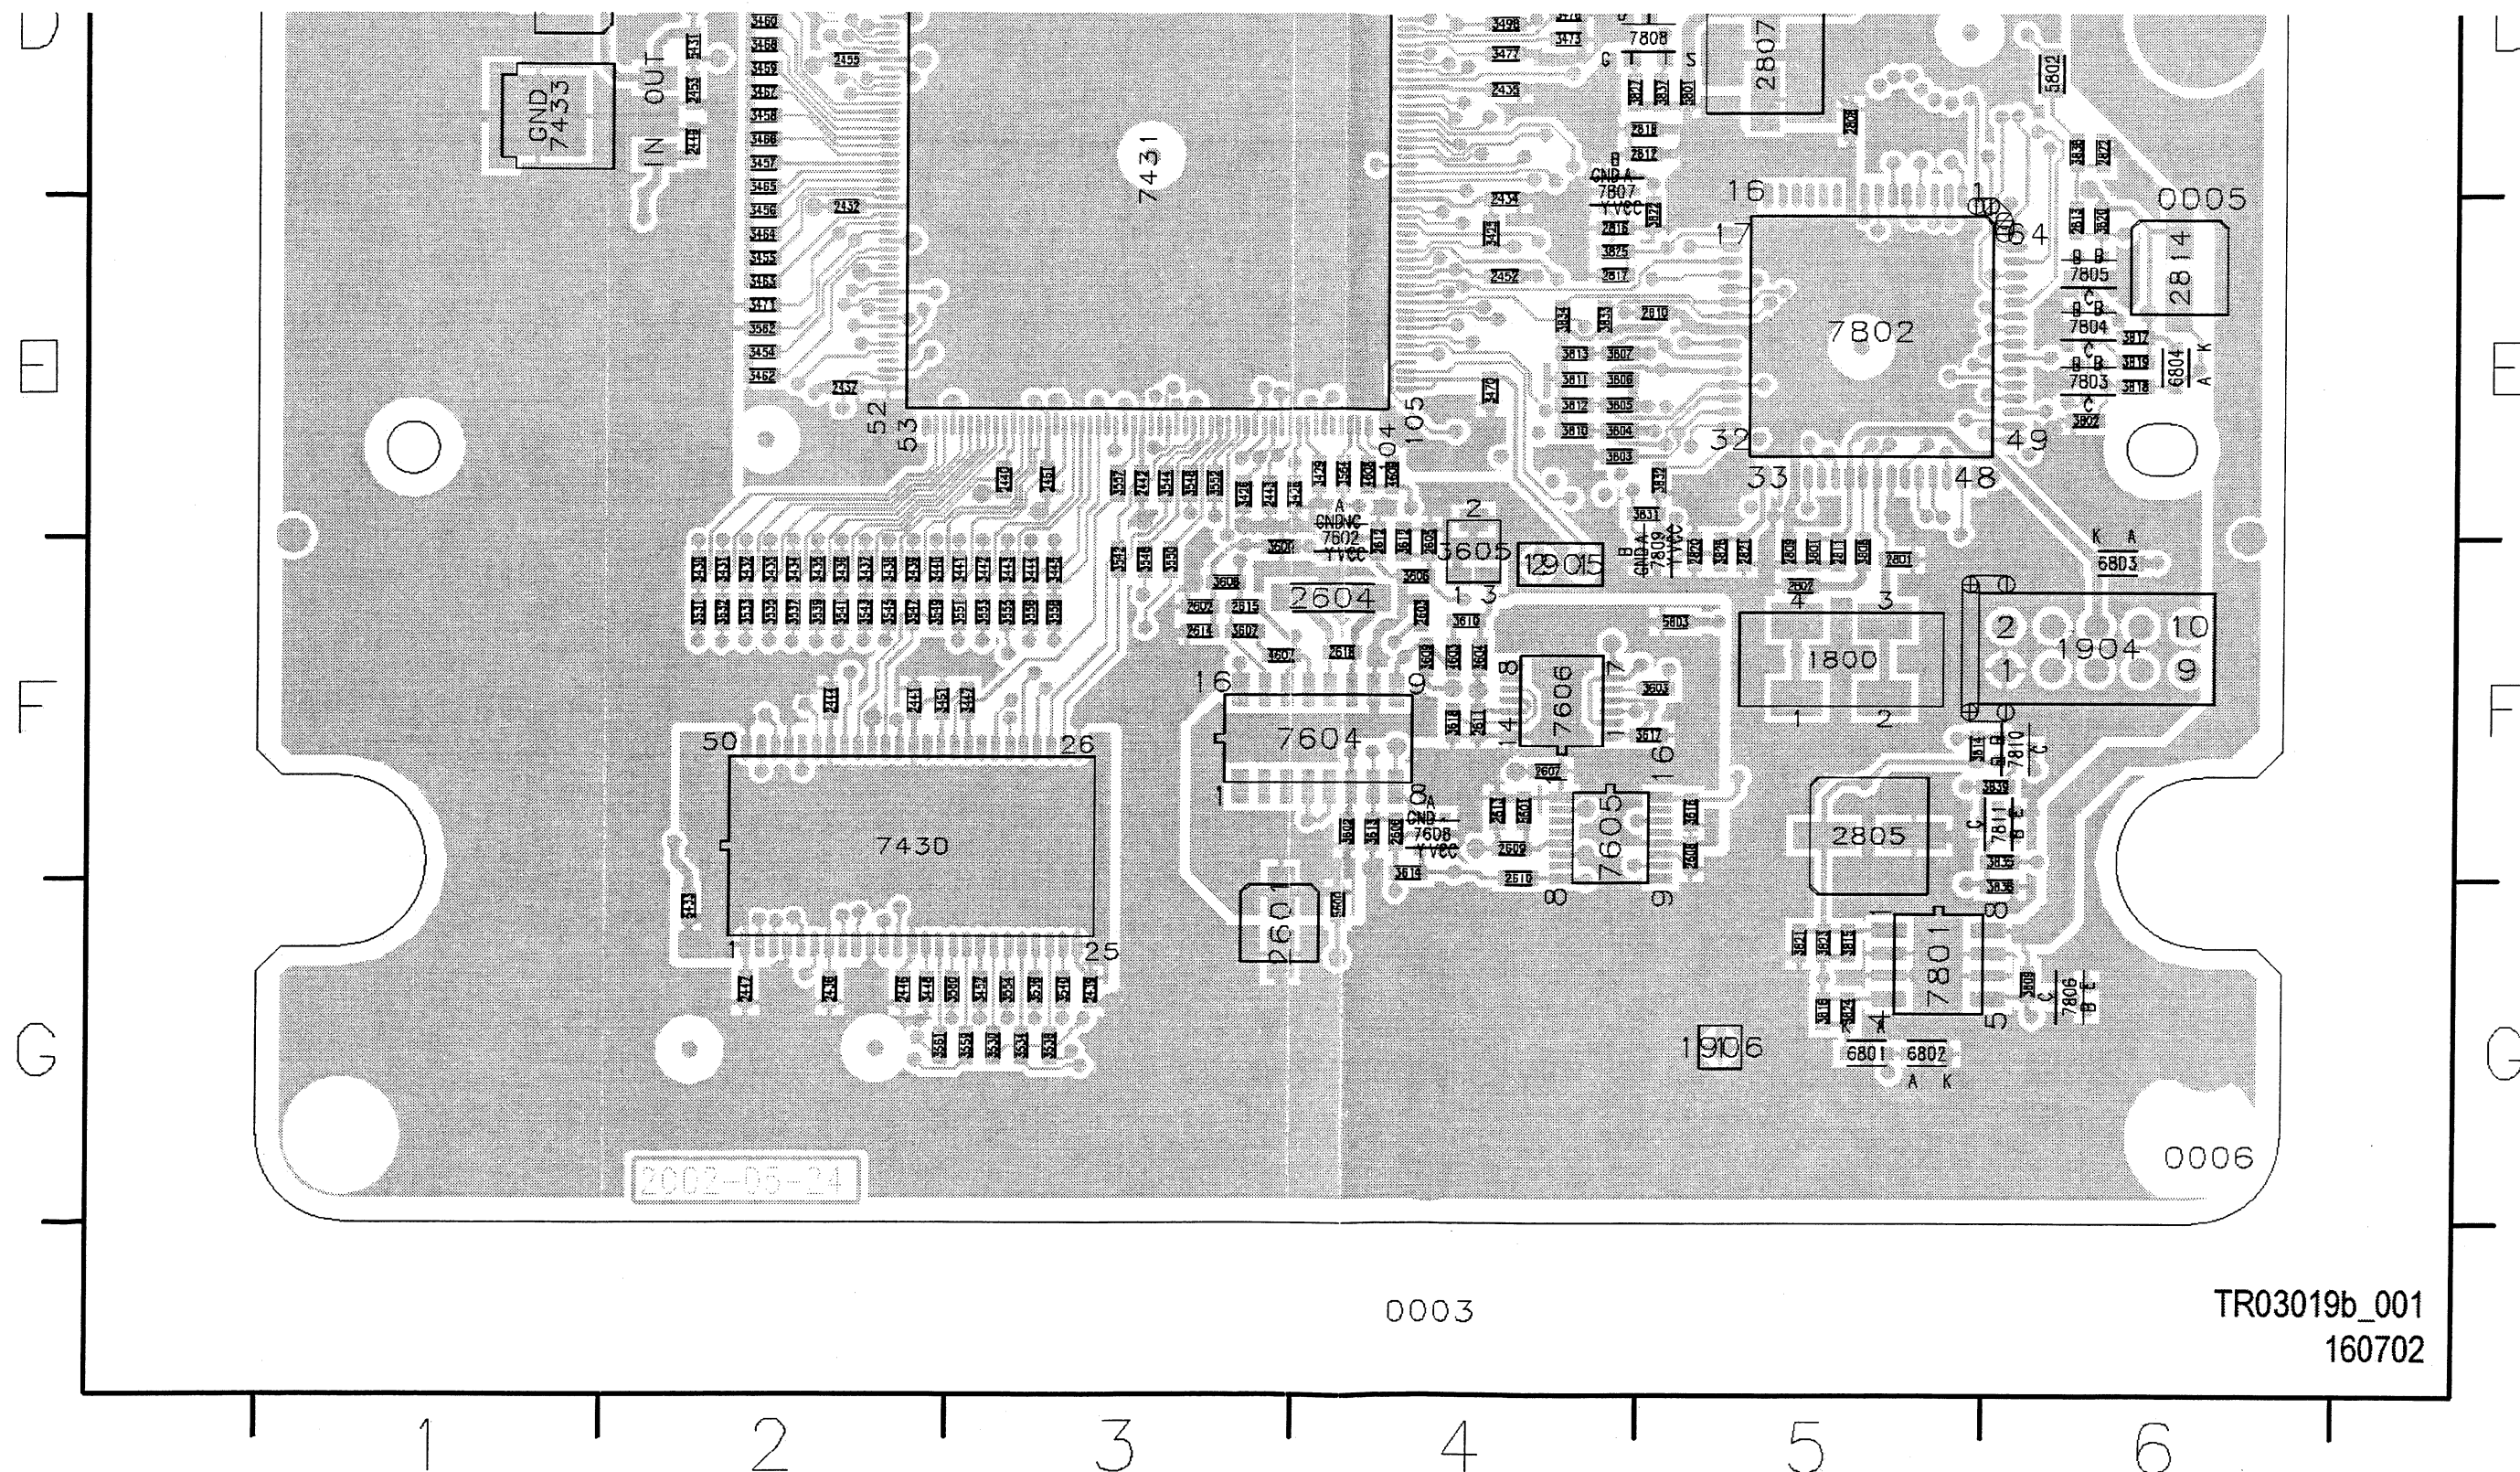


Digital Board 1.5: VSM, Buffer Memory and Bit Engine Interface

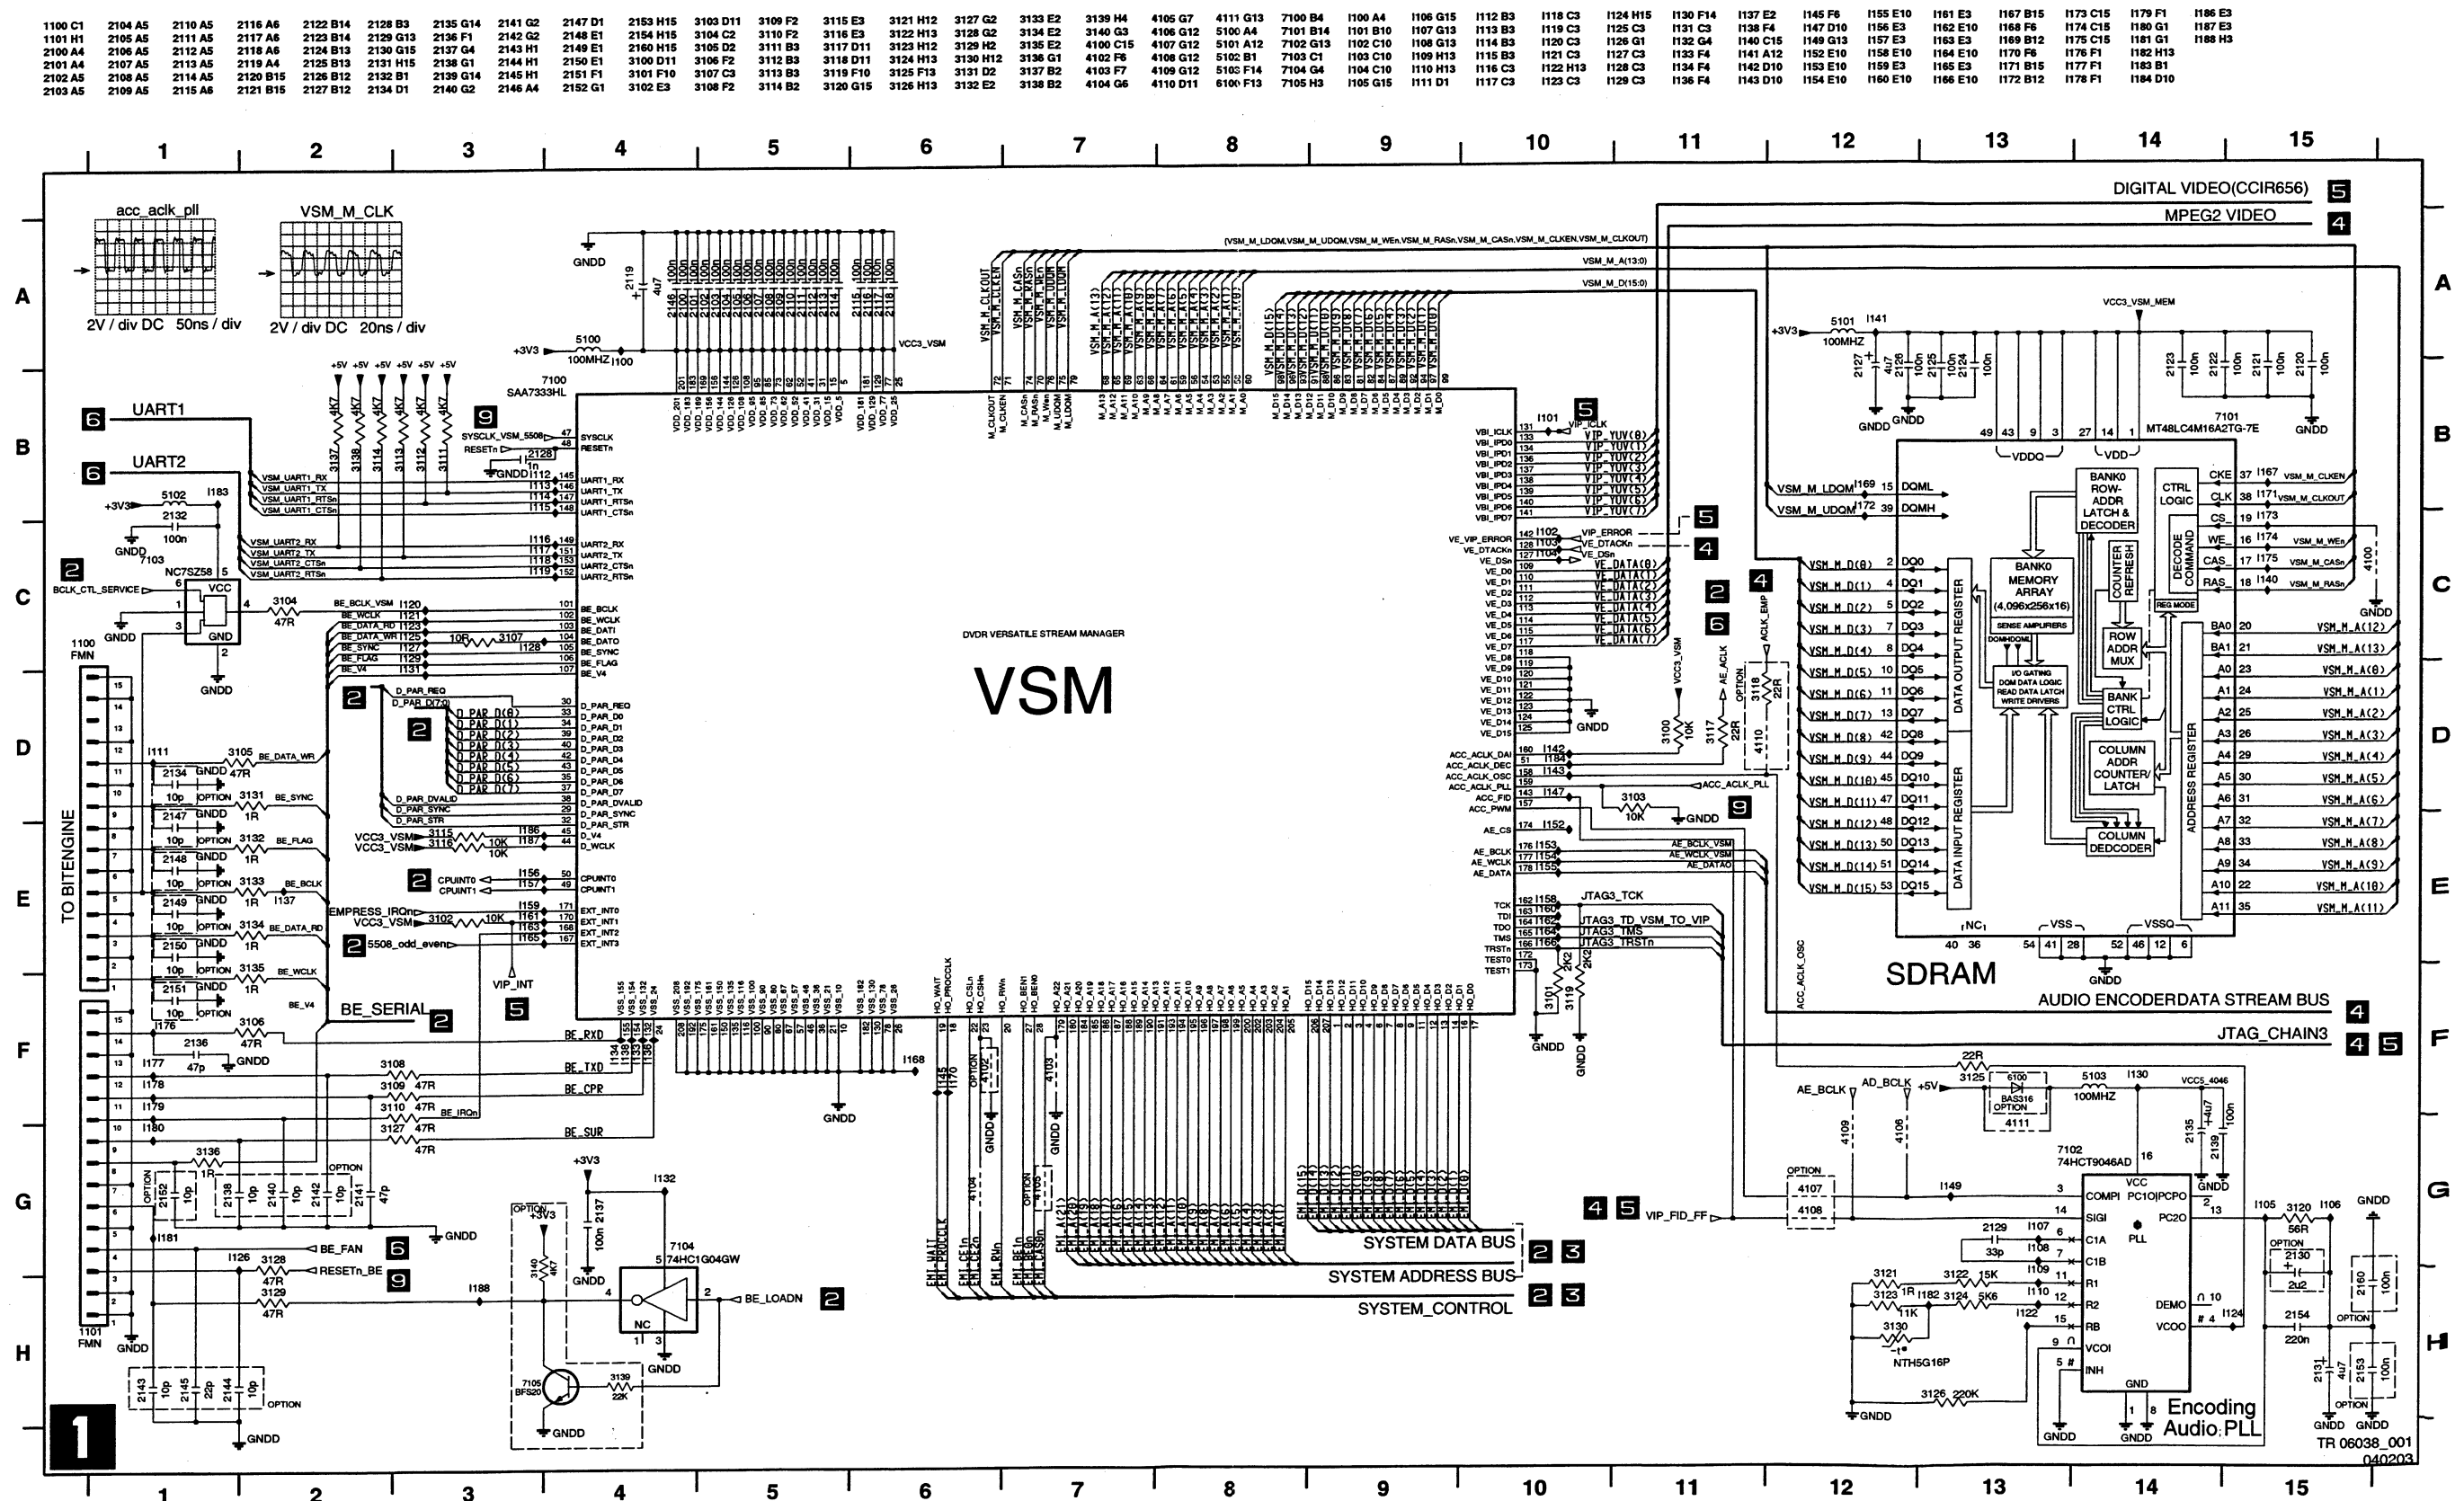


Digital Board 1.5: AV Decoder STI5519

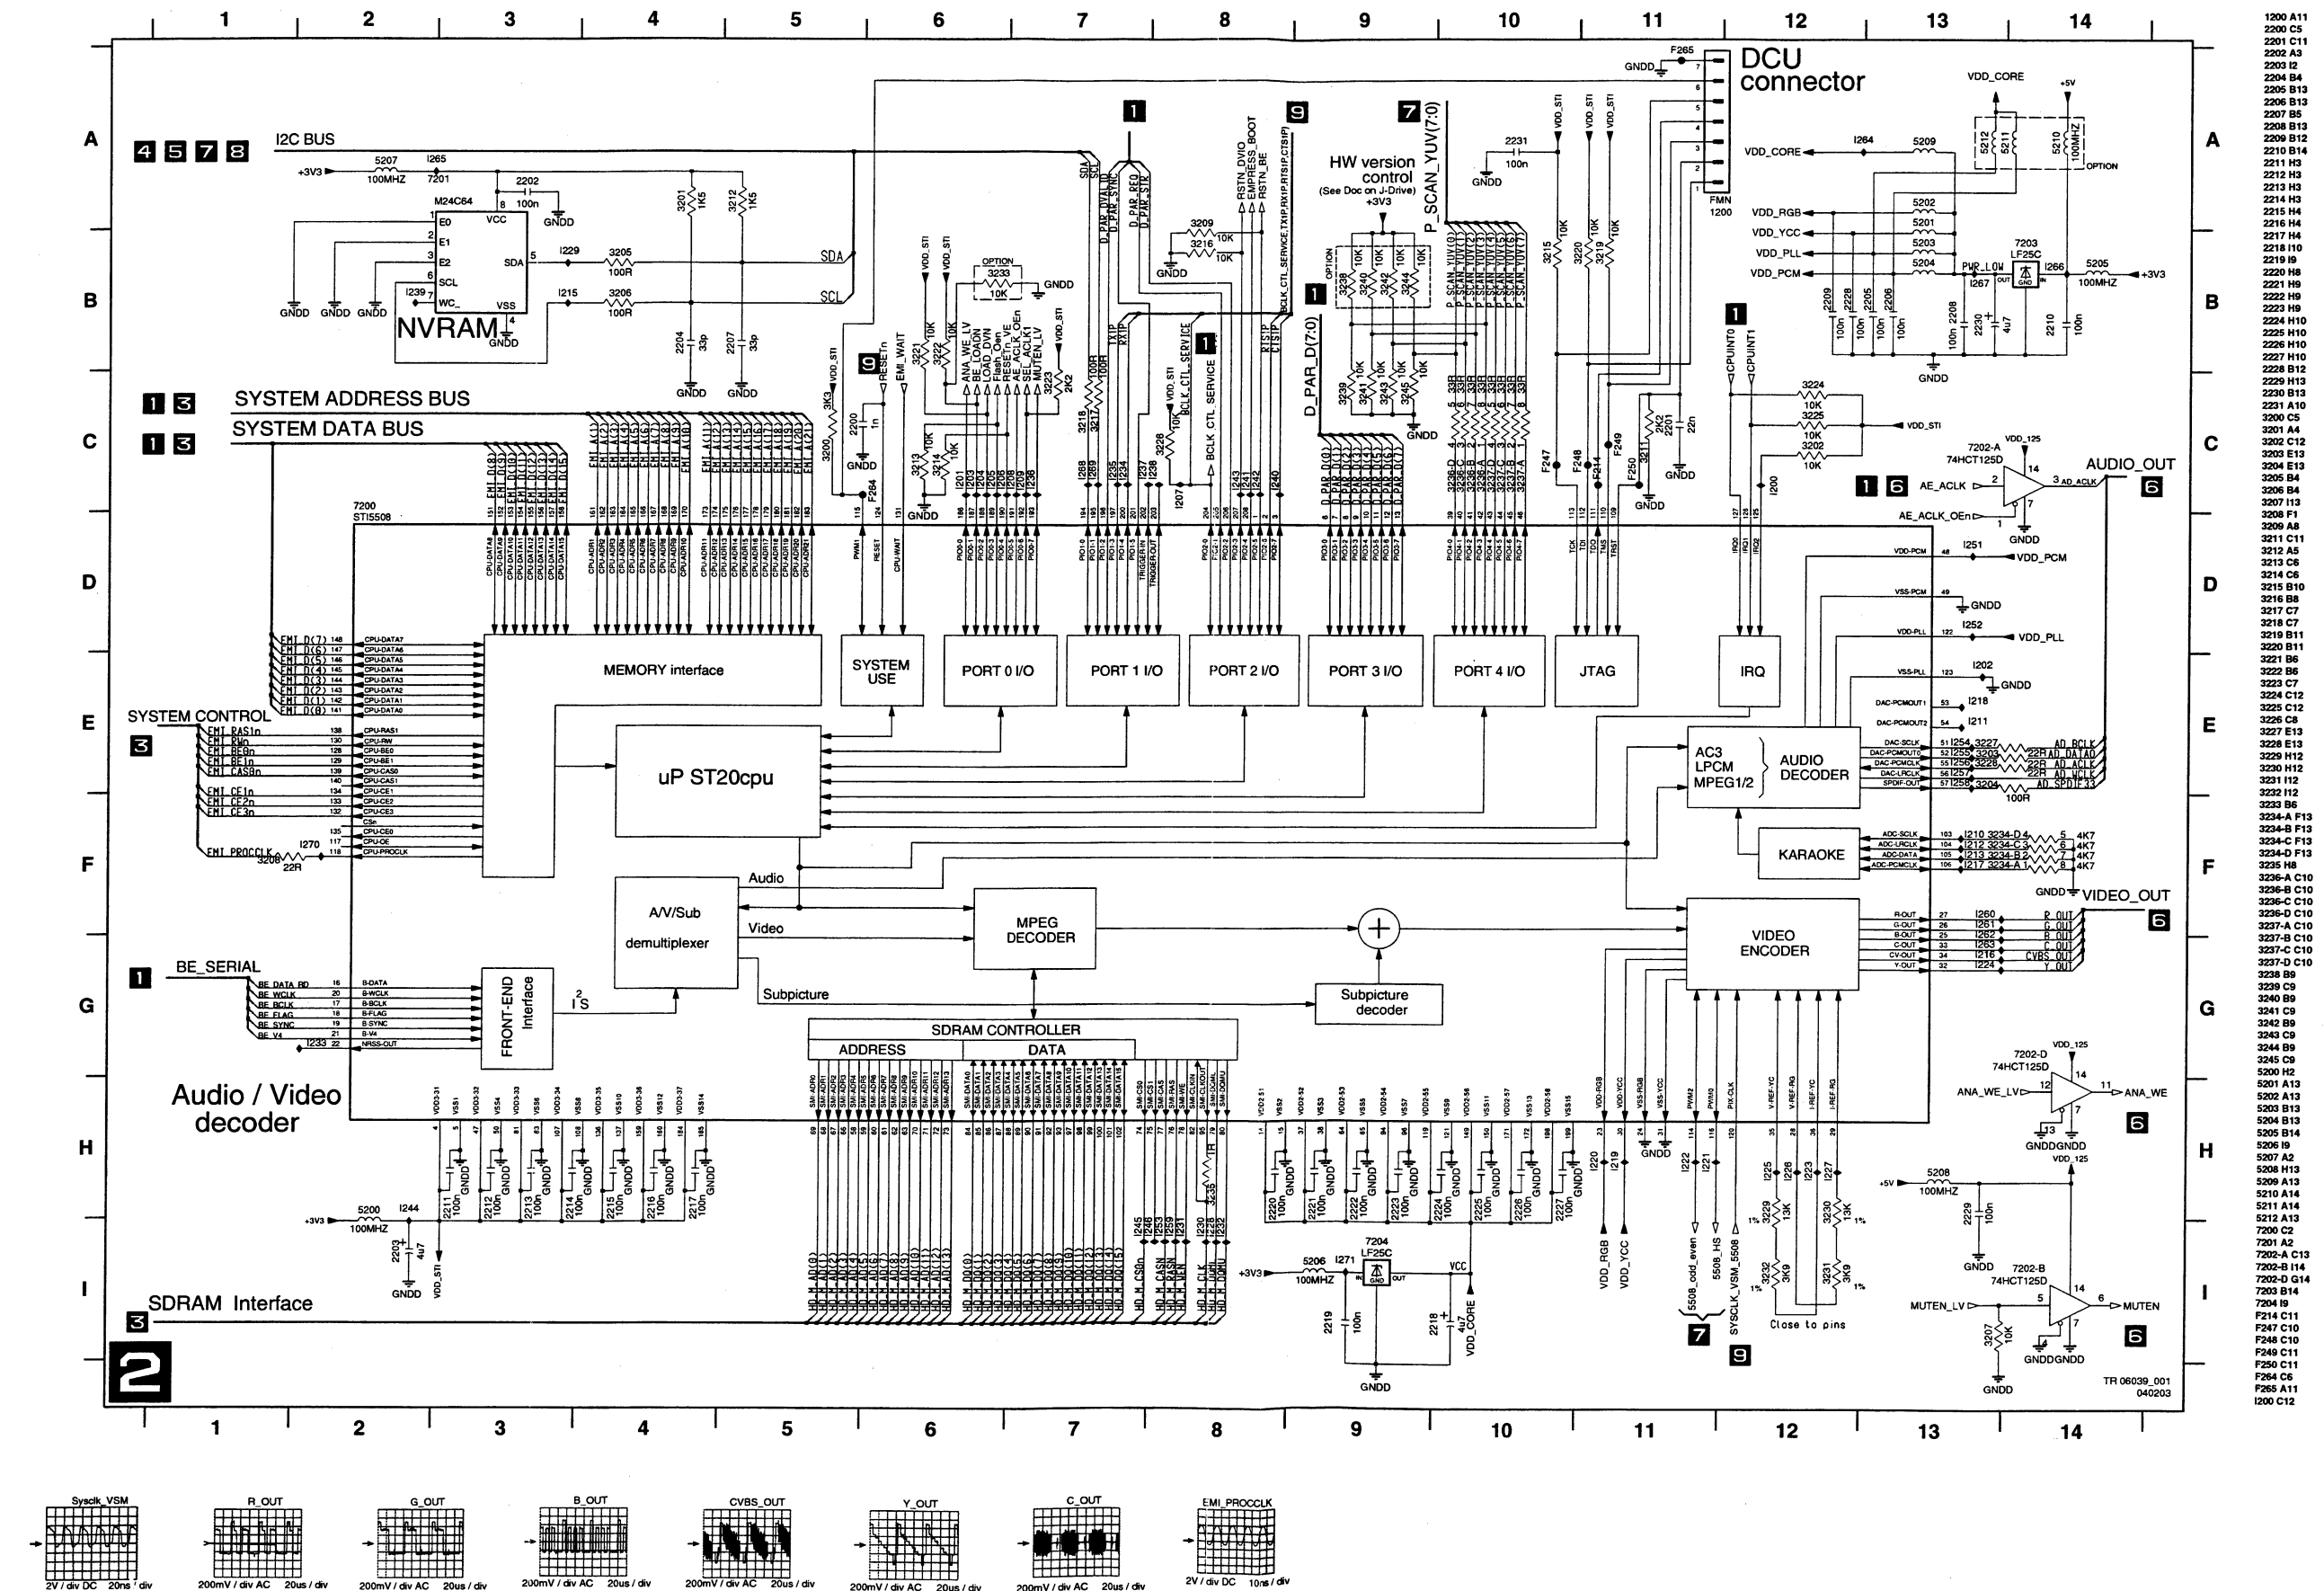


Digital Board 1.5: AV Decoder Memory

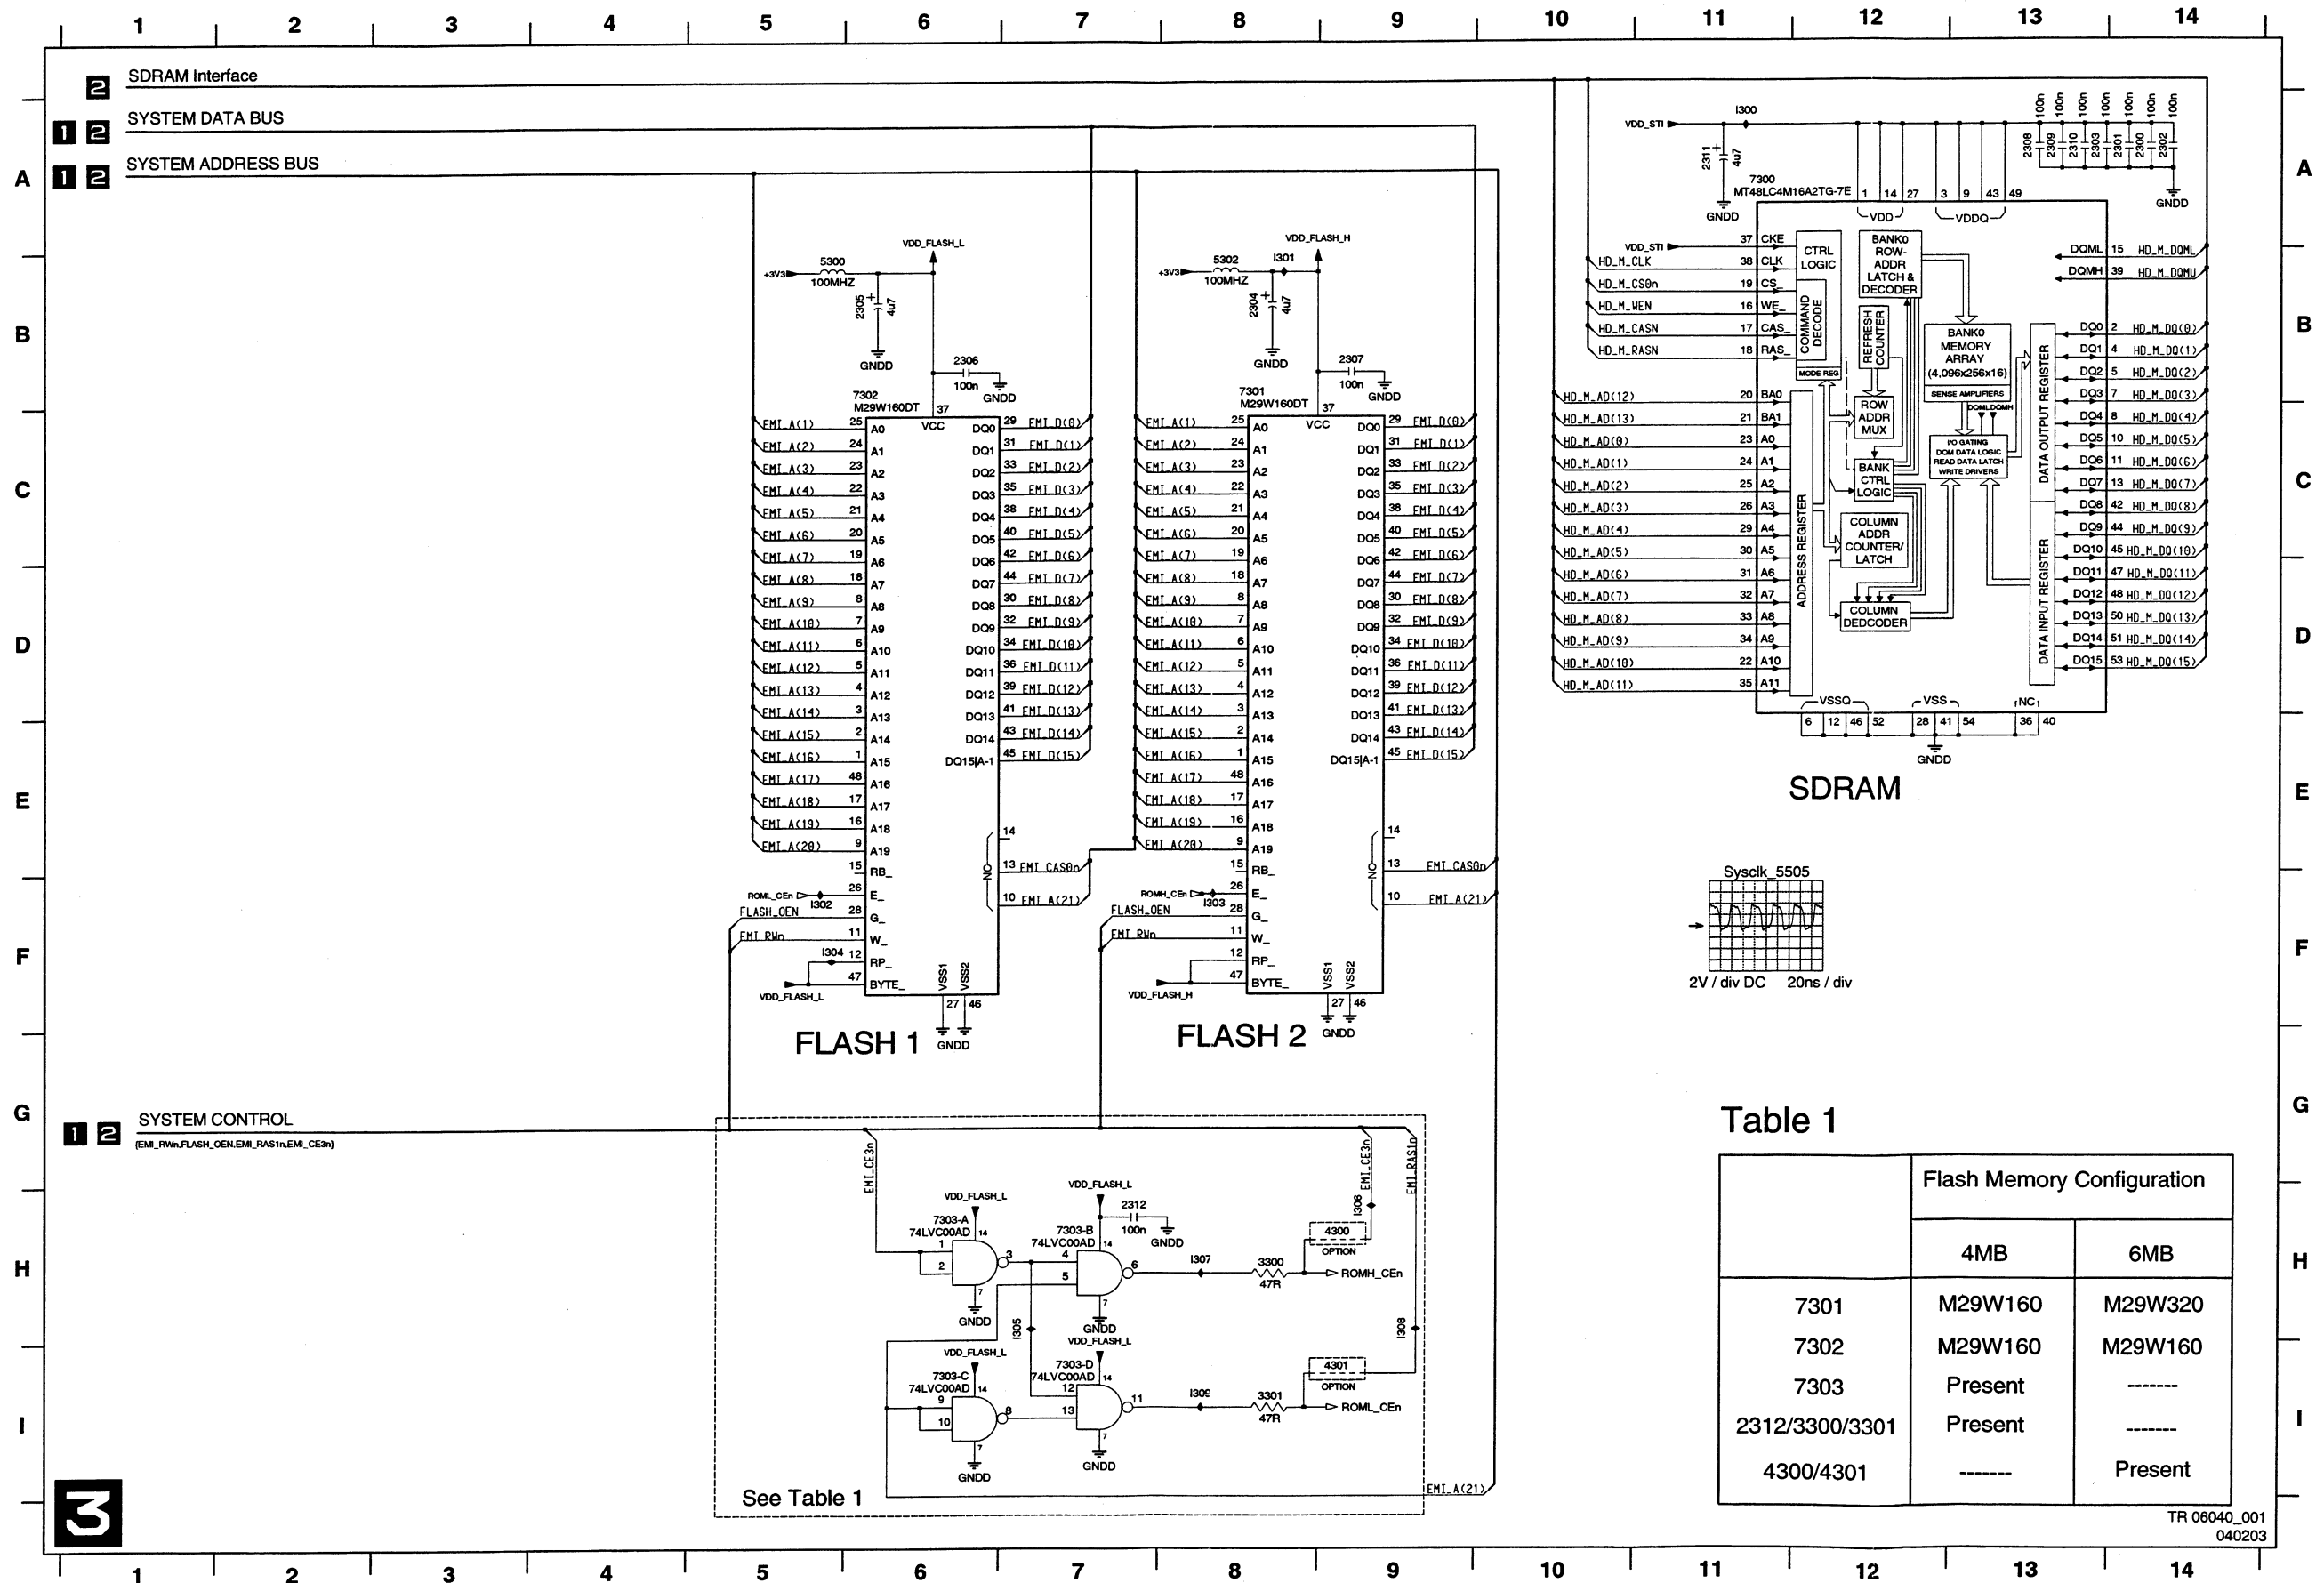

2300 A14
2301 A14
2302 A14
2303 A13
2304 38
2305 38
2306 38
2307 38
2308 A13
2309 A13
2310 A13
2311 A11
2312 H7
3300 H7
3301 8
4300 H9
4301 9
5302 38
5303 38
7301 A11
7302 38
7303-A H8
7303-B H7
7303-C H6
7303-D H7
I300 A11
I301 8
I302 F5
I303 F5
I304 F5
I305 H7
I306 H9
I307 H9
I308 H9
I309 H1




Digital Board 1.5: Video Encoder, Empress

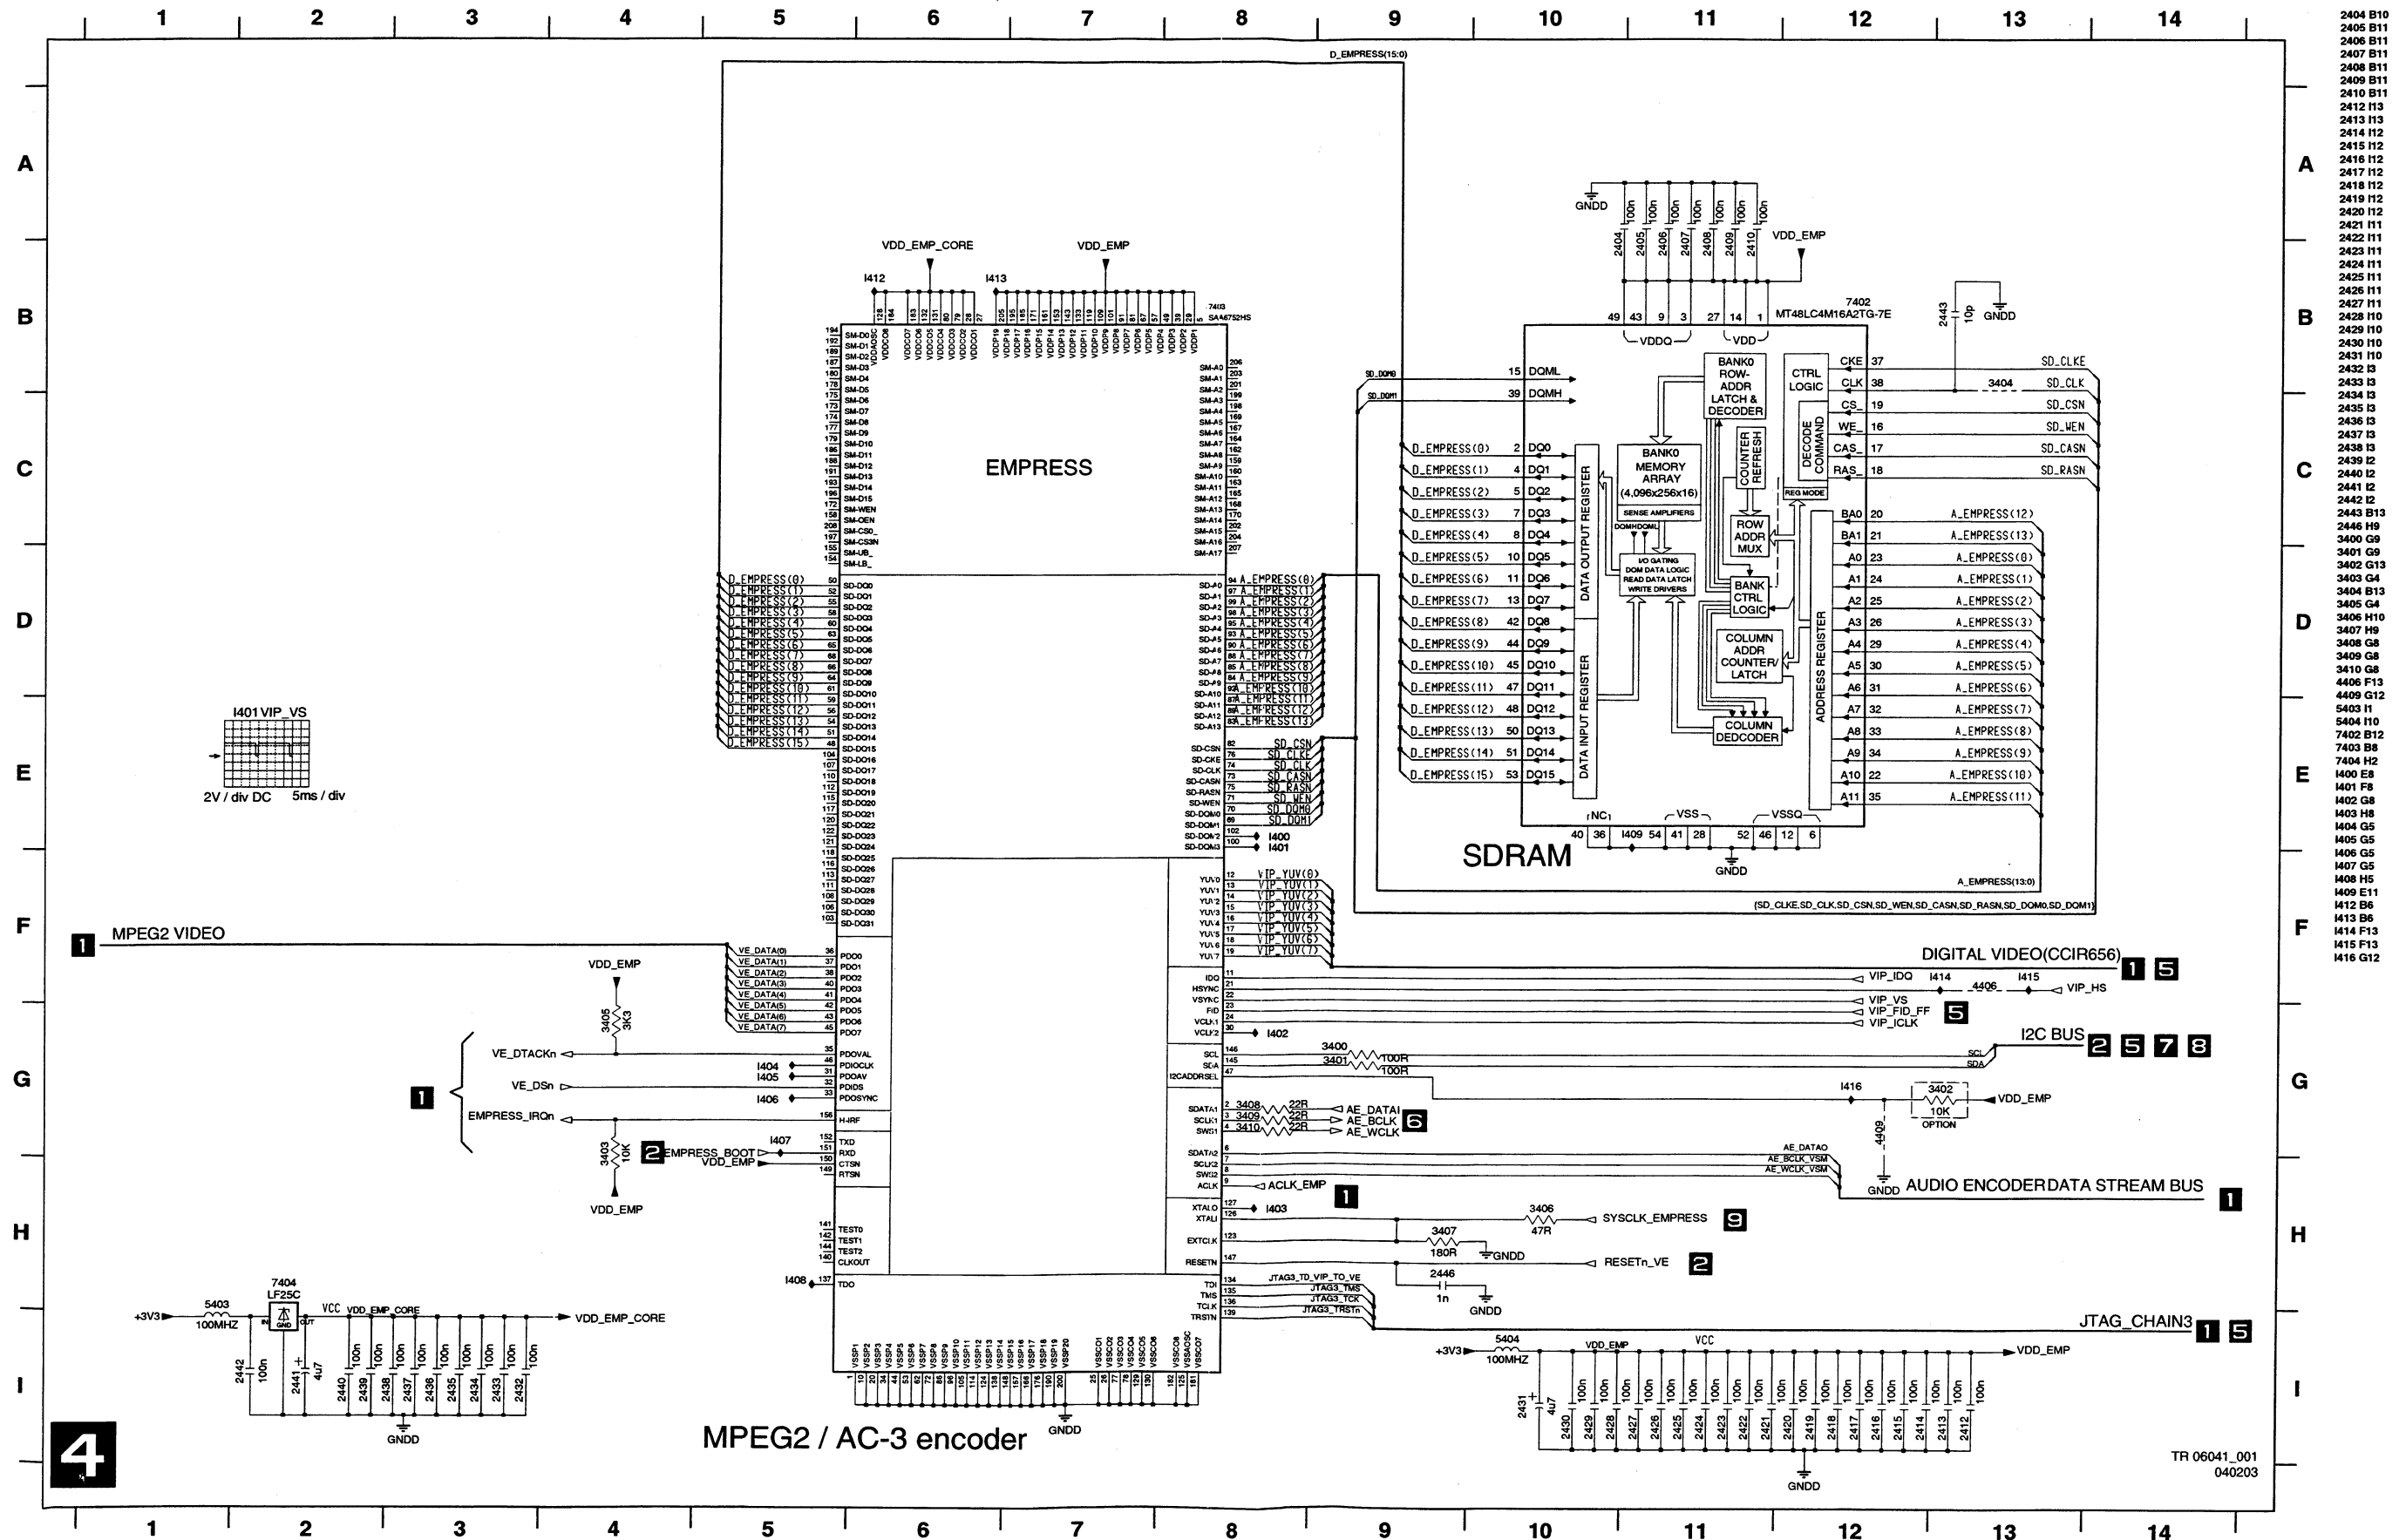


2404 B10
2405 B11
2406 B11
2407 B11
2408 B11
2409 B11
2410 B11
2412 I13
2413 I13
2414 I12
2415 I12
2416 I12
2417 I12
2418 I12
2419 I12
2420 I12
2421 I11
2422 I11
2423 I11
2424 I11
2425 I11
2426 I11
2427 I11
2428 I10
2429 I10
2430 I10
2431 I10
2432 I3
2433 I3
2434 I3
2435 I3
2436 I3
2437 I3
2438 I3
2439 I2
2440 I2
2441 I2
2442 I2
2443 B13
2446 H9
3400 G9
3401 G9
3402 G13
3403 G4
3404 B13
3405 G4
3406 H10
3407 H9
3408 G8
3409 G8
3410 G8
4406 F13
4409 G12
5403 I1
5404 I10
7402 B12
7403 B8
7404 H2
I400 E8
I401 F8
I402 G8
I403 G8
I404 G5
I405 G5
I406 G5
I407 G5
I408 H5
I409 E11
H12 B6
H13 B6
H14 F13
H15 F13
H16 G12

Digital Board 1.5: VIP CVBS Y/C Video Input

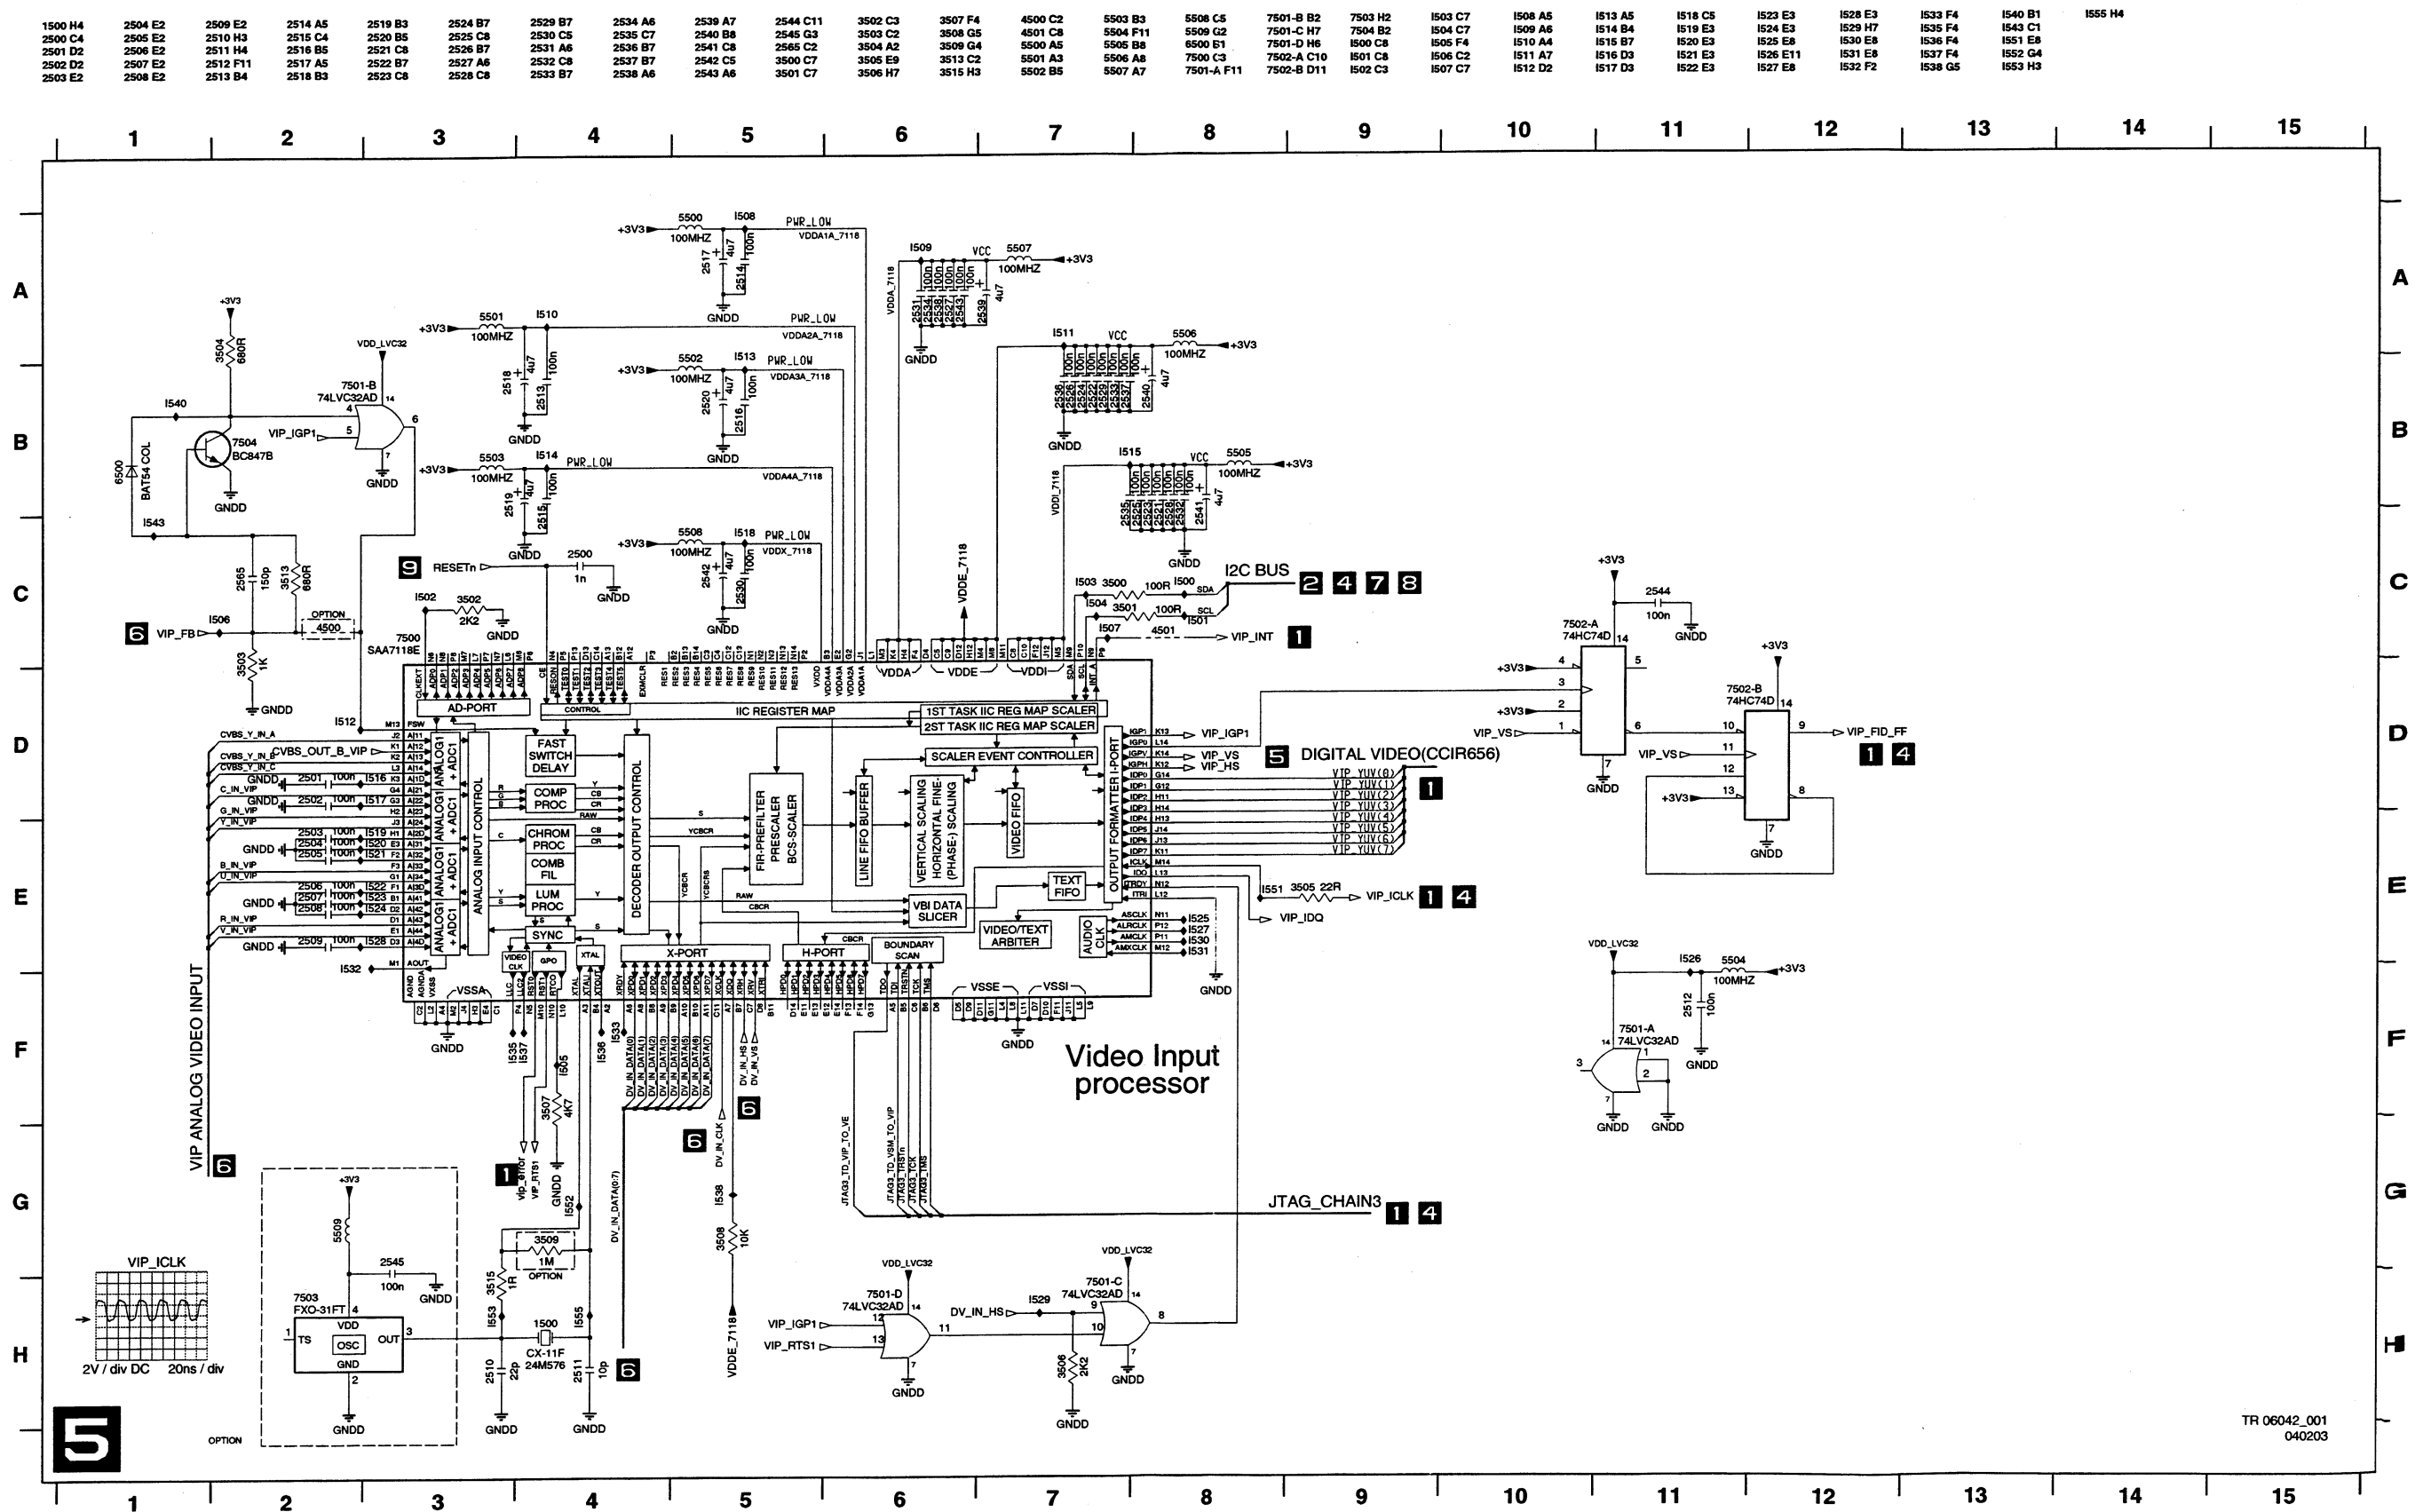


Digital Board 1.5: Analog Board Cons. Video In / Output

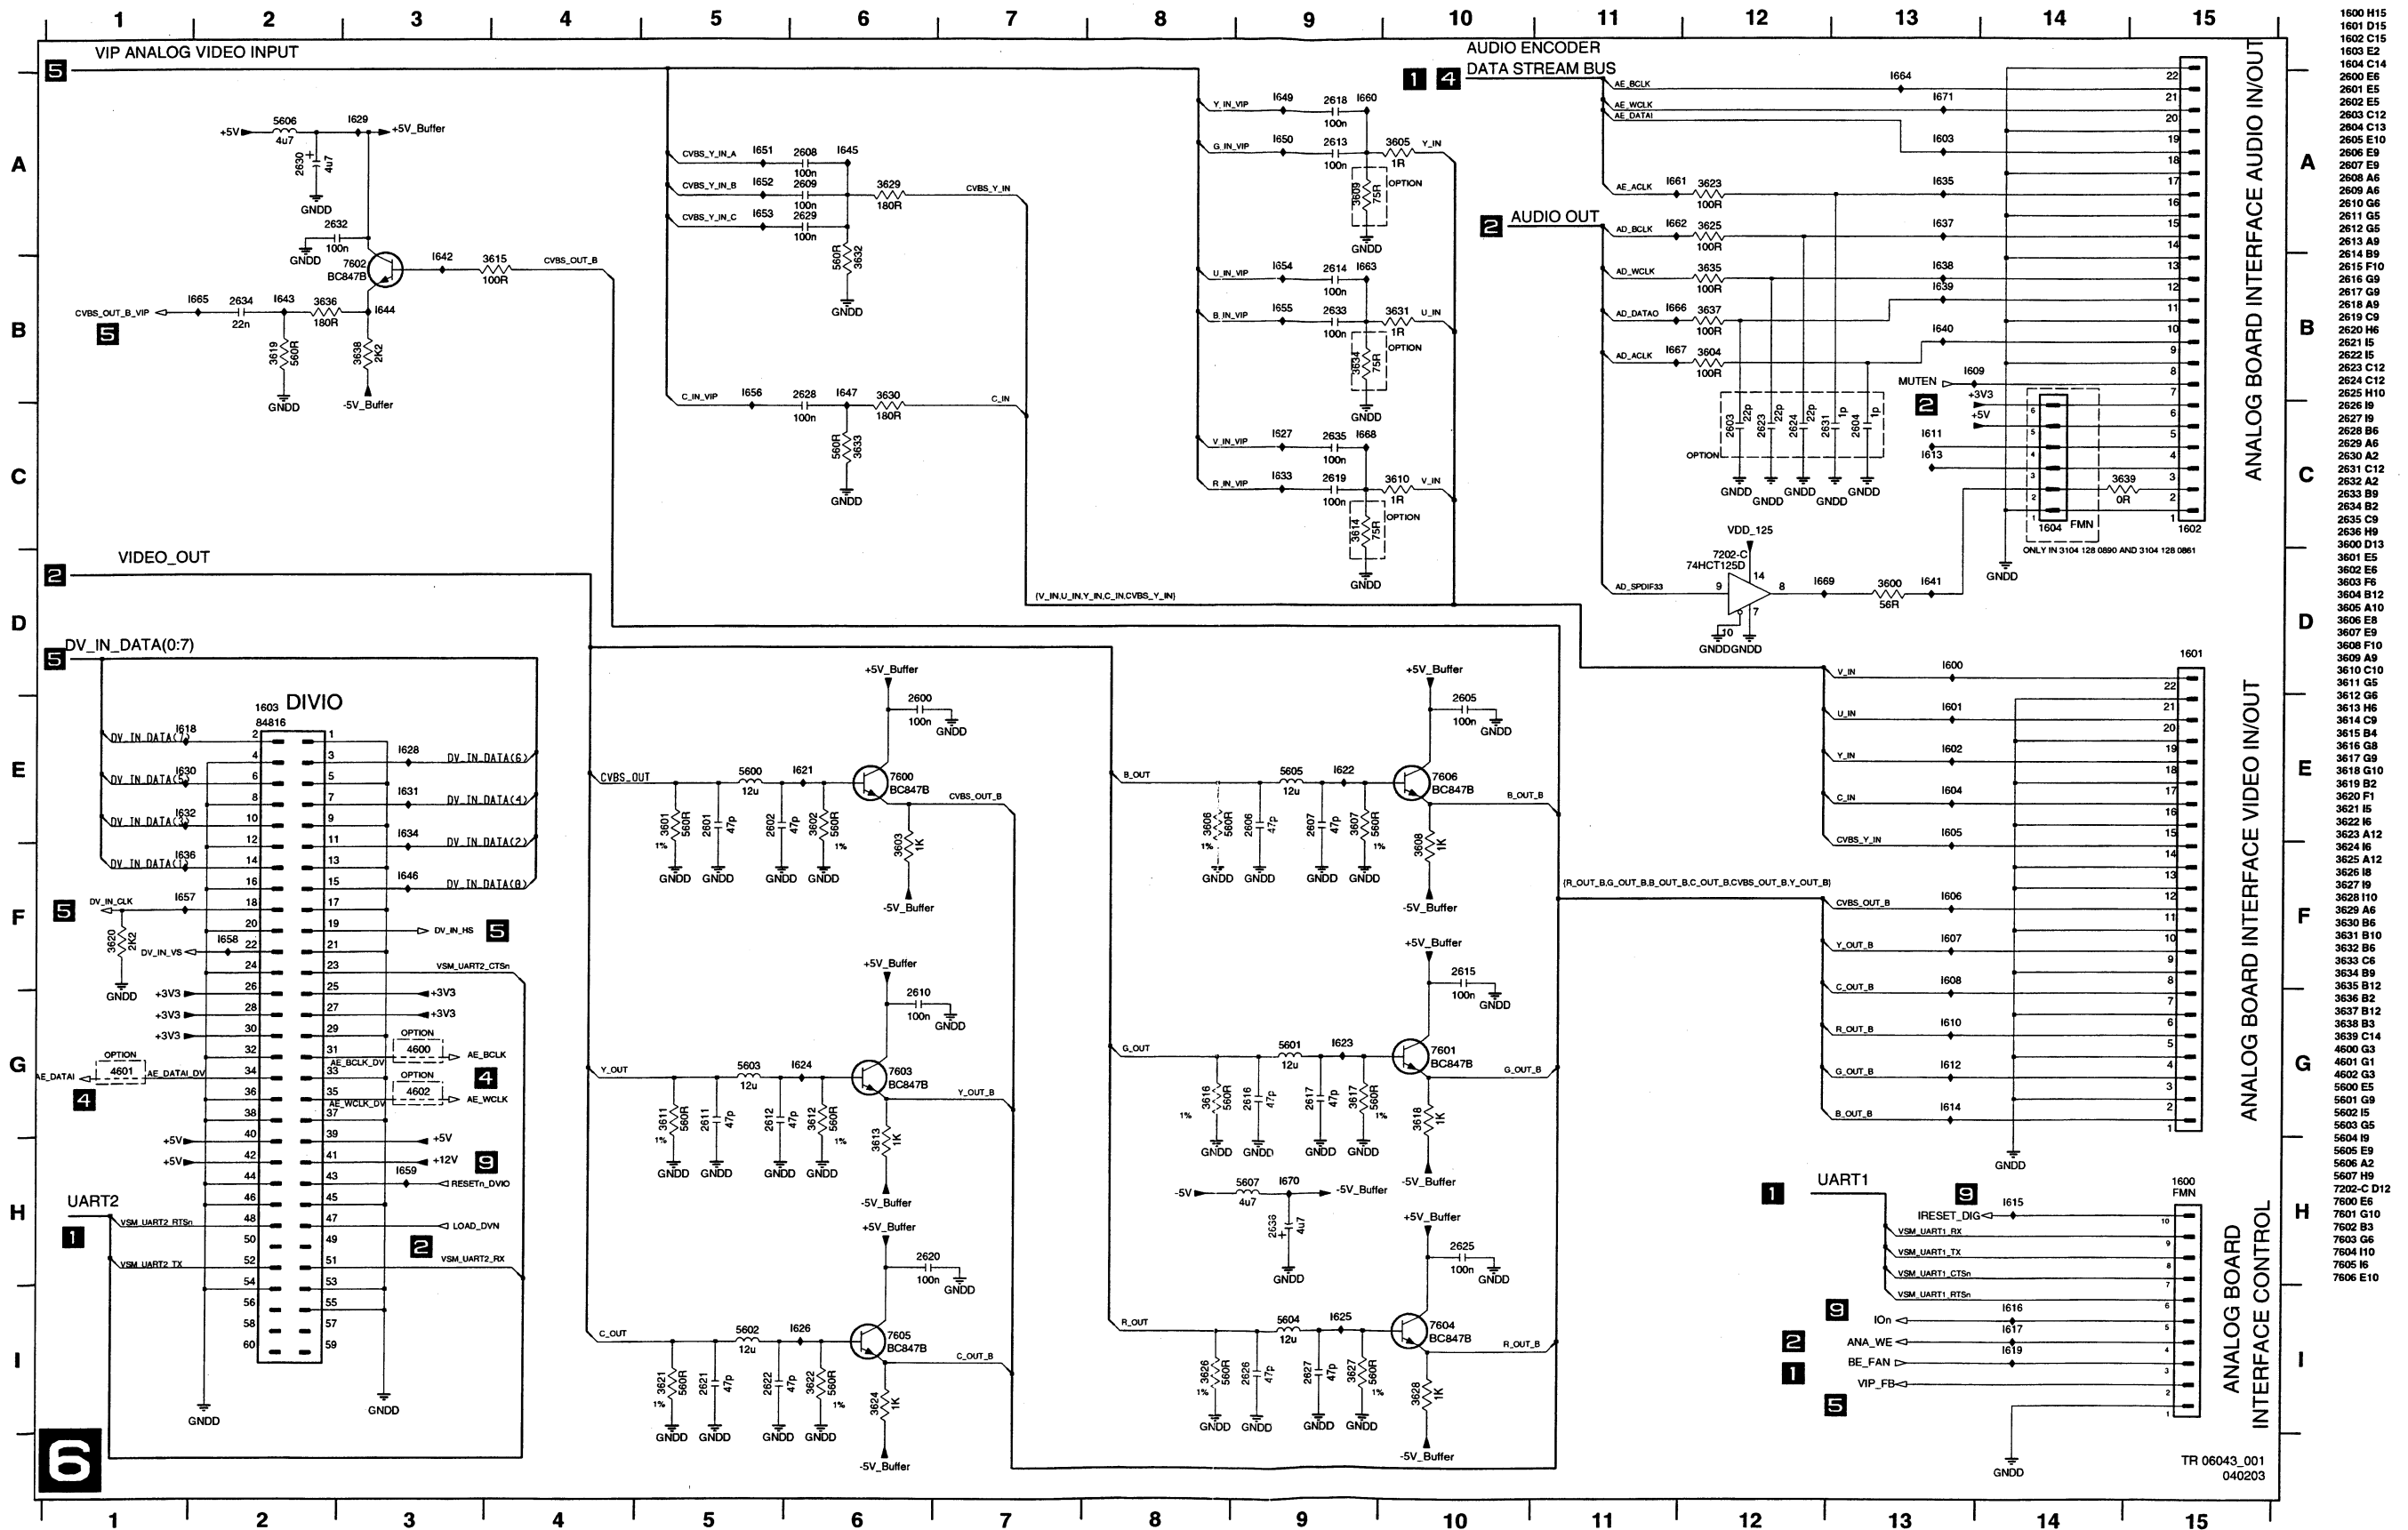


1600 H15
1601 D15
1602 C15
1603 E2
1604 C14
2600 E6
2601 E5
2602 E5
2603 C12
2604 C13
2605 E10
2606 E9
2607 E9
2608 A6
2609 A6
2610 G6
2611 G5
2612 G5
2613 A9
2614 B9
2615 F10
2616 G9
2617 G9
2618 A9
2619 C9
2620 H6
2621 I5
2622 I5
2623 C12
2624 C12
2625 H10
2626 I9
2627 I9
2628 B6
2629 A6
2630 A2
2631 C12
2632 A2
2633 B9
2634 B2
2635 C9
2636 H9
3600 D13
3601 E5
3602 E6
3603 F6
3604 B12
3605 A10
3606 E8
3607 E9
3608 F10
3609 A9
3610 C10
3611 G5
3612 G6
3613 H6
3614 C9
3615 B4
3616 G8
3617 G9
3618 B10
3619 B2
3620 F1
3621 I5
3622 I6
3623 A12
3624 A6
3625 A12
3626 I8
3627 I9
3628 I10
3629 A6
3630 B6
3631 B10
3632 B6
3633 C6
3634 B9
3635 B12
3636 B2
3637 B12
3638 B3
3639 C14
4600 G3
4601 G1
4602 G3
5600 E5
5601 G9
5602 I5
5603 G5
5604 I9
5605 E9
5606 A2
5607 H9
7202-C D12
7600 E6
7601 G10
7602 B3
7603 G6
7604 I10
7605 I6
7606 E10

TR 06043_001
040203

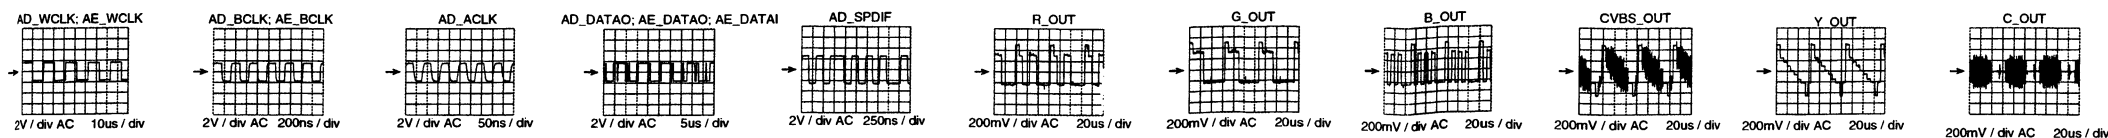


Digital Board 1.5: Progressive Scan

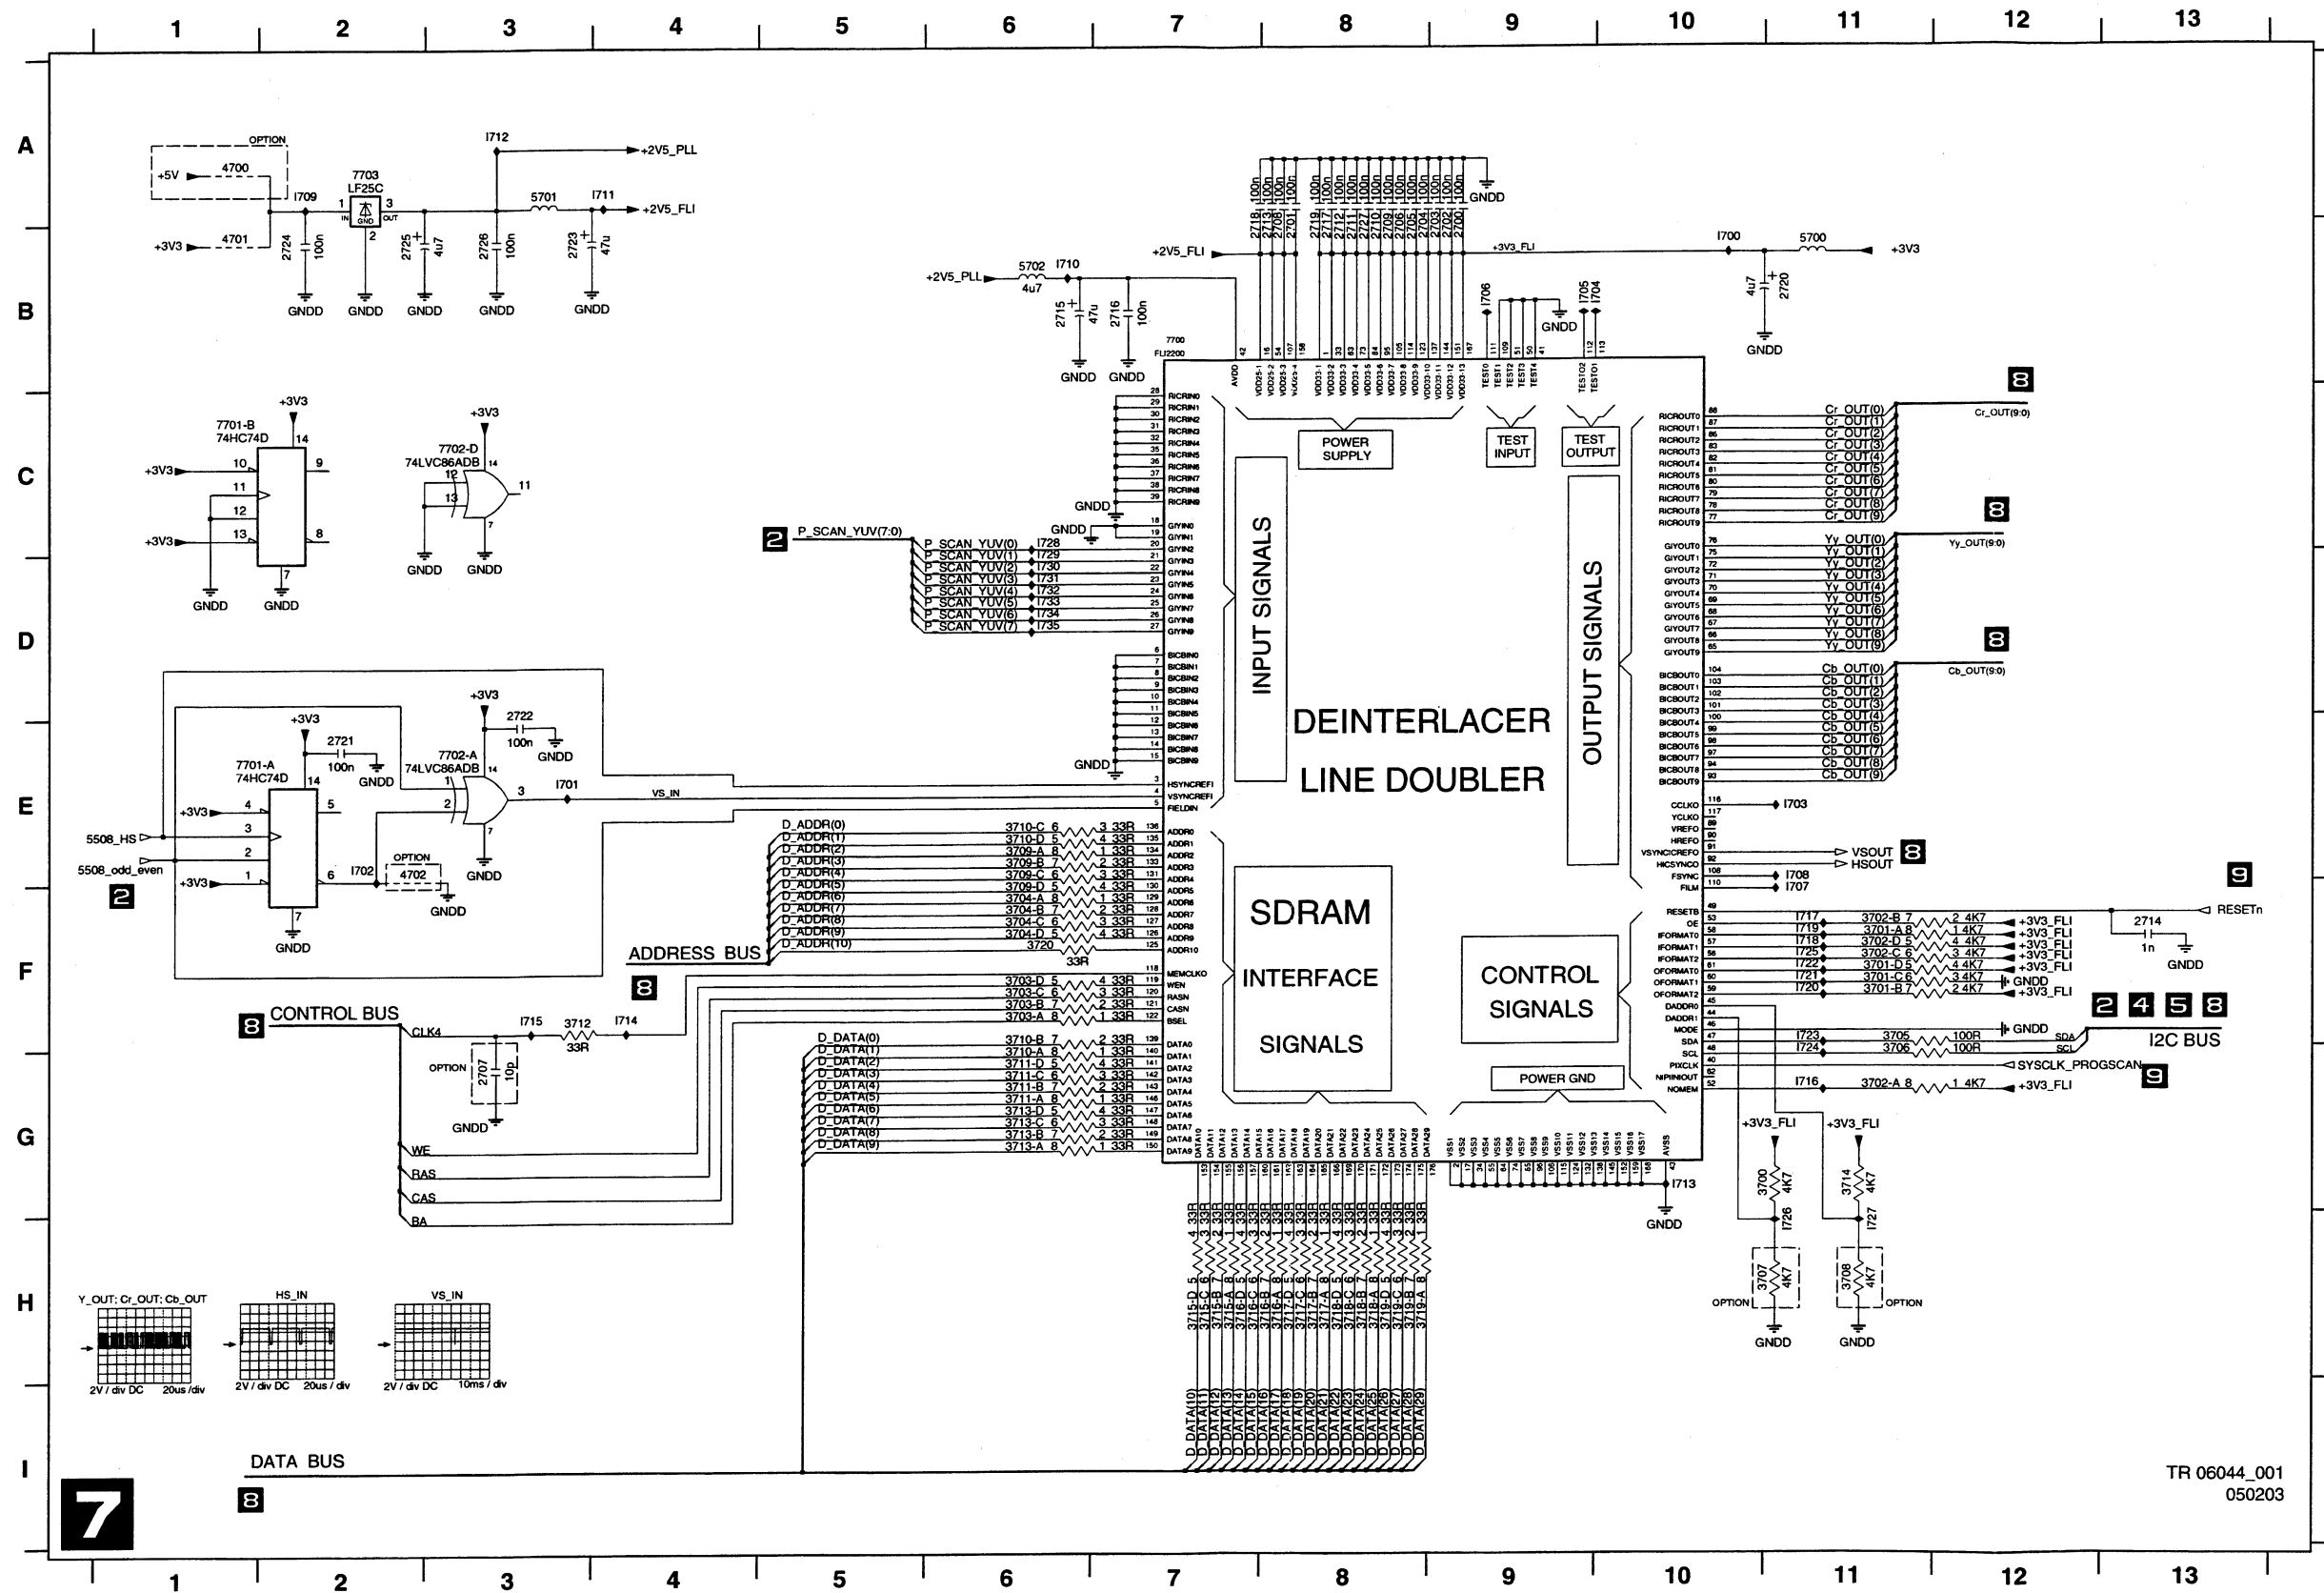TR 06044_001
050203

2700 B9
2701 B8
2702 B9
2703 B9
2704 B8
2705 B8
2706 B8
2707 G3
2708 B8
2709 B8
2710 B8
2711 B8
2712 B8
2713 B8
2714 F13
2715 B6
2716 B7
2717 B8
2718 B7
2719 B8
2720 B11
2721 E2
2722 D3
2723 B3
2724 B2
2725 B2
2726 B3
2727 B8
3700 G11
3701-A F11
3701-B F11
3701-C F11
3701-D F11
3702-A G11
3702-B F11
3702-C F11
3702-D F11
3703-A F6
3703-B F6
3703-C F6
3703-D F6
3704-A F6
3704-B F6
3704-C F6
3704-D F6
3705 F11
3706 G11
3707 H11
3708 H11
3709-A E6
3709-B E6
3709-C E6
3709-D E6
3710-A G6
3710-B F6
3710-C E6
3710-D E6
3711-A G6
3711-B G6
3711-C G6
3711-D G6
3712 F3
3713-A G6
3713-B G6
3713-C G6
3713-D G6
3714 G11
3715-A H7
3715-B H7
3715-C H7
3715-D H7
3716-A H8
3716-B H8
3716-C H7
3716-D H7
3717-A H8
3717-B H8
3717-C H8
3717-D H8
3718-A H8
3718-B H8
3718-C H8
3718-D H8
3719-A H8
3719-B H8
3719-C H8
3719-D H8
3720 F6
4700 A1
4701 B1
4702 E2
5700 B11
5701 A3
5702 B6
7700 B7
7701-A E1
7701-B C1
7702-A E3
7702-D C3
7703 A2
7704 B10
7705 E3
7706 E2
7707 E11
7708 B9
7709 B9
7710 B9
7711 A4
7712 A3
7713 G10
7714 F4
7715 F3
7716 G11
7717 F11
7718 F11
7719 F11
7720 F11
7721 F11
7722 F11
7723 F11
7724 G11
7725 F11
7726 H11
7727 H11
7728 C6
7729 D6
7730 D6
7731 D6
7732 D6
7733 D6
7734 D6
7735 D6

1800 D14	2806 B3	2812 B3	2818 C7	2824 C14	2832 E12	3800 G4	3806 B8	3812 D14	3818 E14	3824 F14	5801 B12	5807 E12	7802 B14	8003 F6	81012 E13	8116 F6	8222 D15	8228 D6	8324 E6	8400 G7	8406 E6	8522 G4	8613 C8	8719 D13
2000 B15	2813 B3	2813 B3	2818 C8	2826 D11	2832 E12	3801 C14	3807 C14	3813 D13	3819 E14	3825 F14	5802 B13	5808 E13	7803-A D14	8005 F6	8111 E14	8117 F6	8223 E15	8229 D6	8325 E6	8411 G7	8417 F6	8582 C2	8614 C8	8719 D12
2802 B2	2808 B2	2814 C11	2820 C9	2827 D12	2834 F14	3802 B8	3808 C14	3814 D13	3820 E11	3826 F11	5803 D12	5809 F12	7803-B E14	8006 D13	8121 E10	8118 F12	8224 C6	8320 E6	8326 D2	8422 G7	8468 F6	8699 C2	875 C8	1881 E12
2803 B2	2809 B3	2815 C12	2821 C14	2828 D12	2835 F11	3803 C13	3809 D11	3815 E11	3821 E13	3827 F11	5804 D12	5811 B8	7807 D14	8013 F10	8123 F10	8119 B9	8225 C6	8311 E6	8327 G7	8437 G7	8469 G6	870 C2	876 C13	1882 F13
2804 B2	2810 B3	2816 C12	2822 C9	2829 D14	2836 G11	3804 C13	3810 D6	3816 D14	3822 C13	3828 G4	5805 D13	7800 B1	8011 B13	8008 E10	8114 D2	8220 G6	8226 D6	8322 E6	8328 G7	8444 G8	8550 G6	8711 B12	877 C12	1883 F10
2805 B2	2811 B3	2817 C12	2823 C9	2831 E11	2837 B8	3805 C8	3811 D11	3817 E11	3823 F11	3828 G4	5806 E12	7801 C6	8002 C14	8009 E10	8115 F6	8221 C15	8227 D6	8323 E6	8329 G7	8458 G8	8511 G4	872 B12	878 C12	1884 G10




[illegible]

TR 06046_001
050203


900 A14
1901-1 G14
1901-2 F14
1901-3 G14
1901-4 H14
1901-5 F14
1901-6 H14
1901-7 F14
1902 I7
1903 I6
1904 I7
1905 I7
1906 I8
1907 I8
2900 A13
2901 A13
2902 A13
2903 B13
2904 B13
2906 A3
2907 A2
2908 A2
2909 G13
2911 H1
2912 H13
2914 F1
2915 F2
2916 B7
3900 A2
3901 B4
3902 B2
3903 B2
3904 G2
3906 E4
3907 E4
3908 F4
3909 F4
3910 G13
3911 G13
3912 I4
3913 G13
3914 C10
3915 D10
3916 G13
3917 H4
3918 H10
3919 H13
3920 H3
3921 H13
3922 I3
3923 I3
3924 A7
3925 B8
5900 A13
5901 B13
5903 A1
5905 H1
5907 F1
6900 B7
7002-B C9
7002-C D9
7900 A3
7901 B2
7902 B7
7904-A D1
7904-B F3
7904-C D3
7904-D H3
7904-E C3
7904-F E1
7905-A F10
7905-B H11
7905-C G12
7905-D H12
7905-E G9
7905-F G10
7906 H2
F831 F13
F832 G13
F833 G13
F834 H13
F835 H13
H900 A2
H901 B4
H902 B4
H903 B2
H904 B7
H905 A13
H906 B13
H907 A13
H908 B13
H909 B4
H11 B2
H12 B8
H13 C3
H15 E3
H16 E4
H17 E4
H18 F13
H19 F4
H20 F4
H21 G12
H22 G12
H23 H4
H24 H4
H25 H1
H26 H11
H27 H12
H28 H12
H30 F2
H31 A12
H32 B7

[illegible]


Layout Digital Board 1.5 (Part 1 Top View)

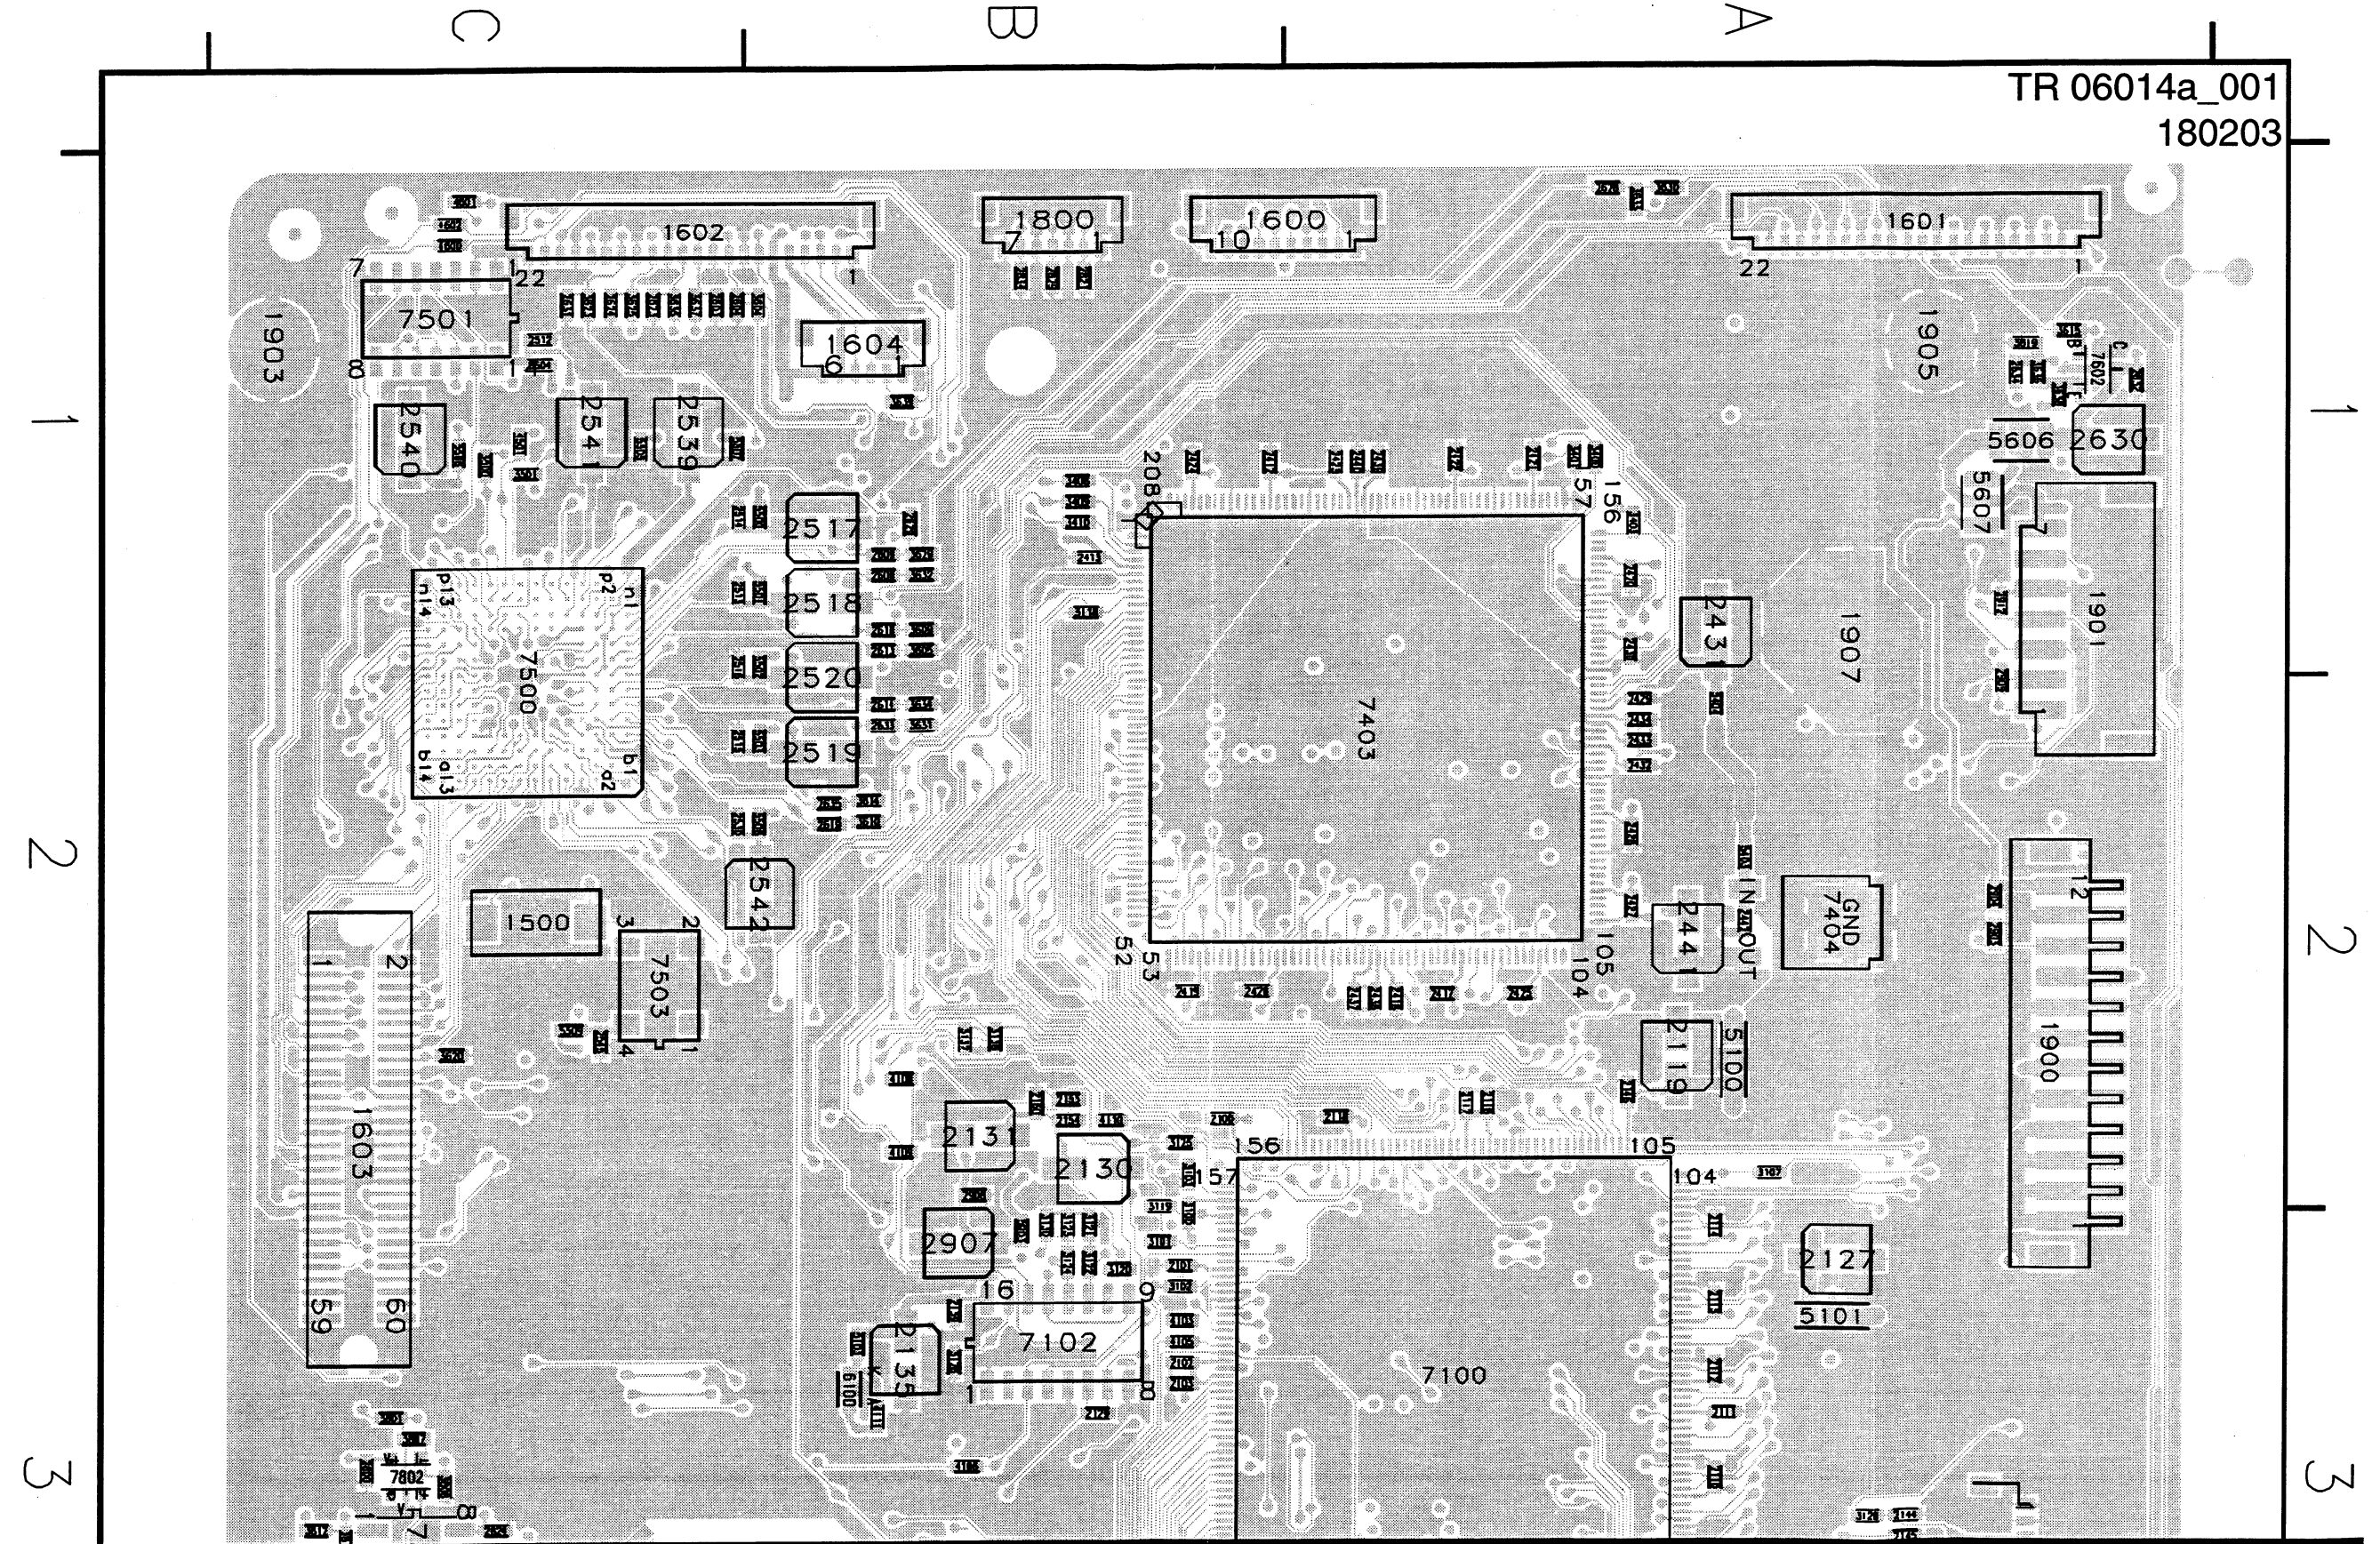

Layout Digital Board 1.5 (Part 2 Top View)

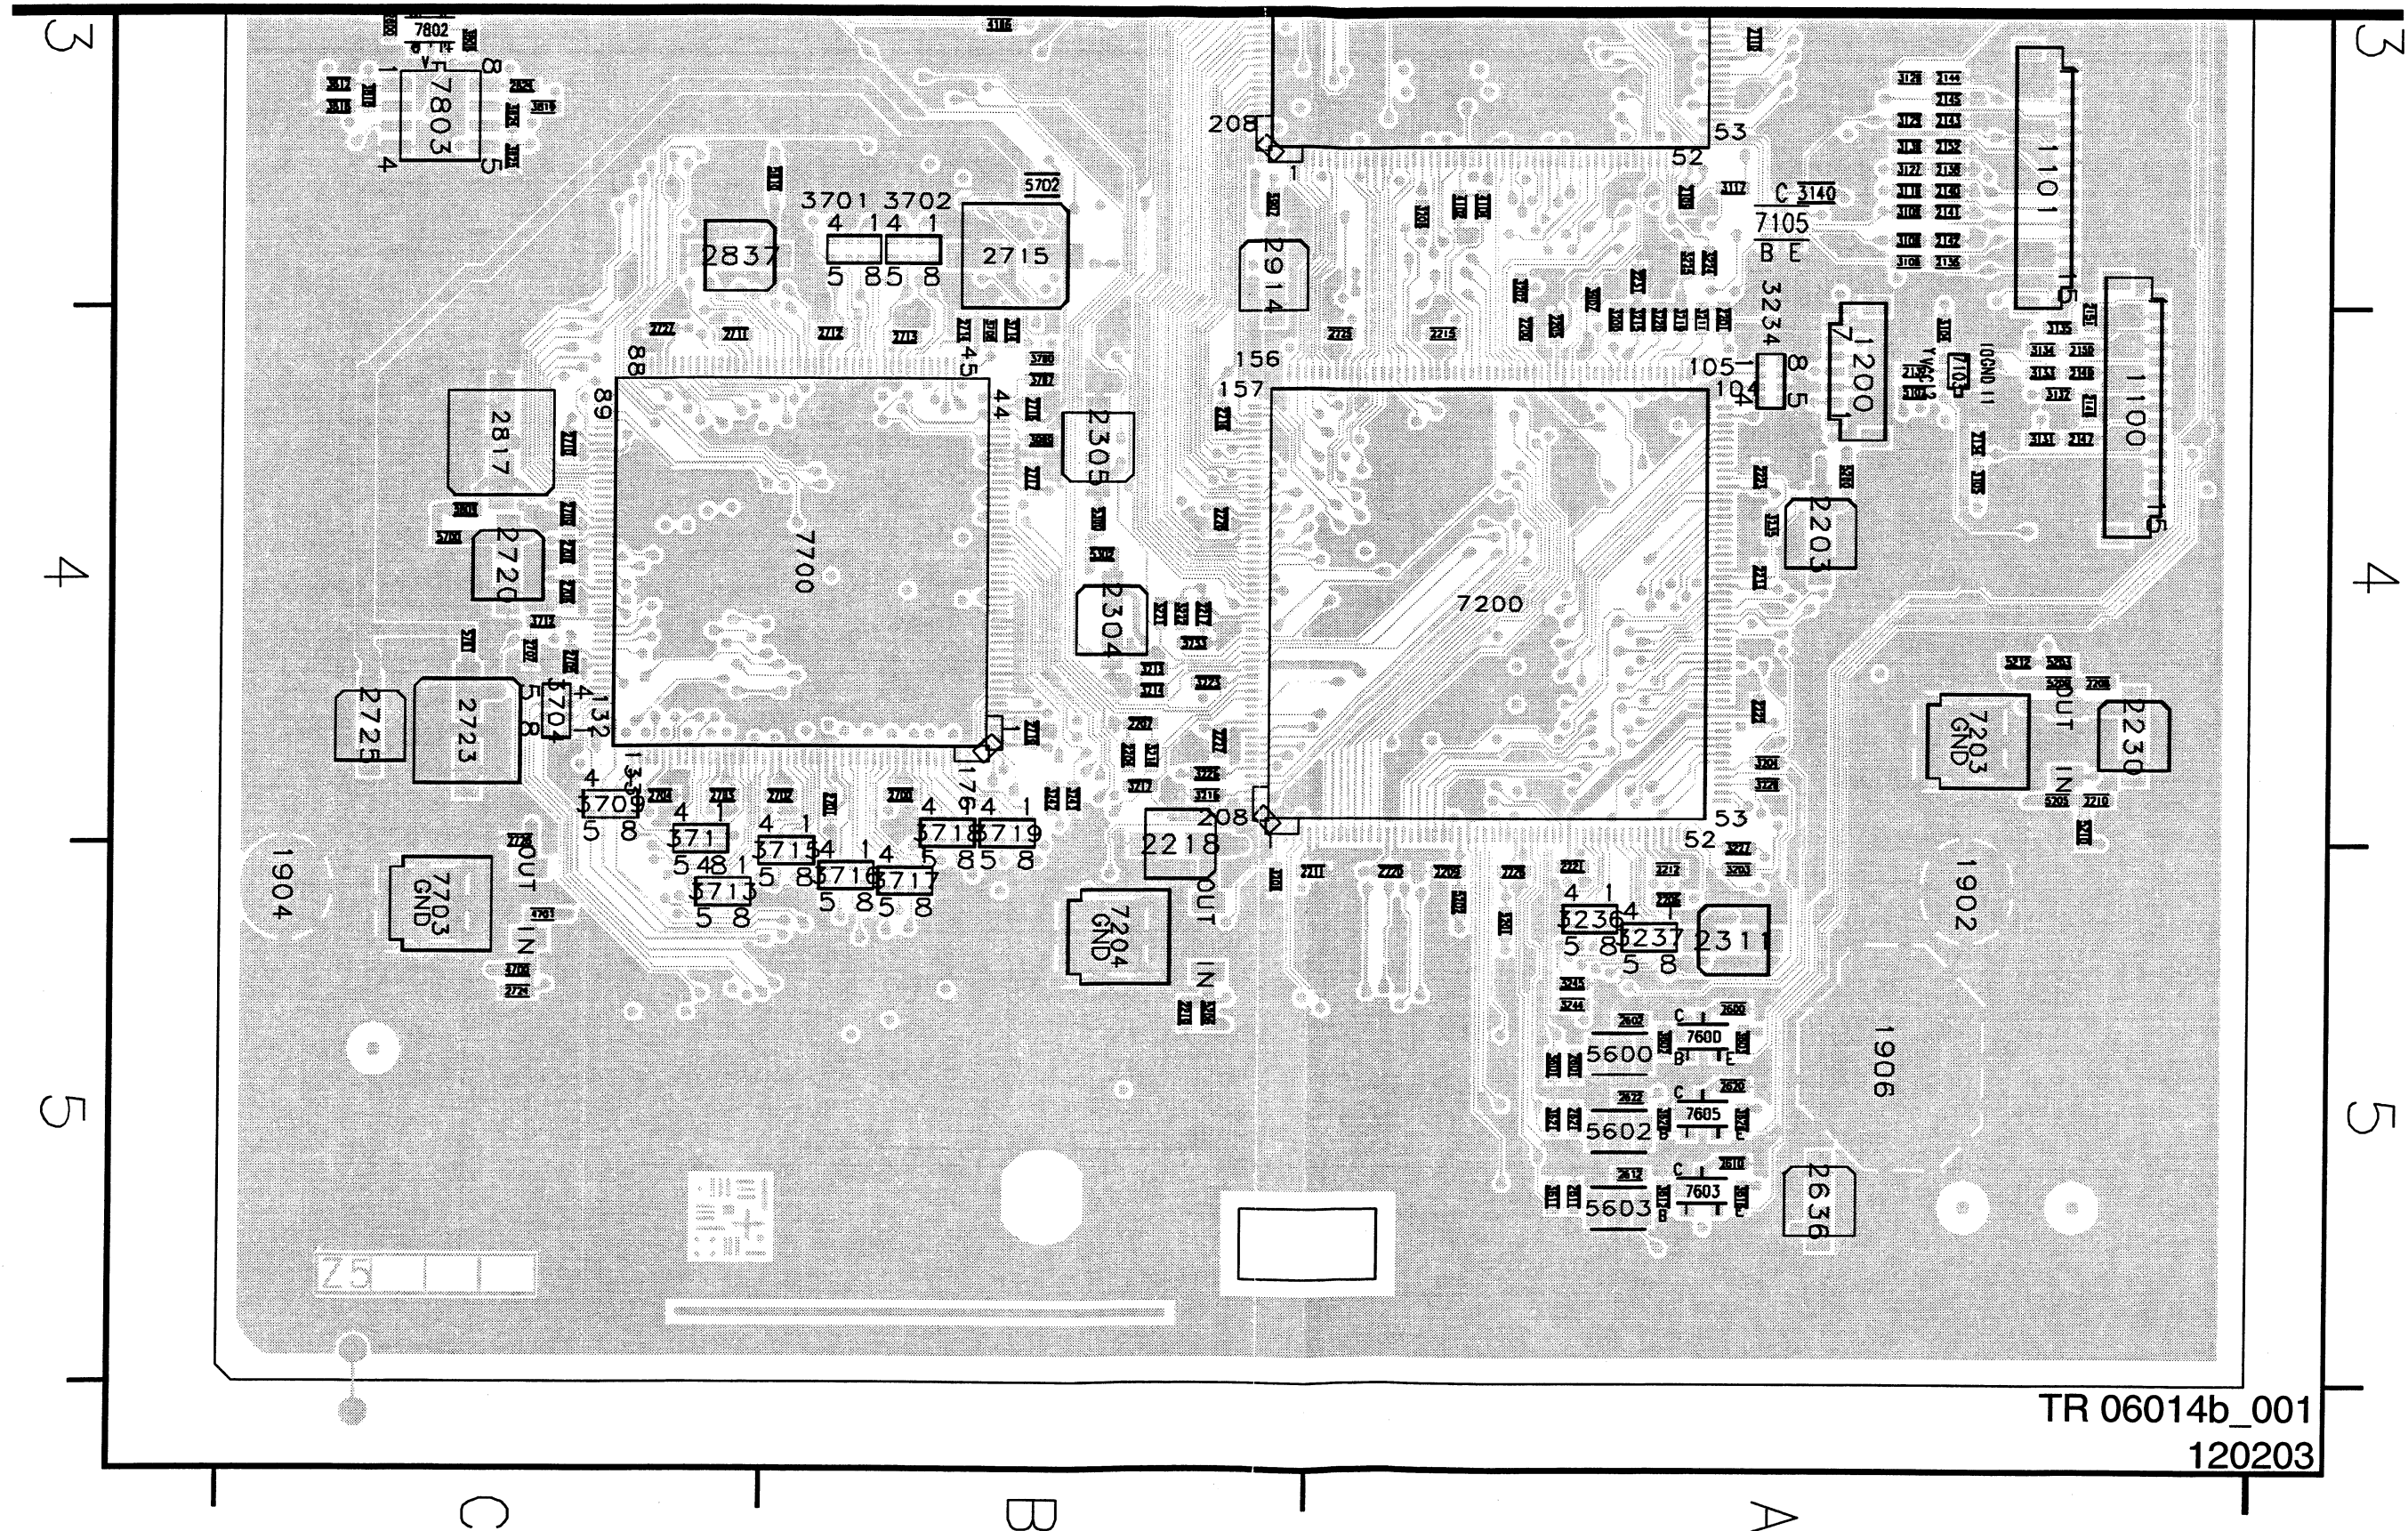
TR 06014b_001
120203

Layout Digital Board 1.5 (Overview Bottom View)

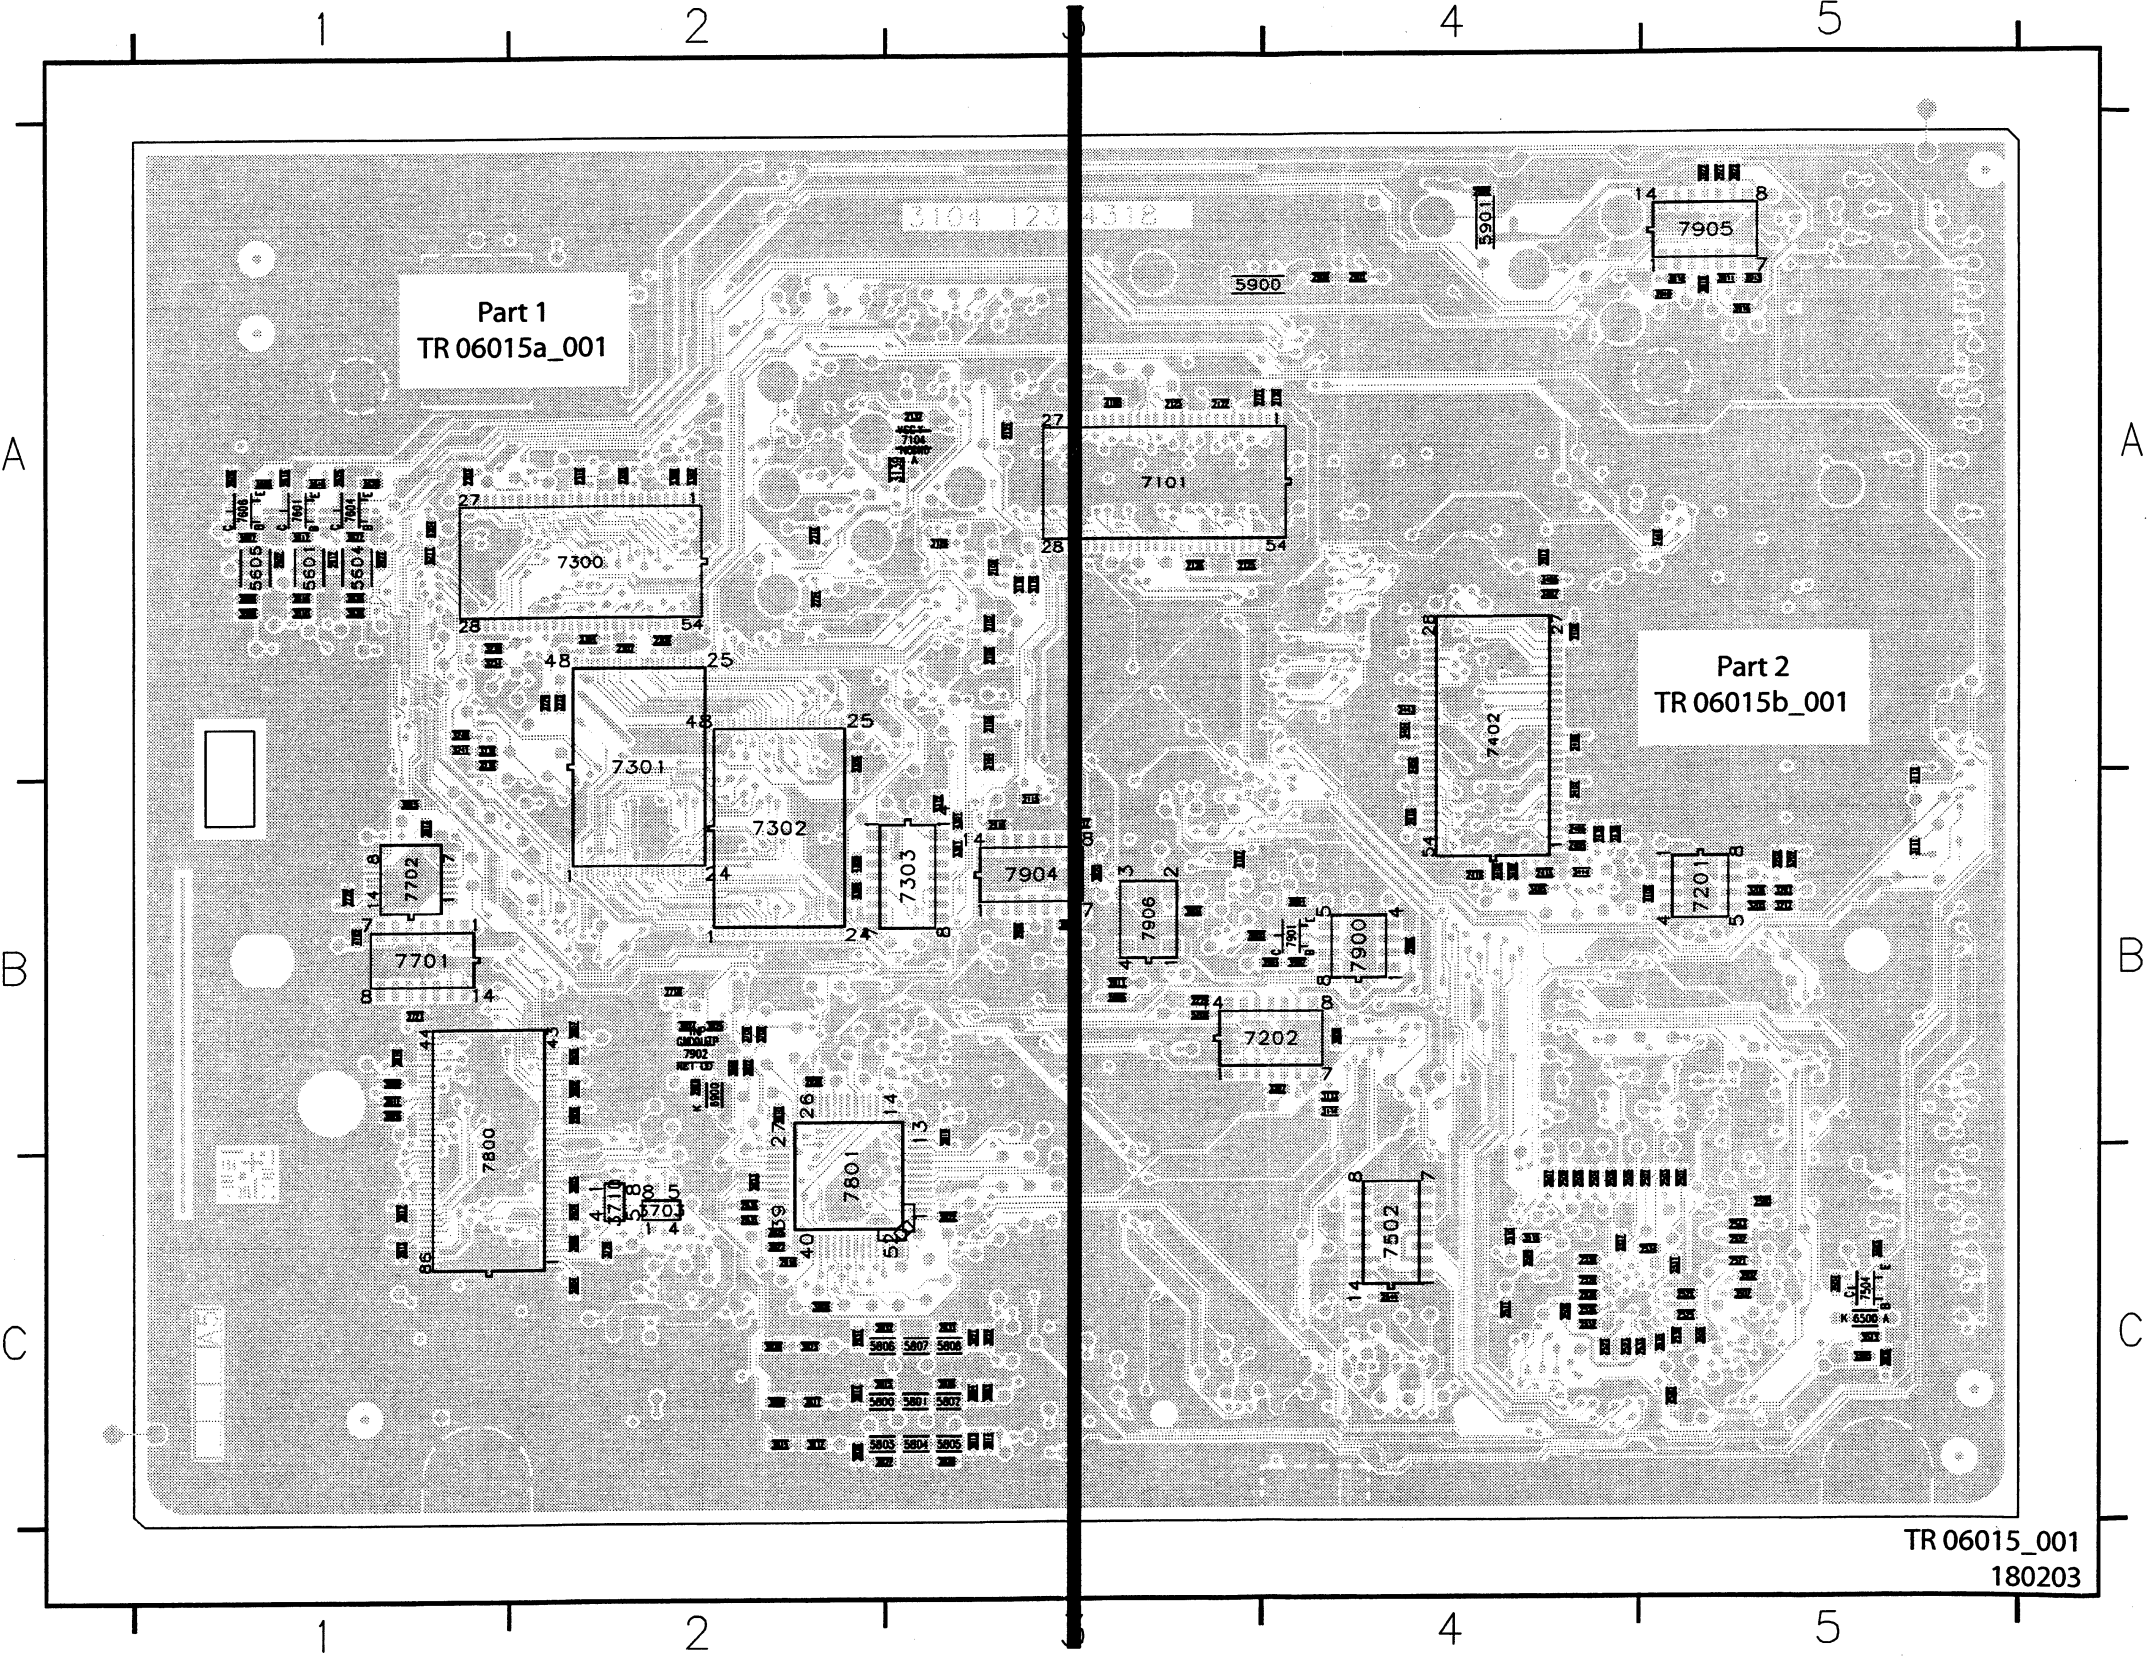


2104	A3	2105	A3	2106	A3	2107	A3	2108	A3	2109	A3	2110	A3	2111	A3	2112	A3	2113	A3	2114	A3	2115	A3	2116	A3	2117	A3	2118	A3	2119	A3	2120	A3	2121	A3	2122	A3	2123	A3	2124	A3	2125	A3	2126	A3	2127	A3	2128	A3	2129	A3	2130	A3	2131	A3	2132	A3	2133	A3	2134	A3	2135	A3	2136	A3	2137	A3	2138	A3	2139	A3	2140	A3	2141	A3	2142	A3	2143	A3	2144	A3	2145	A3	2146	A3	2147	A3	2148	A3	2149	A3	2150	A3	2151	A3	2152	A3	2153	A3	2154	A3	2155	A3	2156	A3	2157	A3	2158	A3	2159	A3	2160	A3	2161	A3	2162	A3	2163	A3	2164	A3	2165	A3	2166	A3	2167	A3	2168	A3	2169	A3	2170	A3	2171	A3	2172	A3	2173	A3	2174	A3	2175	A3	2176	A3	2177	A3	2178	A3	2179	A3	2180	A3	2181	A3	2182	A3	2183	A3	2184	A3	2185	A3	2186	A3	2187	A3	2188	A3	2189	A3	2190	A3	2191	A3	2192	A3	2193	A3	2194	A3	2195	A3	2196	A3	2197	A3	2198	A3	2199	A3	2200	A3	2201	A3	2202	A3	2203	A3	2204	A3	2205	A3	2206	A3	2207	A3	2208	A3	2209	A3	2210	A3	2211	A3	2212	A3	2213	A3	2214	A3	2215	A3	2216	A3	2217	A3	2218	A3	2219	A3	2220	A3	2221	A3	2222	A3	2223	A3	2224	A3	2225	A3	2226	A3	2227	A3	2228	A3	2229	A3	2230	A3	2231	A3	2232	A3	2233	A3	2234	A3	2235	A3	2236	A3	2237	A3	2238	A3	2239	A3	2240	A3	2241	A3	2242	A3	2243	A3	2244	A3	2245	A3	2246	A3	2247	A3	2248	A3	2249	A3	2250	A3	2251	A3	2252	A3	2253	A3	2254	A3	2255	A3	2256	A3	2257	A3	2258	A3	2259	A3	2260	A3	2261	A3	2262	A3	2263	A3	2264	A3	2265	A3	2266	A3	2267	A3	2268	A3	2269	A3	2270	A3	2271	A3	2272	A3	2273	A3	2274	A3	2275	A3	2276	A3	2277	A3	2278	A3	2279	A3	2280	A3	2281	A3	2282	A3	2283	A3	2284	A3	2285	A3	2286	A3	2287	A3	2288	A3	2289	A3	2290	A3	2291	A3	2292	A3	2293	A3	2294	A3	2295	A3	2296	A3	2297	A3	2298	A3	2299	A3	2300	A3	2301	A3	2302	A3	2303	A3	2304	A3	2305	A3	2306	A3	2307	A3	2308	A3	2309	A3	2310	A3	2311	A3	2312	A3	2313	A3	2314	A3	2315	A3	2316	A3	2317	A3	2318	A3	2319	A3	2320	A3	2321	A3	2322	A3	2323	A3	2324	A3	2325	A3	2326	A3	2327	A3	2328	A3	2329	A3	2330	A3	2331	A3	2332	A3	2333	A3	2334	A3	2335	A3	2336	A3	2337	A3	2338	A3	2339	A3	2340	A3	2341	A3	2342	A3	2343	A3	2344	A3	2345	A3	2346	A3	2347	A3	2348	A3	2349	A3	2350	A3	2351	A3	2352	A3	2353	A3	2354	A3	2355	A3	2356	A3	2357	A3	2358	A3	2359	A3	2360	A3	2361	A3	2362	A3	2363	A3	2364	A3	2365	A3	2366	A3	2367	A3	2368	A3	2369	A3	2370	A3	2371	A3	2372	A3	2373	A3	2374	A3	2375	A3	2376	A3	2377	A3	2378	A3	2379	A3	2380	A3	2381	A3	2382	A3	2383	A3	2384	A3	2385	A3	2386	A3	2387	A3	2388	A3	2389	A3	2390	A3	2391	A3	2392	A3	2393	A3	2394	A3	2395	A3	2396	A3	2397	A3	2398	A3	2399	A3	2400	A3	2401	A3	2402	A3	2403	A3	2404	A3	2405	A3	2406	A3	2407	A3	2408	A3	2409	A3	2410	A3	2411	A3	2412	A3	2413	A3	2414	A3	2415	A3	2416	A3	2417	A3	2418	A3	2419	A3	2420	A3	2421	A3	2422	A3	2423	A3	2424	A3	2425	A3	2426	A3	2427	A3	2428	A3	2429	A3	2430	A3	2431	A3	2432	A3	2433	A3	2434	A3	2435	A3	2436	A3	2437	A3	2438	A3	2439	A3	2440	A3	2441	A3	2442	A3	2443	A3	2444	A3	2445	A3	2446	A3	2447	A3	2448	A3	2449	A3	2450	A3	2451	A3	2452	A3	2453	A3	2454	A3	2455	A3	2456	A3	2457	A3	2458	A3	2459	A3	2460	A3	2461	A3	2462	A3	2463	A3	2464	A3	2465	A3	2466	A3	2467	A3	2468	A3	2469	A3	2470	A3	2471	A3	2472	A3	2473	A3	2474	A3	2475	A3	2476	A3	2477	A3	2478	A3	2479	A3	2480	A3	2481	A3	2482	A3	2483	A3	2484	A3	2485	A3	2486	A3	2487	A3	2488	A3	2489	A3	2490	A3	2491	A3	2492	A3	2493	A3	2494	A3	2495	A3	2496	A3	2497	A3	2498	A3	2499	A3	2500	A3	2501	A3	2502	A3	2503	A3	2504	A3	2505	A3	2506	A3	2507	A3	2508	A3	2509	A3	2510	A3	2511	A3	2512	A3	2513	A3	2514	A3	2515	A3	2516	A3	2517	A3	2518	A3	2519	A3	2520	A3	2521	A3	2522	A3	2523	A3	2524	A3	2525	A3	2526	A3	2527	A3	2528	A3	2529	A3	2530	A3	2531	A3	2532	A3	2533	A3	2534	A3	2535	A3	2536	A3	2537	A3	2538	A3	2539	A3	2540	A3	2541	A3	2542	A3	2543	A3	2544	A3	2545	A3	2546	A3	2547	A3	2548	A3	2549	A3	2550	A3	2551	A3	2552	A3	2553	A3	2554	A3	2555	A3	2556	A3	2557	A3	2558	A3	2559	A3	2560	A3	2561	A3	2562	A3	2563	A3	2564	A3	2565	A3	2566	A3	2567	A3	2568	A3	2569	A3	2570	A3	2571	A3	2572	A3	2573	A3	2574	A3	2575	A3	2576	A3	2577	A3	2578	A3	2579	A3	2580	A3	2581	A3	2582	A3	2583	A3	2584	A3	2585	A3	2586	A3	2587	A3	2588	A3	2589	A3	2590	A3	2591	A3	2592	A3	2593	A3	2594	A3	2595	A3	2596	A3	2597	A3	2598	A3	2599	A3	2600	A3	2601	A3	2602	A3	2603	A3	2604	A3	2605	A3	2606	A3	2607	A3	2608	A3	2609	A3	2610	A3	2611	A3	2612	A3	2613	A3	2614	A3	2615	A3	2616	A3	2617	A3	2618	A3	2619	A3	2620	A3	2621	A3	2622	A3	2623	A3	2624	A3	2625	A3
------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----

Layout Digital Board 1.5 (Part 1 Bottom View)

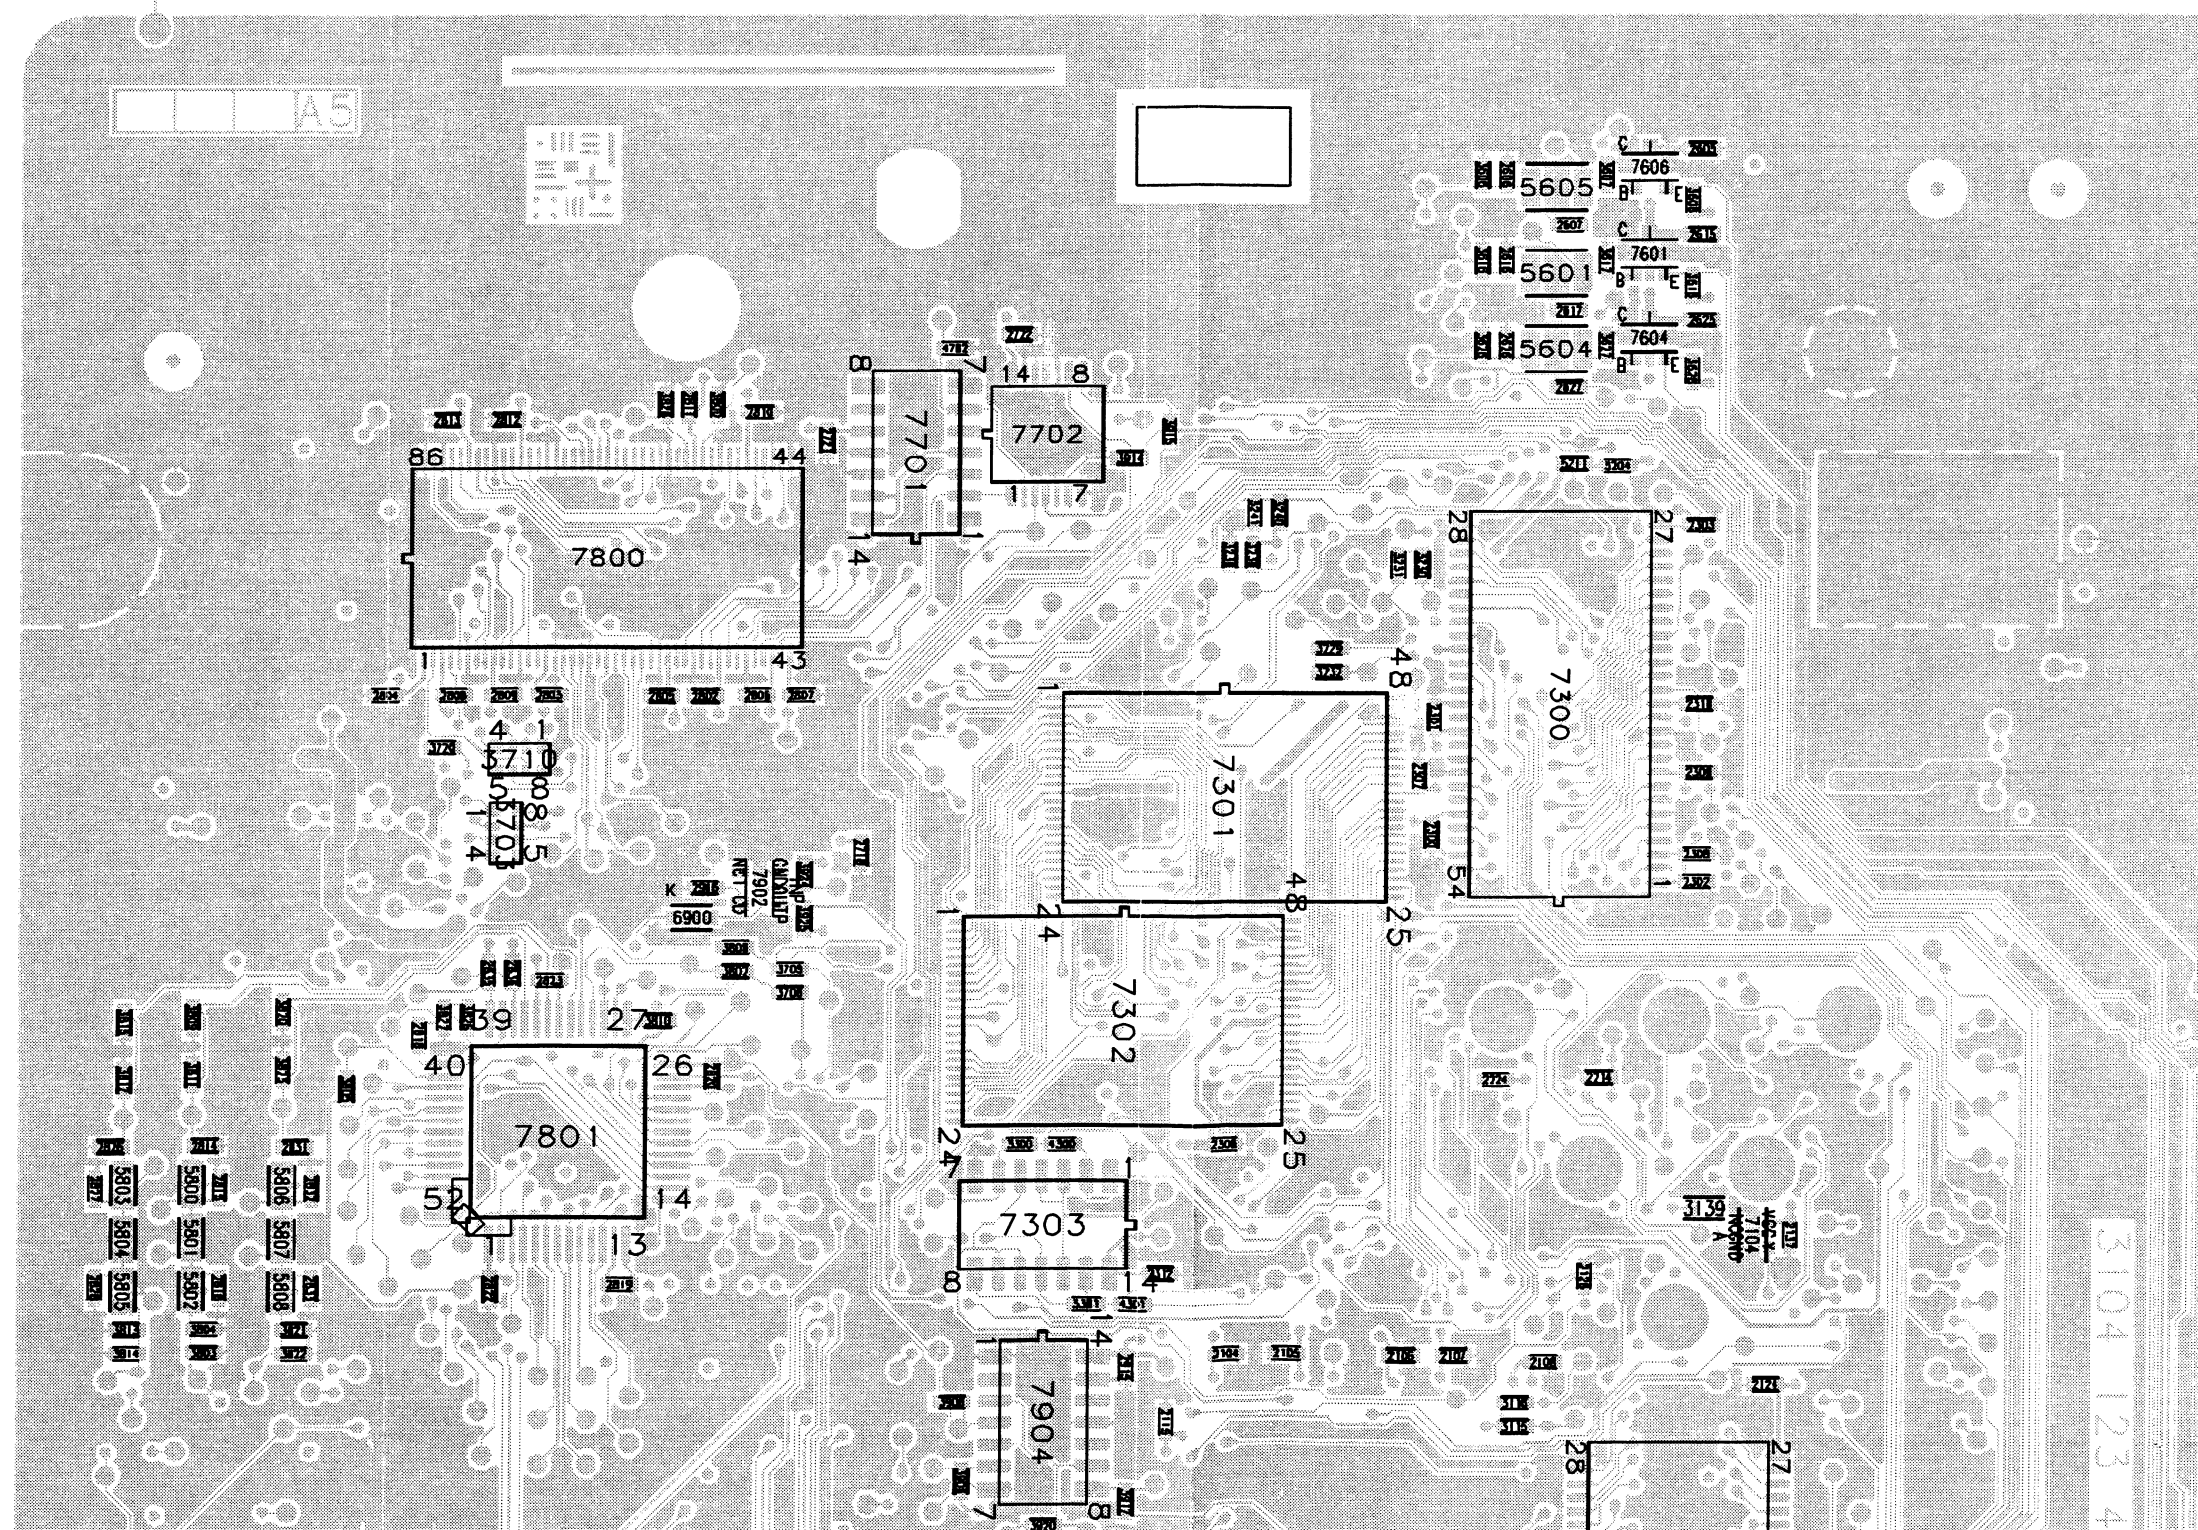
TR 06015a_001
250203

Layout Digital Board 1.5 (Part 2 Bottom View)

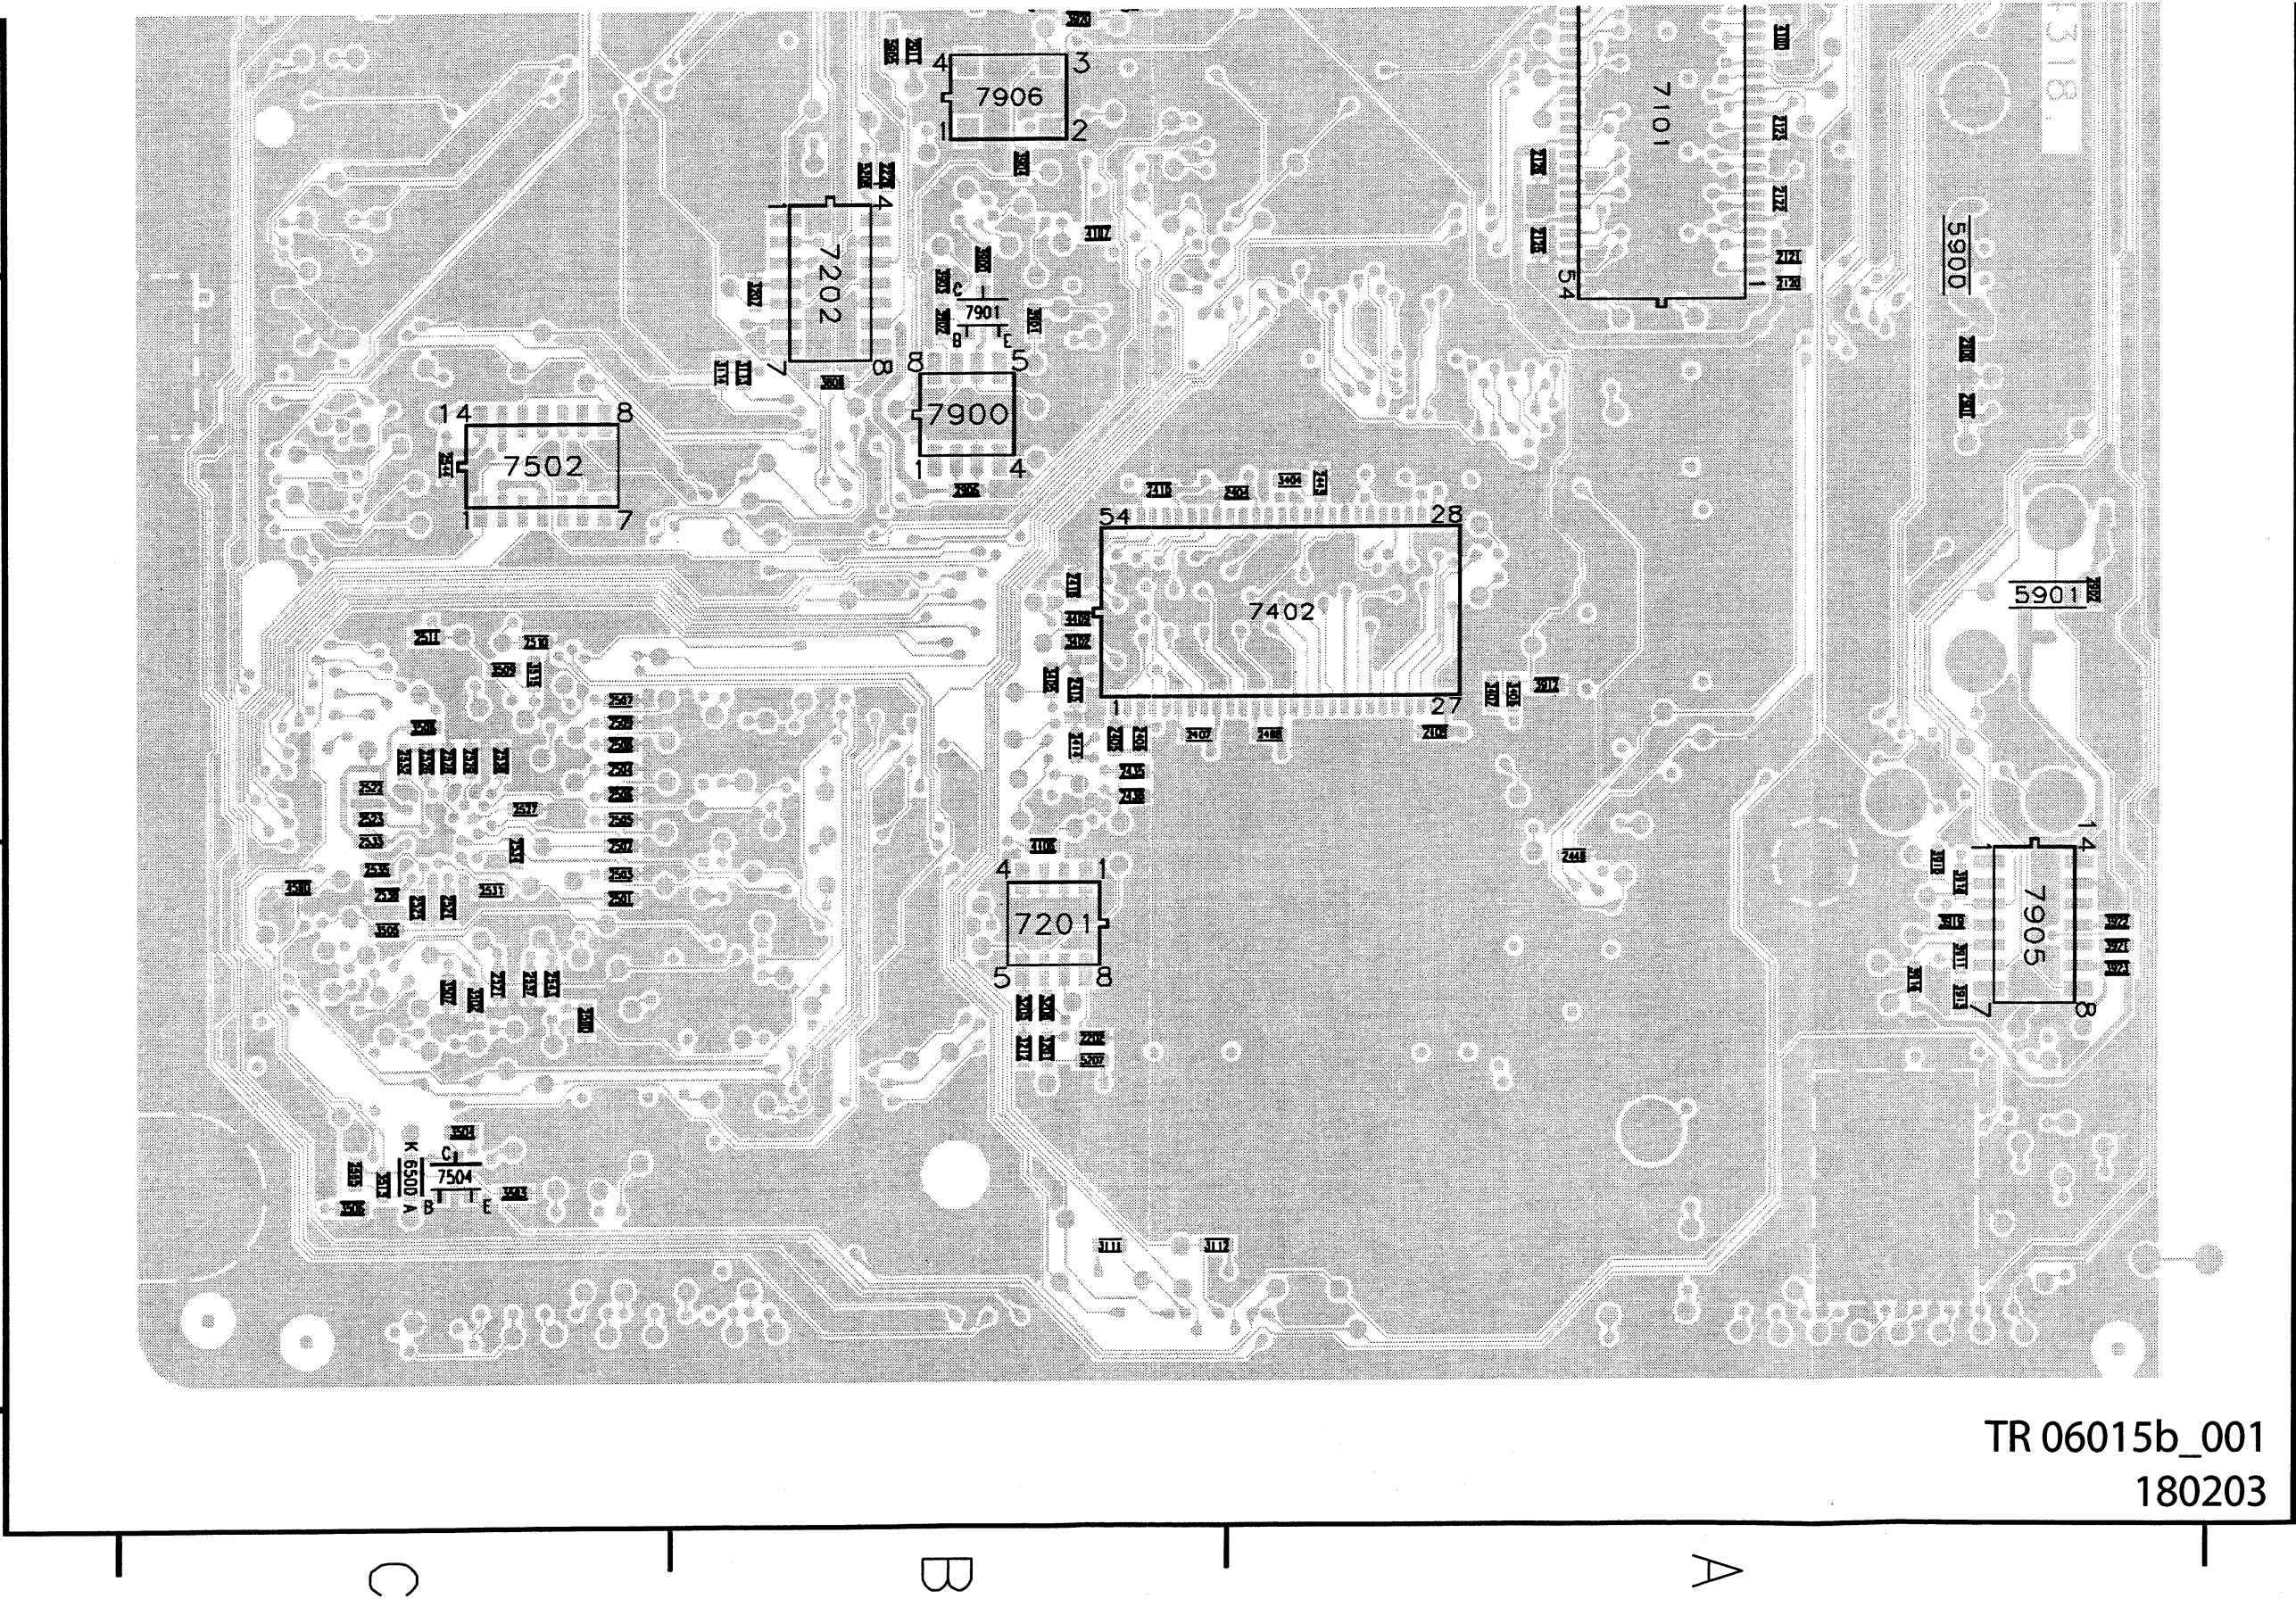


TR 06015b_001
180203

Digital Board Chrysalis 2.1: IDE, UARTS, RESET, BE

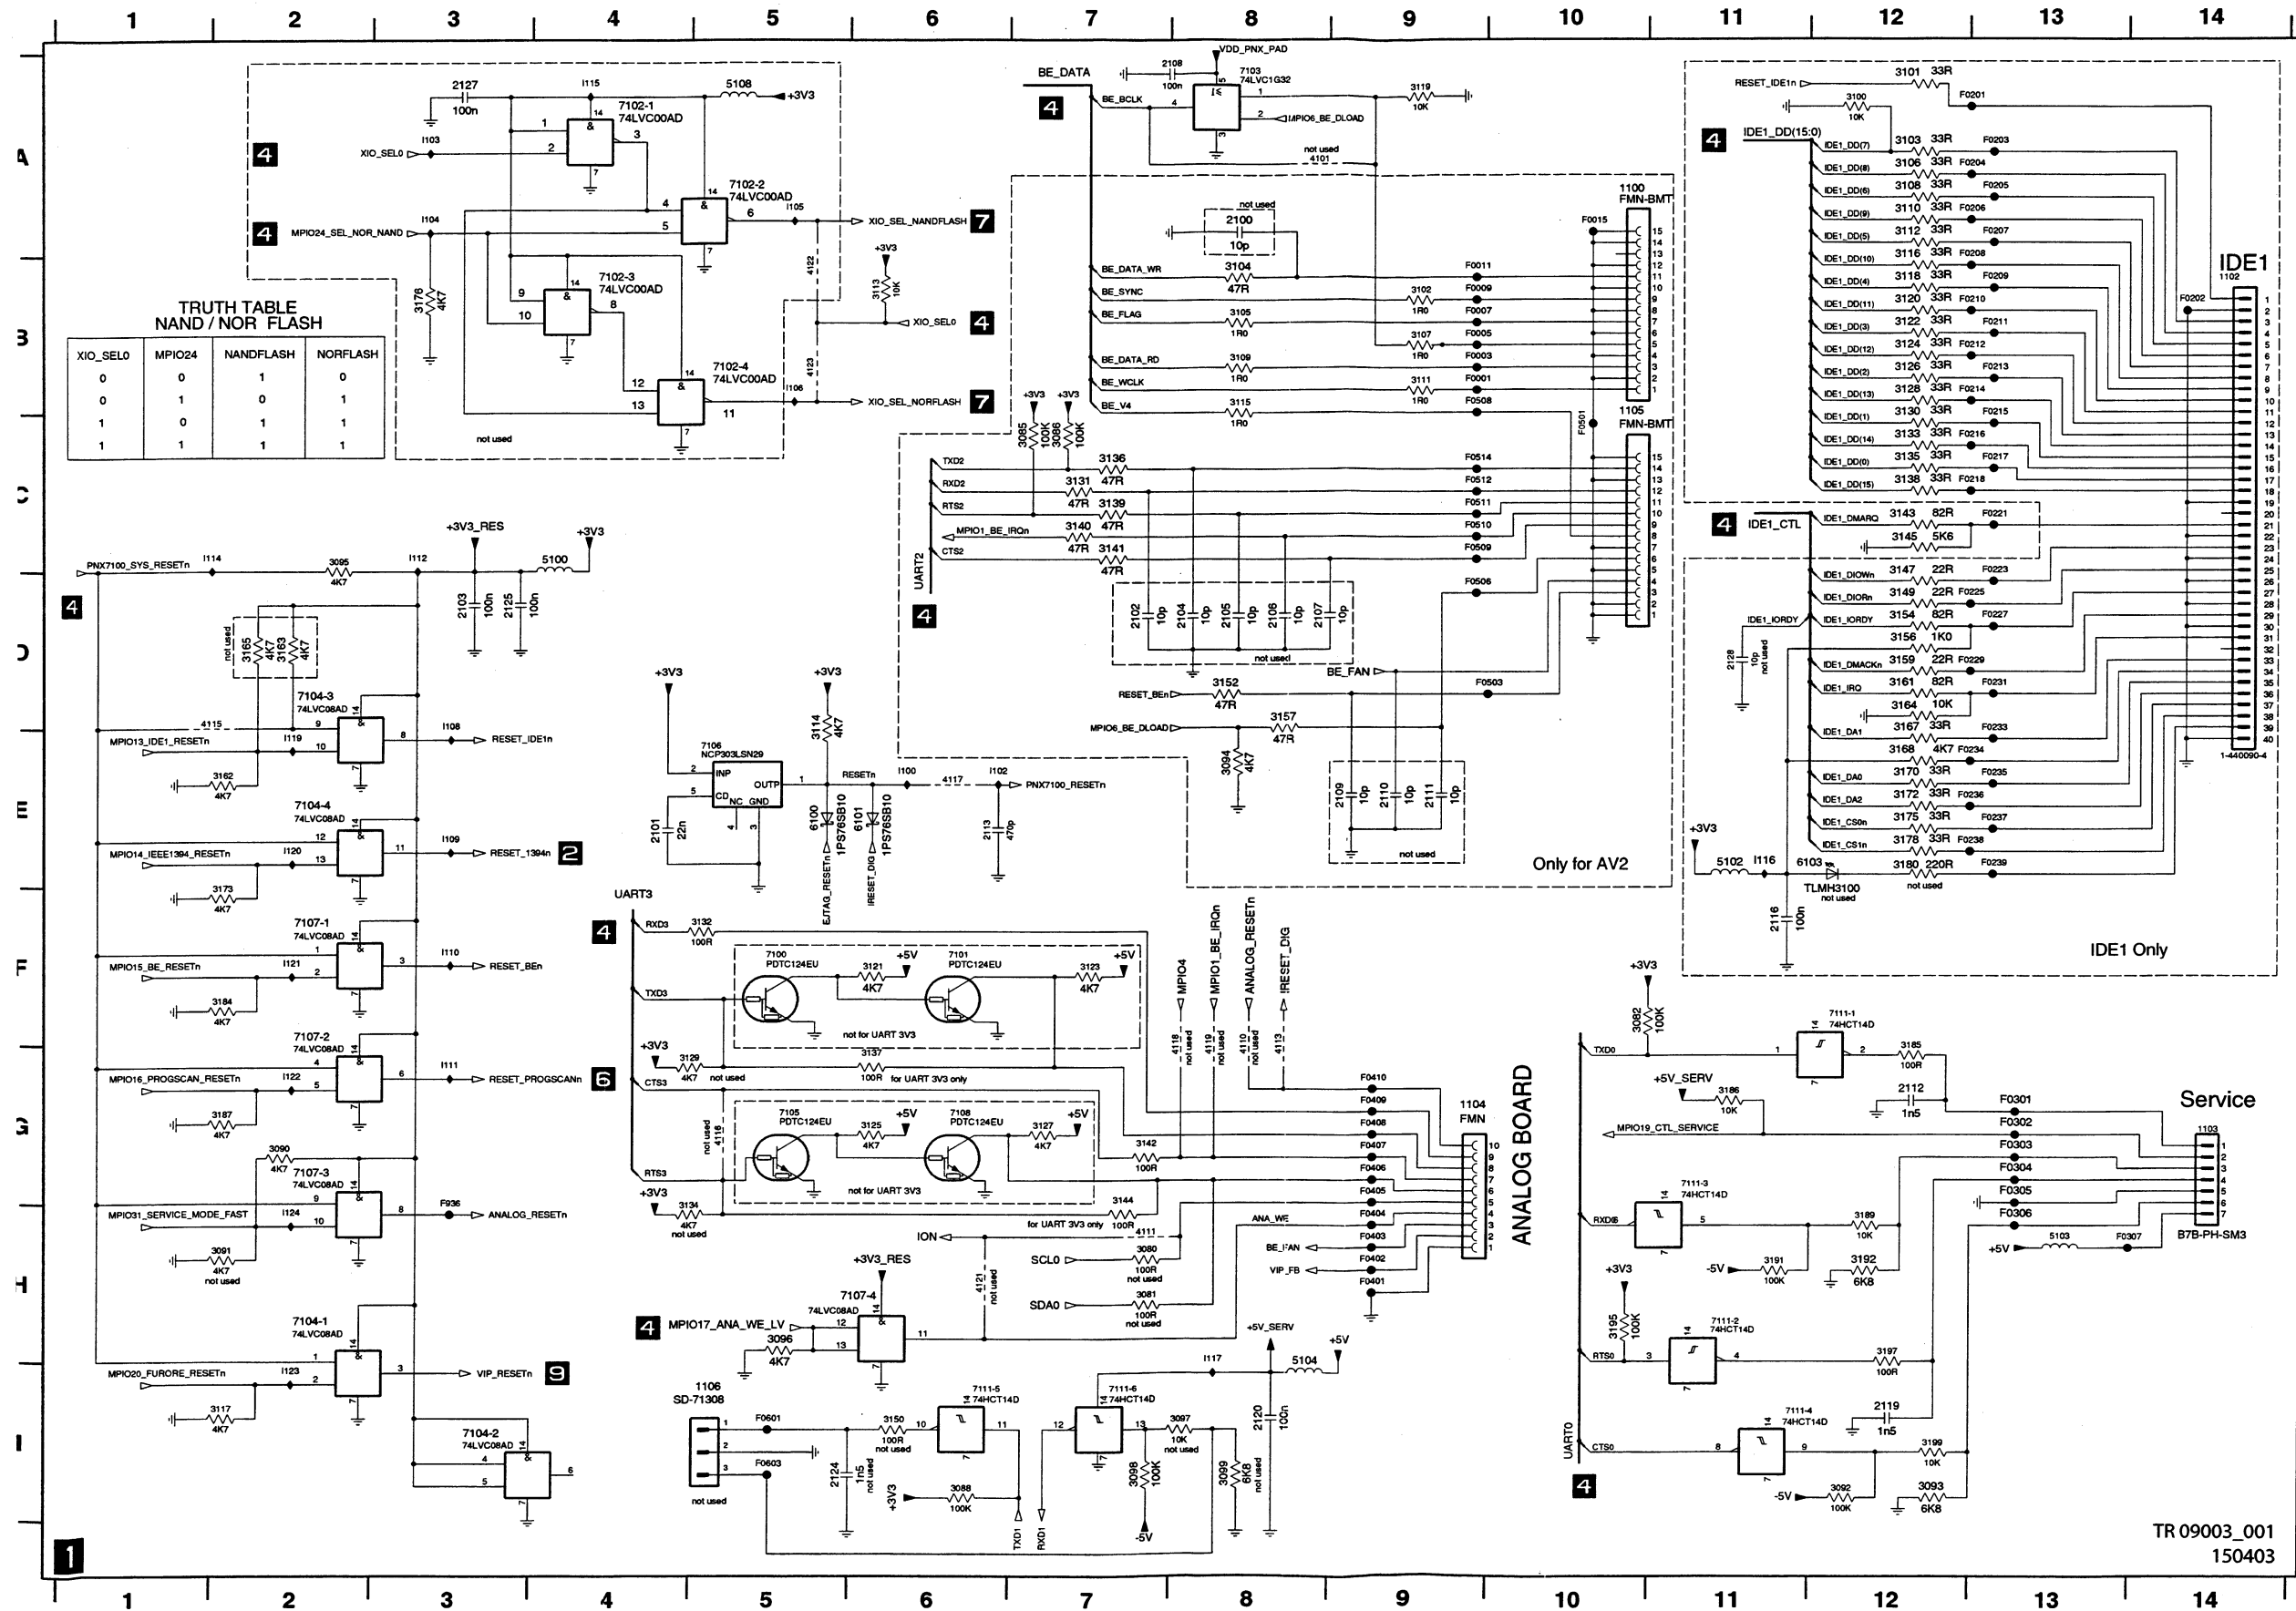


1100 A10
1102 B14
1103 G14
1104 G9
1105 C10
1106 I5
2100 A8
2101 E4
2102 D7
2103 D3
2104 D8
2105 D8
2106 D8
2107 D8
2108 A7
2109 E9
2110 E9
2111 E9
2112 G12
2113 E6
2116 F11
2119 I12
2120 H12
2121 H12
2122 G12
2123 D3
2125 D3
2127 A3
2128 D11
3080 H7
3081 H7
3082 F10
3085 C7
3086 C7
3088 I6
3090 G2
3091 H2
3092 I12
3093 I12
3094 E8
3095 C2
3096 H5
3097 I8
3098 I7
3099 I8
3100 A12
3101 A12
3102 B9
3103 A12
3104 B8
3105 B8
3106 A12
3107 B9
3108 A12
3109 B8
3110 A12
3111 B9
3112 A12
3113 B6
3114 D5
3115 B8
3116 B12
3117 I2
3118 B12
3119 A9
3120 B12
3121 F6
3122 B12
3123 F7
3124 B12
3125 G6
3126 B12
3127 G7
3128 B12
3129 G4
3130 C12
3131 C7
3132 F5
3133 C12
3134 H4
3135 C12
3136 C7
3137 G6
3138 C12
3139 C7
3140 C7
3141 C7
3142 G7
3143 C12
3144 G7
3145 C12
3147 D12
3149 D12
3150 I6
3152 D8
3154 D12
3156 D12
3157 D8
3159 D12
3161 D12
3162 E2
3163 D2
3164 D12
3165 D2
3167 E12
3168 E12
3170 E12
3172 E12
3173 F2
3175 E12
3176 B3
3178 E12
3180 E12
3184 F2
3185 G12
3186 G11
3187 G2
3189 H12
3191 H11
3192 H12
3195 H10
3197 H12
3199 I12
4101 A8
4110 F8
4111 H7
4113 F8
4115 D1
4116 G5
4117 E6
4118 F8
4119 F8
4121 H6
4122 B5
4123 B5
5100 C4
5102 E11
5103 H13
5104 B5
5108 A5
6100 E5
6101 E6
6103 E11
7100 F5
7101 F6
7102-1 A4
7102-2 A5
7102-3 B4
7102-4 B5
7103 A8
7104-1 H2
7104-2 I3
7104-3 D2
7104-4 E2
7105 G5
7106 E5
7107-1 F2
7107-2 F2
7107-3 G2
7107-4 H5
7108 G6
7111-1 F12
7111-2 H11
7111-3 G11
7111-4 I11
7111-5 I6
7111-6 I7
7111-7 H11
7111-8 H11
7111-9 H11
7111-10 H11
7111-11 H11
7111-12 H11
7111-13 H11
7111-14 H11
7111-15 H11
7111-16 H11
7111-17 H11
7111-18 H11
7111-19 H11
7111-20 H11
7111-21 H11
7111-22 H11
7111-23 H11
7111-24 H11
7111-25 H11
7111-26 H11
7111-27 H11
7111-28 H11
7111-29 H11
7111-30 H11
7111-31 H11
7111-32 H11
7111-33 H11
7111-34 H11
7111-35 H11
7111-36 H11
7111-37 H11
7111-38 H11
7111-39 H11
7111-40 H11
7111-41 H11
7111-42 H11
7111-43 H11
7111-44 H11
7111-45 H11
7111-46 H11
7111-47 H11
7111-48 H11
7111-49 H11
7111-50 H11
7111-51 H11
7111-52 H11
7111-53 H11
7111-54 H11
7111-55 H11
7111-56 H11
7111-57 H11
7111-58 H11
7111-59 H11
7111-60 H11
7111-61 H11
7111-62 H11
7111-63 H11
7111-64 H11
7111-65 H11
7111-66 H11
7111-67 H11
7111-68 H11
7111-69 H11
7111-70 H11
7111-71 H11
7111-72 H11
7111-73 H11
7111-74 H11
7111-75 H11
7111-76 H11
7111-77 H11
7111-78 H11
7111-79 H11
7111-80 H11
7111-81 H11
7111-82 H11
7111-83 H11
7111-84 H11
7111-85 H11
7111-86 H11
7111-87 H11
7111-88 H11
7111-89 H11
7111-90 H11
7111-91 H11
7111-92 H11
7111-93 H11
7111-94 H11
7111-95 H11
7111-96 H11
7111-97 H11
7111-98 H11
7111-99 H11
7111-100 H11

1206 C1	3286 H13
1207 D1	3289 H13
1203 A1	3290 H13
2200 B2	3291 H3
2201 C2	3292 H3
2202 D1	3293 H3
2203 D2	3294 H12
2204 D2	3295 F12
2205 D2	3296 F12
2206 G3	3297 F8
2207 F2	3298 F8
2208 F2	3299 F8
2210 G2	3315 F8
2212 H1	3316 F8
2214 H2	3317 F8
2215 H2	3318 F8
2217 L2	3319 F8
2218 L2	3320 F12
2219 L2	4201 D6
2220 L2	4202 D6
2221 L3	4203 G12
2222 L3	4204 G12
2223 L3	4205 G12
2224 L4	5200 F2
2225 L4	5201 F5
2226 L4	5202 G2
2227 L4	5203 H2
2228 L4	5204 H2
2229 L5	6200 G4
2230 L5	7200 A5
2231 L6	7201 B12
2232 L6	7202 H5
2233 L6	F1201 B1
2234 L6	F1202 A1
2235 A5	F1203 A1
2236 G3	F1204 A2
2237 B9	F1205 A2
2238 B6	F200 D12
2239 L6	F201 C3
3002 F12	F203 C3
3203 H5	F204 C13
3204 D6	F205 C13
3205 A2	F206 C13
3207 L7	F207 C13
3207 B8	F208 C13
3208 B7	F209 C13
3209 B8	F210 C13
3210 C12	F211 C13
3210 D12	F212 C13
3212 B2	F213 C13
3213 B3	F214 C13
3214 C12	F215 C13
3215 C12	F216 D13
3216 C12	F217 C13
3217 C12	I200 H4
3218 C12	I201 F2
3219 D13	I202 G2
3220 B7	I203 H2
3221 D12	I204 I2
3222 C12	H05 H11
3223 B6	I205 G4
3224 C12	I207 A3
3225 C7	I208 B3
3226 C12	I209 B3
3227 C12	I210 C2
3228 C6	I211 B7
3229 C12	I212 C7
3230 D13	I213 D6
3231 C7	I214 D6
3232 C7	I215 A6
3233 C2	I216 B6
3234 C6	I217 A8
3235 C13	I218 C7
3236 C7	I219 C7
3237 C7	I220 G12
3238 C8	I221 G12
3239 D12	I222 C7
3240 C2	I223 G12
3241 D12	I224 G8
3242 D12	I225 C7
3243 D12	I226 C7
3244 D12	I227 C7
3245 D6	
3246 E12	
3247 E12	
3248 L7	
3249 E12	
3250 E12	
3251 E12	
3252 E12	
3253 D12	
3254 E12	
3255 E13	
3256 E13	
3257 E13	
3258 D13	
3259 D13	
3260 F12	
3261 E3	
3262 F8	
3263 F8	
3264 F8	
3265 G8	
3266 G8	
3267 G8	
3268 G8	
3269 G8	
3270 G12	
3271 G12	
3272 G12	
3273 H8	
3274 G12	
3275 G5	
3276 G7	
3277 F12	
3278 F12	
3279 F12	
3280 A7	
3281 A7	
3282 A2	
3283 A2	
3284 A8	
3285 A8	
3286 H13	
3287 H13	

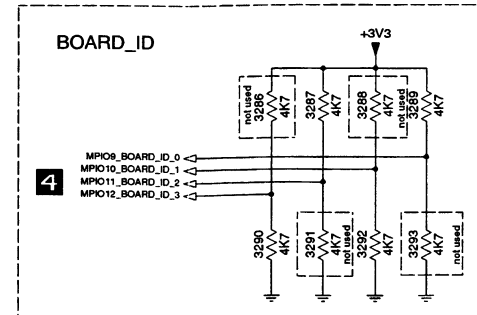


Digital Board Chrysalis 2.1: Audio PLL

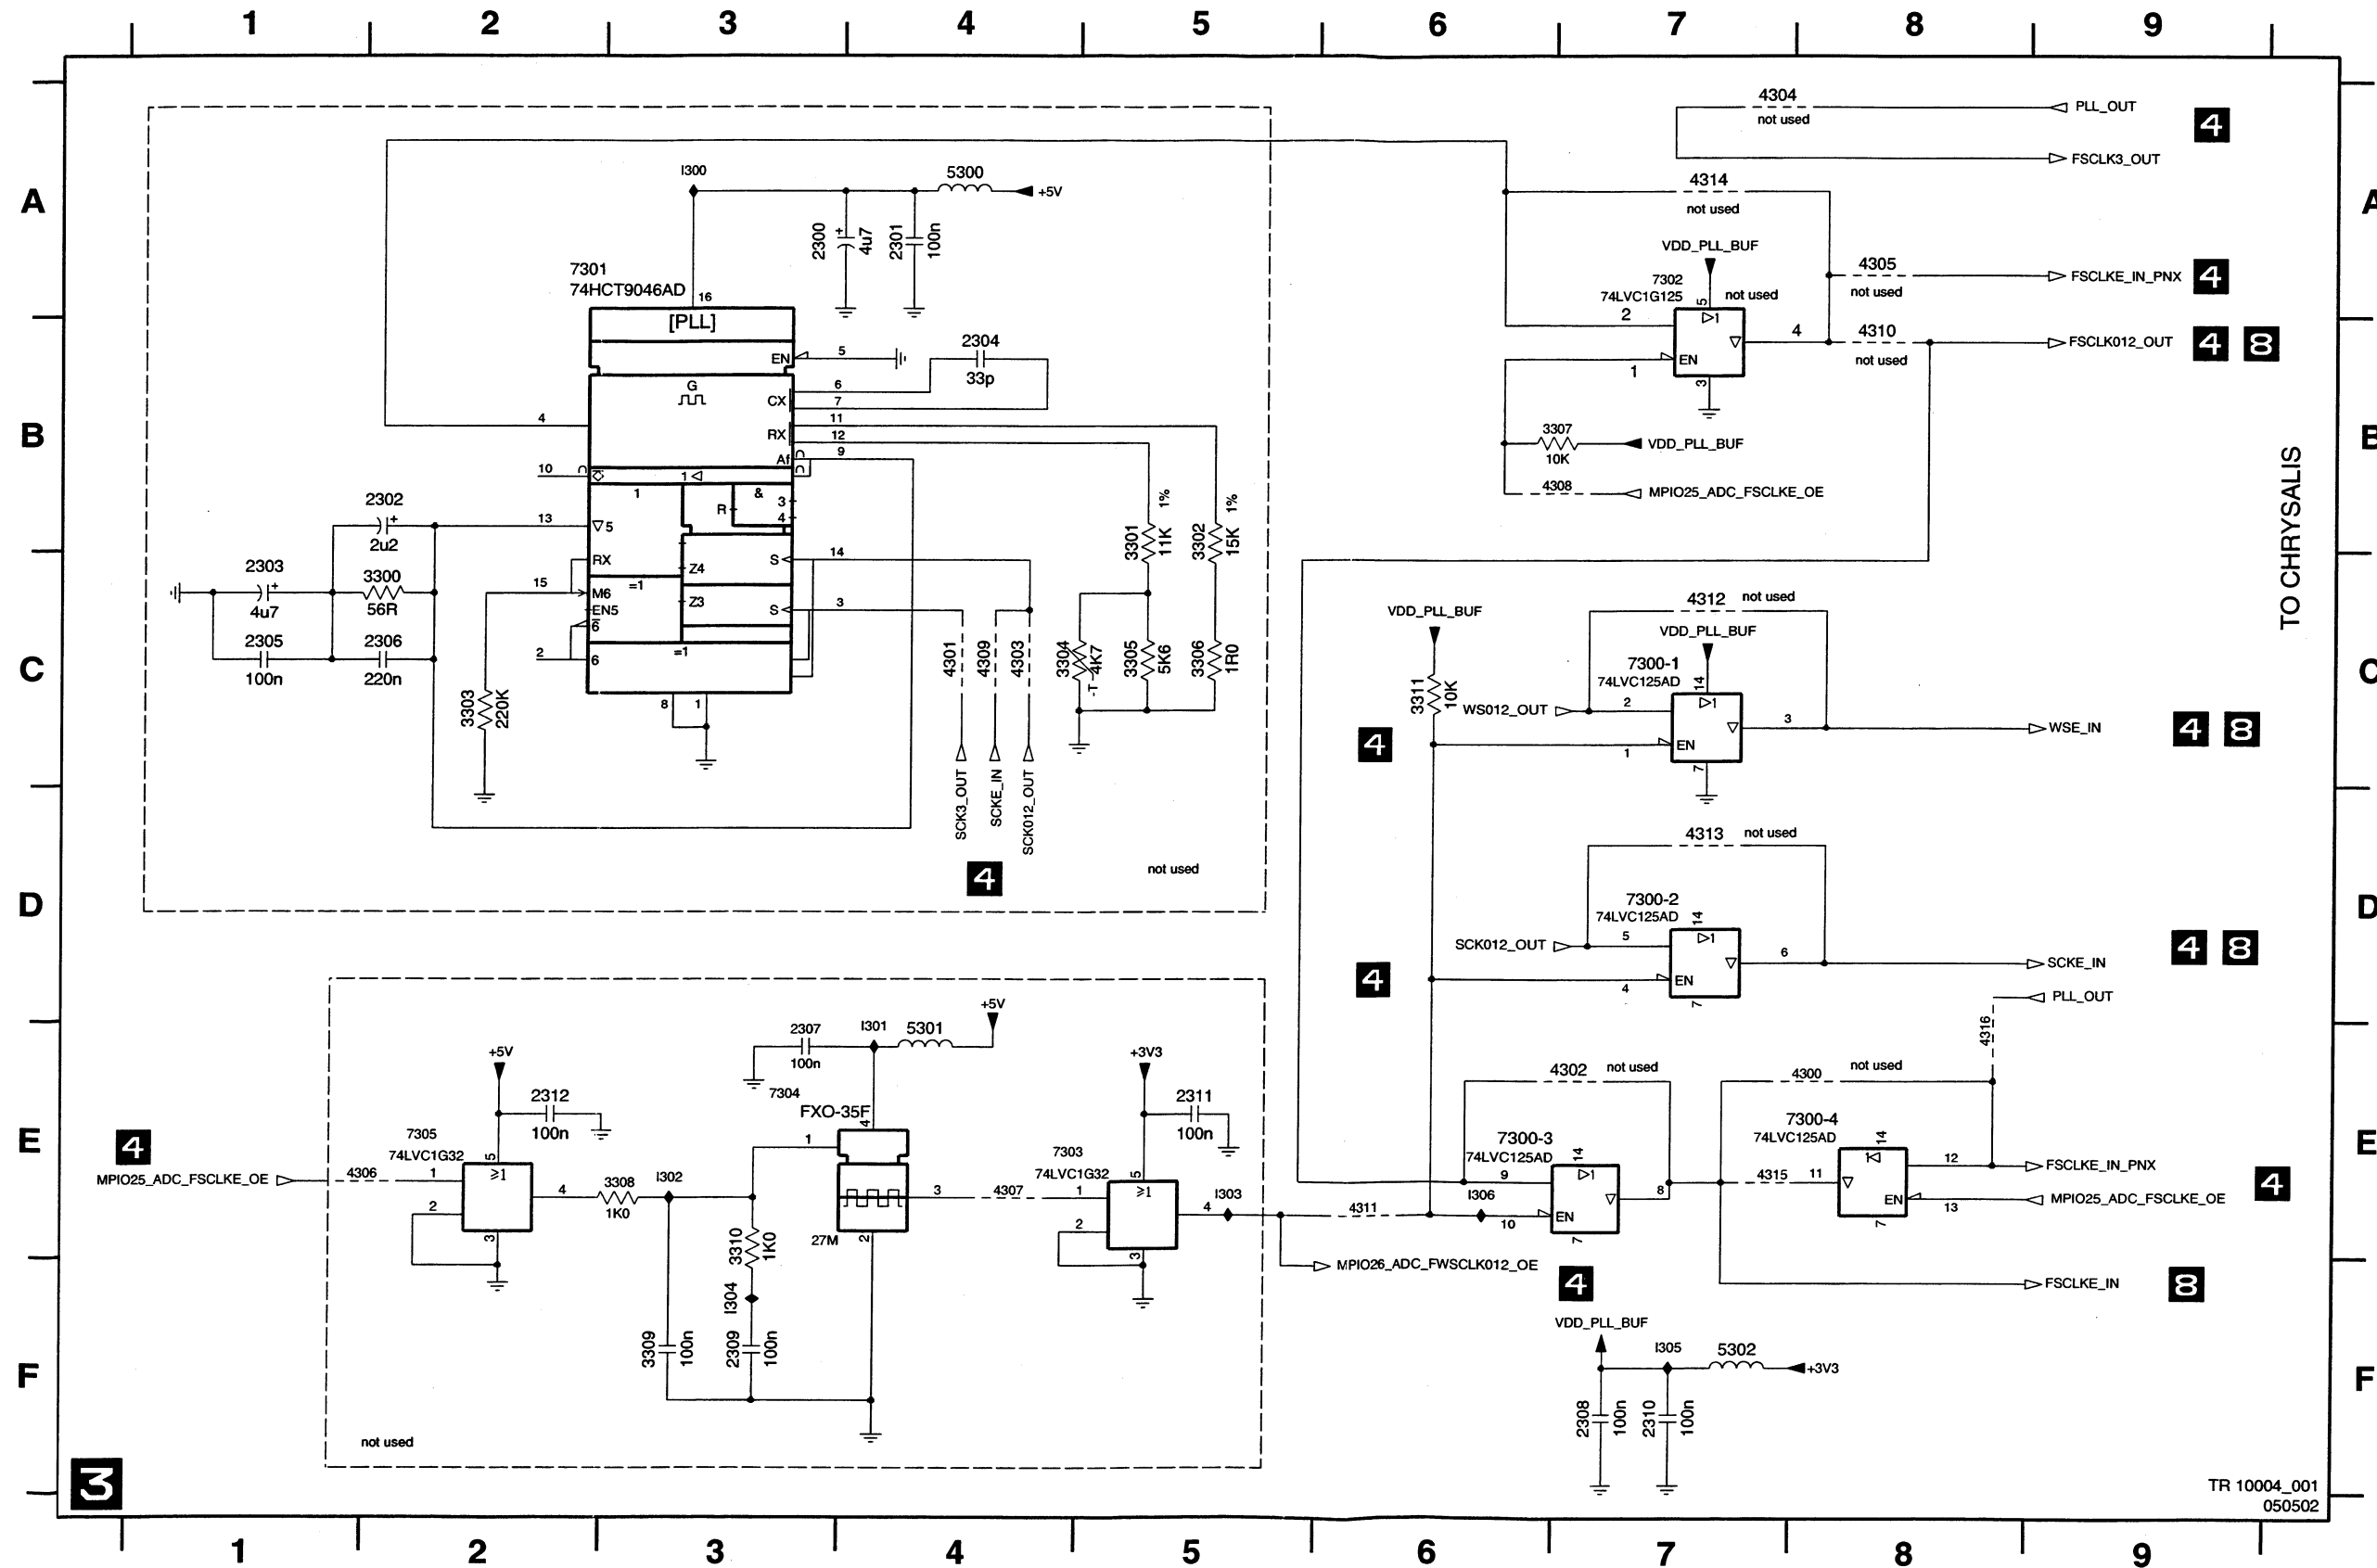


2300 A3
2301 A4
2302 B2
2303 C1
2304 B4
2305 C1
2306 C2
2307 E3
2308 F7
2309 F3
2310 F7
2311 E5
2312 E2
3300 C2
3301 B5
3302 B5
3303 C2
3304 C4
3305 C5
3306 C5
3307 B6
3308 E3
3309 F3
3310 E3
3311 C6
4300 E8
4301 C4
4302 E7
4303 C4
4304 A7
4305 A8
4306 E1
4307 E4
4308 B6
4309 C4
4310 B8
4311 E6
4312 C7
4313 D7
4314 A7
4315 E7
4316 E8
5300 A4
5301 E4
5302 F7
7300-1 C7
7300-2 D7
7300-3 E6
7300-4 E8
7301 A2
7302 A7
7303 E5
7304 E3
7305 E2
I300 A3
I301 E4
I302 E3
I303 E5
I304 F3
I305 F7
I306 E6

TR 10004_001
050502

1400	D14	3447	B11	5400	B13
1401	I5	3448	B10	5401	H12
2400	A9	3449	B11	5402	H12
2401	A9	3450	B10	5403	H1
2402	A9	3451	B11	5404	J6
2403	B12	3452	B10	5405	I12
2404	H12	3453	B11	5406	J12
2405	H13	3454	C10	7400	B2
2406	H13	3455	C11	7401	I1
2407	H13	3456	C10	7402	J6
2408	I12	3457	C11	F1401	D14
2409	I12	3458	C10	F1402	D14
2410	I13	3459	C11	F1403	D14
2411	I13	3460	C10	F1405	D14
2412	I13	3461	C11	F1407	D14
2413	I13	3462	C10	F1409	E14
2414	I13	3463	C11	F1411	E14
2415	I14	3464	C10	F1413	E14
2416	I14	3465	C11	F1415	F14
2417	I14	3466	C10	F1417	F14
2418	I12	3467	D11	F1419	F14
2419	I13	3468	D10	F1421	F14
2420	J12	3469	D11	F1423	G14
2421	J12	3470	D10	F1425	G14
2422	J13	3471	D11	F1427	G14
2423	J13	3472	D10	F400	A12
2424	J13	3473	D11	F401	A12
2425	J13	3474	D10	F402	A8
2426	J13	3475	D11	F403	C1
2427	J14	3476	D10	F404	D1
2428	J14	3477	D11	F405	I5
2429	J14	3478	D10	F406	I5
2430	J5	3479	D11	I400	I3
2431	I6	3480	D10	I401	I3
2432	I1	3481	E11	I402	I1
2433	J6	3482	E10	I403	J4
2435	A9	3483	E11	I404	E10
3021	I1	3484	E10	I405	F10
3400	A14	3485	E11	I406	F10
3401	A14	3486	E10	I407	J6
3402	A14	3487	E11	I408	J6
3403	A14	3488	E10	I409	J6
3404	A14	3489	E10	I410	J7
3405	A12	3490	E11	I411	J7
3406	A12	3491	E10	I412	J7
3407	A12	3492	E11	I413	B12
3408	A12	3493	F10	I414	H12
3409	A14	3494	F11	I415	H12
3410	B14	3495	F11	I416	I12
3411	B14	3496	F10	I417	J12
3412	B14	3497	J4	I418	A14
3413	B14	3498	G1	I419	A14
3414	B14	3499	G1	I420	A14
3415	B14	3820	D1	I421	A14
3416	B14	3821	D1	I422	A14
3417	C14	3822	D1	I423	A14
3418	C14	3823	D1	I424	B14
3419	C14	3824	D1	I425	B14
3420	C14	3825	D1	I426	B14
3421	C14	3826	D1	I427	B14
3422	C14	3827	E1	I428	B14
3423	C14	3828	B1	I429	B14
3424	D13	3829	B1	I430	B14
3425	C13	3830	B1	I431	C14
3426	C13	3831	B1	I432	C14
3427	C13	3832	B1	I433	C14
3428	C13	3833	C1	I434	C14
3429	D13	3834	C1	I435	C14
3430	E13	3835	C1	I436	C14
3431	F13	3837	J1	I437	C14
3432	F13	3838	J1	I438	A12
3433	F1	3839	J1	I439	A12
3434	F1	3840	H1	I440	F11
3435	F1	3850	H1		
3436	F13	3851	H2		
3437	G13	3852	I2		
3438	G13	3853	G2		
3439	G13	4401	I5		
3440	G13	4402	J4		
3442	B10	4403	I2		
3443	B11	4404	J2		
3444	B10	4405	J2		
3445	B11				

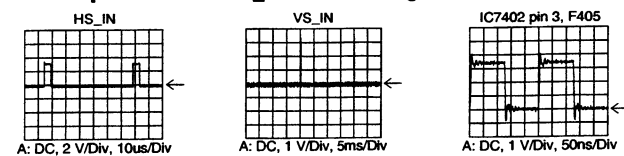


Digital Board Chrysalis 2.1: 1.8V Power

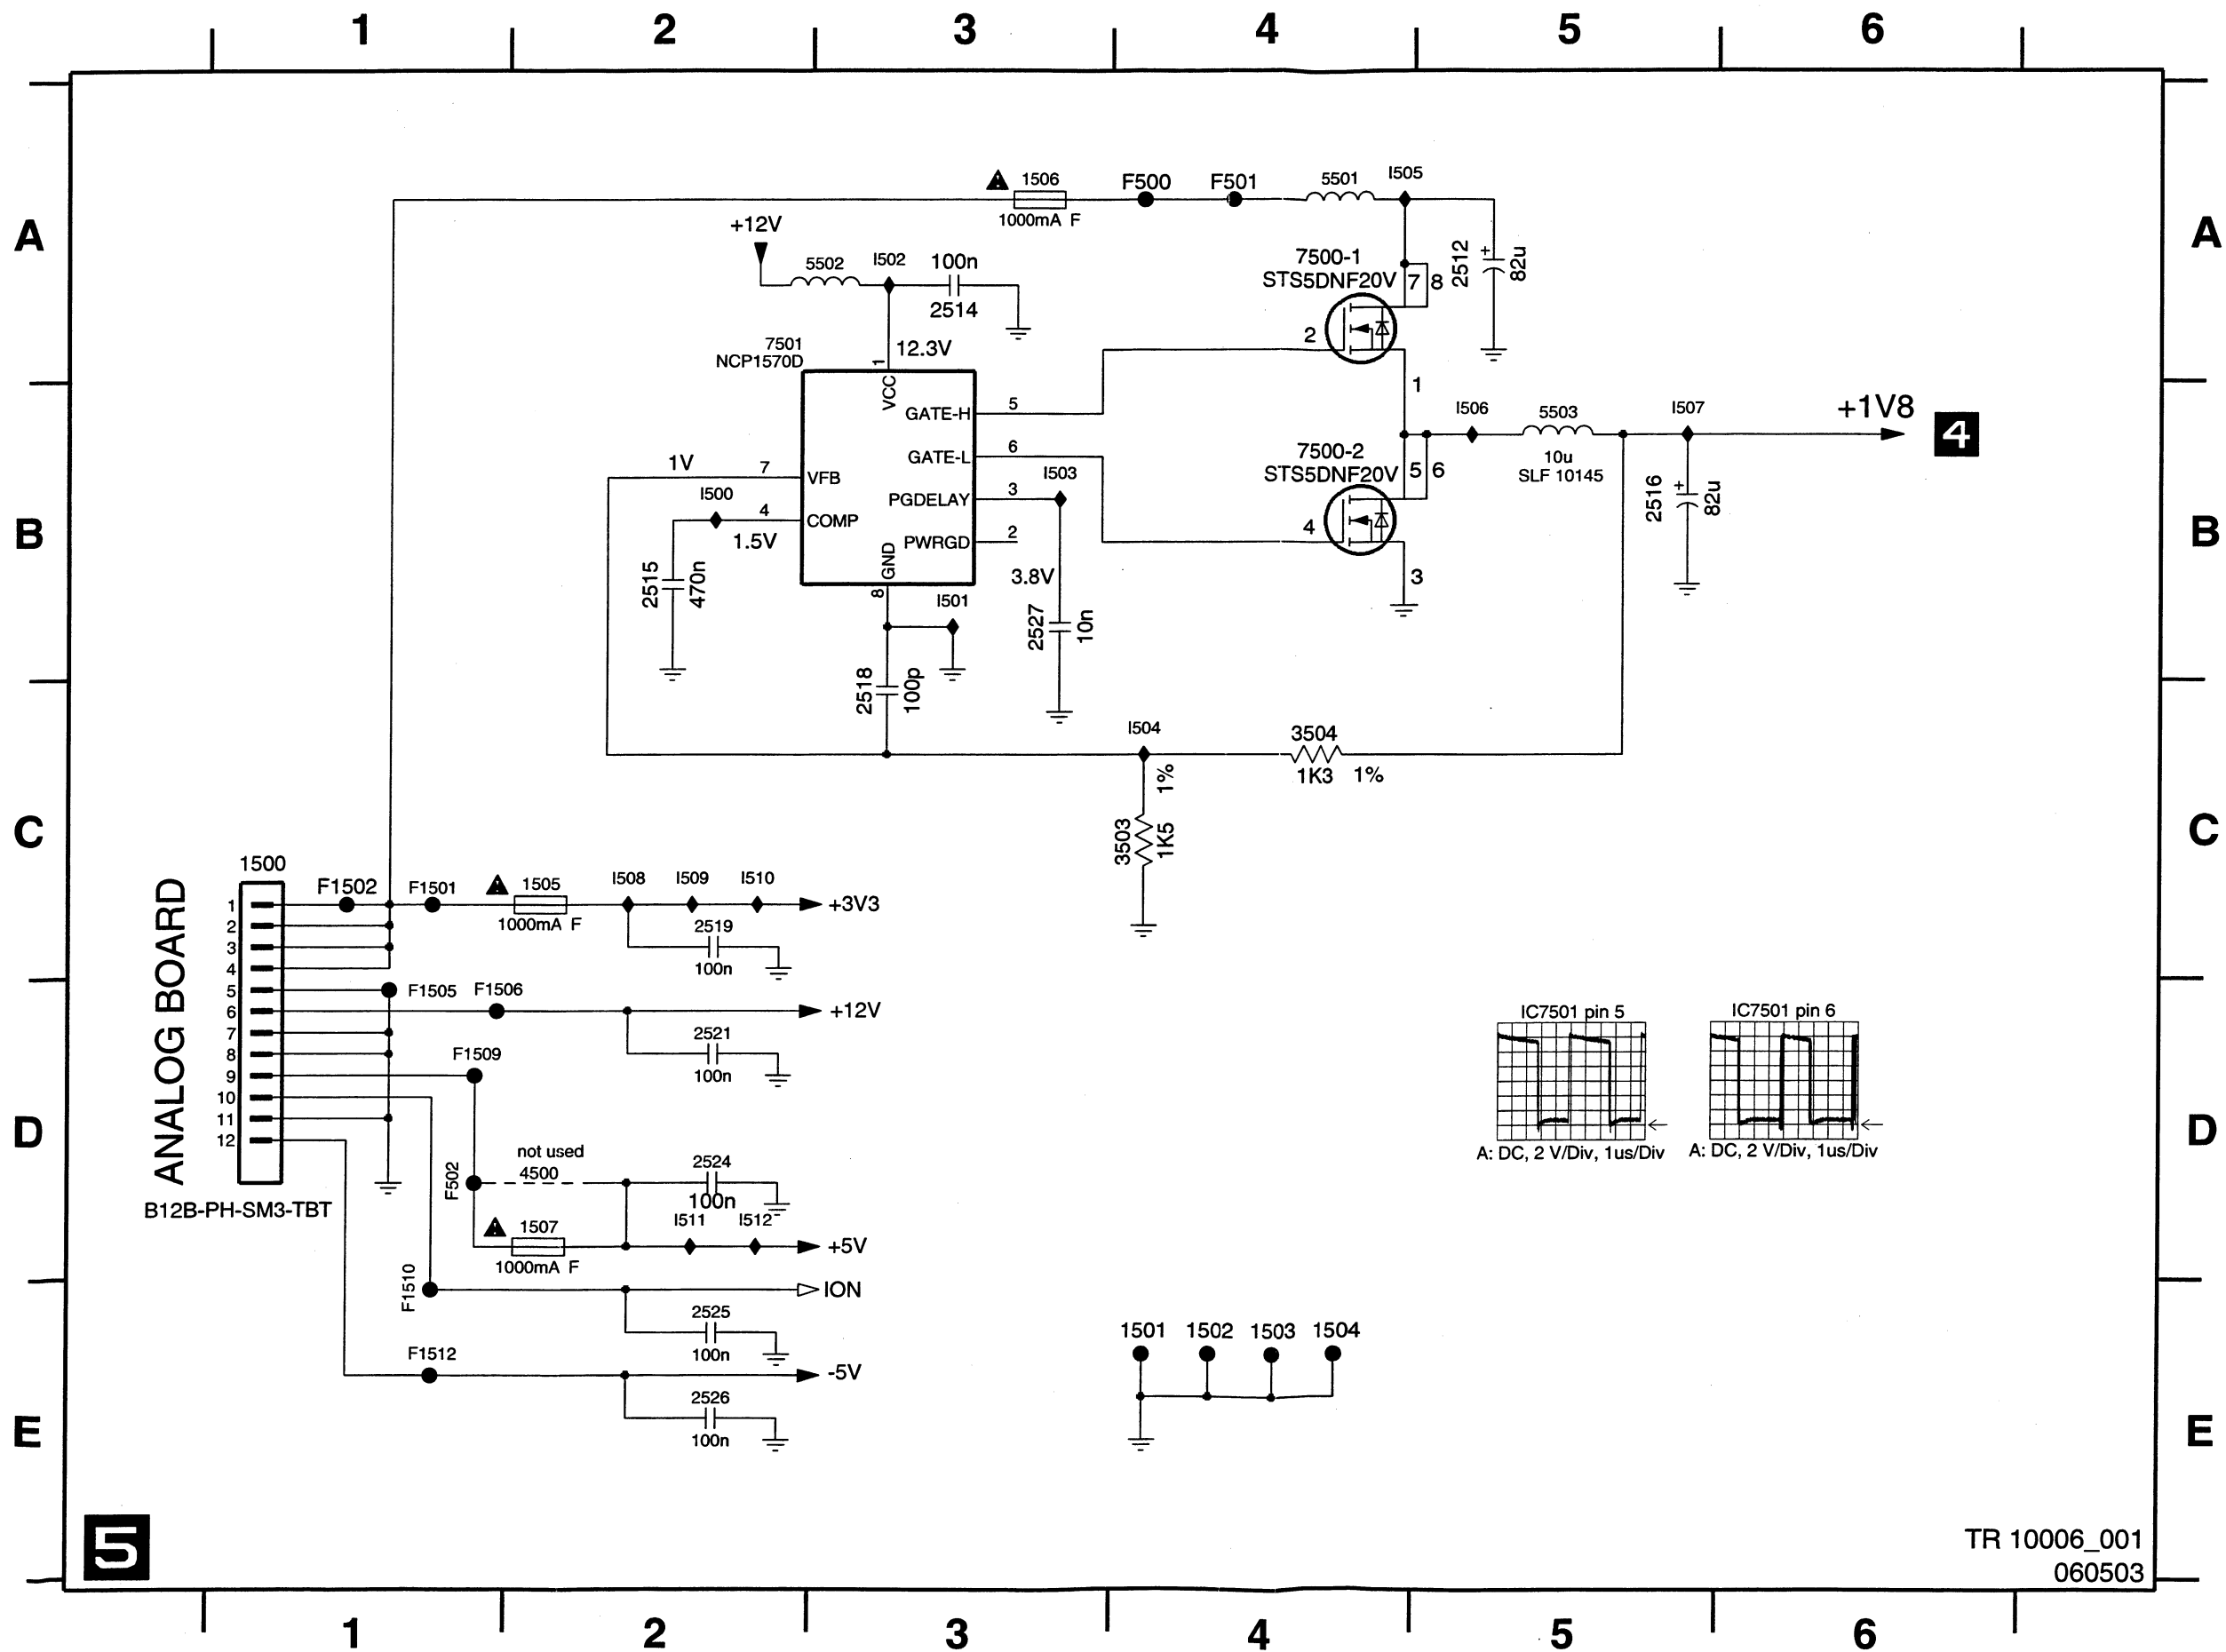

- 1500 C1
- 1501 E4
- 1502 E4
- 1503 E4
- 1504 E4
- 1505 C2
- 1506 A3
- 1507 D2
- 2512 A5
- 2514 A3
- 2515 B2
- 2516 B5
- 2518 C3
- 2519 C2
- 2521 D2
- 2524 D2
- 2525 E2
- 2526 E2
- 2527 B3
- 3503 C4
- 3504 C4
- 4500 D2
- 5501 A4
- 5502 A3
- 5503 B5
- 7500-1 A4
- 7500-2 B4
- 7501 A2
- F1501 C1
- F1502 C1
- F1505 D1
- F1506 D1
- F1509 D1
- F1510 E1
- F1512 E1
- F500 A4
- F501 A4
- F502 D1
- I500 B2
- I501 B3
- I502 A3
- I503 B3
- I504 C4
- I505 A4
- I506 B5
- I507 B5
- I508 C2
- I509 C2
- I510 C2
- I511 D2
- I512 D2

TR 10006_001
060503


Digital Board Chrysalis 2.1: Prog. scan DAC

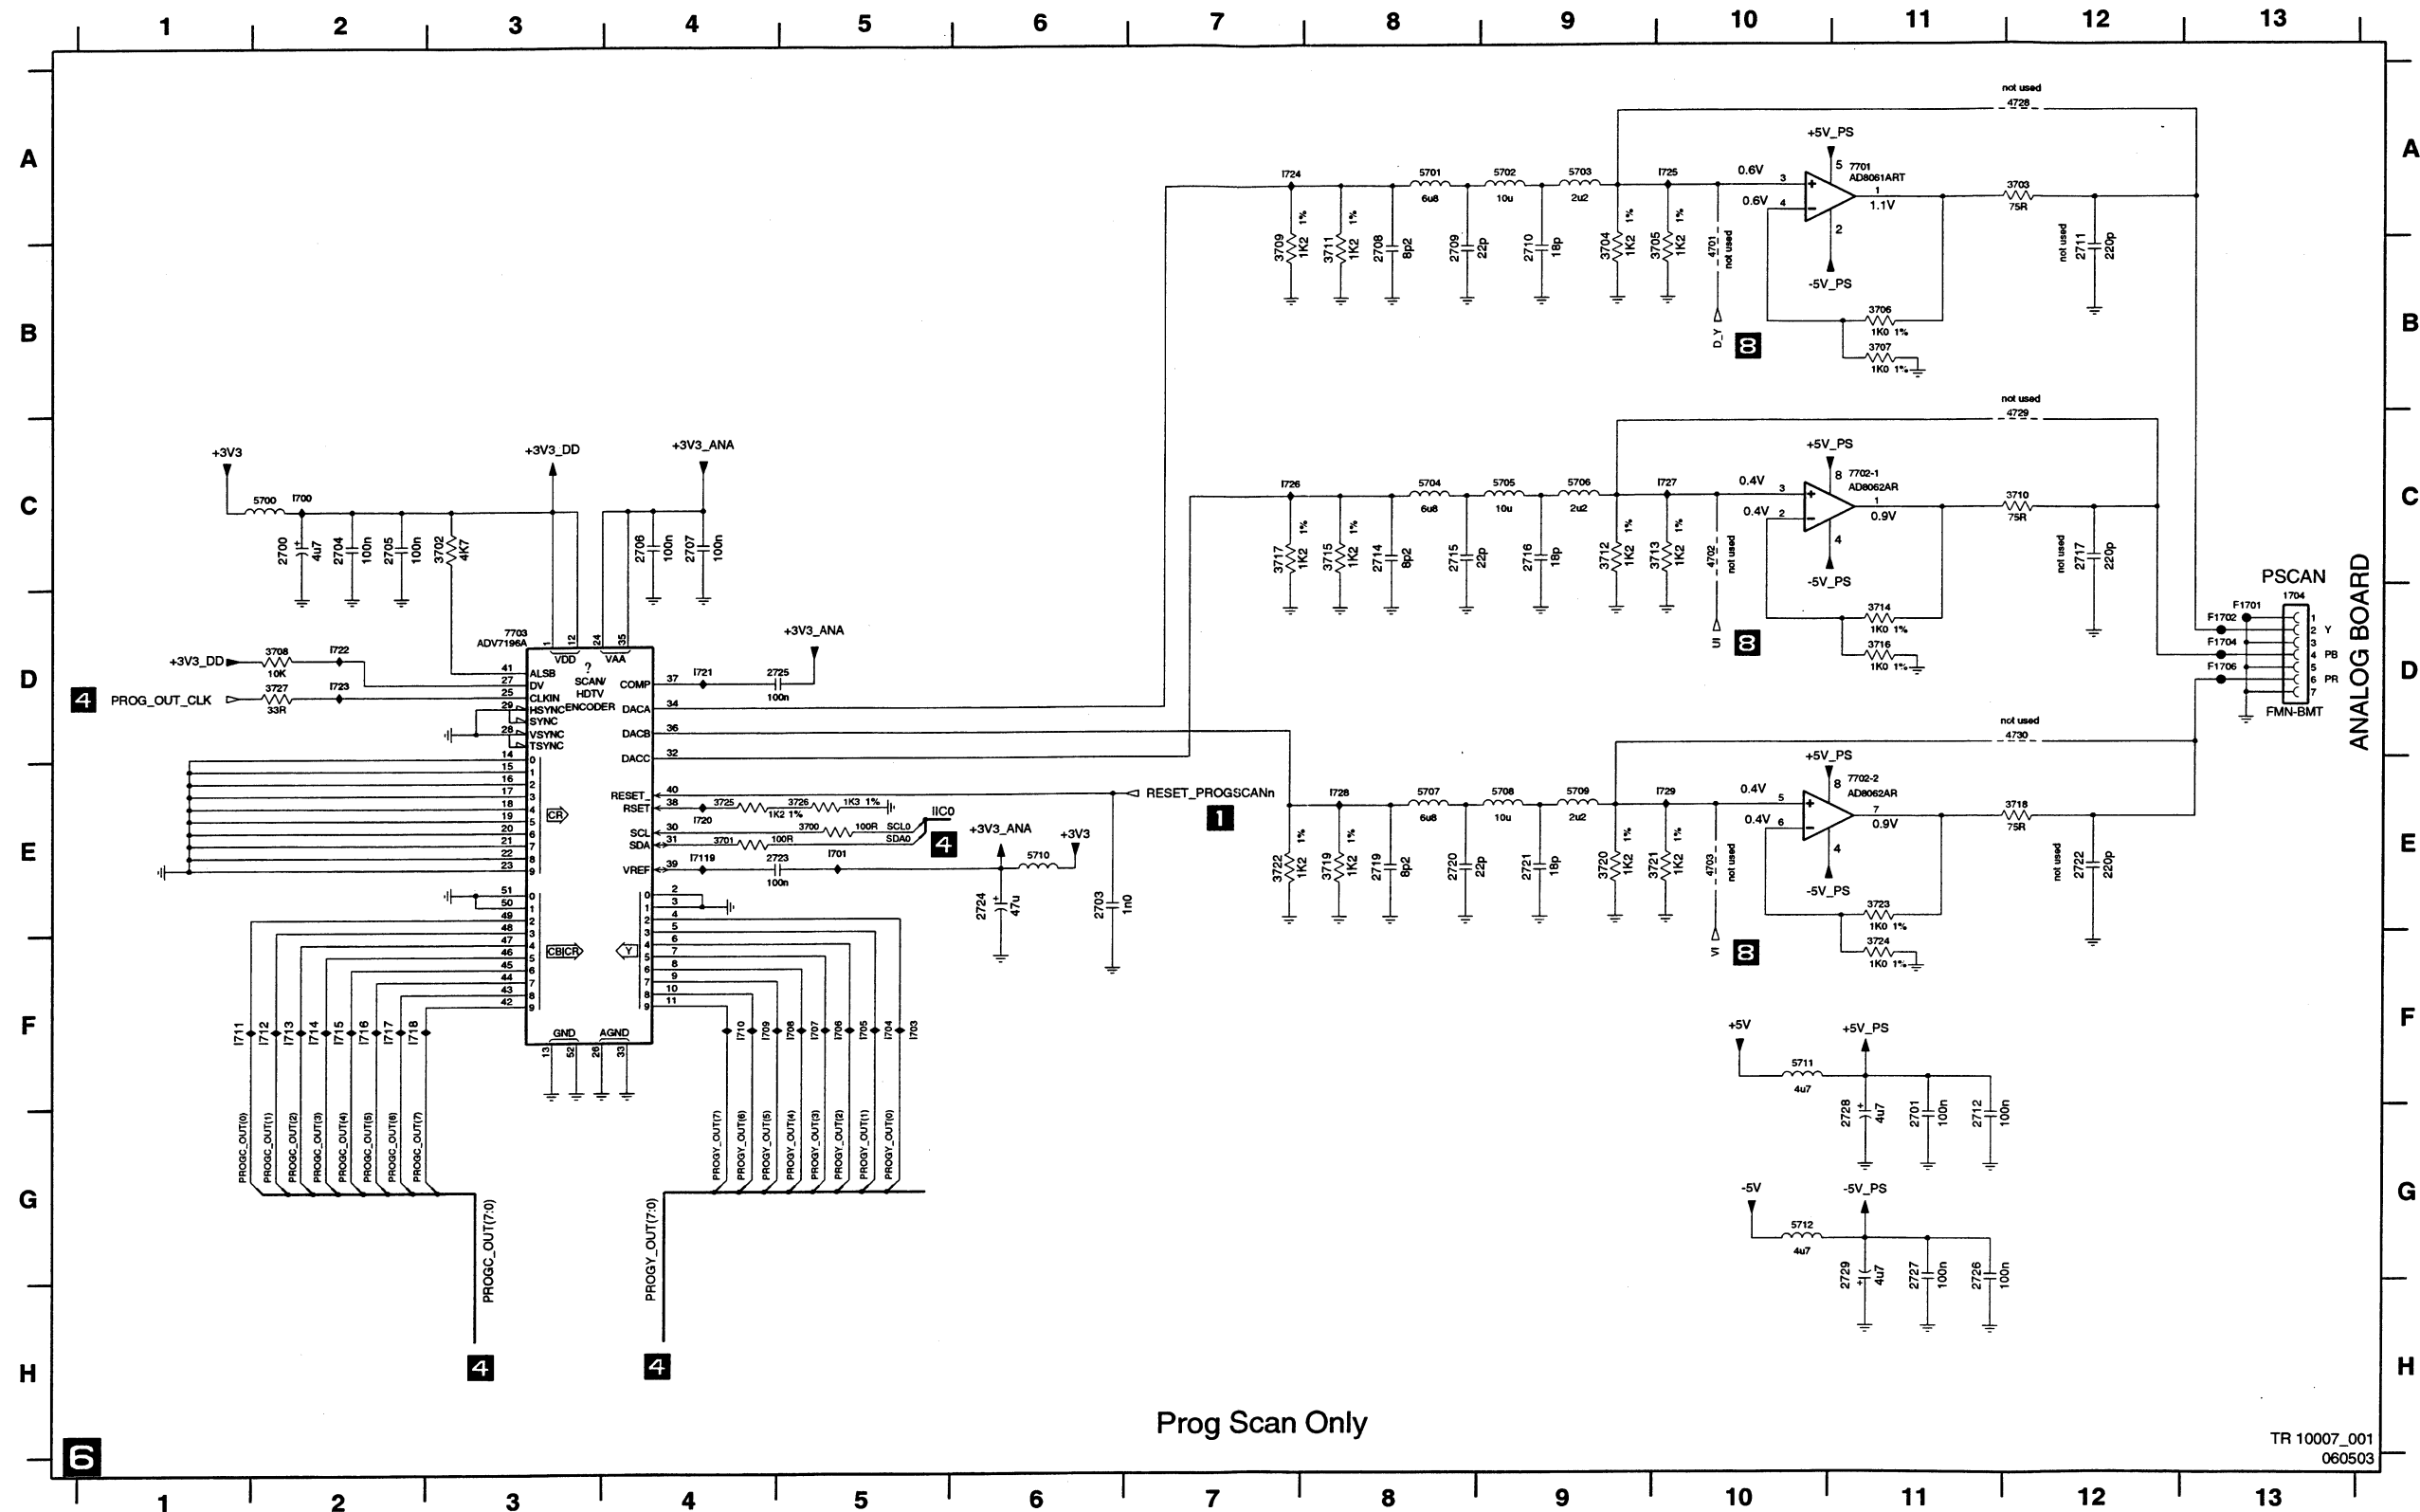


1704 D13
1715 F2
1716 F2
1717 F2
1718 F2
1719 F2
1720 E4
1721 D4
1722 D2
1723 A7
1724 A7
1725 A10
1726 C7
1727 C10
1728 E8
1729 E10
1730 C2
1731 D13
1732 D13
1733 D13
1734 F2
1735 F2
1736 F2
1737 F2
1738 F2
1739 F2
1740 F4
1741 F1
1742 E4
1743 F2
1744 F2
1745 F2
1746 F2
1747 F2
1748 F2
1749 F2
1750 F2
1751 F2
1752 F2
1753 F2
1754 F2
1755 F2
1756 F2
1757 F2
1758 F2
1759 F2
1760 F2
1761 F2
1762 F2
1763 F2
1764 F2
1765 F2
1766 F2
1767 F2
1768 F2
1769 F2
1770 F2
1771 F2
1772 F2
1773 F2
1774 F2
1775 F2
1776 F2
1777 F2
1778 F2
1779 F2
1780 F2
1781 F2
1782 F2
1783 F2
1784 F2
1785 F2
1786 F2
1787 F2
1788 F2
1789 F2
1790 F2
1791 F2
1792 F2
1793 F2
1794 F2
1795 F2
1796 F2
1797 F2
1798 F2
1799 F2
1800 F2

1704 D13
1715 F2
1716 F2
1717 F2
1718 F2
1719 F2
1720 E4
1721 D4
1722 D2
1723 A7
1724 A7
1725 A10
1726 C7
1727 C10
1728 E8
1729 E10
1730 C2
1731 D13
1732 D13
1733 D13
1734 F2
1735 F2
1736 F2
1737 F2
1738 F2
1739 F2
1740 F4
1741 F1
1742 E4
1743 F2
1744 F2
1745 F2
1746 F2
1747 F2
1748 F2
1749 F2
1750 F2
1751 F2
1752 F2
1753 F2
1754 F2
1755 F2
1756 F2
1757 F2
1758 F2
1759 F2
1760 F2
1761 F2
1762 F2
1763 F2
1764 F2
1765 F2
1766 F2
1767 F2
1768 F2
1769 F2
1770 F2
1771 F2
1772 F2
1773 F2
1774 F2
1775 F2
1776 F2
1777 F2
1778 F2
1779 F2
1780 F2
1781 F2
1782 F2
1783 F2
1784 F2
1785 F2
1786 F2
1787 F2
1788 F2
1789 F2
1790 F2
1791 F2
1792 F2
1793 F2
1794 F2
1795 F2
1796 F2
1797 F2
1798 F2
1799 F2
1800 F2


06005 E3
06069 F3
2806 A14
2807 A13
2808 A12
2809 A13
2810 A13
2811 A13
2812 B13
2814 C11
2816 F6
2820 E16
2821 E15
2822 E15
2823 E13
2824 E12
2826 E13
2827 F9
2828 F9
2829 F9
2830 D3
2832 F2
2833 D2
2834 D7
2836 H2
3801 F1
3802 F1
3804 G5
3805 G2
3806 E2
3807 E2
3808 G4
3809 C2
3810 C1
3811 B1
3812 B1
3814 B1
3815 B2
3816 C5
3817 C5
3818 C5
3819 C9
3836 G2
3841 B6
3842 B6
3843 B6
3844 B6
3845 B6
3846 C6
3847 C6
3848 D8
3849 D4
3854 D3
3855 E3
3856 H8
4801 C8
4801 C8
4802 D1
4803 D1
4804 C2
4805 H8
4806 G8
4807 H8
4808 H8
4809 I1
4812 C6
4813 D4
4814 D9
4815 D11
4816 G5
4817 G5
4818 G5
4819 H5
4820 A11
4821 A1
4822 G2
4823 G5
4824 G5
4825 A11
4826 E1
4827 H1
4828 H1
4829 H2
4830 H2
4831 H2
4832 H2
4833 H2
4834 H2
4835 H2
4836 H2
4837 H2
4838 H2
4839 H2
4840 H2
4841 H2
4842 H2
4843 H2
4844 H2
4845 H2
4846 H2
4847 H2
4848 H2
4849 H2
4850 H2
4851 H2
4852 H2
4853 H2
4854 H2
4855 H2
4856 H2
4857 H2
4858 H2
4859 H2
4860 H2
4861 H2
4862 H2
4863 H2
4864 H2
4865 H2
4866 H2
4867 H2
4868 H2
4869 H2
4870 H2
4871 H2
4872 H2
4873 H2
4874 H2
4875 H2
4876 H2
4877 H2
4878 H2
4879 H2
4880 H2
4881 H2
4882 H2
4883 H2
4884 H2
4885 H2
4886 H2
4887 H2
4888 H2
4889 H2
4890 H2
4891 H2
4892 H2
4893 H2
4894 H2
4895 H2
4896 H2
4897 H2
4898 H2
4899 H2
4900 H2
4901 H2
4902 H2
4903 H2
4904 H2
4905 H2
4906 H2
4907 H2
4908 H2
4909 H2
4910 H2
4911 H2
4912 H2
4913 H2
4914 H2
4915 H2
4916 H2
4917 H2
4918 H2
4919 H2
4920 H2
4921 H2
4922 H2
4923 H2
4924 H2
4925 H2
4926 H2
4927 H2
4928 H2
4929 H2
4930 H2
4931 H2
4932 H2
4933 H2
4934 H2
4935 H2
4936 H2
4937 H2
4938 H2
4939 H2
4940 H2
4941 H2
4942 H2
4943 H2
4944 H2
4945 H2
4946 H2
4947 H2
4948 H2
4949 H2
4950 H2
4951 H2
4952 H2
4953 H2
4954 H2
4955 H2
4956 H2
4957 H2
4958 H2
4959 H2
4960 H2
4961 H2
4962 H2
4963 H2
4964 H2
4965 H2
4966 H2
4967 H2
4968 H2
4969 H2
4970 H2
4971 H2
4972 H2
4973 H2
4974 H2
4975 H2
4976 H2
4977 H2
4978 H2
4979 H2
4980 H2
4981 H2
4982 H2
4983 H2
4984 H2
4985 H2
4986 H2
4987 H2
4988 H2
4989 H2
4990 H2
4991 H2
4992 H2
4993 H2
4994 H2
4995 H2
4996 H2
4997 H2
4998 H2
4999 H2
5000 H2



Digital Board Chrysalis 2.1: Video IO

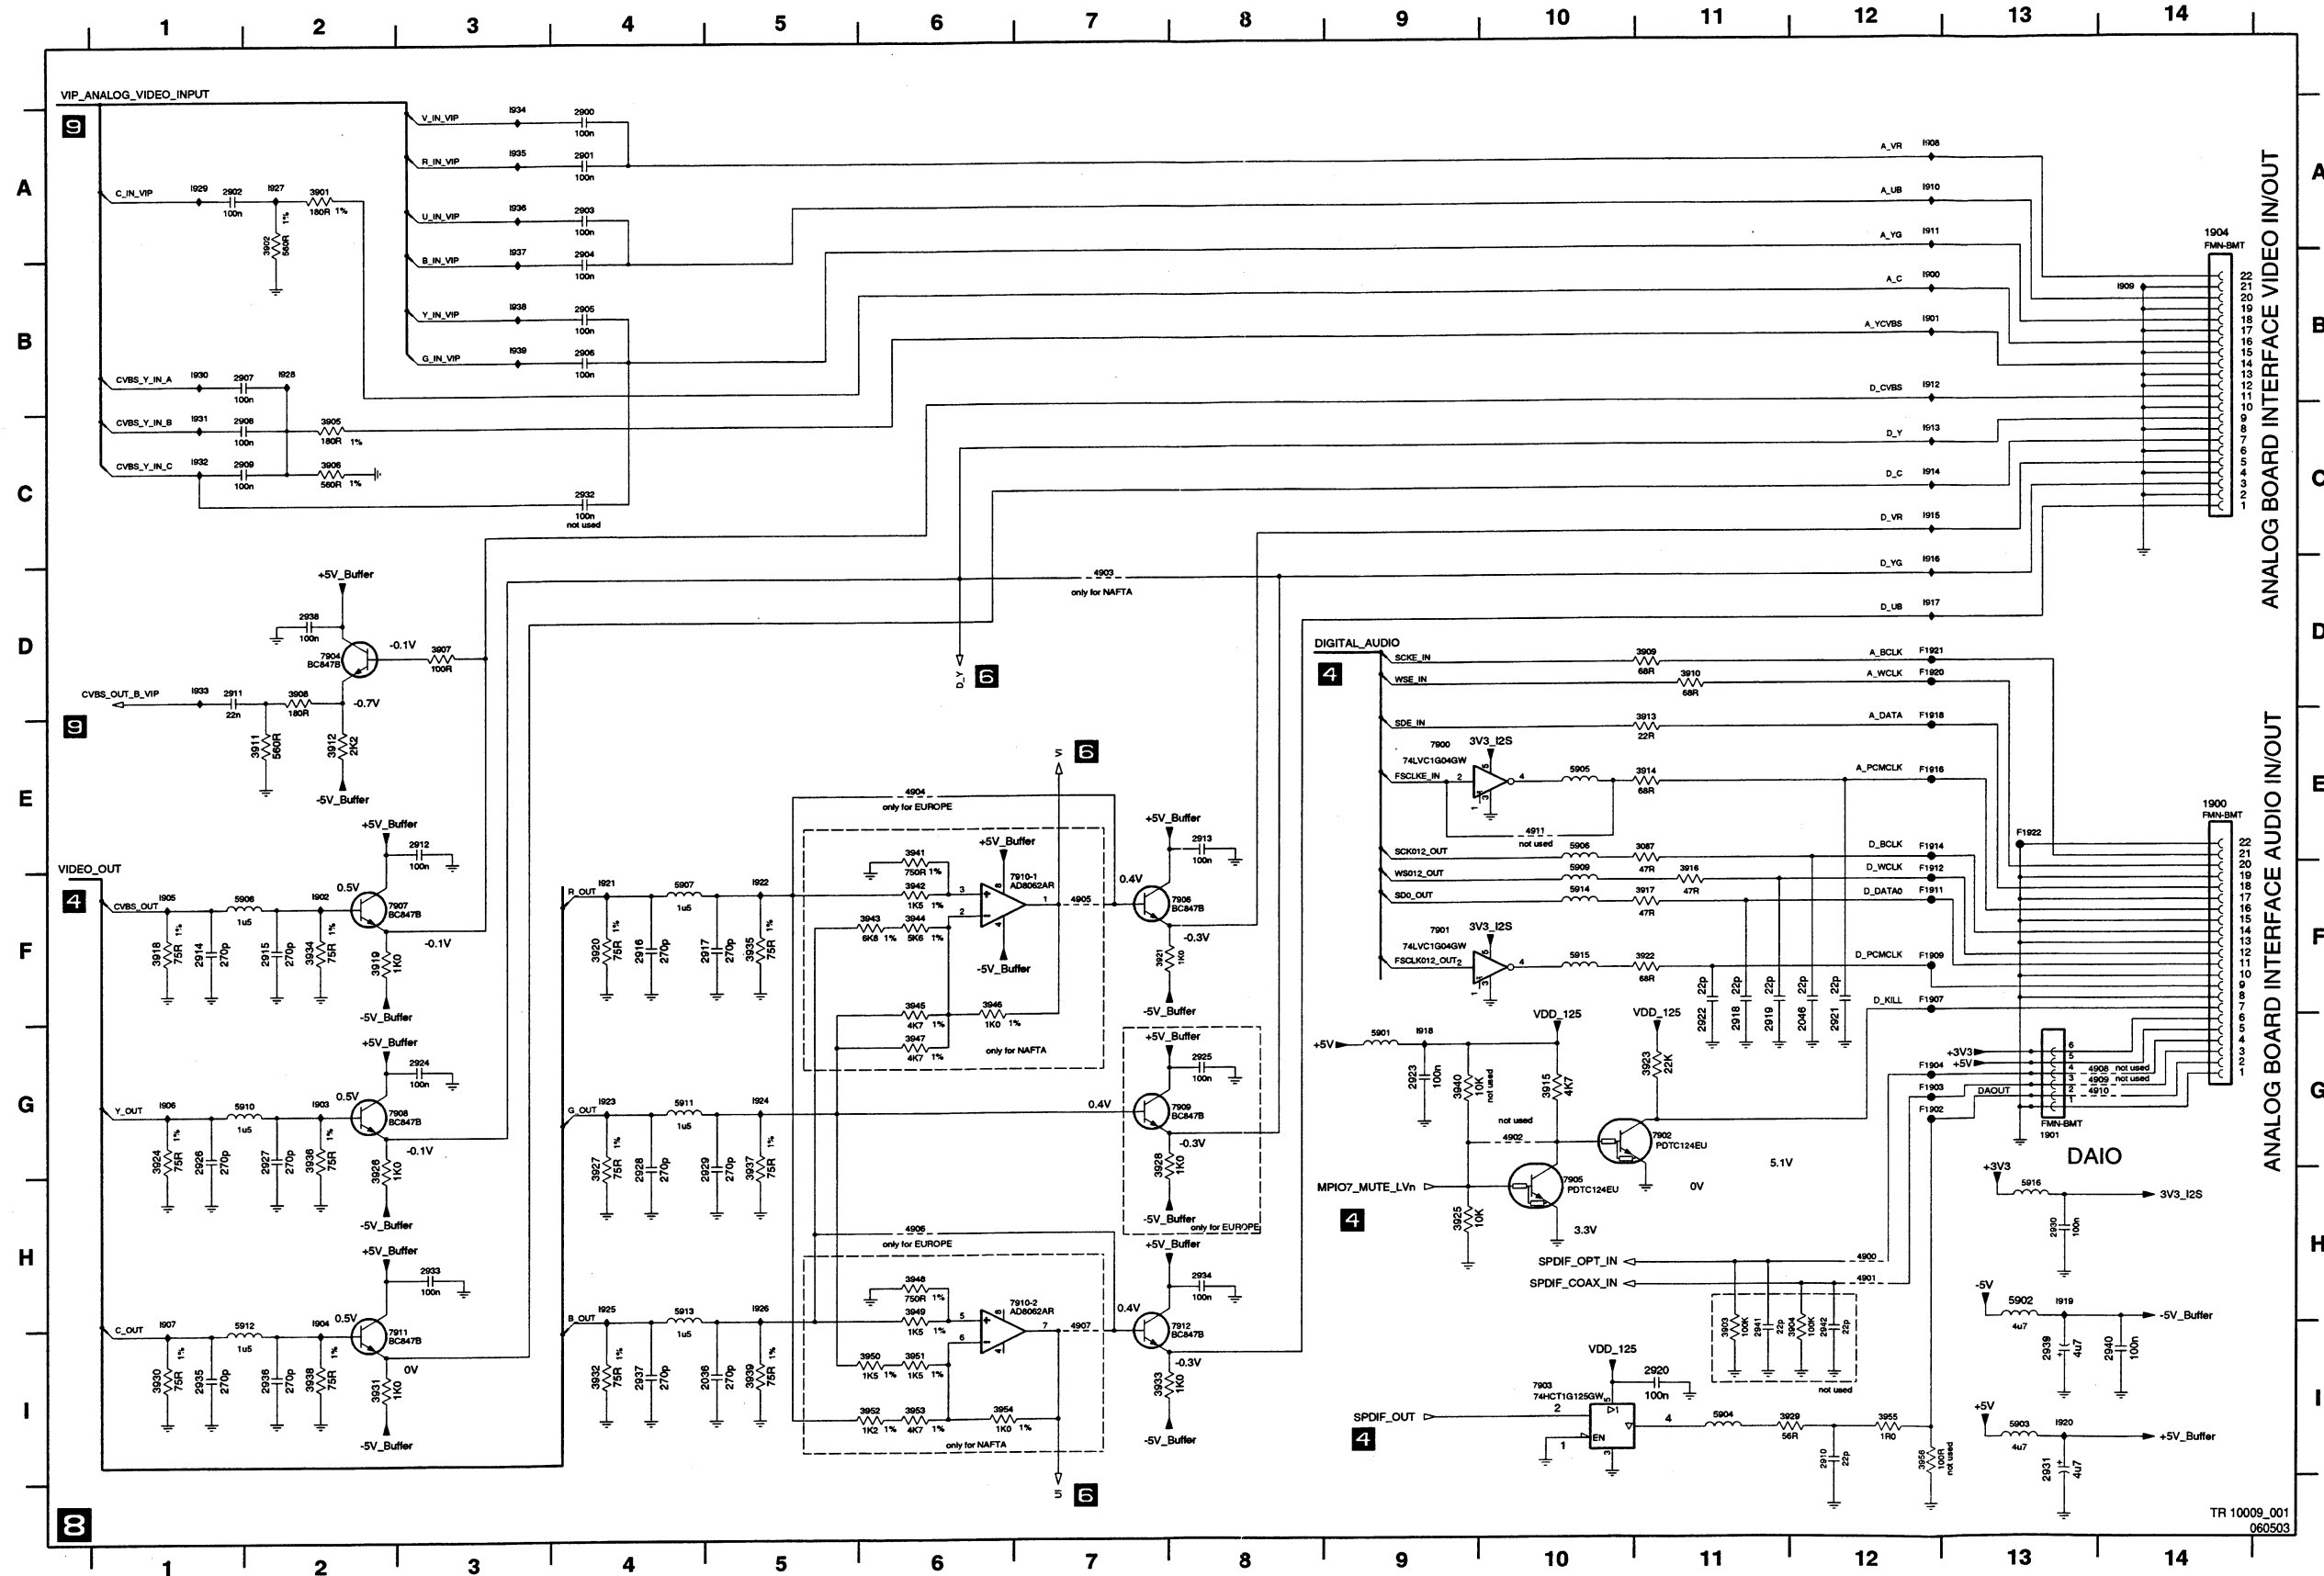


1900 E14	5914 F10
1901 G13	5915 F10
1904 A14	5916 H13
2900 E9	7900 E9
2904 G12	7901 F9
2900 A4	7902 G11
2901 A4	7903 I10
2902 A1	7904 D2
2903 A4	7905 H10
2904 A4	7906 F8
2905 B4	7907 F2
2906 B4	7908 G2
2907 B1	7909 G8
2908 C1	7910-1 F8
2909 C1	7910-2 H6
2910 I12	7911 I2
2911 D1	7912 I8
2912 E3	F1902 G12
2913 E8	F1903 G12
2914 F1	F1912 G11
2915 F2	F1907 F12
2916 F4	F1909 F12
2917 F5	F1911 F12
2918 G11	F1912 G11
2919 G11	F1914 E12
2920 I11	F1916 E12
2921 G12	F1918 E12
2922 G11	F1920 D12
2923 G9	F1921 D12
2924 G3	F1922 E13
2925 G8	1900 B12
2926 G1	1901 B12
2927 G2	1902 F2
2928 G4	1903 G2
2929 G5	1904 H2
2930 H13	1905 F1
2931 I13	1906 G1
2932 C4	1907 H1
2933 H3	1908 A12
2934 H8	1909 B14
2935 I1	1910 A12
2936 I2	1911 A12
2937 I4	1912 B12
2938 D2	1913 C12
2939 I13	1914 C12
2940 I14	1915 C12
2941 I11	1916 D12
2942 I12	1917 D12
3087 E11	1918 G8
3901 A2	1919 H13
3902 A2	1920 I13
3903 I11	1921 F4
3904 I12	1922 F5
3905 C2	1923 G4
3906 C2	1924 G5
3907 D3	1925 H4
3908 D2	1926 H5
3909 D11	1927 A2
3910 D11	1928 B2
3911 E2	1929 A1
3912 E2	1930 B1
3913 E11	1931 C1
3914 E11	1932 C1
3915 G10	1933 D1
3916 F11	1934 A3
3917 F11	1935 A3
3918 F1	1936 A3
3919 F2	1937 A3
3920 F4	1938 B3
3921 F7	1939 B3
3922 F11	
3923 G11	
3924 G1	
3925 H9	
3926 G2	
3927 G4	
3928 G7	
3929 H11	
3930 H1	
3931 I2	
3932 I4	
3933 I7	
3934 F2	
3935 F5	
3936 G2	
3937 G5	
3938 I2	
3939 I5	
3940 G9	
3941 E8	
3942 F8	
3943 F8	
3944 F8	
3945 F8	
3946 F8	
3947 G8	
3948 H6	
3949 H6	
3950 H6	
3951 H6	
3952 H6	
3953 H6	
3954 H6	
3955 I12	
3956 I12	
4900 H12	
4901 H12	
4902 G10	
4903 D7	
4904 E8	
4905 F7	
4906 H5	
4907 F7	
4908 G13	
4909 G13	
4910 G13	
4911 E10	
5901 G9	
5902 H13	
5903 I13	
5904 I11	
5905 E10	
5906 E10	
5907 F4	
5908 F1	
5909 F10	
5910 G1	
5911 G4	
5912 H1	
5913 H4	

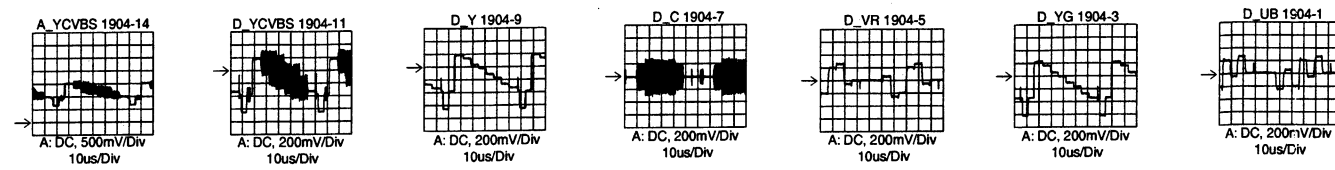

TR 10009_001
060503


[illegible]

Layout Digital Board Chrysalis 2.1 (Top View)

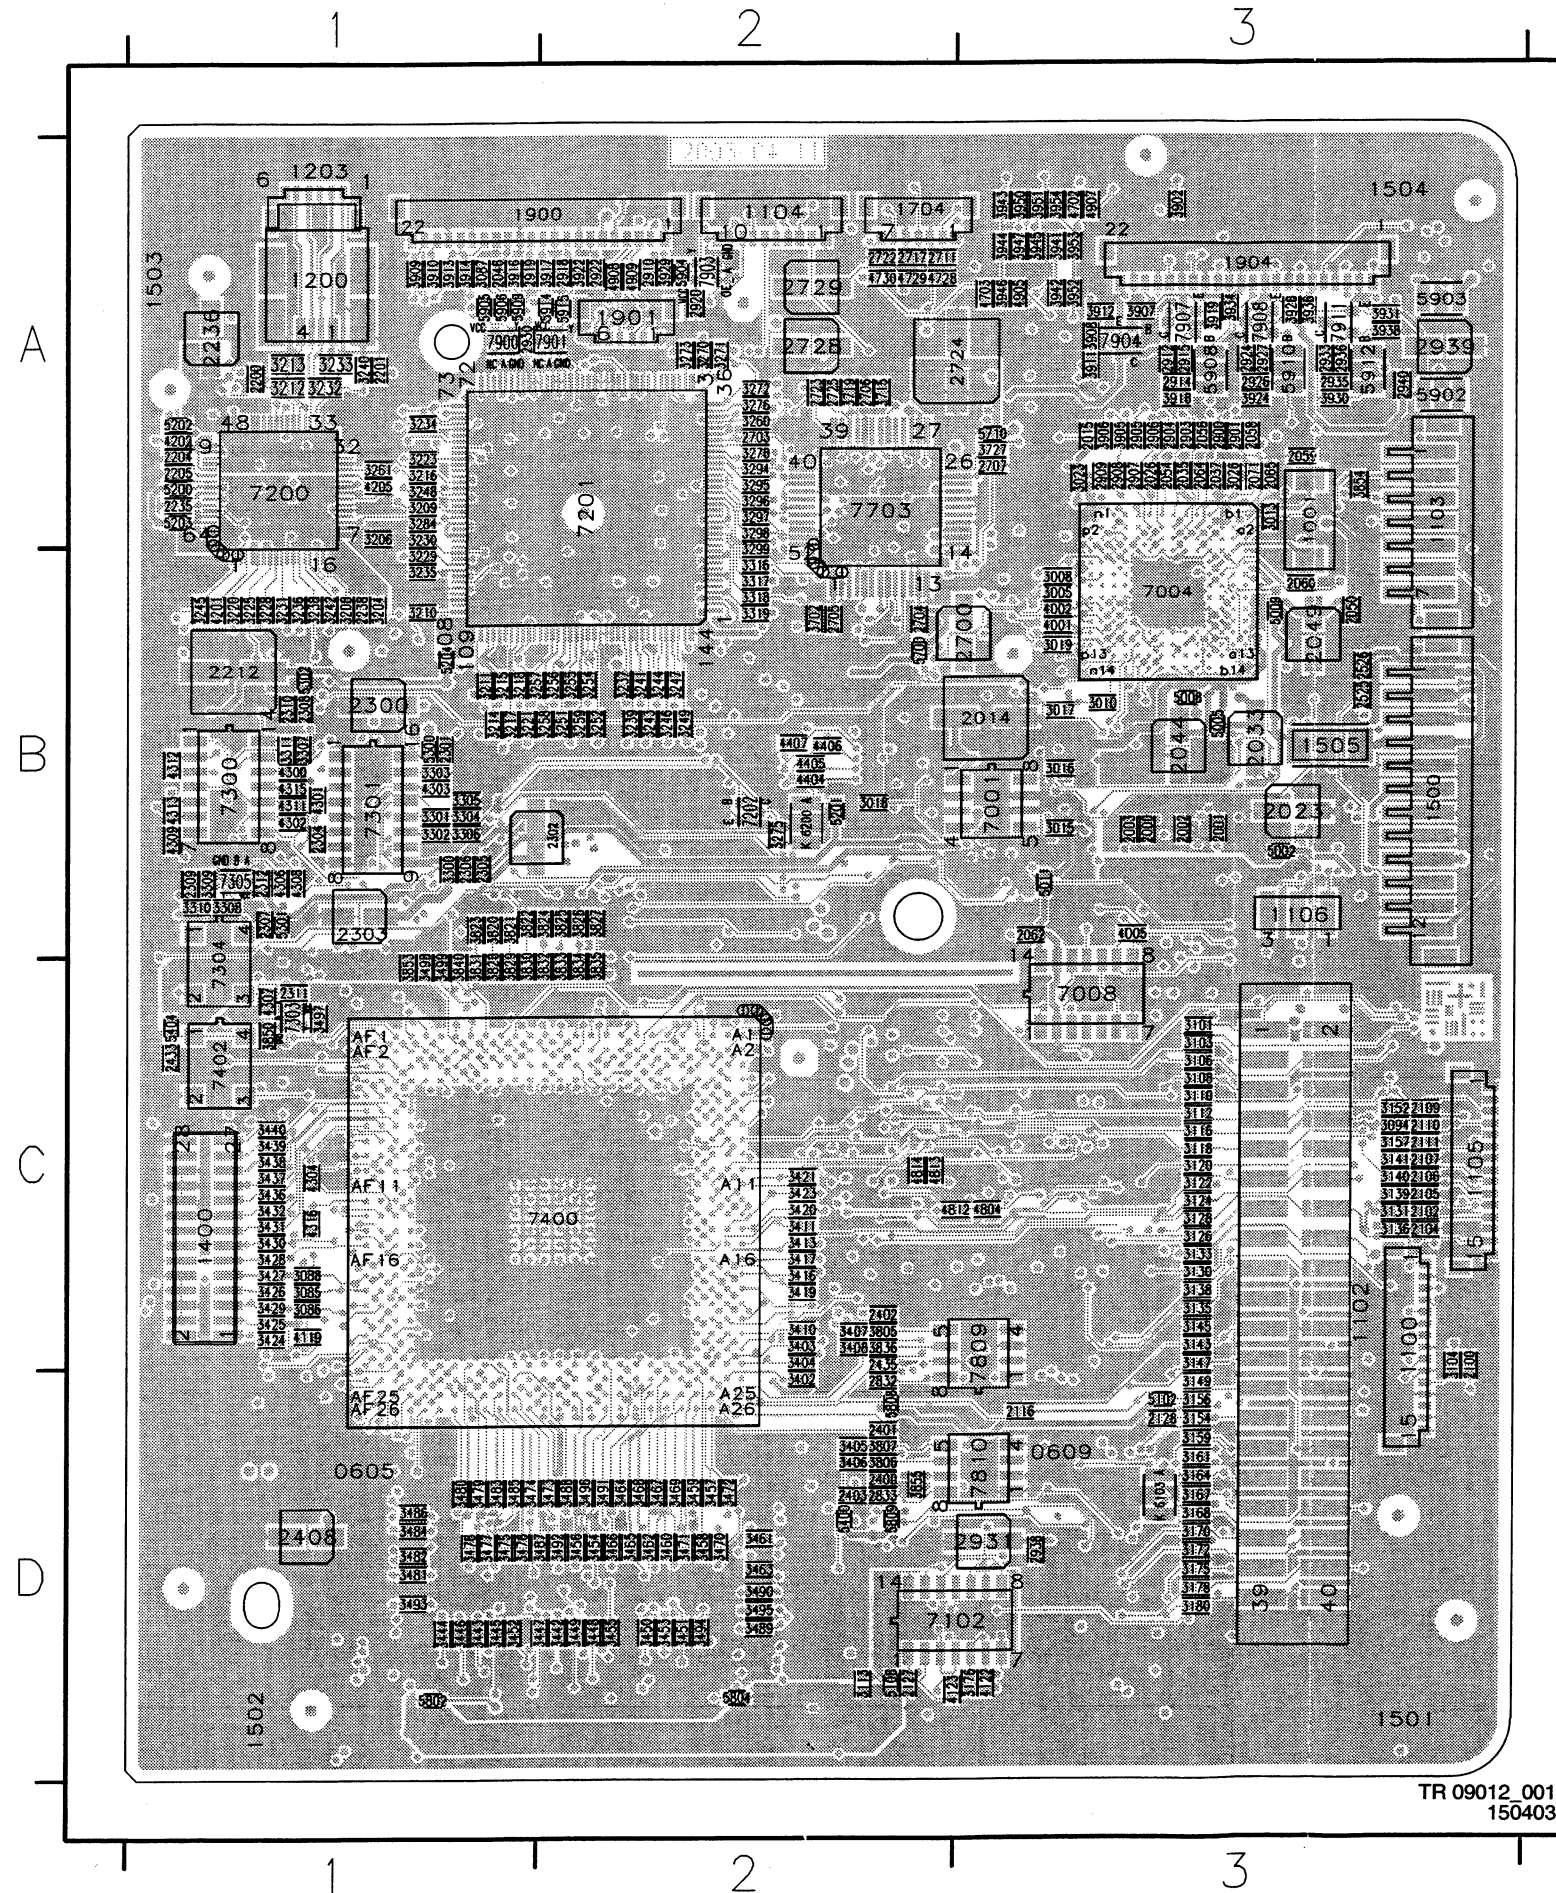

0605 D1	2707 A3	3164 D3	3403 C2	3719 A2	4407 B2
0609 D3	2711 A2	3167 D3	3404 C2	3727 A3	4702 A3
1001 A3	2717 A2	3168 D3	3405 D2	3805 C2	4703 A3
1100 C3	2722 A2	3170 D3	3406 D2	3806 D2	4728 A2
1102 C3	2723 A2	3172 D3	3407 C2	3807 D2	4729 A2
1103 A3	2724 A2	3175 D3	3408 C2	3820 B1	4730 A2
1104 A2	2725 A2	3176 D3	3410 C2	3821 B1	4804 C3
1105 C3	2728 A2	3178 D3	3411 C2	3822 B1	4812 C3
1106 B3	2729 A2	3180 D3	3413 C2	3823 B1	4813 C2
1200 A1	2832 D2	3204 B1	3416 C2	3824 B2	4814 C2
1203 A1	2833 D2	3206 A1	3417 C2	3825 B2	4905 A3
1400 C1	2900 A3	3208 B1	3419 C2	3826 B2	4907 A3
1500 B3	2901 A3	3209 A1	3420 C2	3827 B2	4908 A2
1505 B3	2903 A3	3210 B1	3421 C2	3828 C1	4909 A2
1704 A2	2904 A3	3211 B1	3423 C2	3829 C1	5002 B3
1900 A1	2905 A3	3212 A1	3424 C1	3830 C1	5005 B3
1901 A2	2906 A3	3213 A1	3425 C1	3831 C1	5008 B3
1904 A3	2907 A3	3214 B1	3426 C1	3832 C2	5009 B3
2000 B3	2908 A3	3215 B1	3427 C1	3833 C2	5011 B3
2001 B3	2909 A3	3216 A1	3428 C1	3834 C2	5102 D3
2002 B3	2910 A2	3217 B1	3429 C1	3835 C2	5108 D2
2003 B3	2912 A3	3218 B1	3430 C1	3836 C2	5200 A1
2014 B3	2914 A3	3220 B1	3431 C1	3840 C1	5201 B2
2015 A3	2915 A3	3221 B1	3432 C1	3850 C1	5202 A1
2023 B3	2918 A2	3223 A1	3436 C1	3853 C1	5203 A1
2026 A3	2919 A1	3225 B1	3437 C1	3854 A3	5204 B1
2033 B3	2920 A2	3228 B1	3438 C1	3855 D2	5300 B1
2035 A3	2922 A2	3229 B1	3439 C1	3902 A3	5301 B1
2037 A3	2924 A3	3230 A1	3440 C1	3905 A3	5302 B1
2044 B3	2926 A3	3231 B1	3442 D2	3906 A3	5400 D2
2046 A1	2927 A3	3232 A1	3443 D1	3907 A3	5404 C1
2049 B3	2930 A1	3233 A1	3444 D1	3908 A3	5700 B2
2050 B3	2931 D3	3234 A1	3445 D1	3909 A1	5710 A3
2054 A3	2933 A3	3235 B1	3446 D1	3910 A1	5802 D1
2056 A3	2935 A3	3236 B1	3447 D2	3911 A3	5804 D2
2058 A3	2936 A3	3237 B2	3448 D2	3912 A3	5808 D2
2059 A3	2938 D3	3238 B1	3449 D2	3913 A1	5809 D2
2060 B3	2939 A3	3239 B2	3450 D2	3914 A1	5902 A3
2062 B3	2940 A3	3240 A1	3451 D2	3916 A1	5903 A3
2064 A3	3005 B3	3241 B2	3452 D1	3917 A2	5904 A2
2065 A3	3008 B3	3242 B1	3453 D2	3918 A3	5905 A1
2071 A3	3010 B3	3243 B2	3454 D2	3919 A3	5906 A1
2100 D3	3013 A3	3244 B2	3455 D2	3922 A2	5908 A3
2102 C3	3015 B3	3245 B1	3456 D2	3924 A3	5909 A1
2104 C3	3016 B3	3246 B2	3457 D2	3926 A3	5910 A3
2105 C3	3017 B3	3247 B2	3458 D2	3929 A2	5912 A3
2106 C3	3018 B2	3248 A1	3459 D2	3930 A3	5914 A2
2107 C3	3019 B3	3249 B2	3460 D2	3931 A3	5915 A2
2109 C3	3023 A3	3251 B2	3461 D2	3934 A3	6103 D3
2110 C3	3026 A3	3252 B2	3462 D2	3936 A3	6200 B2
2111 C3	3085 C1	3254 B2	3463 D2	3938 A3	7001 B3
2116 D3	3086 C1	3255 B2	3464 D2	3941 A3	7004 B3
2127 D2	3087 A1	3256 B2	3465 D2	3942 A3	7008 C3
2128 D3	3088 C1	3257 B1	3466 D2	3943 A3	7102 D3
2200 A1	3094 C3	3258 B2	3467 D2	3944 A3	7200 A1
2201 A1	3101 C3	3259 B2	3468 D2	3945 A3	7201 A2
2204 A1	3103 C3	3260 A2	3469 D2	3946 A3	7202 B2
2205 A1	3104 D3	3261 A1	3470 D2	3947 A3	7300 B1
2212 B1	3106 C3	3270 A2	3471 D2	3950 A3	7301 B1
2235 A1	3108 C3	3271 A2	3472 D2	3951 A3	7303 C1
2236 A1	3110 C3	3272 A2	3473 D2	3952 A3	7304 C1
2238 B1	3112 C3	3273 A2	3474 D1	3953 A3	7305 B1
2300 B1	3113 D2	3275 B2	3475 D1	3954 A3	7400 C2
2301 B1	3116 C3	3276 A2	3476 D1	4001 B3	7402 C1
2302 B2	3118 C3	3278 A2	3477 D1	4002 B3	7703 A2
2303 B1	3120 C3	3284 A1	3478 D1	4005 B3	7809 C3
2304 B1	3122 C3	3294 A2	3479 D1	4119 C1	7810 D3
2305 B1	3124 C3	3295 A2	3480 D1	4122 D3	7900 A1
2306 B1	3126 C3	3296 A2	3481 D1	4123 D2	7901 A2
2307 B1	3128 C3	3297 A2	3482 D1	4201 B1	7903 A2
2308 B1	3130 C3	3298 A2	3483 D1	4202 A1	7904 A3
2309 B1	3131 C3	3299 B2	3484 D1	4205 A1	7907 A3
2310 B1	3133 C3	3300 B1	3485 D1	4300 B1	7908 A3
2311 C1	3135 C3	3301 B1	3486 D1	4301 B1	7911 A3
2312 B1	3136 C3	3302 B1	3487 D2	4302 B1	
2400 D2	3138 C3	3303 B1	3488 D2	4303 B1	
2401 D2	3139 C3	3304 B1	3489 D2	4304 C1	
2402 C2	3140 C3	3305 B1	3490 D2	4306 B1	
2403 D2	3141 C3	3306 B1	3491 D2	4307 C1	
2408 D1	3143 C3	3307 B1	3492 D2	4308 B1	
2433 C1	3145 C3	3308 B1	3493 D1	4309 B1	
2435 C2	3147 C3	3309 B1	3494 D2	4311 B1	
2525 B3	3149 D3	3310 B1	3495 D2	4312 B1	
2526 B3	3152 C3	3311 B1	3496 D2	4313 B1	
2700 B3	3154 D3	3316 B2	3497 C1	4315 B1	
2703 A2	3156 D3	3317 B2	3498 C1	4316 C1	
2704 B2	3157 C3	3318 B2	3499 C1	4404 B2	
2705 B2	3159 D3	3319 B2	3702 B2	4405 B2	
2706 A2	3161 D3	3402 D2	3715 A2	4406 B2	

Layout Digital Board Chrysalis 2.1 (Bottom View)

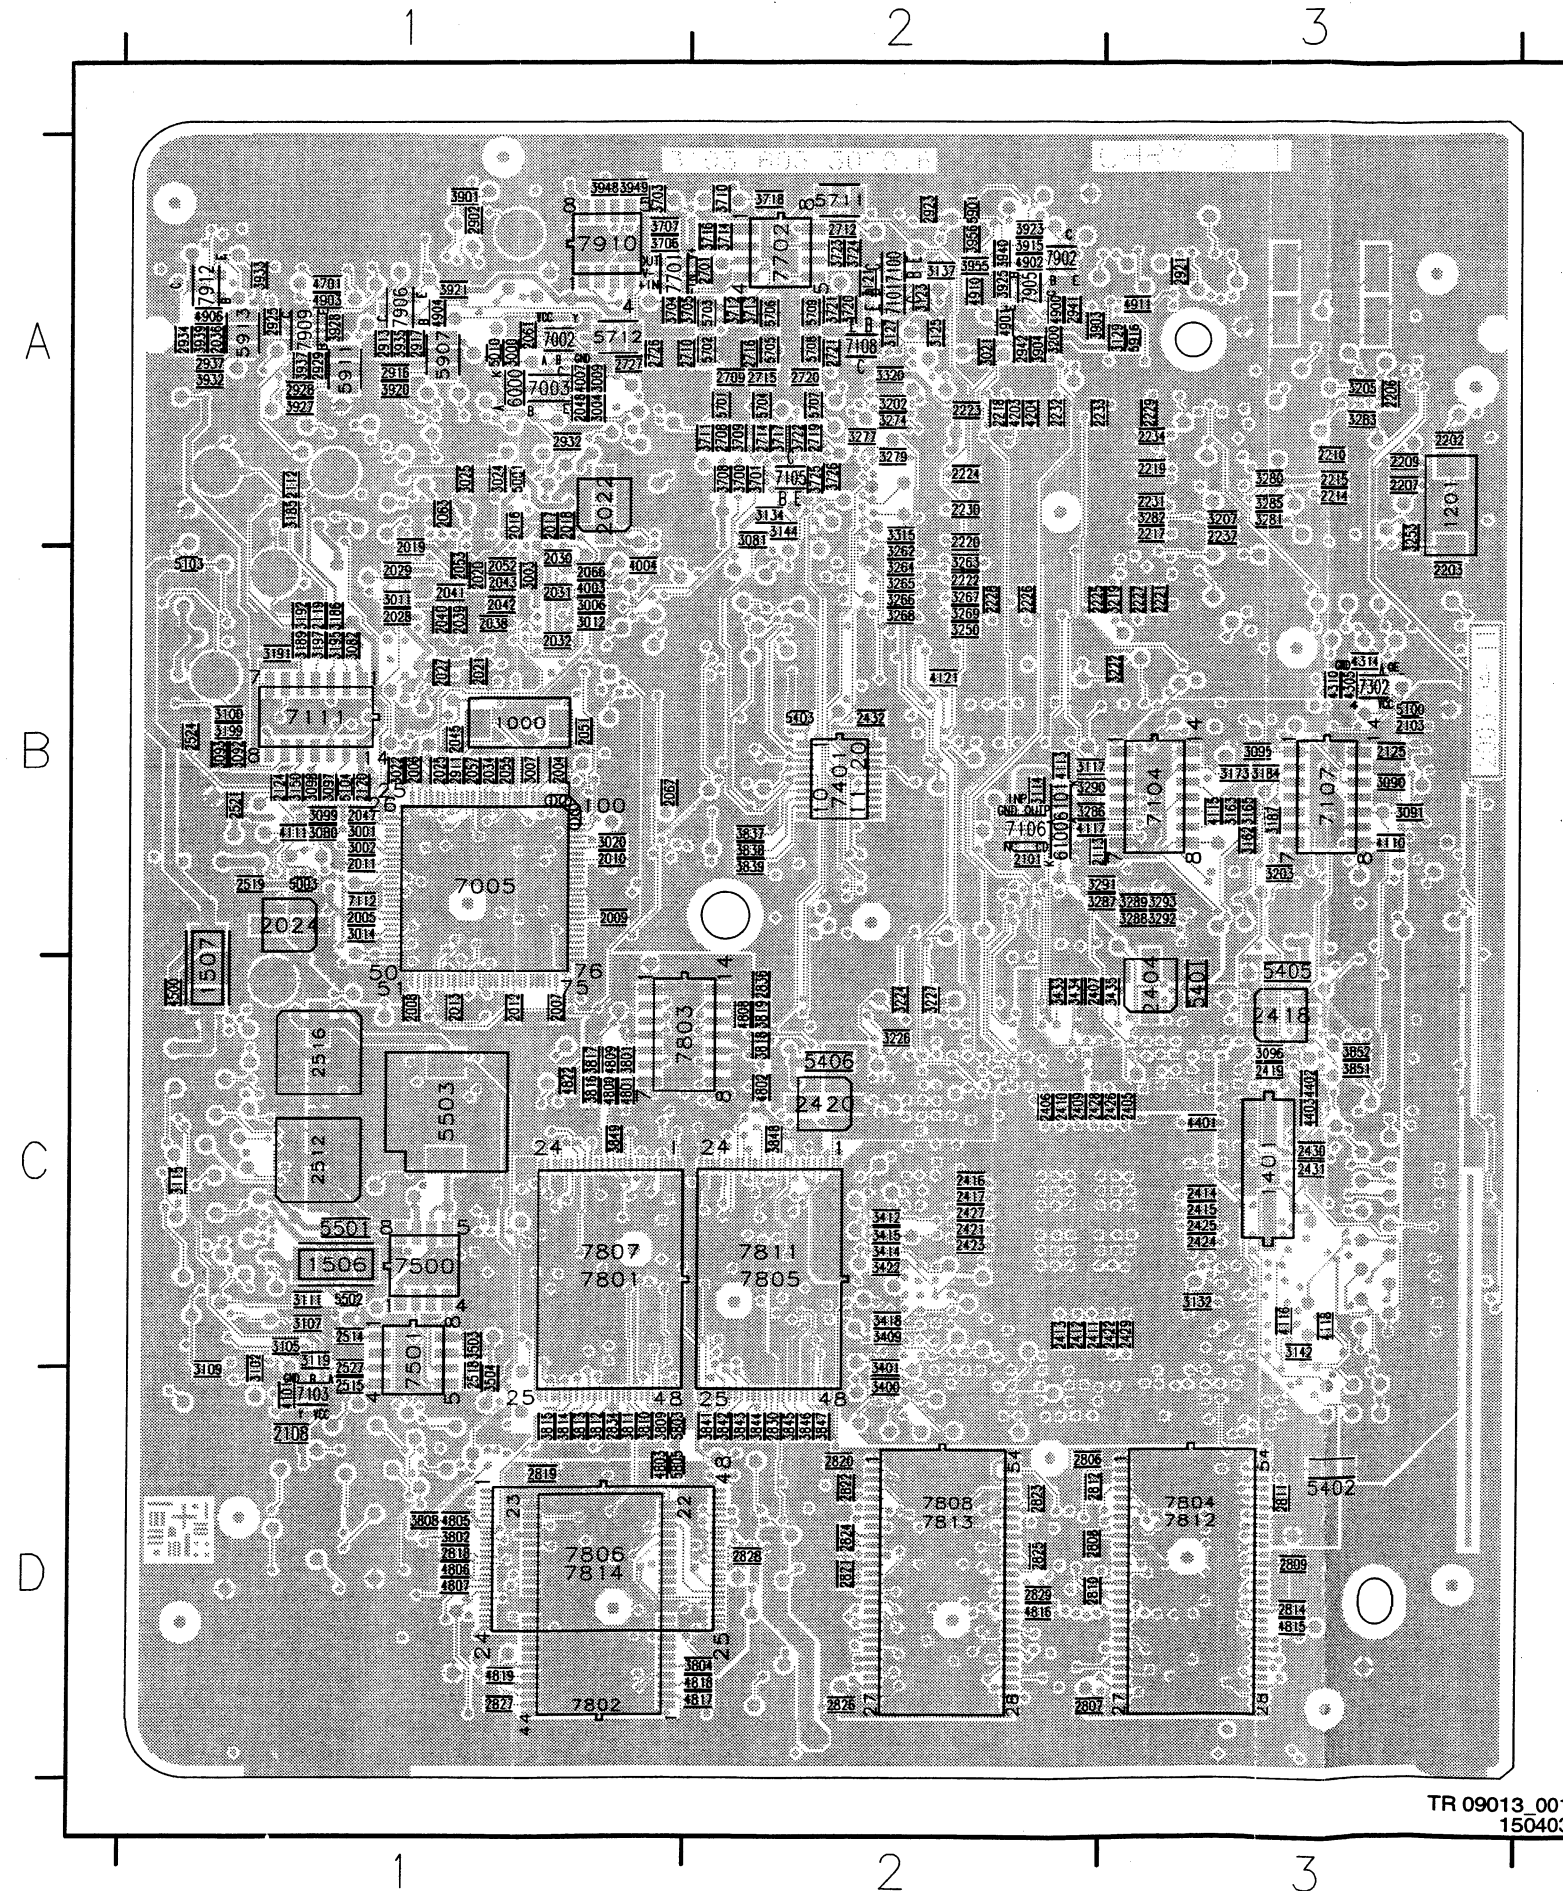TR 09013_001
150403

1000 B1	2409 C2	3007 B1	3291 B2	3956 A2	7107 B3
1201 A3	2410 C2	3009 A1	3292 B3	4003 B1	7108 A2
1401 C3	2411 C2	3011 B1	3293 B3	4004 B1	7111 B1
1506 C1	2412 C2	3012 B1	3315 A2	4007 A1	7112 B1
1507 C1	2413 C2	3014 B1	3320 A2	4101 D1	7302 B3
2004 B1	2414 C3	3020 B1	3400 D2	4110 B3	7401 B2
2005 B1	2415 C3	3021 A2	3401 D2	4111 B1	7500 C1
2006 B1	2416 C2	3022 B1	3409 C2	4113 B2	7501 C1
2007 C1	2417 C2	3024 A1	3412 C2	4115 B3	7701 A1
2008 C1	2418 C3	3025 A1	3414 C2	4116 C3	7702 A2
2009 B1	2419 C3	3080 B1	3415 C2	4117 B2	7801 C1
2010 B1	2420 C2	3081 A2	3418 C2	4118 C3	7802 D1
2011 B1	2421 C2	3082 B1	3422 C2	4121 B2	7803 C1
2012 C1	2422 C3	3090 B3	3433 C2	4203 A2	7804 D3
2013 C1	2423 C2	3091 B3	3434 C2	4204 A2	7805 C2
2016 A1	2424 C3	3092 B1	3435 C3	4305 B3	7806 D1
2017 A1	2425 C3	3093 B1	3503 C1	4310 B3	7807 C1
2018 A1	2426 C3	3095 B3	3504 D1	4314 B3	7808 D2
2019 B1	2427 C2	3096 C3	3700 A2	4401 C3	7811 C2
2020 B1	2428 C2	3097 B1	3701 A2	4402 C3	7812 D3
2021 B1	2429 C3	3098 B1	3703 A1	4403 C3	7813 D2
2022 A1	2430 C3	3099 B1	3704 A1	4500 C1	7814 D1
2024 B1	2431 C3	3100 B1	3705 A1	4701 A1	7902 A2
2025 B1	2432 B2	3102 D1	3706 A1	4800 C1	7905 A2
2027 B1	2512 C1	3105 C1	3707 A1	4801 C1	7906 A1
2028 B1	2514 C1	3107 C1	3708 A2	4802 C2	7909 A1
2029 B1	2515 D1	3109 D1	3709 A2	4803 D1	7910 A1
2030 B1	2516 C1	3111 C1	3710 A2	4805 D1	7912 A1
2031 B1	2518 D1	3114 B2	3711 A2	4806 D1	
2032 B1	2519 B1	3115 C1	3712 A2	4807 D1	
2034 B1	2521 B1	3117 B2	3713 A2	4808 C2	
2036 A1	2524 B1	3119 C1	3714 A2	4809 C1	
2038 B1	2527 D1	3121 A2	3716 A2	4815 D3	
2039 B1	2701 A2	3123 A2	3717 A2	4816 D2	
2040 B1	2708 A2	3125 A2	3718 A2	4817 D2	
2041 B1	2709 A2	3127 A2	3720 A2	4818 D2	
2042 B1	2710 A1	3129 A3	3721 A2	4819 D1	
2043 B1	2712 A2	3132 C3	3722 A2	4822 C1	
2045 B1	2714 A2	3134 A2	3723 A2	4900 A2	
2047 B1	2715 A2	3137 A2	3724 A2	4901 A2	
2048 A1	2716 A2	3142 C3	3725 A2	4902 A2	
2051 B1	2719 A2	3144 A2	3726 A2	4903 A1	
2052 B1	2720 A2	3150 B1	3801 C1	4904 A1	
2053 B1	2721 A2	3162 B3	3802 D1	4906 A1	
2055 B1	2726 A1	3163 B3	3804 D2	4910 A2	
2057 B1	2727 A1	3165 B3	3808 D1	4911 A3	
2061 A1	2806 D2	3173 B3	3809 D1	5001 A1	
2063 A1	2807 D2	3184 B3	3810 D1	5003 B1	
2066 B1	2808 D2	3185 A1	3811 D1	5010 A1	
2067 B1	2809 D3	3186 B1	3812 D1	5100 B3	
2101 B2	2810 D2	3187 B3	3813 D1	5103 B1	
2103 B3	2811 D3	3189 B1	3814 D1	5104 B1	
2108 D1	2812 D2	3191 B1	3815 D1	5401 C3	
2112 A1	2814 D3	3192 B1	3816 C1	5402 D3	
2113 B2	2818 D1	3195 B1	3817 C1	5403 B2	
2119 B1	2819 D1	3197 B1	3818 C2	5405 C3	
2120 B1	2820 D2	3199 B1	3819 C2	5406 C2	
2124 B1	2821 D2	3200 A2	3837 B2	5501 C1	
2125 B3	2822 D2	3202 A2	3838 B2	5502 C1	
2202 A3	2823 D2	3203 B3	3839 B2	5503 C1	
2203 B3	2824 D2	3205 A3	3841 D2	5701 A2	
2206 A3	2825 D2	3207 A3	3842 D2	5702 A2	
2207 A3	2826 D2	3219 B3	3843 D2	5703 A2	
2209 A3	2827 D1	3222 B3	3844 D2	5704 A2	
2210 A3	2828 D2	3224 C2	3845 D2	5705 A2	
2214 A3	2829 D2	3226 C2	3846 D2	5706 A2	
2215 A3	2830 D2	3227 C2	3847 D2	5707 A2	
2217 A3	2834 D1	3250 B2	3848 C2	5708 A2	
2218 A2	2836 C2	3253 A3	3849 C1	5709 A2	
2219 A3	2902 A1	3262 B2	3851 C3	5711 A2	
2220 A2	2911 B1	3263 B2	3852 C3	5712 A1	
2221 B3	2913 A1	3264 B2	3901 A1	5803 D1	
2222 B2	2916 A1	3265 B2	3903 A2	5805 D1	
2223 A2	2917 A1	3266 B2	3904 A2	5901 A2	
2224 A2	2921 A3	3267 B2	3915 A2	5907 A1	
2225 B2	2923 A2	3268 B2	3920 A1	5911 A1	
2226 B2	2925 A1	3269 B2	3921 A1	5913 A1	
2227 B3	2928 A1	3274 A2	3923 A2	5916 A3	
2228 B2	2929 A1	3277 A2	3925 A2	6000 A1	
2229 A3	2932 A1	3279 A2	3927 A1	6100 B2	
2230 A2	2934 A1	3280 A3	3928 A1	6101 B2	
2231 A3	2937 A1	3281 A3	3932 A1	7002 A1	
2232 A2	2941 A2	3282 A3	3933 A1	7003 A1	
2233 A2	2942 A2	3283 A3	3935 A1	7005 B1	
2234 A3	3000 A1	3285 A3	3937 A1	7100 A2	
2237 A3	3001 B1	3286 B2	3939 A1	7101 A2	
2404 C3	3002 B1	3287 B2	3940 A2	7103 D1	
2405 C3	3003 B1	3288 B3	3948 A1	7104 B3	
2406 C2	3004 A1	3289 B3	3949 A1	7105 A2	
2407 C2	3006 B1	3290 B2	3955 A2	7106 B2	


8. Alignments

8.1 Alignment Instructions Analog Board

Test equipment:

- Dual-trace oscilloscope
Voltage range : 0.001 ~ 50 V/div
Frequency : DC ~ 50 MHz
Probe : 10:1, 1:1
- DVM (Digital voltmeter)
- Frequency counter
- Sinus generator
Sinus : 0 ~ 50 MHz
- Test pattern generator

How to read the adjustment procedures:

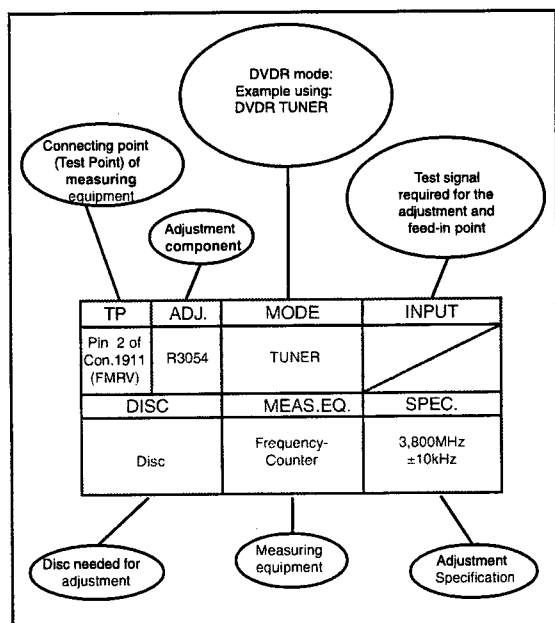

Front End (FV)

Service tasks after replacement of IC 7710, coil L5710 and L5711:

1 AFC Adjustment:

Purpose: Correct adjustment of demodulator AFC - circuit

Symptom, if incorrectly set:

Bad or disturbed TV channel reception.

PAL - AFC adjustment [5711]:

TP	ADJ.	MODE	INPUT
IC 7710 Pin 17 (F708)	L5711	TUNER	38,9MHz 500mV _{pp} at Tuner 1705, Pin 11 (F710, IF-out)
DISC		MEAS.EQ.	SPEC.
		DC Voltmeter Frequ. Generator	2,5V ±0,1V

Storage in NVRAM via command mode interface of DSW:

After adjustment, the AFC reference value has to be stored in the NVRAM.

This reference value is $256 \cdot \text{measured voltage} / U_{cc}$. U_{cc} is 5.0V.

Store the reference value via command 732, followed by the ref. value.

Example: DD:> 732 128

2 HF - AGC adjustment [3724]:

Service tasks after replacement of IC 7710:

Purpose: Set amplifier control.

Symptom, if incorrectly set:

Picture jitter if input level is too low and picture distortion if input level is too high.

TP	ADJ.	MODE	INPUT
Tuner 1705 Pin 11 (F710, IF-out)	R3707	Set tuned to channel 25 503.25 MHz	5mV(74dBμV) on aerial input PAL white picture, audio IF on, no modulation
DISC		MEAS.EQ.	SPEC.
		Oscilloscope Video Pattern Generator	500mV _{pp} ±0.5dB (use a 10:1 probe)

3 Attenuating the 40.4 MHz [5710]: (SECAM only)

Service tasks after replacement of coil 5710:

Purpose: To attenuate the band I carrier rests.

Symptom, if incorrectly set:

Bad picture quality when the filter attenuates the picture carrier (38.9MHz).

TP	ADJ.	MODE	INPUT
OFW 1701 Pin 1 (F709)	L5710	TUNER	40.4 MHz, 200mV _{rms} at Tuner 1705, Pin 11 (F710, IF-out)
DISC		MEAS.EQ.	SPEC.
		Oscilloscope, Sinus Generator, Counter	adjust minimum amplitude

If the adjustment is correct the signal at pin 1 of OFW [1701] must be smaller than the input signal amplitude by at least 6 dB.

Figure 8-1

8.2 Reprogramming Procedure of NVM on the Microprocessor Sub PCB

The NVM, item 7808, on the Microprocessor Sub board contains the following factory settings:

1. Clock correction factor
2. AFC reference value
3. Slash version

The settings 1,2 and 3 are stored in the NVM during the production of the analogue board.

The slash version is stored at the end of the production line of the set.

In case of failure, the NVM must be replaced by an empty device. By way of commands via the Diagnostic Software or via ComPair, the factory settings must be restored in the NVM.

8.2.1 Clock Correction Adjustment

To guarantee an exact function of the real time clock, an adjustment of the clock frequency is possible. The adjustment value is stored in the NVM.

Procedure:

- put the set in service command mode
- execute command 722 for Digital Board 1.5 Empress or 1117 for Chrysalis to initiate that a signal with 32768 Hz is available on pin 3 of connector 1988
example:
DD:>722 or DD:>1117
- measure the frequency fmeas of the Clock Crystal with an accuracy of 0.1 Hz.
- Calculate the parameter to be entered: $32768/fmeas * 106$
- Normally the parameter must be between 999902 and 1000097. If the parameter and therefore the frequency of the crystal is outside this range, the crystal must be replaced.
- Execute command 721 for Empress or 1118 for Chrysalis with the parameter as input
example:
DD:>721 1000023 (Empress)
or DD:>1118 1000023 (Chrysalis)

8.2.2 AFC Reference Voltage Tuner

This function stores the reference voltage for the tuner in the NVM. Before this value can be stored, the AFC adjustment, described in the adjustment instructions of the analogue board, must be carried out.

Procedure:

- Adjust AFC circuit
- Calculate the reference value
- Execute command 732 for Empress or 1119 for Chrysalis and use the calculated reference value as parameter
example: DD:>732 128 (Empress)
or DD:>1119 128 (Chrysalis)

8.2.3 Slash Version

The slash version is stored with command 715 for Empress or 1217 for Chrysalis, followed by the slash version as parameter. The slash versions used in DVDR75 and DVDR80 are the following:

- DVDR80/00x/02x: SV 65
- DVDR80/05x: SV 66
- DVDR75/00x/02x: SV 67
- DVDR75/05x: SV 68
- DVDR70/00x/02x: SV 69
- DVDR70/05x: SV 70

Example:

DD:>715 65 (Empress)

or DD:>1217 65 (Chrysalis)

Reset of Slash Version

Use command 729 for Empress or 1115 for Chrysalis to reset the analogue board to the default setting.

Procedure:

- Put the set in DSW command mode
- Execute command 729 (Empress) or 1115 (Chrysalis) with the following parameters:
DD:> 729 w 0xAE 2 0xD0 0x00 (Empress)
DD:> 1115 w 0xAE 2 0xD0 0x00 (Chrysalis)
- Leave the DSW command mode and start up the set in application mode
No background is visible on the TV screen. The analogue board is ready to accept the appropriate slash version

8.3 Rework Procedure IEEE Unique Number

8.3.1 Scope:

The procedure describes how to upgrade sets with a unique number after repair. This unique number is stored in the NVRAM (item 7201) of the digital board at the end of the production line.

This procedure is only valid or necessary when:

- The digital board is replaced
- NVRAM on the digital board is replaced
- NVRAM is cleared

In all other cases the repaired set retains its unique number.

The procedure defines several means to re-assure the unique number depending on the possibilities of repair or the state the faulty set is in.

8.3.2 Handling:

State of original (defective) board:

1. The digital board starts up in Diagnostics Mode: follow procedure A to retrieve the valid unique number
2. The digital board does NOT start up in Diagnostics Mode: follow procedure B.

8.3.3 Procedure A

1. Connect defective digital board to PC via serial cable (3122 785 90017)
2. start up hyper terminal or any other serial terminal via the correct settings (DSW command mode interface)
3. read out existing unique number via nucleus 403 (Empress) or 1208 (Chrysalis)
example:
DD:> 403 40300: DV Unique ID = 00D7A1FC6C Test OK @
4. note read out
5. program new digital board via nucleus 410 (Empress) or 1207 (Chrysalis)
example:
DD:> 410 00D7A1FC6C 41000: Test OK @

The set has now the original unique number

8.3.4 Procedure B

- Note the serial number of the set example:
VN050136130156
 - VN = production centre (VN....Szekesfehervar).
According to UAW-500: V=22 and N=14
 - 05 = change code (this is not used for this calculation)
 - 01 = YEAR
 - 36 = Production WEEK
 - 130156 = Lot and SERIAL number
- Calculate the unique number: this number always exists out of 10 hexadecimal numbers.
- First 5 numbers: First we calculate a decimal number according to the formula below: $35828 \cdot \text{YEAR} + 676 \cdot \text{WEEK} + 26 \cdot A + H + 8788$ The figures are fixed, YEAR + WEEK + factory code (A + H) are variable Example: $35828 \cdot 01 + 676 \cdot 36 + 26 \cdot 1 + 8 + 8788 = 68986$ (decimal) Then we translate the decimal number to a hexadecimal number. example: 68986 (decimal) = 10D7A (hex)
- Last 5 numbers: The last 5 numbers exist out of the Lot and SERIAL number.
We have to translate the decimal number to the next 5 hexadecimal numbers: Example: 130156 (decimal) = 1FC6C (hex)
- Program new digital board via nucleus 410 (Empress) or 1207 (Chrysalis). Therefore we use the 10 hexadecimal numbers we calculated above:
example:
DD:> 410 10D7A1FC6C
or DD:> 1207 10D7A1FC6C
41000: Test OK @

The set has now its original unique number

8.4 Adjustment DVIO 1.8 PCB

This adjustment sets the free running frequency of the VCO of the audio PLL. It should be carried out after replacement of IC 7604.

- Disconnect DVD+RW set from the mains.
- Plug DVIO1.8 board via edge-connector onto Digital Board (DVIO board is vertically oriented, so that both sides of the PCB are accessible for measurements).
- Connect DVD+RW set to the mains.
- Turn DVD+RW set on and select any video input source except the DV input.
- Check the signal at test point F611 with an oscilloscope. The signal should be 5V digital with 50% duty-cycle.
- Measure the frequency of the signal at test point F610 and adjust the potentiometer 3605 to get a frequency of 12.288MHz 50kHz (after removing the screwdriver from the potentiometer).
 - In case the frequency can not be increased sufficiently, replace capacitor 2618 by NPO-type capacitor with 18pF. Adjust afterwards again the frequency with the potentiometer.
 - In case the frequency can not be decreased sufficiently, add (3pF-10pF) trim-capacitor in parallel to capacitor 2618 or replace capacitor 2618 by NPO-type capacitor with 27pF. Adjust afterwards again the frequency with the potentiometer (and/or trim-capacitor).
- Switch DVD+RW set to Stand-by mode.
- Disconnect the DVD+RW set from the mains.
- Plug DVIO1.8 board directly (without edge connector) onto Digital Board.
- Connect DVD+RW set to the mains.
- Connect a DV-source that transmits DV-video data with audio to the DVD+RW set.
- Turn DVD+RW set on, select DV input, and switch DVD+RW set appropriately to output the decoded signal. Audio should be output without distortion.

8.5 Alignments after replacing the Boot EEPROM 7810 in sets with Digital Board Chrysalis

The NVM, item 7810, on the Digital Board Chrysalis contains the "Diversity String" that tells the software during startup which hardware version is present.

The setting is stored in the NVM during the production of the Digital Board Chrysalis

In case of a fault the NVM must be replaced by a programmed device containing the boot script.

Via the Diagnostic Software the Diversity String is stored with command 1226, followed by the Diversity String as parameter.

The diversity strings used in DVDR70/0x1 and DVDR75/0x1 are the following:

Chrysalis Board Type	String
E1	44424849A8E920014531000000000000230303000101020100000020040000
E2	44424849BAE92001453200000000000002403030000000020100000020040000

Example:

```
DD:> 1226 44424849A8E920014531000000000000230303000000101020100000020040000
122600
Test OK @
```

E1...Digital Board Chrysalis version Euro 1 (with DV input) for DVDR75/0x1.

E2...Digital Board Chrysalis version Euro 2 (without DV input) for DVDR70/0x1.

With command 1228 the settings can be displayed.

9. Circuit-, IC descriptions and list of abbreviations

9.1 Display Board

9.1.1 Microcontroller

The core element of the Display Control unit is the microcontroller TMP87CH74AF [7110]. The TMP87CH74AF is an 8 bit microcontroller fitted with 32kB ROM and 1kB RAM. It requires 5V supply and is responsible for the following functions:

- Interface to Central Controller-P
- Evaluation of the keyboard matrix
- Decoding the remote control commands from the infra-red receiver
- Activation and control of the local display
- Heater voltage generation

The 8 MHz resonator (Pos. 1111) generates the system clock. The reset is generated by the CC-P via "POR_DC"-signal where the transistor [7106] is used as a level-shifter from 3V3 to 5V.

9.1.2 Interface to the Central Control μ P

The communication to the main microcontroller (CC) on the P-Sub-PCB is done via I2C-Interface, where the TMP87CH74AF acts in slave-mode.

An additional wire ("INT"-line) is used to signal the Central controller that data are ready, e.g. when a key has been pressed.

9.1.3 Evaluation of the keyboard matrix

There are 12 different keys on the display board. A resistor network is used to generate a specific direct voltage value, depending on the pressed key. Via the resistors 3107 and 3102 on the analog/digital (A/D) ports (7103 pin 37 and 38) the evaluation is done.

9.1.4 IR receiver and signal evaluation

The IR receiver [7107] contains a selectively controlled amplifier as well as a photo-diode. The photo-diode changes the received infra red transmission (approx. 940nm) to electrical pulses, which are then amplified and demodulated. On the output of the IR receiver [7107], a pulse sequence with TTL-level, which corresponds to the envelope curve of the received IR remote control command, can be measured. This pulse sequence is fed into the controller for further processing via port TC1 [7103, pin20].

9.1.5 Vacuum Fluorescence Display

The VFD "BJ900GNK" [POS 7100] is fully controlled by the microcontroller. The μ C also includes the driving stages. Only two additional drivers [POS 7101 and 7102] are necessary for the grids 8 and 9 because of their large size.

9.1.6 VFD Heater Voltage Generator

The circuit around POS [7106, 7108 and 7109] is used to generate a proper AC-Voltage for the filament of the VFD. For this the microcontroller generates an appropriate rectangular signal with 50% duty-cycle and a frequency of 30 kHz at pin 19. Pos. [5104] and [2113] are acting as a resonance-circuit. Via Zener-Diode (POS[6100]) and resistors [3119, 3122 and 3123] the two heater-pins of the VFD ("FIL1" and "FIL2") are clamped so that the grids and segments can be fully switched off.

9.1.7 REC-LED

The REC-LED-ring is made with 3 red LED, controlled via pin 3 (only for flashing) and pin 12 for on/off switching, of the microcontroller. The POS [7105] is used as a driver for the led.

9.1.8 EPG-LED

The EPG led is a white led and controlled from the pin 14 from the microcontroller. The POS [7110] is used as a driver for the led.

9.1.9 TRAY-LED

There are 6 leds (chip) necessary to illuminate the tray, these 6 leds are located on a little sub-pcb connected over a 4 pin connector POS [1911] from the DC-print. The leds are controlled from pin 11 of the microcontroller.

9.2 Microcontroller Sub Board (UP SUB Board)

9.2.1 General

This small PCB is directly soldered in on top of the Analogue-Board.

It is used with no diversity in all three different basic versions (Europe, NAFTA and APAC-Pal). Only the software being loaded into the external Flash-memory is not the same.

9.2.2 Microcontroller

The main part of the Sub-PCB is the central controller (CC) μ P [7804] TMP91CW12AF, which is a 16-bit CPU with 128kBROM and 4kB RAM.

It works with a 3V3 supply and a system clock of 24,576MHz [1801].

The 3V3-supply is made out of the "5VSTBY" by the circuit around [7816].

After connecting the set to the mains (power-up) the IC [7806] generates a reset pulse. This signal ("IPOR") is directly fed to first priority interrupt input (pin 63) for power fail detection and also to the Reset-Input of the CC (Pin30) via [7802], which is necessary to generate a reset only during power-up. In case of power fail pin 30 of the CC must be kept high (3V3).

The internal memory of the CC is too small for all necessary demands. Therefore an external Flash-ROM [7805] with 1MByte in size and a RAM [7803] with 128kByte are necessary. Both parts are connected to the μ P via a parallel address-/data-bus. The lower eight bus-lines (AD0 to AD7) are multiplexed by [7801] and the "ALE"-signal of the CC.

For updating of the software the external Flash-ROM can be reprogrammed by the μ P. During this process [7807] is switched on by the "WE"-signal.

When no mains is connected, the CC is supplied via Gold-Cap [2816] during the power backup period. The diode [6802] prevents unwanted current consumption of other components. The internal ROM of the μ P holds the program code for the Real-Time-Clock. Only the microprocessor is supplied by the backup cell, not the external memories and the μ P operates in a low frequency mode with the clock crystal [1805] only (32.768 kHz). To adjust the clock the frequency can be measured at pin 87 of the μ P in a special test-mode.

9.2.3 Control-Interfaces

The CC is communicating with the digital board via a serial connection, which operates at a speed of 19,4 kbit/s ("D_DATA", "A_DATA", "D_RDY"- and "A_RDY"-signal on

[1986]). By generating a high level on pin 16 of the CC the digital PCB can be reset (inverter [7817] in between). Most of the other parts are controlled by the μ P via I2C-bus ("SDA"- and "SCL"-signal). The FETs [7821] and [7822] are used for adaptation of the 3V3-level on CC-side to the components supplied with 5V.

The CC can also reset the display-board- μ P by pulling pin 39 to high.

The transistor [7819] acts as a level shifter for the "INT"-signal. In the European sets a bi-directional interface is established between the recording unit and the TV device at pin 10 of the Scart ("P50"-line/Easy Link). The processing is done via pin 14 (output) and pin 38 (input) of the CC and the circuit around [7813], [7814] and [7815].

9.2.4 EEPROM

The EEPROM M24C16 [7808] is an electrical erasable and programmable, non-volatile memory. The EEPROM stores data specific to the device, such as the AFC-reference value of the Europe IF-part, the clock-correction-factor, etc. It is accessed by the μ P via the I2C-bus.

9.2.5 Sync Separator

To detect whether a video signal is available or not a separate IC [7825] is used to extract the sync information out of the video signal that is also routed to the digital board for recording. While on the input a low-pass-filter ([2823] and [3869]) limits the bandwidth an additional filter (circuit around [7818]) on the output avoids distortions. Afterwards the sync-signal is routed to pin11 of the CC.

9.2.6 Fan Control

To avoid unwanted temperatures inside the set (especially the Laser on the OPU of the drive is very sensitive) a fan is located on top of the basic engine. The speed control is dependent on the ambient temp. A NTC resistor [3134] located on the display board measures the temperature. An operational amplifier [7902-B] generates a proper voltage, which is then fed to the engine ("BE_FAN"-line). Below 28°C ambient temp. the fan-voltage is approx. 5V and is increased to 10V when the ambient temperature goes up to approx. 38°C. The second part of the Op-Amp. [7902-A] prevents damage of any temperature-sensitive part in case the NTC or the wire in between is damaged. It acts as a comparator and pulls the "BE_FAN"-signal to 10V. As the fan has to be stopped in case the tray of the drive is open this voltage is "killed" by the CC ("FAN_OFF"-signal). The double-diode [6901] acts for both Op.-Amp.-circuits. The circuit is also prepared for a set-fan (circuit around the Op-Amp. [7902-C]).

9.3 Analog board Europe

9.3.1 General

This PCB consists out of the following parts:

- Power-Supply-Unit
- Frontend (Audio & Video)
- Input-/Output-switching
- Audio ADC- & DAC-processing
- VPS/PDC- and Text-Data slicer
- Analog Follow-Me Circuit

All functional groups are either controlled via I2C-bus or via separate signal lines by the Central-Controller on the μ P-Sub-Board. This sub board is directly soldered in onto the analog PCB. During Stand-By mode of the set, several parts are not supplied (Tuner, MSP, ...). The microprocessor is running and maintains the clock of the set.

To avoid bus blockades the I2C-bus ("SCLSW" & "SDASW") to/from these units is decoupled via transistors [7419], [7420] from the general bus ("SCL" & "SDA").

9.3.2 Power Supply Unit

Functional principle:

This power supply works in the way of a flyback converter. In the mains input part [1931 to 2309], the mains voltage is rectified and buffered in the capacitor [2309]. From this direct voltage at [2309] energy is transferred into the transformer [5300, pins 7-5] during the conductive phase of the switching transistor [7307] and is stored there as magnetic energy. This energy is passed to the secondary outputs of the power supply in the blocking phase of the switching transistor [7307]. With the switch-on time of the switching transistor [7307], the energy transferred in every cycle is regulated in such a way that the output voltages remain constant regardless of changes in the load or mains voltage. The power transistor is driven by the integrated circuit [7313].

Mains input part:

The mains input part extends from the mains socket [1931] to the capacitor [2309]. The diodes [6301, 6302, 6305 and 6306] rectify the AC supply voltage, which is then buffered by the capacitor [2309]. The common mode coil [5302] and capacitor [2302] work as a filter to block interference arising in the power supply from the mains. Components [1302], [3306] and [3304] protect the power supply against short-term over voltages in the mains, e.g. caused by indirect lightning.

Start-up with Mains-on:

After connecting the power cord to the mains, the capacitor [2325] is loaded via a current source between pin 8 and pin 1 in the IC [7313]. Once the voltage on [2325] and therefore the supply voltage V_{cc} of the IC [7313] has reached approx. 11V, the IC starts up and provides pulses at its output pin 5. These pulses are used to drive the gate of the power transistor [7307]. The frequency of these pulses is depending on load and mains voltage. The current consumption of the IC is approx. 5 mA at V_{cc} in normal mode.

If V_{cc} drops to below approx. 9V (e.g. with power limitation) or if V_{ac} exceeds approximately 16V (e.g. interruption of the control loop), the output of the IC [7313, pin 5] is blocked and a new start-up cycle begins. (See also "Overload, Power Limitation, Burst Mode" section)

Normal operation:

With the power supply in normal mode, the periodic sequences in the circuit are divided primarily into the conductive and blocking phase of the switching transistor [7307]. During the conductive phase of the switching transistor [7307], current flows from the rectified mains voltage at capacitor [2309] through the primary coil of the transformer [5300, pins 7-5], the transistor [7307] and resistors [3321, 3352] to ground. The positive voltage on pin 7 of the transformer [5300] can be assumed as constant for a switching cycle. The current in the primary coil of the transformer [5300] increases linearly. A magnetic field representing a certain value of the primary current is formed inside the transformer. In this phase, the voltages on the secondary coils are polarized such that the diodes [6300, 6303, 6307, 6308, 6310, 6313, 6317 and 6319] block. From the controller [7315] a current is supplied into the CTRL input on the IC [pin 3, 7313] via optocoupler [7314]. Once the switch on time of the switching transistor [7307] - that corresponds to the current supplied into the CTRL input - has been reached, the switching transistor [7307] is switched off. When the switching transistor has been switched off, the blocking phase begins. No more energy will be transferred into the transformer. The inductivity of the transformer will still attempt to keep the current flowing at a constant level ($U=L \cdot di/dt$). Switching off transistor [7307] interrupts the primary current circuit. The polarity of the voltages on the transformer is reversed, which means that the diodes [6300, 6303, 6307, 6308, 6310, 6313, 6317 and 6319] become conductive and current flows into the capacitors [2305, 2312, 2319, 2322, 2326 and 2328] and the load. This current is also re-mp-shaped (di/dt negative, therefore decreasing).

The feedback control for the switched-mode power supply is done by changing the conductive phase of the switching transistor so that either more or less energy is transferred from the rectified mains voltage at [2309] into the transformer. The regulation information is provided by voltage reference [7315]. This element compares the 5V-output voltage via voltage divider [3332, 3333, 3334] with an internal 2.5V reference voltage. The output voltage of [7315] passes via an optocoupler [7314] for insulation of primary and secondary parts as a current value into pin 3 on the IC [7313]. The switch-on time of the transistor [7307] is inversely proportional to the value of this current.

Overload, power limitation, burst mode:

With increasing load on one or more of the power supply outputs, the switch-on time for the power transistor [7307] increases, and thus also the peak value of the delta-shaped current through this power transistor. The equivalent voltage of this current profile is passed from resistors [3321] and [3352] via [3365] to pin 5 of the IC [7313]. If the voltage on pin 2 reaches approx. 0.4V in one switching cycle, the conductive phase of the switching transistor is ended immediately. The check is done in each individual switching cycle. This process ensures that no more than approx. 60W can be taken out from the mains (= power limitation).

If the power supply reaches the power limit, the output voltages and the supply voltage V_{CC} on pin 1 of the IC [7313] will be reduced following further loading. If V_{CC} is less than approx. 9V at any point during this process, the output of the IC [7313, pin 6] is blocked. All output voltages and V_{CC} decrease and a new start-up cycle begins. If the overload status or short-circuit remains, the power limitation will be activated immediately and the voltages will again decrease, followed by another start-up cycle (Burst Mode). The amount of power taken up from the mains in burst mode is low.

Standby modes:

In the 'AV-Standby' operating mode of the set, the 'ION' control line is primarily used to switch off all output voltages for Basic Engine and Digital Board (supplies 3V3, 5V, 12V, 5N and 4V6 at Connectors 1932 and 1933) of the power supply. This reduces the amount of power taken from the mains. In Low Power Standby mode additionally the 'STBY' control line is used to switch off output voltages 5SW and 8SW. This reduces power consumption to less than 3W, if additionally the display is switched off. The power supply will continue operating in Standby mode with a switching frequency of approx. 25 kHz.

9.3.3 Frontend

This unit is designed to support two basic versions, which are distinguished by a different assembly variant only (one for multistandard and the second for Pal-I only) and comprises the following parts:

- Tuner UV1316K [1705]
- IF amplifier & video demodulator IC TDA 9818/9817 [7710]
- Sound processor MSP3415G [7600]

Tuner and IF selection

The Tuner [1705] converts the RF-signal coming from the antenna input to an IF-signal. The tuner is fully controlled via I^2C -bus of the CC- μP . [1705] is also equipped with a "passive-loop-through" between antenna-in and -out to save power in stand-by of the set, when the complete part is not supplied. The IF frequency of the video carrier is 38.9 MHz for all systems except SECAM L' (34,0 MHz).

A quasi-split audio system is used. Separate surface-wave filters (SAW) are required. [1701], [1703] for video, [1702] for audio. [1701] is switched into the signal path for DK/I-SECAM L/L' reception, if the signal "SFS_TS" is "high". In this case the switches [7704], [7705] are open and the diode [6703] is conducting. [1703] is switched into the signal path for BG reception ("SFS_TS" is "low"). Then the switch [7712] is open and the diode [6704] is conducting. For DK/I-SECAM L/L'

reception, an additional circuit for suppressing the audio carrier of the adjacent channel is used. This circuitry is adjusted by coil [5710] for maximum suppression at 40.4MHz.

IF demodulator

The signal from the tuner and IF-selection circuit is processed by the demodulator IC TDA 9818/9817 [7710]. The signal "PSS" to pin 3 switches between demodulation of positive (SECAM only) or negative modulated video carriers. A QSS-audio-IF signal SIF1 is generated for demodulation in the sound processor [7600]. The audio-IF carrier is selected in the audio SAW filter [1702]. This filter is switched for SECAM L'. If the signal "SB1" is "high", the switch [7714] is closed and the diode [6705] is not conducting. For all other standards the diode [6705] is conducting and the switch [7714] is open. The output signal of this SAW filter is firstly processed in the TDA 9818. Audio carriers are converted from the tuner IF level to the audio IF position and further processed in the audio demodulator [7600]. The AFC coil [5711] on the TDA 9818/9817 is adjusted so that when a frequency of 38.90 MHz is supplied to the IF output of the tuner, the AFC voltage on pin 17 of [7710] is 2.5V. The setting of the picture carrier frequency for SECAM L in the TDA 9818 is achieved by connecting pin 7 of the IC via a resistor [3710] to ground. The switch [7701] and the signal "SB1" do this. The HF-AGC is set using the potentiometer [3724] so that, with a sufficiently large antenna input signal (74 dB μ V), the voltage at the IF output of the tuner [1705] pin 11 is 500 mVpp. This setting must be carried out when the audio carrier is switched off. The demodulated video signal appears on pin 16 of [7710]. The AGC voltage at pin 4 is used to determine the antenna signal strength after a buffer [7717] with the signal "AGC" and an analog input port of the CC-P. The trap [1704] reduces the sound carrier remainders in the video for BG standards. The trap [1706] works in the same way for the Pal-I standard only. For all other standards the switch [7713] is closed via [7706] and "SFS_TS"-line set "high" to bypass this trap. In these cases the selectivity of the SAW filter [1701] is sufficient. The coil [5713] for non-BG standards realizes a frequency response correction. This correction is not desired for SECAM L' and therefore short-circuited by [7716] (signal SB1 is "high" and [7702] has on-status). The demodulated video signal "VFV" is available after the buffer and limiting stage for noise peaks [7711]. The FM-PLL demodulator function of TDA 9818 is not necessary and therefore deactivated by the resistor [3739].

Audio demodulator

The sound demodulation is done by the MSP3415 [7600], which is also fully controlled via I^2C -bus by the CC-P (determination of bandwidth, amplitude, standard, ...). The audio signals are available at pin 30 and pin 31 of [7600] and fed as "AFER"- & "AFEL"-line to the audio-I/O for further processing.

The processing of audio is always done in stereo (e.g. separate left- and right-channel) and the complete switching is realized by using HEF4052, which is a dual four-to-one multiplexer. In principle there are three independent selectors:

a) Scart 1-Output-Path:

Pos [7504] is used to select either Scart 2-Input ("AIN2L"/"AIN2R") or the signal directly from the audio DAC [7004] ("ALDAC"/"ARDAC") as the output source for Scart 1 ("AOUT1L"/"AOUT1R").

The control is done by means of the lines "ASC1S" coming from [7408] (IC [7408] acts as a port expander for the CC-P) and "IASC1M", which is directly coming from the CC. Pos [7412] is used for level adaptation (3V3 to 5V) for the "IASC1M"-signal.

b) Scart 2-Output-Path:

Pos [7503] selects between Scart 1-Input ("AIN1L"/"AIN1R"), signals from the internal frontend ("AFEL"/"AFER") via MSP [7600] or audio directly from the DAC [7004] ("ALDAC"/"ARDAC"). The outputs of this switch are routed to Scart 2 ("AOUT2L"/"AOUT2R"). This switch is controlled via "VSA1"- and "VSA2"-line. These lines come from [7408] that is acting as a port expander for the CC-P.

c) Record-Path:

Pos [7501] selects either signals from Scart 1 ("AIN1L"/"AIN1R") or Scart 2 ("AIN2L"/"AIN2R") or Cinch-Front ("AINFL"/"AINFR") or the MSP [7600] ("AFEL"/"AFER") and routes to the audio ADC [7007] ("ALADC"/"ARADC") for record purposes. The switch is controlled via "RSA1"- and "RSA2"-signals.

These signals come from the MSP [7600], which acts as a port expander of the CC-P. As there can also exist a fifth input in case of DV-In is present the corresponding analog audio signals from the DVIO-board are firstly routed via extra cable and connector [1960] to the MSP. The MSP acts as a preselector between audio from internal frontend or the DV-Input.

Each of these three selectors ([7501], [7503] & [7504]) has a separate Op-Amp on the output for level-adaptation-, performance- and line-driving-reasons. [7505-A & -B] for record, [7502-C & -D] for Scart 1-Output and [7502-A & -B] respectively for Scart 2. Every audio output line on the two Scart connectors can be "killed" (muted) by an extra transistors ([7506], [7508], [7509] & [7511]), which can be activated by the "AKILL"-line. This signal is generated by the circuit around [7404]/[7421] and is a combination of the "KILL"- from the CC-P and the "IPFAIL" of the power-supply-unit.

d) Line-Out-Path:

see chapter 9.3.5

e) Digital Audio Output-Path without IOE-Print:

Additionally to analog audio the set is also equipped with a digital output via cinch plug [1951]. The signal is generated on the dig. board and routed via audio interface cable and connector [1900] to the Ana-PCB. Here the "DAOUT"-line first passes a 6-fold inverter [7580] being used as a driver and for performance reasons (noise reduction, jitter, etc.). Afterwards a transformer [5580] is necessary to achieve the correct level and also to have a floating output with isolated ground before the signal is fed via [3580] to cinch plug [1951]. The capacitor [2580] performs an AC-coupling between connector- and set-ground.

f) Digital Audio Output-Path with IOE-Print:

In case of usage of the IOE-print the digital audio signals (input and output) are directly routed from digital board via interface cable to plug [1920] on the IOE-print. The "DAOUT"-line is splitted into two signals, one for cinch out and one for optical out. The signal to cinch out first passes a 5-fold inverter [7250] being used as a driver and for performance reasons (noise reduction, jitter, etc.). Afterwards a transformer [5250] is necessary to achieve the correct level and also to have a floating output with isolated ground before the signal is fed via [3259] to the cinch plug [1925] (or [1926-B] in case of option

"DIGITAL IN"). The capacitors [2256] and [2266] perform an AC-coupling between connector- and set-ground. The second "DAOUT"-signal is fed directly via [3264] to the optical out transmitter [6255].

g) Digital Audio Input-Path with IOE-Print:

There are two possibilities for a digital audio input signal in case of option "DIGITAL IN". One is the signal from the optical receiver [6259], which is routed via [3269] directly to plug [1920]. The second is the signal from the cinch plug [1926-A]. This signal then passes an inverting amplifier [7250-6] and is then routed via [2253] to the plug [1920].

9.3.5 Audio ADC/DAC

a) PCBs with AD1852 [7004]:

The conversion of analog audio signals from the record-selector [7501] in the I/O ("ALADC"- & "ARADC") is done via UDA1361TS [7007]. This IC can process input signals up to 2Vrms by using external resistors [3047], [3053] in series to the input pins. As the level from the DVIO-Board is only 1Vrms a 6dB step can be performed by setting pin 7 of [7007] to 3,3V via [7008] and the "PWONSW"-line controlled by the CC-P to use the whole dynamic range of the ADC. All required clock signals are generated on the dig. board and only the audio data ("A_DAT"-line) are routed from Ana- to Dig.-PCB for further processing.

The transformation of dig. audio back into the analog domain is done by AD1852 [7004]. All necessary clock signals are coming from the dig. board and dig. audio data ("D_DATA0"-line) are converted into analog signals, which are available at pin 17/16 and pin 12/13 of [7004] as symmetrical signals. Afterwards an Op-Amp. [7003] (line driver & converting to unsymmetrical signal, gain = 1), which is also working as low-pass-filter to increase signal performance (noise, distortions,...), is passed. Then both signals ("ALDAC" & "ARDAC") are directly routed to the rear cinch output and also used in the audio-I/O for further processing. The DAC has also a mute possibility, which can be activated by setting pin 23 to 5V via [7001]. This mute is controlled either by the dig. board ("D_IKLL"-line) or the "IPFAIL"-signal from power-supply-unit (in this case it's the combination of "A_KILL" and "IPFAIL"). If the DAC is muted externally via pin 23 or if there are no audio data available (e.g. "D_DATA0"-line zero), the output pins 8 and 22 of the DAC change to high (+ 5V). These two signals are then combined with diode pos. 6006. After decoupling via [7009] the signal "DAC_MUTE" is used as mute signal for the mute transistors [7415], [7416] for cinch rear out.

b) PCBs with UDA1334BTS [7001]:

The conversion of analog audio signals from the record-selector [7501] in the I/O ("ALADC"- & "ARADC") is done via UDA1361TS [7005]. This IC can process input signals up to 2Vrms by using external resistors [3039], [3041] in series to the input pins. As the level from the DVIO-Board is only 1Vrms a 6dB step can be performed by setting pin 7 of [7005] to 3,3V via [7006] and the "PWONSW"-line controlled by the CC-P to use the whole dynamic range of the ADC. All required clock signals are generated on the dig. board and only the audio data ("A_DAT"-line) are routed from Ana- to Dig.-PCB for further processing.

The transformation of dig. audio back into the analog domain is done by UDA1334BTS [7001]. All necessary clock signals are coming from the dig. board and dig. audio data ("D_DATA0"-line) are converted into analog signals, which are available at pin 14 and pin 16 of [7001]. Afterwards an Op-Amp. [7002] (line driver & level adaptation, gain = 2) which is also working as low-pass-filter to increase signal performance (noise, distortions,...), is passed. Then both signals ("ALDAC" & "ARDAC") are directly routed to the rear cinch output and also used in the audio-I/O for further processing. The DAC has also a mute possibility, which can be activated by setting pin 8 to 3,3V via [7003]. This mute is controlled either by the dig. board

("D_IKLL"-line) or the "IPFAIL"-signal from power-supply-unit (in this case it's the combination of "A_KILL" and "IPFAIL"). In addition to that the DAC [7001] and the cinch outputs can be killed (muted) in case of "digital silence" by the circuit around [7008], [7009] and [7010], when no audio data are available (e.g. "D_DATA0"-line zero).

This function can be also activated via the "ION"-line (set to high during any stand-by mode). To avoid signal distortions (clipping) the mute transistors for cinch rear out [7415], [7416] are decoupled via [7011].

9.3.6 Video-routing

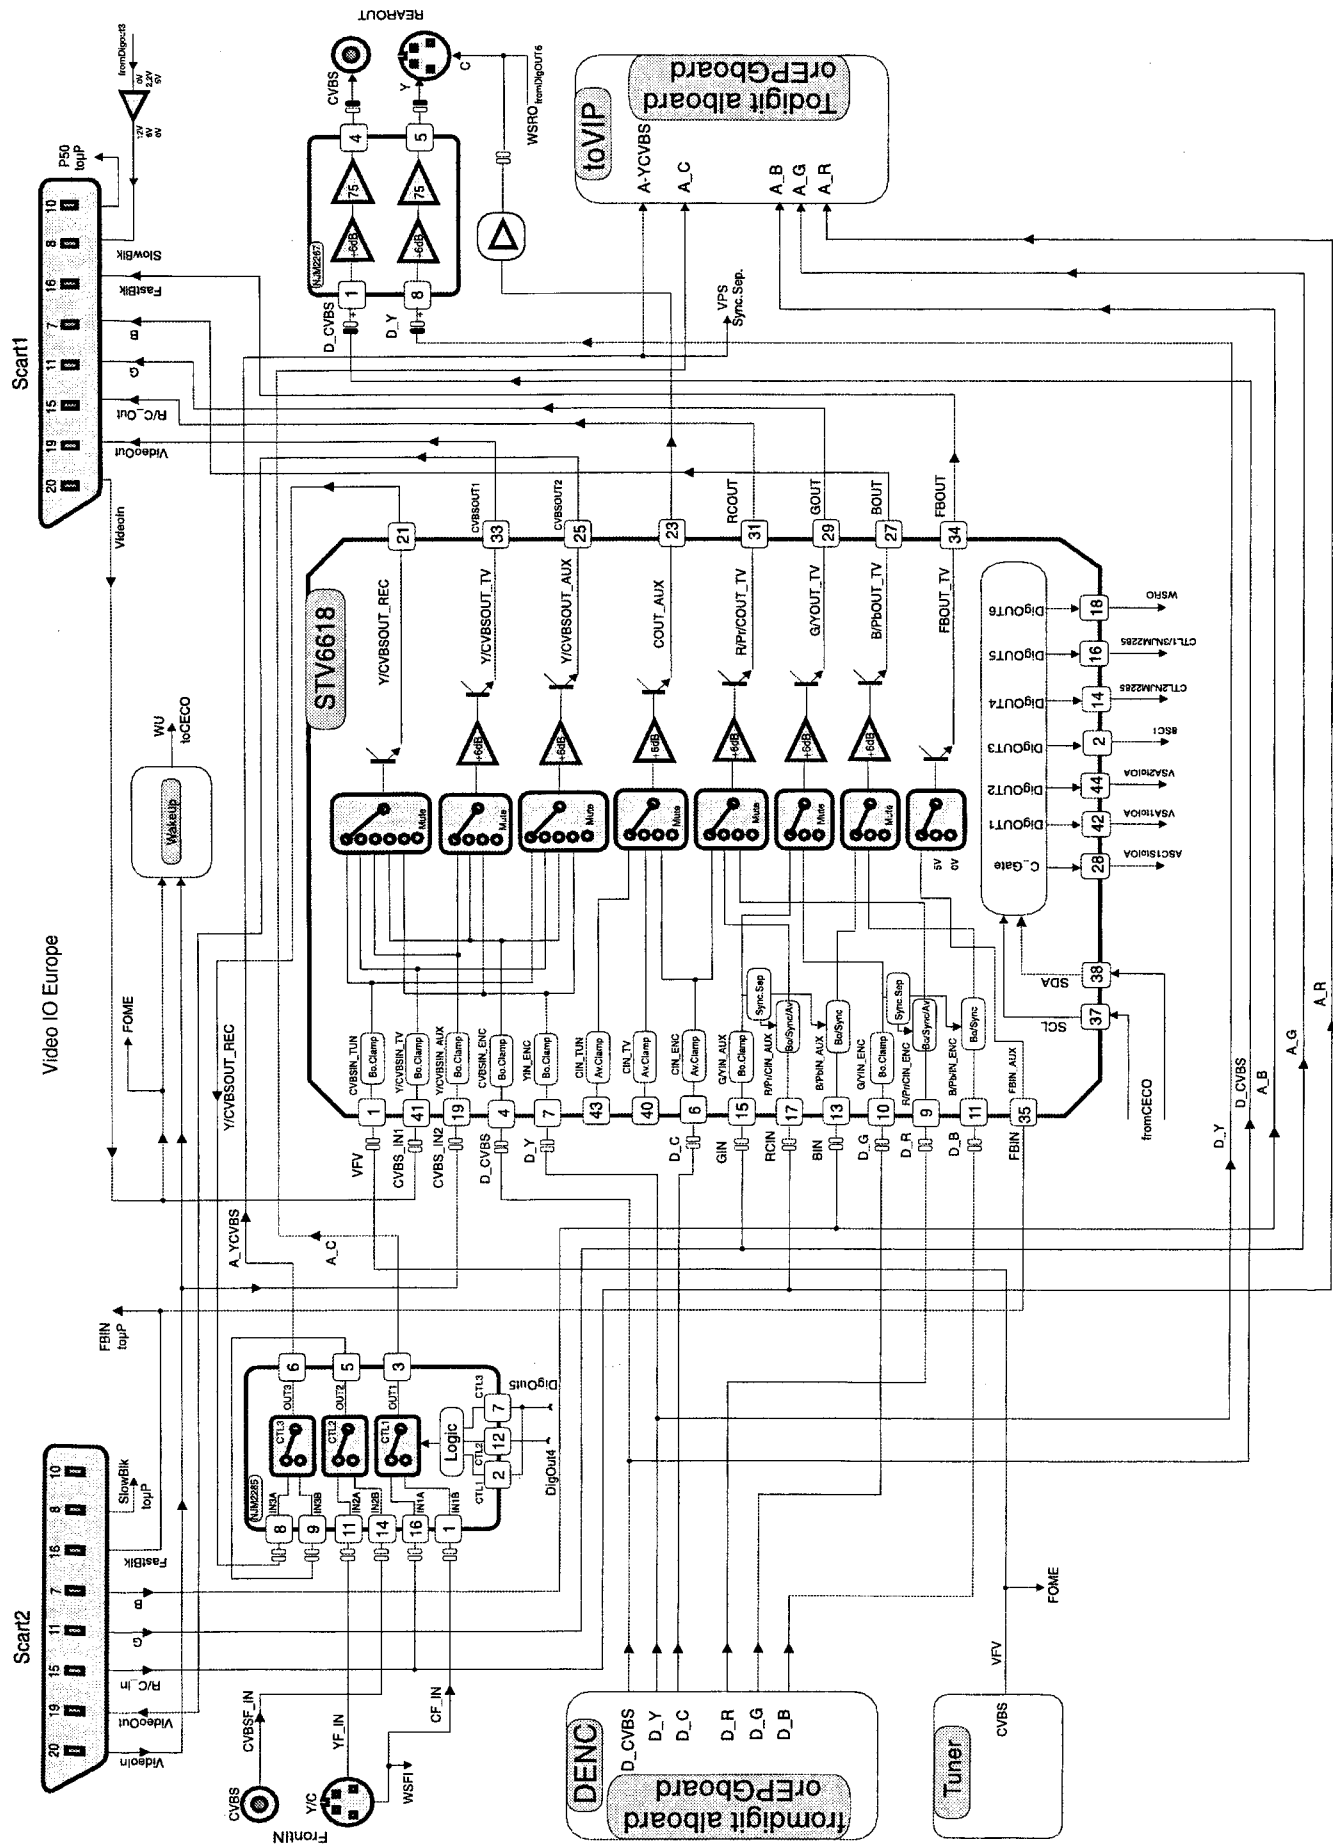


Figure 9-1

The Video-I/O-switching is basically realized by the matrix switch STV6618 [7408], which is controlled via I²C-bus by the CC. All used outputs excluding pin 21 (Y/CVBS-REC) have a 6 dB-amplification and a 75 Ohms driver-stage inside. This IC includes also several digital outputs, which are used for switching purposes on the analog board. The record selector inside the switch selects between the CVBS from frontend ("VFB"), the input from Scart 1 ("YCVBSIN1") or the signal from Scart 2 ("YCVBSIN2"). Afterwards the signal passes another switch [7411] in which a selection between signals from the front or the preselected ones are done. The output signals of [7411] are fed as "A_YCVBS"- and "A_C"-line to the digital board for further processing.

To reduce the number of external presets there exists only one preset for CVBS- and Y/C-front. The set automatically detects between the two inputs depending on the presence of a video signal (sync separator-circuit on μ P-sub-board) where Y/C has higher priority.

The R/G/B-inputs and the Fast-Blanking-line from Scart 2 are routed over the optional EPG board to the digital PCB. Also all other video signal from the analog board are routed through the EPG board if present. These signals are also available on the corresponding input-pins of the STV6618 to enable a loop-through in AV-Standby. In this mode the set has to behave like a cable between the two Scart-connectors. AV-Standby is activated either by a "high" level on pin 8 of Scart 2 ("active device is present") or by the "WU"-line (wake up). This signal is generated out of the circuit around [7401], [7402] & [7403] and will become "high" if there is a signal on pin 20 of Scart 1- or Scart 2. The detection of the input level on pin 8 of Scart 2 ("8SC2") is done via an analog input of the CC-P (less than 2V means inactive; 4,5V to 7V determines a source with 16:9 picture-ratio and greater than 9,5V is an active 4:3 source). All signals from the digital board ("D_R", "D_G", "D_B", "D_C", "D_Y" and "D_CVBS") are routed to the proper inputs of the STV6618 for amplification and driving purpose before they can be seen on the appropriate Scart outputs. In case of EPG the signals from the digital board are routed through the EPG board where the selection between digital board video or EPG OSD is taken.

The "D_CVBS"- and the "D_Y"-line are passing a 6 dB-amplifier and driver-IC [7410] and are then routed to the CVBS-Cinch and Y/C-out rear. The chroma signal for this Y/C out is coming from the STV6618 - which makes the 6 dB-amplification - and a driver [7406] in between.

The detection of the picture ratio information on the Y/C-input front is made by measuring the DC-level on the Chroma signal via analog input of the CC-P ("WSFI"-line). In case the level is higher than 3,5V the input signal is a 16:9 source. If the level is lower than 2,4V the picture ratio is 4:3.

For generation of the appropriate DC-voltage on the Y/C-out rear the "WSRO"-line is controlled via pin 18 of [7408] by the CC-P (Pin 18 set to low means 4:3, pin 18 set to high determines 16:9).

The control of the switching voltage (Pin 8 of Scart 1) is done via 3-level-pin (nr.2) of the STV6618 [7408] and the transistors [7405], [7407] & [7409]. A "low" on pin 2 of [7408] causes around 11V on pin 8-Scart 1 (e.g. source with 4:3 picture-ratio active). Medium level (2,5V) on pin 2 of the STV6618 generates medium level (approx. 6V) on pin 8-Scart 1 (e.g. active source with 16:9) and a "high" on pin 2 of the STV6618 pushes pin 8-Scart 1 to "low" (e.g. inactive).

9.3.7 VPS/PDC- and Text-Dataslicer

For extraction of relevant information out of the video signal (time controlled recording, net-name-identification, time- & date- download) the STV5348 [7931] is used. Data transfer to/from the CC is fully done via I²C-bus and the input signal for decoding is the same as the one being routed to the digital board for recording purposes ("A_YCVBS"-line).

9.3.8 Analog Follow-Me

This circuit compares the video signal from the internal frontend ("VFB") of the recorder with that one of the connected TV-set ("CVBS1"). The TV set delivers the signal via Scart-cable. A comparator [7934] and several additional parts ([7932], [7933], ...) are used to compare the two video signals. In case of both input signals are equal the output-line of this circuit ("FOME") is set to low. Detection is made via an input port of the CC-P.

9.4 Analog board NAFTA- & APAC-Pal- version

9.4.1 Frontend NAFTA

[1701] demodulates the video signal from the antenna input. Tuner and IF-demodulator are in one unit. Also a modulator is included in that part. The audio- and video-signal to the modulator are the ones from the selected input or the playback path of the set ("AMCO"- and "D_CVBS"-line). The control of the tuner is fully done via I²C-bus by the CC-P. Via the "MSW"-signal and [7701] the modulator is switched on and off. In opposite to this the antenna loop-through is opened or closed. In the APAC-Pal version POS [1700] is used with the difference that it demodulates only PAL- instead of NTSC-signals and has also no modulator. The "CSW_SSW" line switches the modulator between CH3 or CH4 in the NTSC-version. To achieve optimal tuning the "AFC"-signal is detected by the CC via an analog input; [3701], [3702] and [3703] are used for level adaptation (5V to 3V3). Pos [7700] is a driver for the video signal.

The sound demodulation is realized by the MSP34x5 [7600], which is also fully controlled via I²C-bus by the CC-P (determination of bandwidth, amplitude, standard, ...). The audio signals are available at pin 30 and pin 31 of [7600] and fed as "AFER"- & "AFEL"-line to the audio-I/O for further processing. As this PCB is used for different regions (NAFTA and APAC) either MSP3425 or MSP3415 are assembled.

9.4.2 Audio routing

Audio IO NAFTA / APAC Overview

12.03.2002 Vers. 05

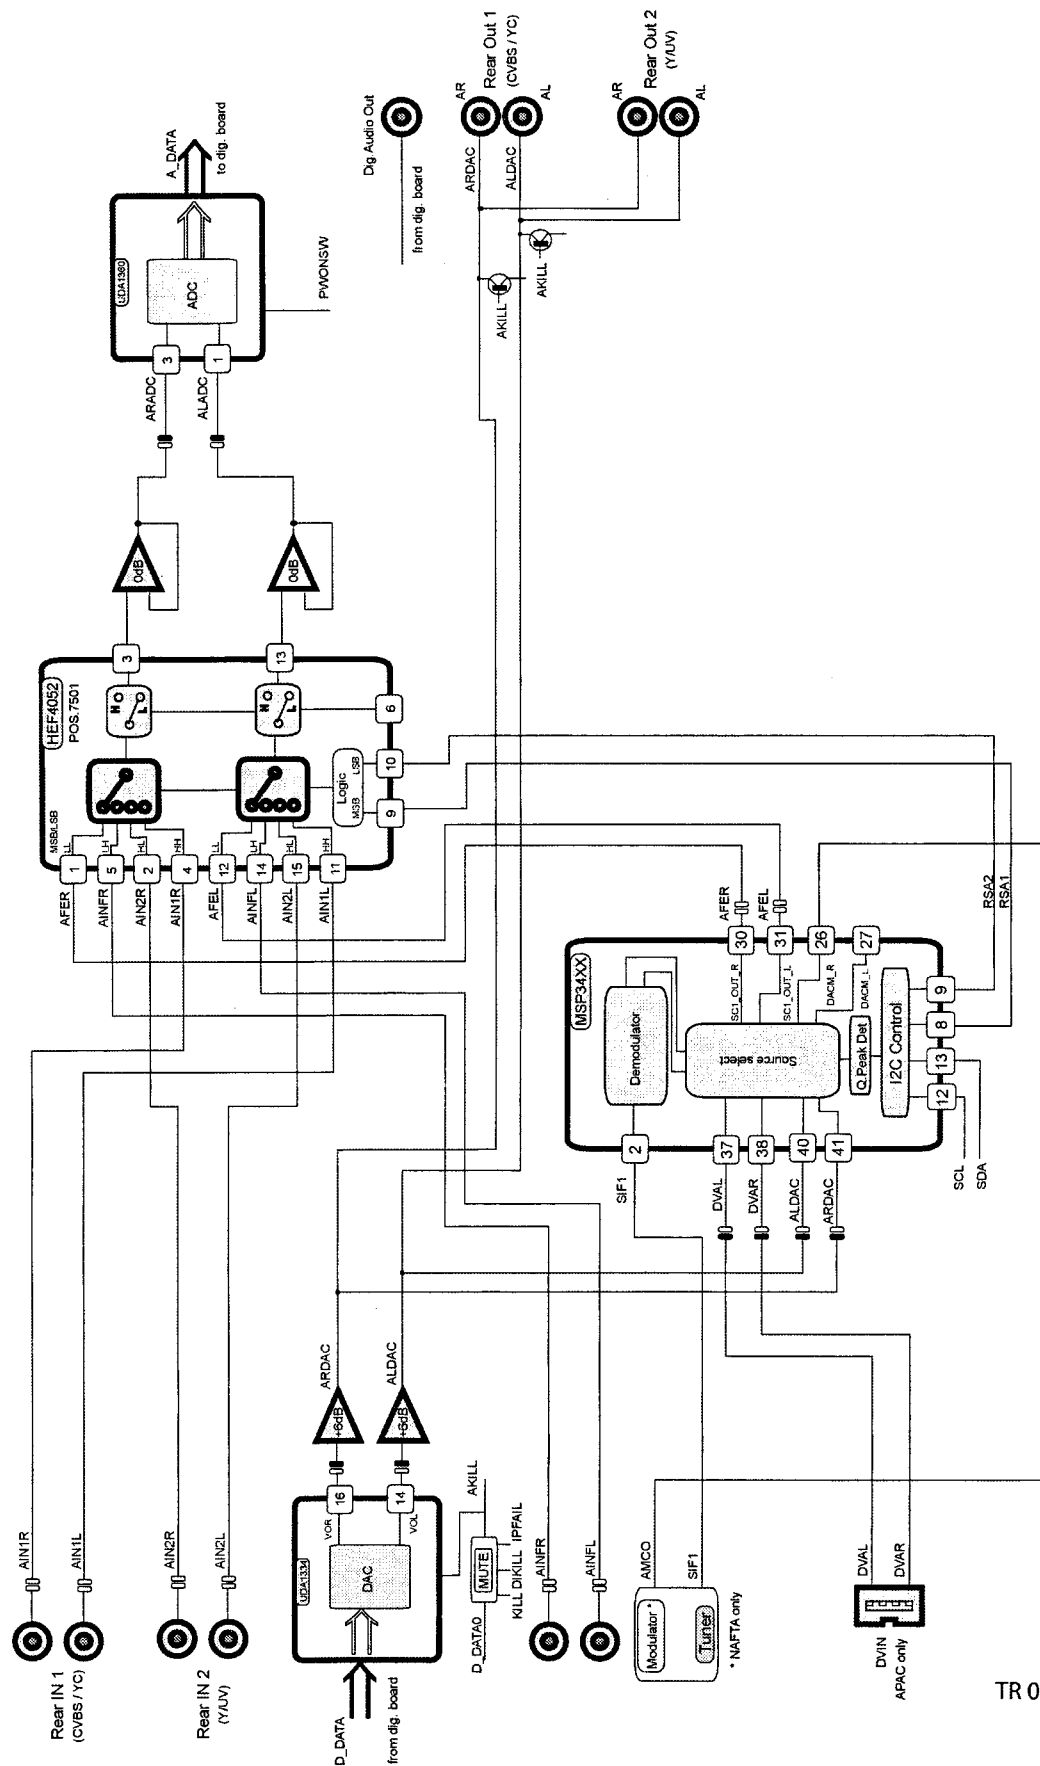


Figure 9-2

TR 01057_001
170502

The sound processing is always done in stereo (that means separate left- and right-channel).

a) Record-Path:

The complete selection of the audio signal for recording is done by a HEF4052 [7501], which is a dual four-to-one multiplexer. The input lines for the selector [7501] are coming either from MSP [7600] ("AFEL"/"AFER") or cinch rear in 1 ("AIN1L"/"AIN1R") or cinch rear in 2 ("AIN2L"/"AIN2R") or the cinch in front ("AINFL"/"AINFR"). The [7501] is controlled via "RSA1"- and "RSA2"-signals coming from the MSP [7600]. The MSP acts as a port expander of the CC-P. The Op-Amp on the output [7504] is necessary for performance reasons and acts also as a driver. The selected signals "ARADC" and "ALADC" are directly fed to the Audio-ADC.

As there can exist also a fifth input in case of DV-In is present the corresponding analog audio signals from the DVIO-board are firstly routed via extra cable and connector [1960] to the MSP, which acts as a preselector between audio from internal frontend or the DV-Input.

b) Line-Out-Path:

see chapter 9.4.3

c) Digital Audio Output-Path without IOE-Print:

Additionally to analog audio the set is also equipped with a digital output via cinch plug [1951]. The signal is generated on the dig. board and routed via audio interface cable and connector [1900] to the Ana-PCB. Here the "DAOUT"-line first passes a 6-fold inverter [7580] being used as a driver and for performance reasons (noise reduction, jitter, etc.). Afterwards a transformer [5580] is necessary to achieve the correct level and also to have a floating output with isolated ground before the signal is fed via [3580] to cinch plug [1951]. The capacitors [2580], [2582] and [2583] perform an AC-coupling between connector- and set-ground.

d) Digital Audio Output-Path with IOE-Print:

see chapter 9.3.4.f

e) Digital Audio Input-Path with IOE-Print:

see chapter 9.3.4.g

9.4.3 Audio ADC/DAC

The conversion of analog audio signals from the record-selector [7501] in the I/O ("ALADC"- & "ARADC") is done via UDA1361TS [7005]. This IC can process input signals up to 2Vrms by using an external resistor [3039], [3041] in series to the input pins. As the level from the DVIO-Board is only 1Vrms a 6dB step can be performed by setting pin 7 of [7005] to 3,3V via [7006] and "PWONSW"-line controlled by the CC-P to use the whole dynamic range of the ADC. All required clock signals are generated on the dig. board and only the audio data ("A_DAT"-line) are routed from Ana- to Dig.-PCB for further processing.

The transformation of dig. audio back to the analog domain is done by UDA1334BTS [7001]. All necessary clock signals are coming from the dig. board and dig. audio data ("D_DATA0"-line) are converted into analog signals, which are available at pin 14 and pin 16 of [7001]. Afterwards an Op-Amp. [7002] (line driver & level adaptation) which also works as a low-pass-filter to increase signal performance (noise, distortions,...) is passed. Then both signals ("ALDAC" & "ARDAC") are directly routed to the rear cinch output. The DAC has also a mute possibility, which can be activated by setting pin 8 to 3,3V via [7003]. This mute is controlled either by the dig. board ("D_KLL"-line) or the "IPFAIL"-signal from power-supply-unit. In addition to that the DAC [7001] and the cinch outputs can be killed (muted) in case of "digital silence" by the circuit around [7008], [7009] and [7010], when no audio data are available (e.g. "D_DATA0"-line zero).

The signals from the audio DAC part ("ARDAC"/"ALDAC") are directly routed to both cinch rear outputs, which are connected

in parallel. To avoid plops and any other audible noise on the output there is a mute-stage implemented [7509], [7511] for each channel. The activation is done via "AKILL"-line, which is a combination of the "KILL" from CC-P, "DAC_MUTE" from DAC-part and "IPFAIL" from the power-supply-unit. The circuit around [6430], [6431], [7430] and [7404] generates this signal.

9.4.4 Video-routing

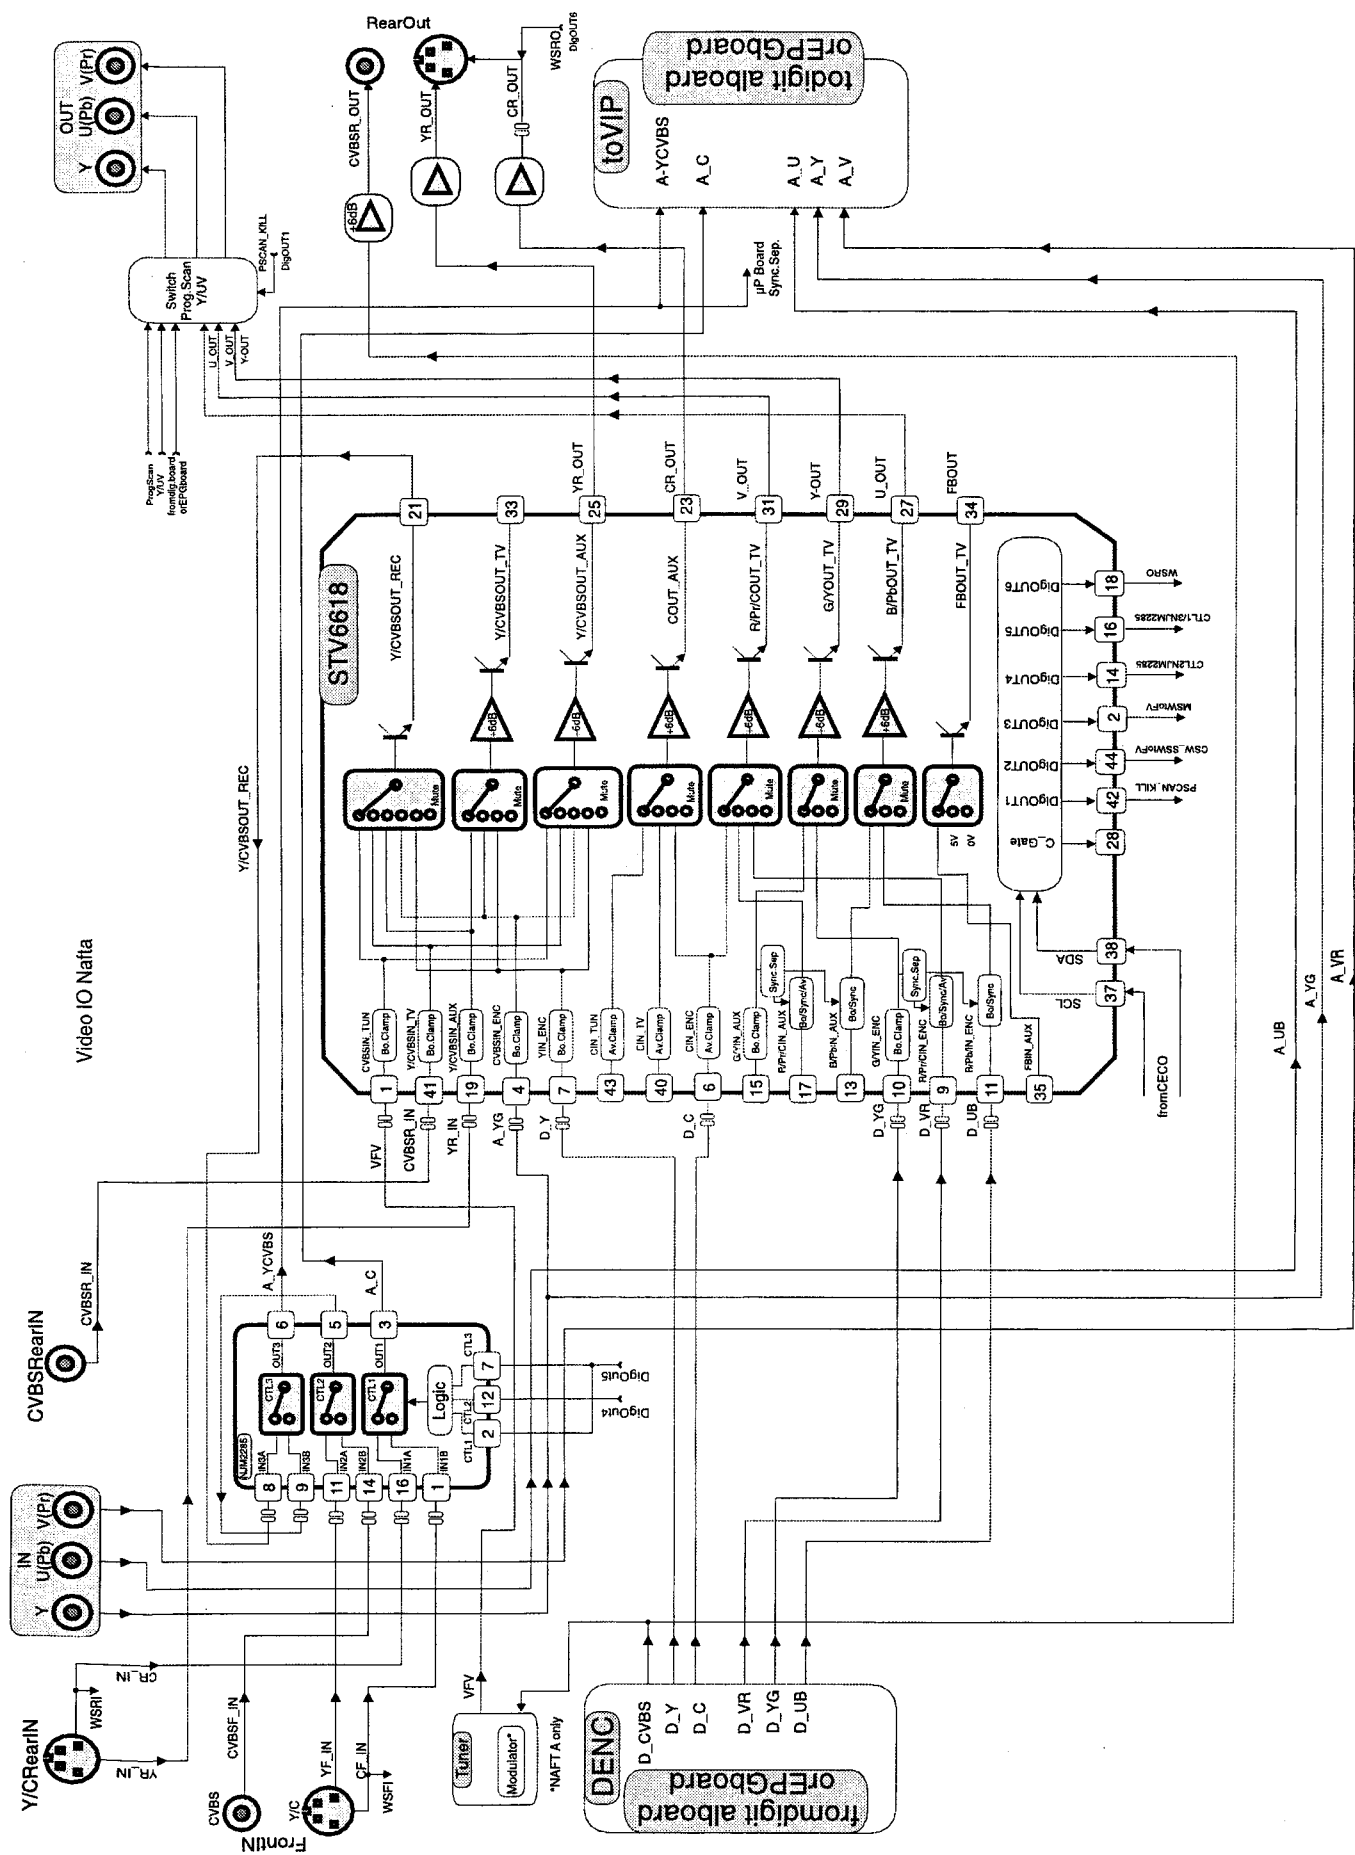


Figure 9-3

The Video-I/O-switching is basically realized by the matrix switch STV6618 [7408], which is controlled via I²C-bus by the CC. All used outputs excluding pin 21 (Y/CVBS-REC) have a 6dB-amplification and a 75 Ohms-driver-stage inside. This IC also includes several digital outputs, which are used for switching purposes on the analog board. The record selector inside the switch selects between the CVBS from frontend, the CVBS from Cinch-Rear or Y from the S-Video-input rear.

Afterwards the signal passes another switch [7411] in which a selection between signals from the front or the preselected ones is done. The output signals of [7411] are fed as "A_YCVBS"- and "A_C"-line to the digital board for further processing.

To reduce the number of external presets there is only one station for CVBS or Y/C (front and rear). The set automatically detects between the two inputs depending on the presence of a video signal (sync separator-circuit on μ P-sub-board) where Y/C has higher priority.

The Y/U/V-inputs are routed over the optional EPG board to the digital PCB. Only the Y-line has to be present additionally on pin 4 of [7408] for video recognition. Also all other video signal from the analog board are routed through the EPG board if present.

The signals "D_C" and "D_Y" are fed through [7408] (6dB amplification) and via [7406], [7409] used as driver to the S-Video output connector. The "D_CVBS" line is directly routed to the modulator and via the circuit around [7431] and [7432] amplified by 6dB before it is fed to the CVBS output plug. In case of EPG the signals from the digital board are routed through the EPG board where the selection between digital board video or EPG OSD is taken.

The Y/U/V signals from the digital board are also passing [7408] for 6dB amplification and driving purpose.

To achieve optimal picture quality the set is equipped with a simple progressive scan function based on a so-called line doubler. The complete generation of the signal is done on the digital board and via a separate cable and connector [1946] the corresponding Y/U/V lines are routed to the analog PCB. Also the YUVprogressive signals are switchable to EPG OSD on the EPG board if implemented. As there is only one Y/U/V output available a switching between interlaced and progressive output is necessary. While the transistors [7421], [7422], [7424], [7425], [7427] and [7428] are used as driver for Y/U/V progressive, [7423], [7426] and [7429] together with [7405] are necessary for killing these signals via pin 42 of [7408] in case the interlaced is selected ("PSCAN_KILL"-line set to low). If progressive output is active the pins 27, 29 and 31 of [7408] are set to high impedance and "PSCAN_KILL" is also high (e.g. 5V).

The detection of the picture ratio information on the Y/C inputs (rear or front) is done by measuring the DC-level on the Chroma signal via an analog input of the CC-P ("WSRI"- and "WSFI"-line). In case the level is higher than 3,5V the input signal is a 16:9 source, if the level is lower than 2,4V the picture ratio is 4:3.

For generation of the appropriate DC-voltage on the Y/C output the "WSRO"-line is controlled via pin18 of [7408] by the CC-P (Pin 18 set to low means 4:3, pin 18 set to high determines 16:9).

During Stand-By there is also no loop-through of any input to any output performed.

9.5 Digital Board

9.5.1 Record Mode

Video Part

Analog Video input signals CVBS, YC and UV(RGB for EURO and YUV for USA) are routed via the analog board to connector 1601 and sent to IC7500 SAA7118 (Video Input Processor). Digital video input signals (DV_IN_DATA(7:0)) are sent from the DIVIO board through the connector 1603 and further also to IC7500.

IC7500 (VIP) encodes the analog video to digital video and processes the digital video to a digital video stream (CCIR656 format). This output stream (VIP_YUV[7:0]) goes to IC7403 SAA6752H (EMPRESS) and to IC7100 Versatile Stream Manager. The latter uses the data for VBI (vertical blanking interval) extraction.

IC7403 (EMPRESS) encodes the digital video stream into a MPEG2 video stream that is fed to IC7100 (VSM).

Audio Part

I2S audio are sent from the analog board to IC7403 EMPRESS via connector 1602. The EMPRESS compresses I2S audio data into an AC3 audio stream which is fed to IC7100 (VSM).

Front-End I2S

IC7100 (VSM) interfaces directly to the different hardware modules such as Basic Engine, EMPRESS IC7403, MPEG decoder IC7200 (Sti5508) and buffers the data streams that are coming from or going to these hardware modules. In IC7100 (VSM), the video MPEG2 stream and the audio AC3 stream are multiplexed into a I2S packetized stream. The serial data are sent to the Basic Engine to be recorded.

Loop-Through

The multiplexed audio and video stream in the VSM is fed back via the parallel front-end interface to IC7200 (Sti5508). This IC decodes the MPEG stream into analog video and I2S audio. The video and audio signals are routed to the analog board via connectors 1601 and 1602. During recording, the recorded signal is present at the outputs of the analog board.

9.5.2 Playback Mode

During playback, the serial data from the Basic Engine is going directly to the Sti5505 via the serial front-end I2S interface. The Sti5508 is a MPEG & Audio/video decoder and has the following outputs:

- To the analog board:
 - analog video RGB, YC, CVBS
 - I2S audio (PCM format)
 - SPDIF audio (digital audio output)
- To the Progressive scan board:
 - digital video YC(7:0).

9.5.3 S2B Interface

The S2B interface between the VSM (IC7100) and the Servo processor MACE3 controls the Basic Engine during record and playback mode.

9.5.4 System Clock

System clocks(27MHz) of VSM, Sti5508, EMPRESS and Progressive Scan are generated by oscillator 7906

9.5.5 Audio Clock

During record mode, the audio clock ACC_ACLK_OSC is generated by IC7102 (PLL) because then, the audio clock must be synchronized with the incoming video (VIP_FID) from the VIP.

During playback mode, the audio clock ACC_ACLK_PLL is generated by the clock synthesizer IC7900 (MK2703S). Both ACC_ACLK_OSC(also goes to the EMPRESS as ACLK_EMP) and ACC_ACLK_PLL are fed to the VSM. This IC selects the appropriate clock to the Sti5508. The EMPRESS IC derives from the incoming ACLK_EMP the I2S audio encoder clocks AE_BCLK and AE_WCLK which are sent to the VSM.

9.5.6 On/Off

The digital board is not powered in standby mode. Control signal ION, coming from the analog board, will enable the PSU and power the digital board.

- ION = High: the digital board is in powered down standby mode
- ION = Low: the power supply to the digital board is enabled

9.5.7 Reset

Control signal IRESET_DIG, controlled by the microprocessor on the analog board is sent to the RESET LOGIC circuit.

- IRESET_DIG = Low in standby mode
- IRESET_DIG = High: the whole system is reset and the Digital board is waked up.

9.5.8 I2C Bus

Sti5508 is master of the I2C bus. The following IC's are controlled by the I2C bus:

- IC7201 NVRAM
- IC7403 EMPRESS
- IC7500 VIP
- IC7700 FLI2200 Video Deinterlacer Line Doubler
- IC7801 ADV7196 Video Denc

9.5.9 EMI Bus

The following IC's are connected to the External Memory Interface bus (EMI) which functions as system bus:

- IC7301 and 7302: Flash memories which contain the application and diagnostic software
- IC7100: VSM
- IC7200: MPEG AV Decoder

Figure 9-4

9.5.10 Progressive Scan

Description

The progressive scan part is integrated in the Digital Board and built around the SAGE Fli2200 de-interlacer / line doubler (7701). This I2C controlled de-interlacer uses a 64Mbit SDRAM (32bit x 2M) to perform high quality deinterlacing (meshing). The de-interlacer gets his digital YUV input data from the STi5508 (7200). The format of the digital YUV input to the SAGE is CCIR656 with separated Hsync, Vsync and odd/even signal running on 27Mhz.

Because the STi5508 doesn't have a Vsync output the odd/even output of this IC has to be translated to a Vsync signal. Some glue logic has been added to extract the vertical sync. The glue logic circuit consists of Flip-Flop IC 74HC74D (7701) and EXOR 74LVC86 (7702). The next diagram shows how the vertical sync is extracted.

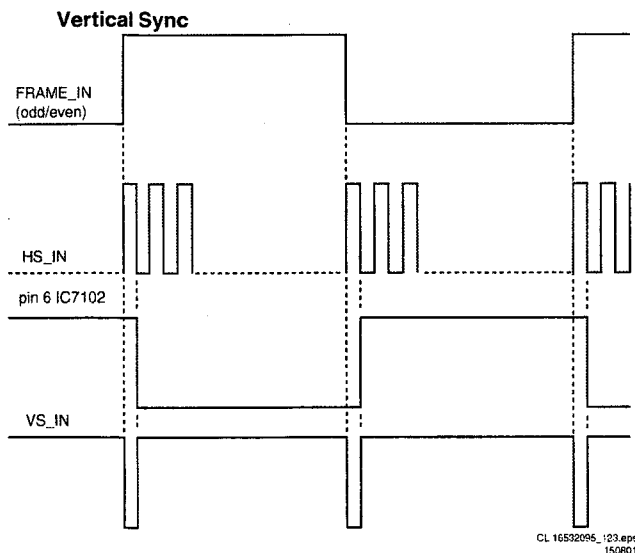


Figure 9-5

The output of the de-interlacer (4:4:4 progressive video) is fed to the Analog Devices ADV71967 MacroVision compliant DENC (7801).

The YUV current output of the DENC is fed via a low pass filter to the single supply output opamps AD8061/8062 (7802-7803). The analog video is fed via a 7 poled flex to the analog board where the YUV 2FH cinch connectors are located.

9.6 Divio 1.8 Board

9.6.1 Short Description of the Module:

The DVIO Module is a decoder for DV streams. Input is a stream from a DV-camcorder via IEEE1394. Outputs are CCIR656 Video and Analog audio (L+R). A serial control interface is present.

The following picture shows the location of the DVIO Module inside the DVDR set.

Description DIVIO Module

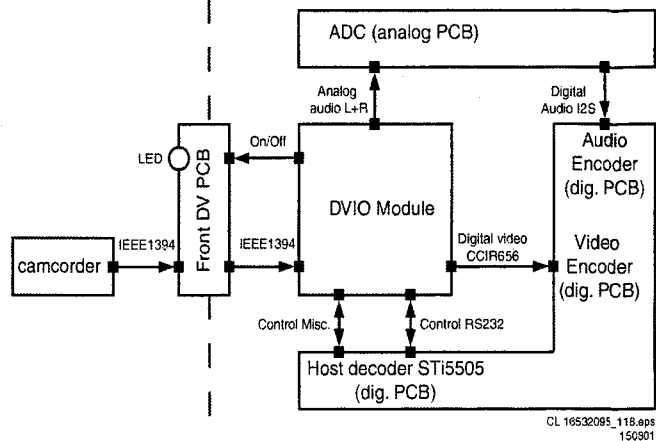


Figure 9-6

9.6.2 Block Diagram

Block Diagram DVIO1.8

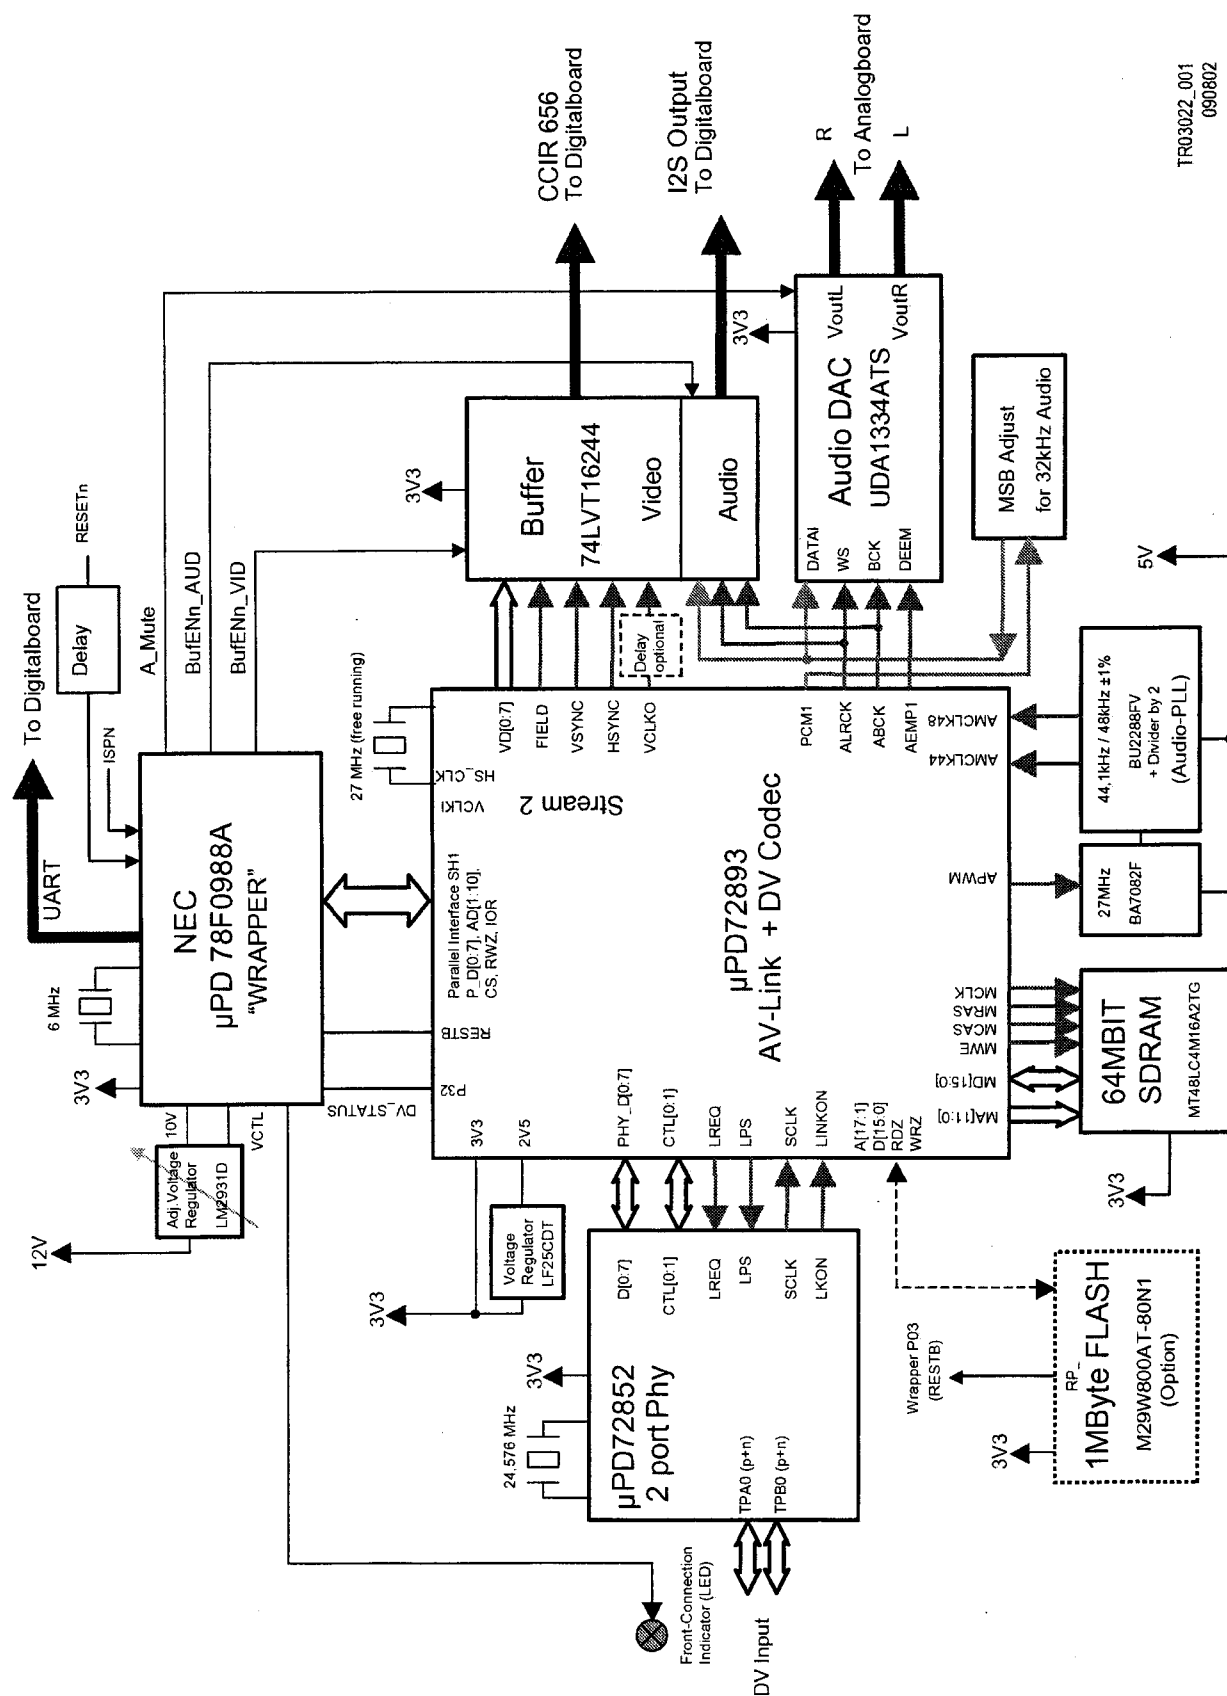
TR03022_001
090802

Figure 9-7

The board encodes and multiplexes analogue video and digital uncompressed audio (I2S) into an MPEG2 stream. This MPEG2 stream is formatted, to be recorded by the DVD+RW engine. In playback, the board will decode the MPEG2 stream into analogue and digital audio and into analogue video. In addition, a DV stream can be received via IEEE1394 (i-Link), and transformed to MPEG2 format.


There are versions foreseen, to generate a progressive scan analogue video output. In the standard Chrysalis board, the

progressive video output is generated by the PNX7100. In the Chrysalis 'F' it is generated by the Faroudja FLi2301.

The Chrysalis Digital board is pin compatible with the Empress digital board in terms of A/V IO, BE interface, Power Supply, and Service interface. For functional enhancements, several connectors are added: IDE connector (HDD, AV3, PCMCIA, etc.).

9.7.2 Record Mode

Block diagram Chrysalis Digital Board

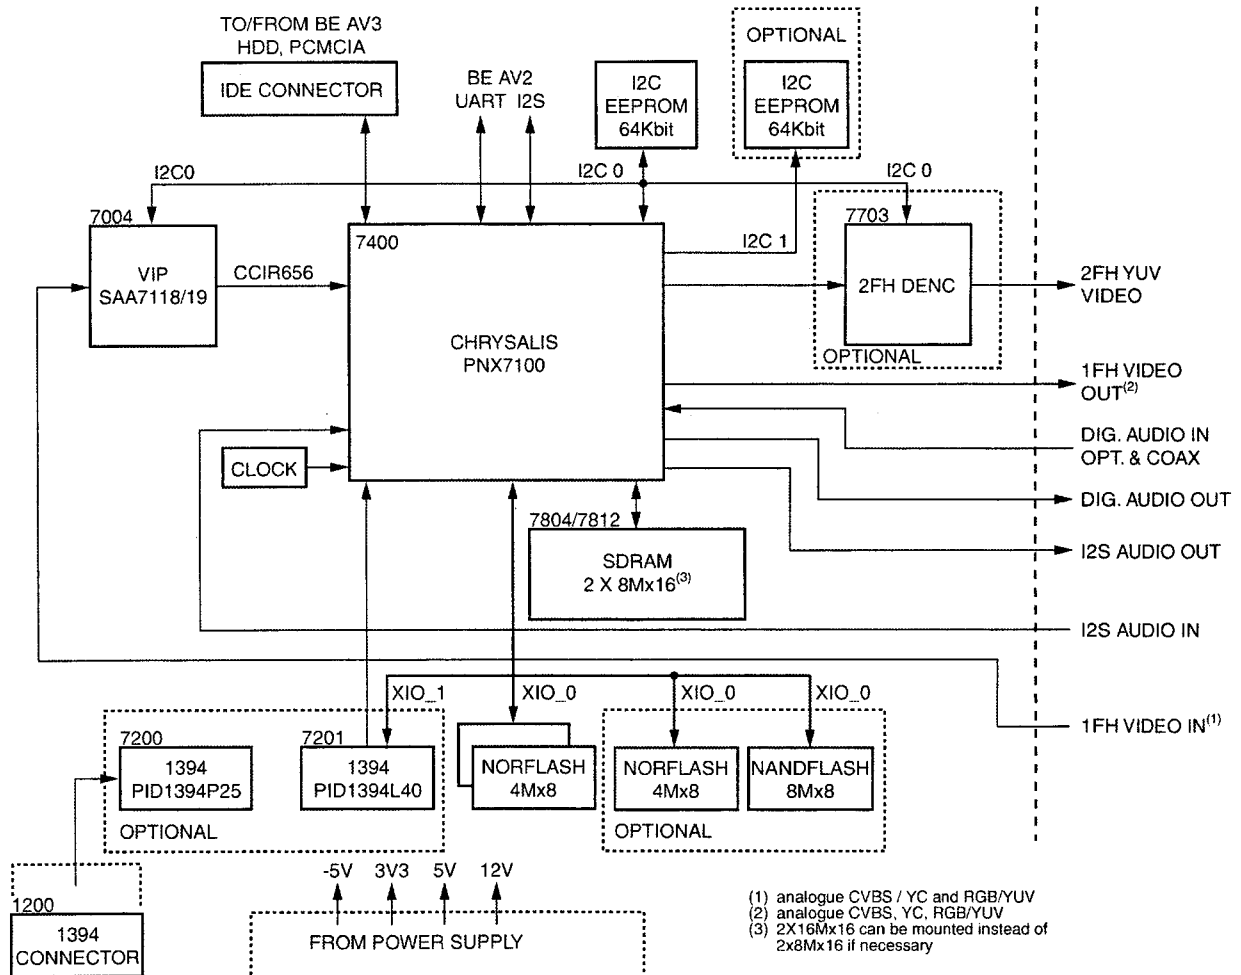

CL 36532004_003.eps
140203

Figure 9-9

Video Part

The analogue video input signals CVBS, YC, and YUV/RGB (RGB for EURO and YUV for USA), are routed via the analogue board to connector 1904 and sent to IC7004 (SAA7118, Video Input Processor).

The digital video input signals are routed from the DV-In connector (item 1200) via ICs 7200 (1394 PHY) and 7201 (1394 LINK) to IC7400 (PNX7100, Chrysalis).

The multistandard Video Input Processor (VIP, IC7400) encodes the analogue video to digital video stream (CCIR656 format). It provides filtering of the analogue signals and separation of luminance and chrominance by a comb filter. The output stream, named ITU_IN(7:0), is then routed to the Chrysalis IC (PNX7100). This IC encodes and decodes the digital video stream into/from MPEG2 format.

Audio Part

I2S audio is sent from the analog board to the Chrysalis IC via connector 1900. The Chrysalis compresses the I2S audio data into an MPEG1-L2/AC3 audio stream.

Front-end I2S

IC7400 (Chrysalis) interfaces directly to the Basic Engine (BE) via connectors 1100 (clock and data) and 1105 (control). For future use (with AV3 BE module, HDD, or card reader) it also interfaces to an IDE bus via connector 1102.

It buffers the data streams that are coming from (or going to) these hardware modules.

In the Chrysalis, the video MPEG2 stream and the audio AC3 stream are multiplexed into an I2S stream. The serial data are sent to the Basic Engine for recording.

9.7.3 Playback Mode

During playback, the serial data from the Basic Engine is going directly to the PNX7100 via the serial front-end I2S interface. The PNX7100 is an MPEG CoDec and has the following outputs:

- To the analogue board: analogue video RGB, YC, CVBS on connector 1904.
- I2S audio (PCM format) on connector 1900.
- SPDIF audio (digital audio output) on connector 1904.
- Progressive video on connector 1704.
- Communication gateway (RS232) on connector 1104.

9.7.4 Basic Engine Interfaces

AV2 Basic Engine (VAE8015 and VAE8020)

The UART interface (for the S2B commands) between the Chrysalis and the servo processor (MACE3 on the BE module), controls the AV2 Basic Engine during record and playback mode. For data transport, an I2S bus is used. For detailed information on the AV2 BE module, see Service Manual 3122 785 12470.

AV3 Basic Engine (VAE8030)

To be prepared for new developments, the Chrysalis Digital Board is equipped with two IDE busses (ATAPI). They can be used for connecting to the new generation Basic Engine (e.g. the AV3), a Hard Disc Drive (HDD), or a Smart Card Reader.

9.7.5 Clock Distribution

Clock distribution on Chrysalis board

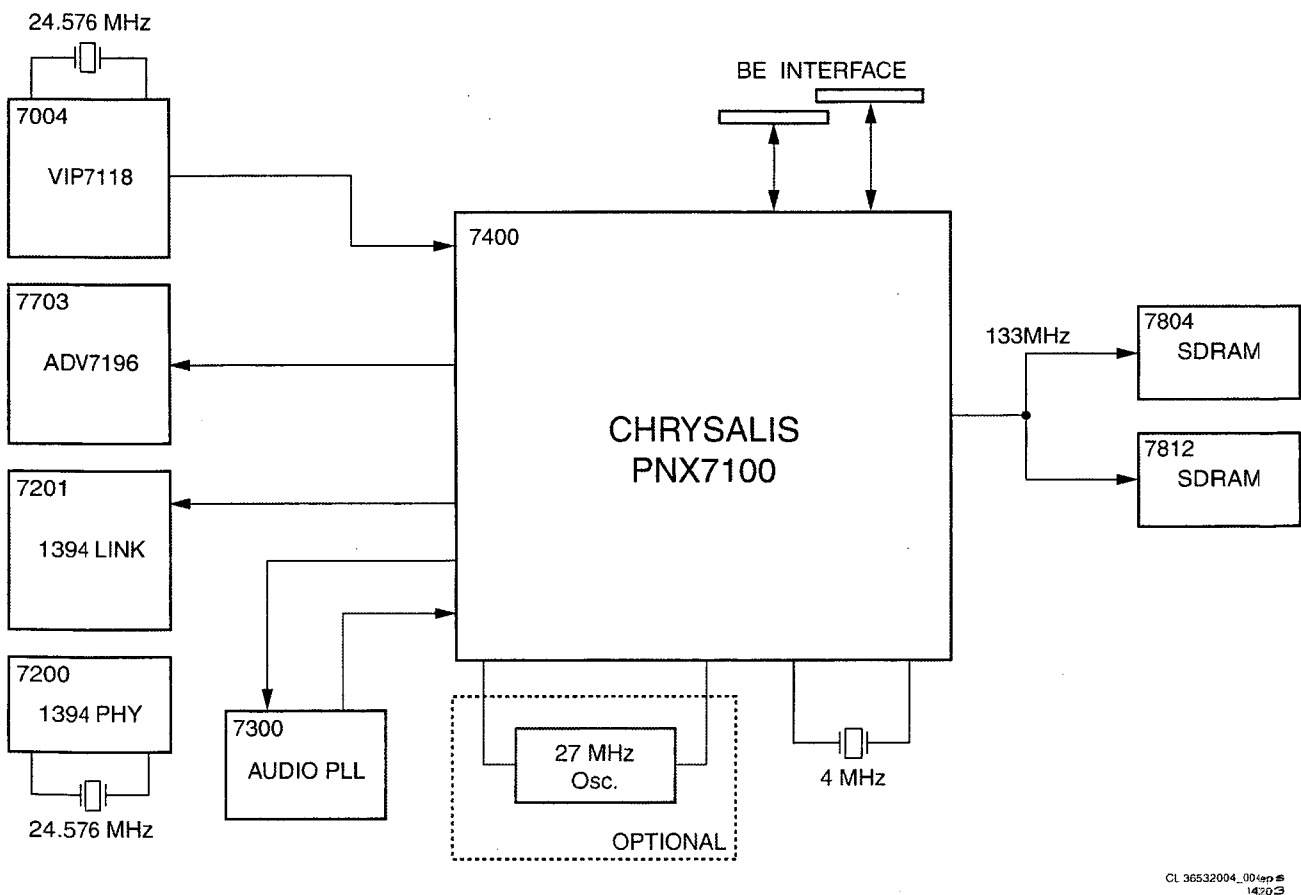


Figure 9-10

The PNX7100 has a complex clock system, which is needed to support the processes running at different frequencies such as video decoding, audio decoding or peripheral I/O devices etc. To ensure a synchronous initialisation of all the registers and state machines, all the PLLs are switched to their default frequency and the reset sequence is run at 4 MHz. Then when the booting control unit is correctly initialized and once it has captured all the booting parameters, it sets the PLLs to its functional frequency to allow the modules to run at their nominal frequencies. Thanks to a clock blocking mechanism, the frequency switching is glitch free.

System clocks:

- PNX7100 (IC7400, pins AF9 and AF10) : 4 MHz provided by the xtal oscillator 7402.
- SAA7118 (IC7004, pins A3 and B4): 24.576 MHz provided by xtal 1001.
- ADV7196 (IC7703, pin 25): 27 MHz provided by PNX7100.
- SDRAM (IC7804 and 7808, pin 38): 133 MHz provided by the PNX7100.
- 1394-LINK (IC7201, pin 88): 49.152 MHz provided by 1394-PHY.
- 1394-PHY (IC7200, pins 59 and 60): 24.576 MHz provided by xtal 1201.

9.7.6 Power Supply

The Digital Board is not powered in standby mode. The control signal 'ION' (Inverse On), coming from the analogue board, will enable the PSU, and power the digital board.

- ION = High: the digital board is in powered down standby mode.
- ION = Low: the power supply to the digital board is enabled.

The 3V3, +5V, -5V, and +12V come from the PSU, while the 1V8 core voltage is generated on the board by a low voltage buck controller (item 7501). It provides the control for a DC-DC power solution producing an 1.8V output voltage over a wide current range. The NCP1570-based solution is powered from

12 V with the output derived from the 3V3 supply. It contains all required circuitry for a synchronous NFET (IC7500-1 and -2) buck regulator.

9.7.7 Memory

Several memories are used on the Chrysalis Digital Board:

- EEPROM IC7810: this memory contains all the necessary boot parameters of the board.
- EEPROM IC7809: this memory contains all the necessary parameters for the application.
- FLASH IC7807(05/11): this memory contains the application-, diagnosis-, and service software.

9.7.8 Reset

Reset concept Chrysalis board

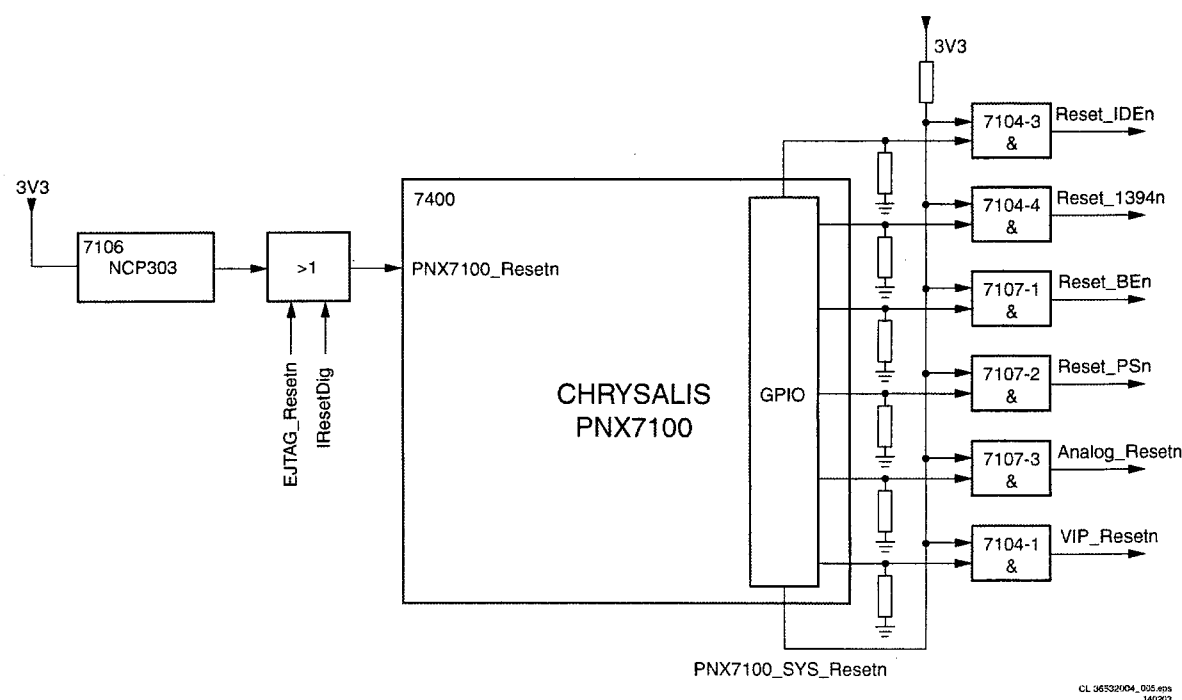


Figure 9-11

The voltage detector NCP303LSN29 (IC7600) provides the reset signal PNX7100_RESETn (active 'low') with the correct timing behavior. This circuitry functions as a Power-On Reset (POR) module, which detects the minimum functional voltage that is needed by the device. It also detects any voltage drop. When the power voltage is outside the nominal range, a reset signal is generated by the POR module and fed to the reset module which controls the individual reset of the different peripherals and processing units.

- There are two control lines which can overrule this reset signal:
- IRESET_DIG (controlled by the microprocessor on the Analogue Board).
 - EJTAG_RESETEn (only for production).

They can pull the output of the NCP303LSN29 (item 7106) down via a shottky diode.

So when the output signal PNX7100_RESETn is 'low', the board will reset. When this signal is 'high', the board is up and running.

The PNX7100_SYS_RESETn is a general enabling signal for the different reset lines. All other reset lines are directly driven from Chrysalis port pins (e.g. MPIO13_IDE1_RESETEn). All

reset lines are logically connected via 74LVC08D (item 7104) and (item 7107) AND-gates. If both reset signals are low, all other external devices are initialised.

9.7.9 I2C Bus

The PNX7100 is the master of the I2C bus (during reset, external I2C masters are allowed). The following ICs are controlled by the I2C bus:

- IC7809.
- IC7810 NVRAMs.
- IC7004 VIP.
- IC7700 FLI2301 Video De-interlacer Line Doubler (for Chrysalis-F boards).
- IC7703 ADV7196 Video Enc (for progressive scan done by Chrysalis).

9.7.10 I/O Connectors

AIO Connector (item 1900)

The Audio In/Out (AIO) connector is used to interchange digital audio signals between Analog- and Digital Board.

DAIO Connector (item 1901)

The Digital Audio In/Out (DAIO) connector is used to interchange digital audio (SPDIF) signals between the IOE-Board and the Digital Board.

VIO Connector (item 1904)

The Video In/Out (VIO) connector is used to interchange analogue video signals between Analog- and Digital-Board.

9.7.11 Progressive Scan**Introduction**

There are two versions foreseen, to generate a progressive scan analogue video output:

- In the standard Chrysalis board, the 'low end' progressive video output is generated by the PNX7100.
- In the Chrysalis 'F', the 'high end' progressive output is generated by the Faroudja FLI2301. This IC offers additionally DCDI, upscaling to HDTV, and picture enhancement.

Description

The progressive scan part is integrated in the Digital Board and built around the FLI2301 de-interlace/line doubler (7701). This I2C controlled de-interlace uses a 64Mbit SDRAM (32bit x 2M) to perform high quality de-interlacing (meshing). The de-interlace gets its digital YUV input data from the PNX7100 (7400). The format of the digital YUV input to the FLI2301 is CCIR656 with separated Hsync, Vsync, and odd/even signal running on 27MHz.


9.8 Service UART Interface

Logic IC 74HCT14D (item 7111) is used to make a level conversion from microprocessor (LVTTL) to +/-5V (compatible with most RS232 interfaces) and vice versa. The control line MPIO19_CTL_SERVICE is used to activate service and diagnostic SW at start up procedure. The connectivity is provided via an external service tool.

9.9 EPG Nafta Board**9.9.1 General**

Two ASICs from Gemstar, GS501 (item 7100) and GS502 (item 7201), generate the EPG OSD. The host P controls both ICs via the I2C bus (pins 45 and 48). A RAM memory (item 7102) and a Flash memory with the firmware (item 7101) belong also to the periphery of these ASICs. A PIC processor (item 7303) generates the POR_N reset for this system. The POR_DC reset comes from the set, and is active after AC power 'on'. A port expander from the host, controls the EXT_RESET signal. This port expander (item 7200) is also used for switching the video paths on the EPG board.

Either the board works in 'Loop Trough' mode, or (for EPG) the output path is switched to the 'EPG RGB' video.

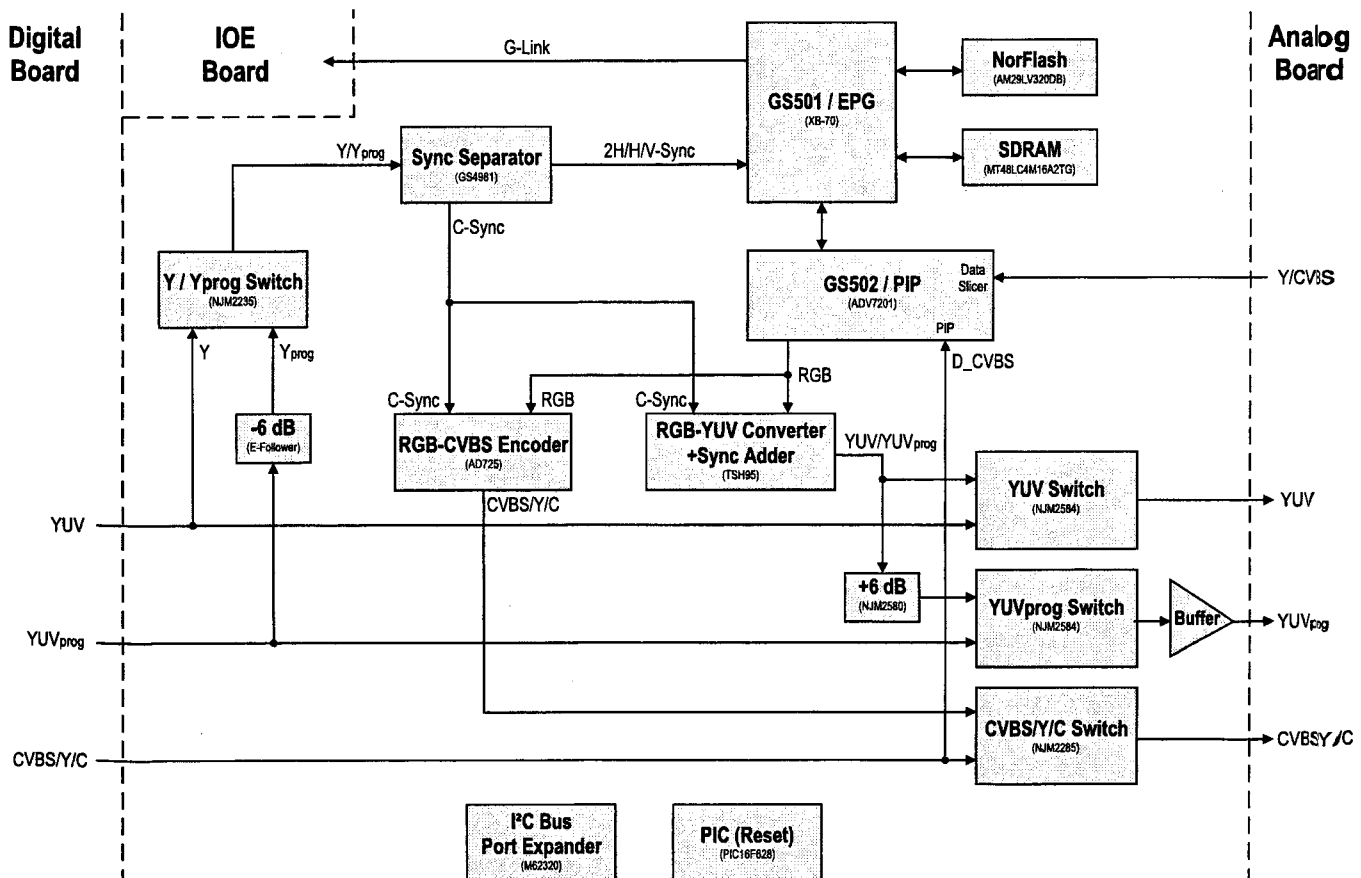Blockdiagramm EPG-Modul Nafta**Figure 9-12**

9.9.2 Loop trough

For 'Loop Trough' the input video signals (CVBS, YC, YUV, and YUV-progressive) from the Digital board are passing three video switches before going to the Analog board.

- Item 7503 for CVBS and Y/C.
- Item 7502 for YUV-interlaced.
- Item 7501 for YUV-progressive.

9.9.3 EPG RGB Video

A V-sync and H-sync (for progressive = 2H-sync) are necessary for outputting an RGB video. A sync separator (item 7703) generates these syncs. Input for the sync separator is either the 1fh or the 2fh luminance signal from the Digital board. A video switch (item 7700) makes the selection. For progressive video, the signal must be attenuated (item 7701).

The RGB signal goes via emitter followers (items 7202, 7203, and 7204) to an RGB-to-YUV converter and to an RGB-to-CVBS, Y/C converter.

The RGB-to-YUV converter consists of four OpAmp's, which are necessary for RGB/YUV conversion (item 7600-B, -C, and -D) and for adding the C-sync to the Y signal (item 7600-A).

The RGB-to-CVBS, Y/C conversion is realized by IC7602. The oscillator (item 7601) is necessary for generating the chroma carrier.

With transistor 7603 the conversion stages can be switched 'off' for power saving.

For the PIP (Picture in Picture) feature, the D_CVBS video signal from the Digital board is used. This signal is fed to Pin 10 of IC7201. For scanning the EPG data, the A_YCVBS signal from the Analogue board is fed to pin 8 of IC7201.

9.9.4 Power supply

The supply for the video stages and the EPG digital part, are generated via DC-DC converters (items 7400, 7401, and 7403) out of the 12STBY.

9.10 EPG Europe Board

9.10.1 General

The ARM7 based microprocessor (item U1) and an ASIC (Gemstar GSA03, item U2) generates the EPG OSD data (RGB or YUV-interl./progr.). The host P on the Digital board, controls both ICs via the I2C bus. A RAM memory (item U7)

and two Flash memories (items U8 and U9) with the firmware and EPG data, belong also to the periphery of the ASIC. A resistor and capacitor (items R1 and C6) generate the reset for this system. The IPOR reset comes from the set and is active after main power 'on'. A port expander from the host, controls the nGCLR reset signal. This port expander (item U31) is also used for switching the video paths on the EPG board.

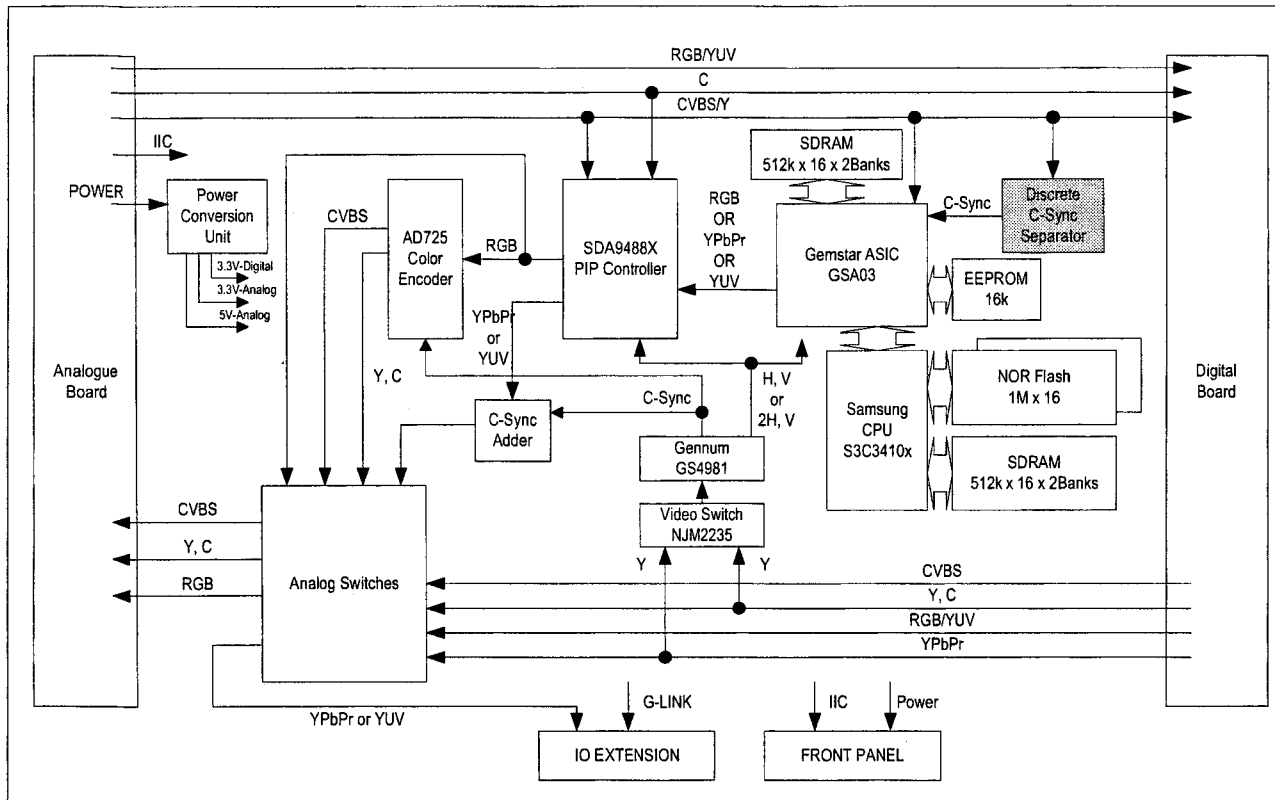


Figure 9-13

Either the board works in 'Loop Trough' mode, or (for EPG) the output path is switched to the 'EPG RGB' video.

9.10.2 Loop Trough

For 'Loop Trough', the input video signals (CVBS, YC, RGB, YUV-interlaced, and YUV-progressive) from the digital board are passing three video switches before going to the Analogue board.

- Item U15 for CVBS and Y/C selection between EPG and Loop trough.
- Items U16, U18, and U19 (and periphery) for RGB selection between EPG and Loop trough.
- Items U42 and U17 for YUV-interlaced and YUV-progressive selection between EPG and Loop trough. These signals are amplified (items U13B, C, and D) for driving a 75-Ohm output.

Note: RGB and YUV-interlaced (VR_DVD, UB_DVD, YG_DVD) are the same signals. It depends on the software, which signal is chosen.

9.10.3 EPG RGB

A V-sync and H-sync (for progressive = 2H-sync) are necessary for outputting an EPG video. A sync separator (item U10) generates these syncs. Input for the sync separator is either the 1st or the 2nd luminance signal from the Digital board. A video switch (item U50) makes the selection.

The EPG signal goes via a PIP-inserter IC (item U11 and peripherals) that inserts a PIP (Picture In Picture) into the EPG OSD. Source for this PIP is the CVBS signal from the digital board.

When the PIP output is a YUV signal, the Y signal is without a sync. Therefore, this sync must be added with item U13A.

For RGB-to-CVBS, Y/C conversion is realized by a PAL conversion IC (item U14). The oscillator (item Y5) is necessary for generating the chroma carrier.

For scanning EPG data, the A_YCVBS signal from the Analogue board is used. This signal is fed to pin 189 of item U2. There is also a sync from the Analogue board necessary. A discrete circuit (items Q18-Q23 and periphery) generates it.

9.10.4 Power supply

The supply for the video stages and the EPG digital parts are generated via DC-DC converters and linear regulators (items U28, U40, and U41) out of the 12VSTBY.

9.11 I/O Extension Board

This board feeds the internal S/PDIF signal from the Digital board to an optical and/or digital out connector. For European players, also an YUV output is present on this board.

9.12 IC Descriptions

9.12.1 Display Board

IC 7103 TMP87CH74F Display Board, Front Microprocessor

Block Diagram

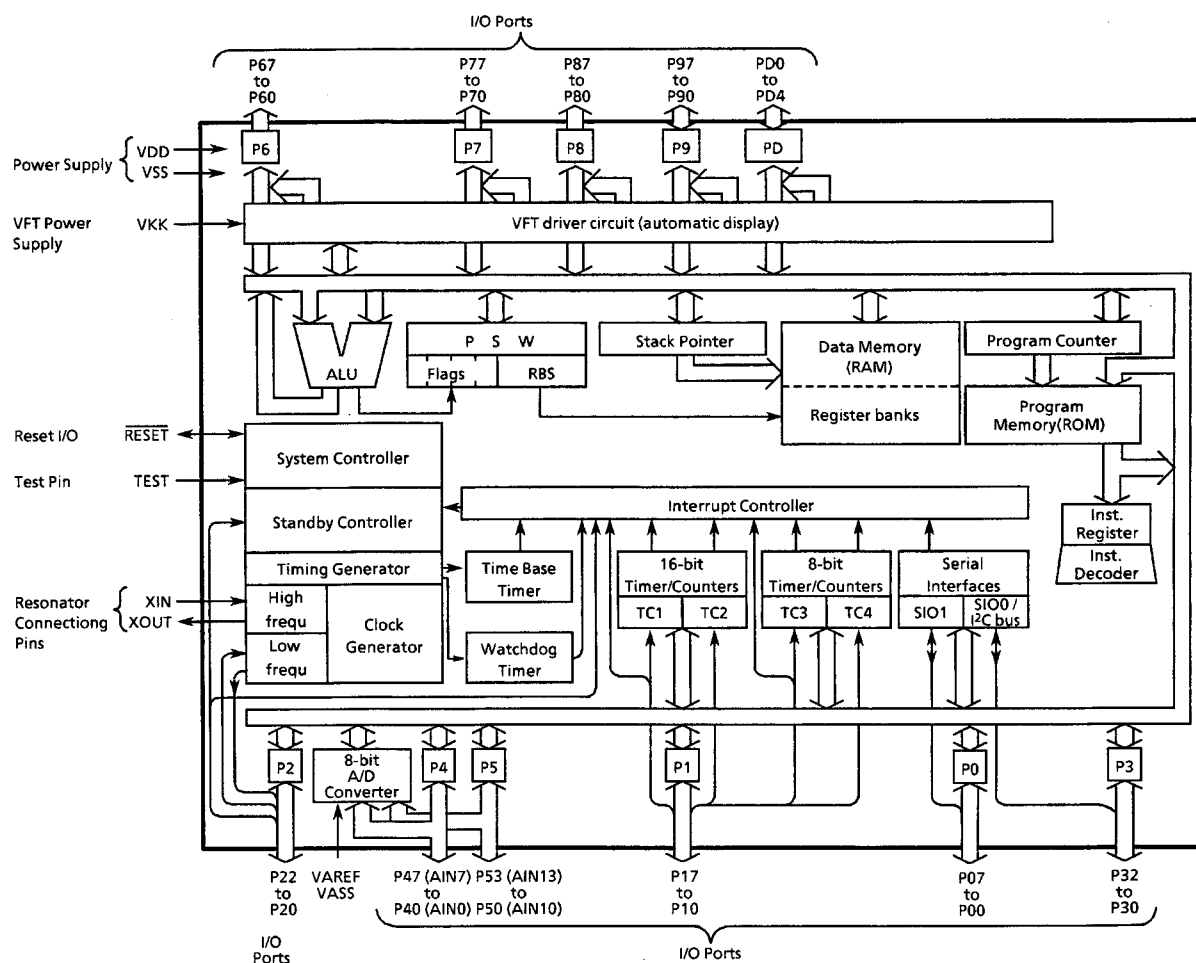


Figure 9-14

Pin Function

Pin Name	Input / Output	Function	
P07 to P03	I/O	Two 8-bit programmable input/output ports (tri-state).	
P02 (S01)	I/O (Output)	Each bit of these ports can be individually configured as an input or an output under software control.	SIO1 serial data Output
P01 (S11)	I/O (Input)	When used as a SIO input/output, an External interrupt input, a	SIO1 serial data Input
P00 (SCK1)	I/O (I/O)	timer/counter input, the latch must be set to "0". When used as a PPG output or divider output, the latch must be set to "1".	SIO1 serial clock input/output
P17 (INT4/TC3)	I/O (Input)		External interrupt input 4 or Timer/Counter 3 input
P16 (INT2)			External interrupt input 2
P15 (INT3/TC1)			External interrupt input 3 or Timer/Counter 1 input
P14 (TC4/PDO/PWM)			Timer counter 4 input or 8-bit programmable divider output or 8-bit PWM output
P13 (DVO)	I/O (Output)		Divider output
P12 (TC2/PPG)	I/O (I/O)		Timer counter 2 input or Programmable pulse generator output
P11 (INT1)	I/O (Input)		External interrupt input 1
P10 (INT0)			External interrupt input 0
P22 (XTOUT)	I/O (Output)	3-bit input/output port with latch. When used as input port, or external interrupt input, STOP mode release signal input, the latch must be set to "1".	Resonator connecting pins (32.768 kHz). For inputting external clock, XTIN is used and XTOUT is opened.
P21 (XTIN)	I/O (Input)		External interrupt input 5 or STOP mode release signal input
P20 (INT5/STOP)			
P32 (SCK0)	I/O (I/O)	3-bit programmable input/output ports (Sink open drain).	SIO0 serial clock input/output
P31 (SDA/SO0)	I/O (I/O/Output)	Each bit of these ports can be individually configured as an input or an output under software control. When used as a I2C input/output, the latch must be set to "1".	I2Cbus serial data input/output or SIO0 serial data output
P30 (SCL/SI0)	I/O (I/O/Input)		I2Cbus serial clock input/output or SIO0 serial data Input
P47 (AIN7) to P40 (AIN0)	I/O (Input)	8-bit programmable input/output ports (tri-state). Each bit of these ports can be individually configured as an input or an output under software control. When used as an analog input, the P4CR must be set to "0".	A/D converter analog inputs
P53 (AIN13) to P50 (AIN10)	I/O (Input)	4-bit programmable input/output ports (tri-state). Each bit of these ports can be individually configured as an input or an output under software control. When used as an analog input, the P5CR must be set to "0".	A/D converter analog inputs
P67 (V7) to P60 (V0)	I/O (Output)	Four 8-bit high breakdown voltage output ports with the latch. When used as a VFT driver output, the latch must be cleared to "0".	VFT driver outputs
P77 (V15) to P70 (V8)			
P87 (V23) to P80 (V16)			
P97 (V31) to P90 (V24)			
PD4 (V36) to PD0 (V32)	I/O (Output)	5-bit high breakdown voltage output ports with the latch. When used as a VFT driver output, the latch must be cleared to "0".	

Figure 9-15

Pin Name	Input / Output	Function
XIN, XOUT	Input, Output	Resonator connecting pins for high-frequency clock. For inputting external clock, XIN is used and XOUT is opened.
RESET	I/O	Reset signal input or watchdog timer output/address-trap-reset output/system-clock-reset outputted.
TEST	Input	Test pin for out-going test. Be tied to low.
VDD, VSS	Power Supply	+ 5 V, 0 V (GND)
VKK		VFT driver power supply
VAREF, VASS		Analog reference voltage inputs (High, Low)

Figure 9-16

9.12.2IC's Analog Board

IC7408: STV6618 Analog Board, Video Switch Matrix

STV6618

GENERAL OVERVIEW

1.2 Pin Description

Pin No.	Symbol	Description
1	Y/CVBSIN_TUN	Y/CVBS Input from Tuner
2	DIGOUT3	Digital Output Pin 3
3	GND1	Ground Supply 1 for Video Inputs
4	CVBSIN_ENC	CVBS Input from Encoder
5	DECV	Video decoupling capacitor
6	CIN_ENC	Chroma Input from Encoder
7	YIN_ENC	Y Input from Encoder
8	V _{CC}	+5 V Power Supply for Video Inputs
9	R/PR/CIN_ENC	Red or Pr or Chroma Input from Encoder
10	G/YIN_ENC	Green or Y Input from Encoder
11	B/PBIN_ENC	Blue or Pb Input from Encoder
12	GND2	Ground Supply 2 for Video Inputs
13	B/PBIN_AUX	Blue or Pb Input from Auxiliary (SCART2 or external Cinch)
14	DIGOUT4	Digital Output Pin 4
15	G/YIN_AUX	Green or Y Input from Auxiliary (SCART2 or external Cinch)
16	DIGOUT5	Digital Output Pin 5
17	R/PR/CIN_AUX	Red or Pr or Chroma input from Auxiliary (SCART2 or external Cinch)
18	DIGOUT6	Digital Output Pin 6
19	Y/CVBSIN_AUX	Y/CVBS Input from Auxiliary (SCART2 or external Cinch)
20	VCCB_REC	Video Output Recorder Buffer Supply Pin
21	Y/CVBSOUT_REC	Y/CVBS Output to Recorder
22	GNDB_REC	Ground Supply for Recorder Buffer
23	COU _T _AUX	Chroma Output to Auxiliary (SCART2 or external Cinch)
24	VCCB1	Video Output Buffer Supply Pin
25	Y/CVBSOUT_AUX	Y/CVBS Output to Auxiliary (SCART2 or external Cinch)
26	GNDB	Ground Supply for Video Buffer
27	B/PBOUT_TV	Blue or Pb Output to TV (SCART1 or external Cinch)
28	C_GATE	External Transistor Command for Bidirectional B/C SCART I/O
29	G/YOUT_TV	Green or Y Output to TV (SCART1 or external Cinch)
30	VCCB2	Video Buffer
31	R/PR/COU _T _TV	Red or Pr or Chroma Output to TV (SCART1 or external Cinch)
32	VCCB3	Video Output Buffer Supply Pin
33	Y/CVBSOUT_TV	Y/CVBS Output to TV (SCART1 or external Cinch)
34	FBOUT_TV	Fast Blanking Output to TV (SCART1)
35	FBIN_AUX	Fast Blanking Input from Auxiliary (SCART2)

Pin No.	Symbol	Description
36	VDD	+5 V Digital Power Supply
37	SCL	I ² C Bus Clock
38	SDA	I ² C Bus Data
39	GNDD	Digital Ground Supply
40	CIN_TV	Chroma Input from TV (SCART1 or external Cinch)
41	Y/CVBSIN_TV	Y/CVBS Input from TV (SCART1 or external Cinch)
42	DIGOUT1	Digital Output Pin 1
43	CIN_TUN	Chroma Input from Tuner
44	DIGOUT2	Digital Output Pin 2

Figure 2: STV6618 Input/Output Diagram



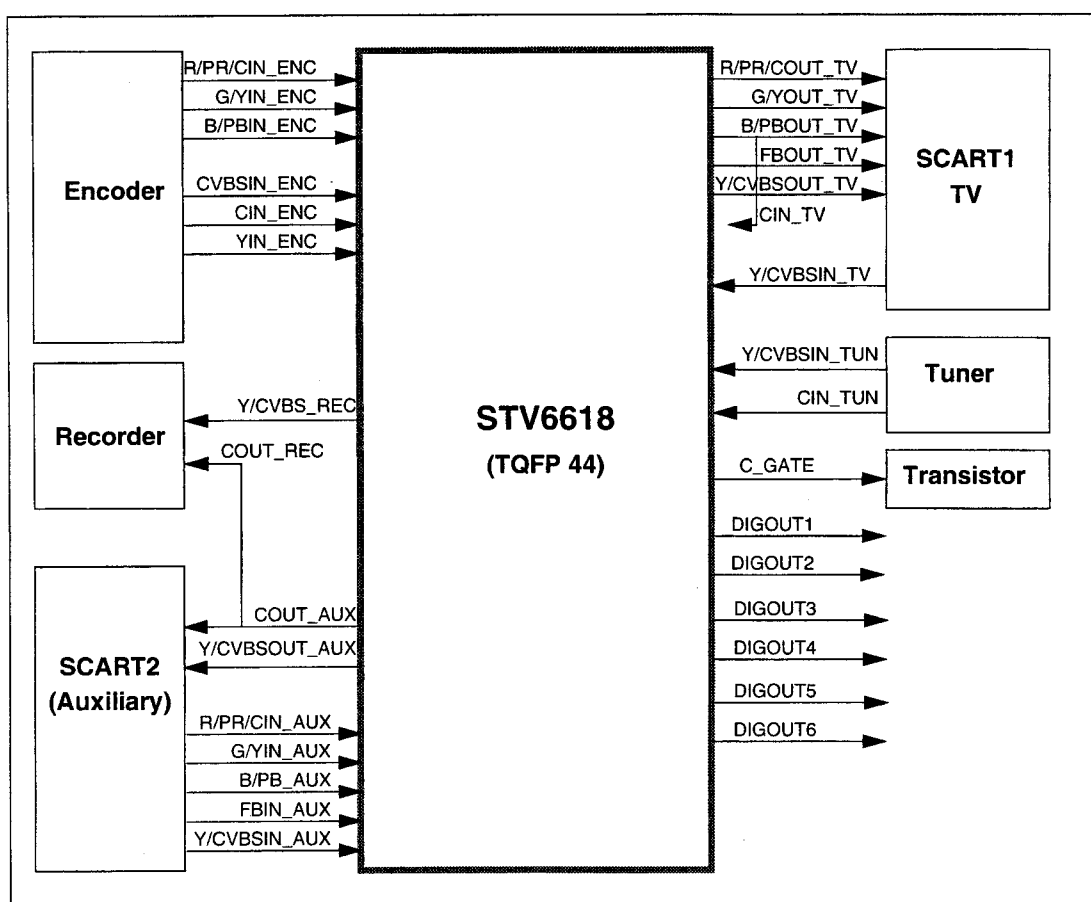


Figure 3: STV6618 Block Diagram

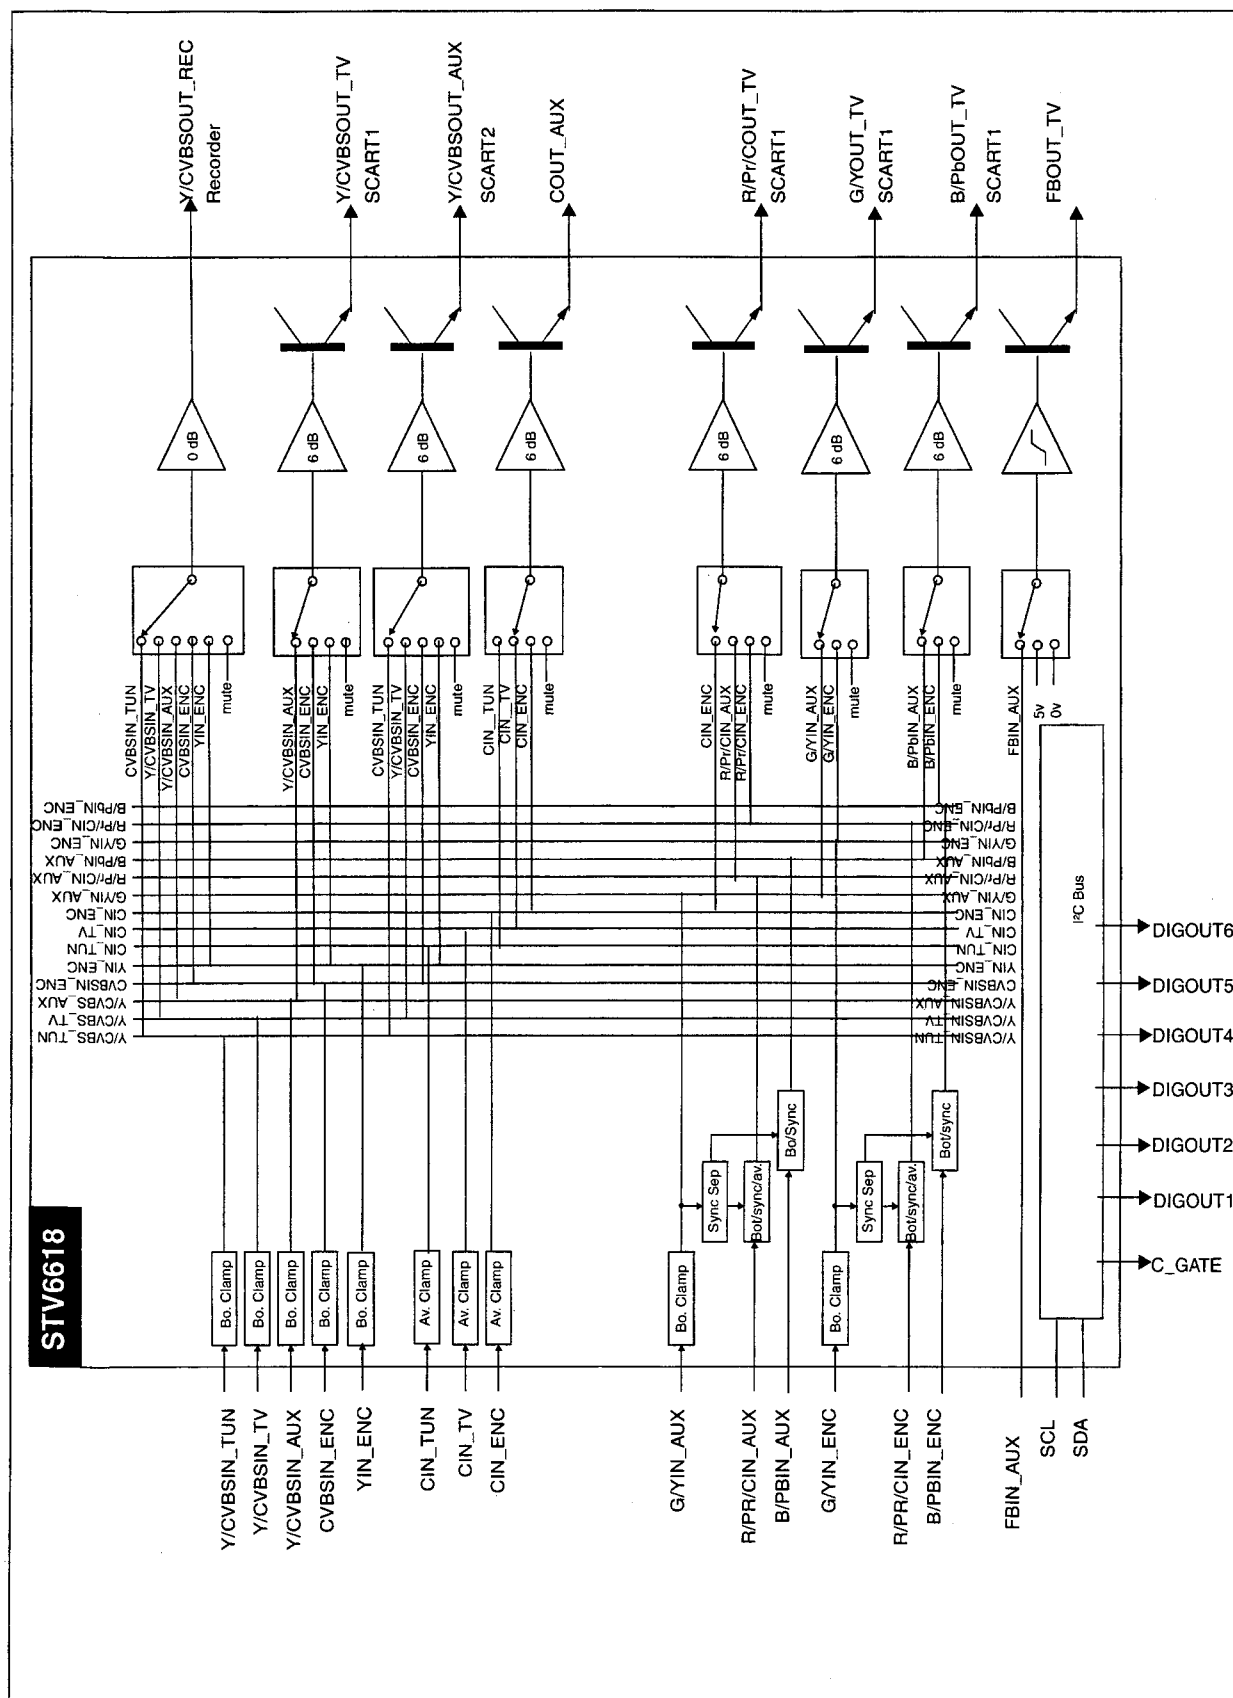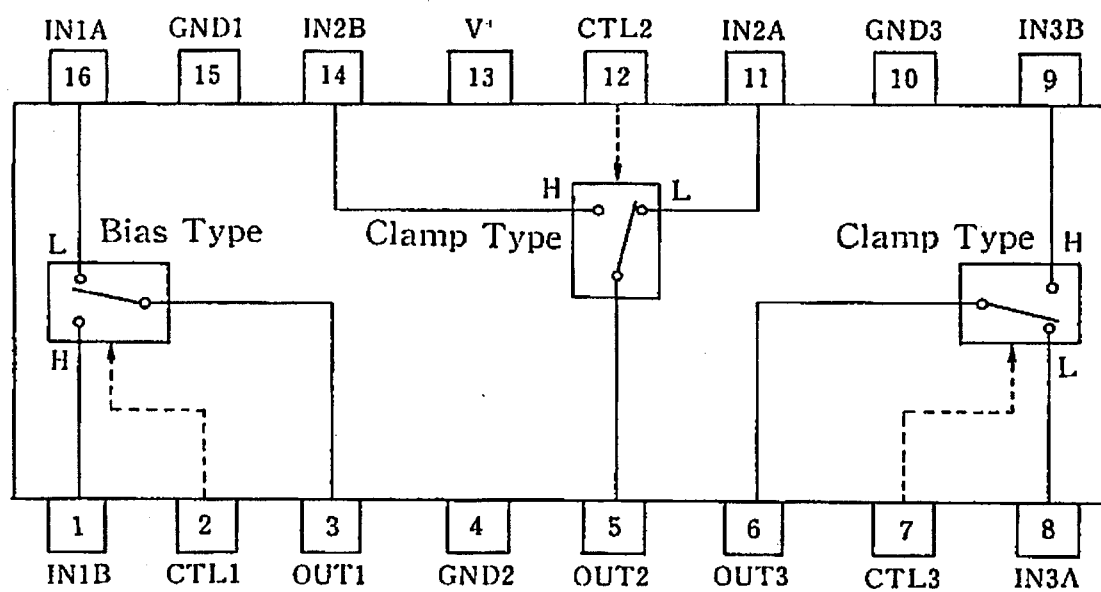

IC7411: NJM2285 Analog Board, Video Switch

NJM2285D
NJM2285M
NJM2285V

IC7313 TEA 1507 Analog Board, Power Supply Control

BLOCK DIAGRAM


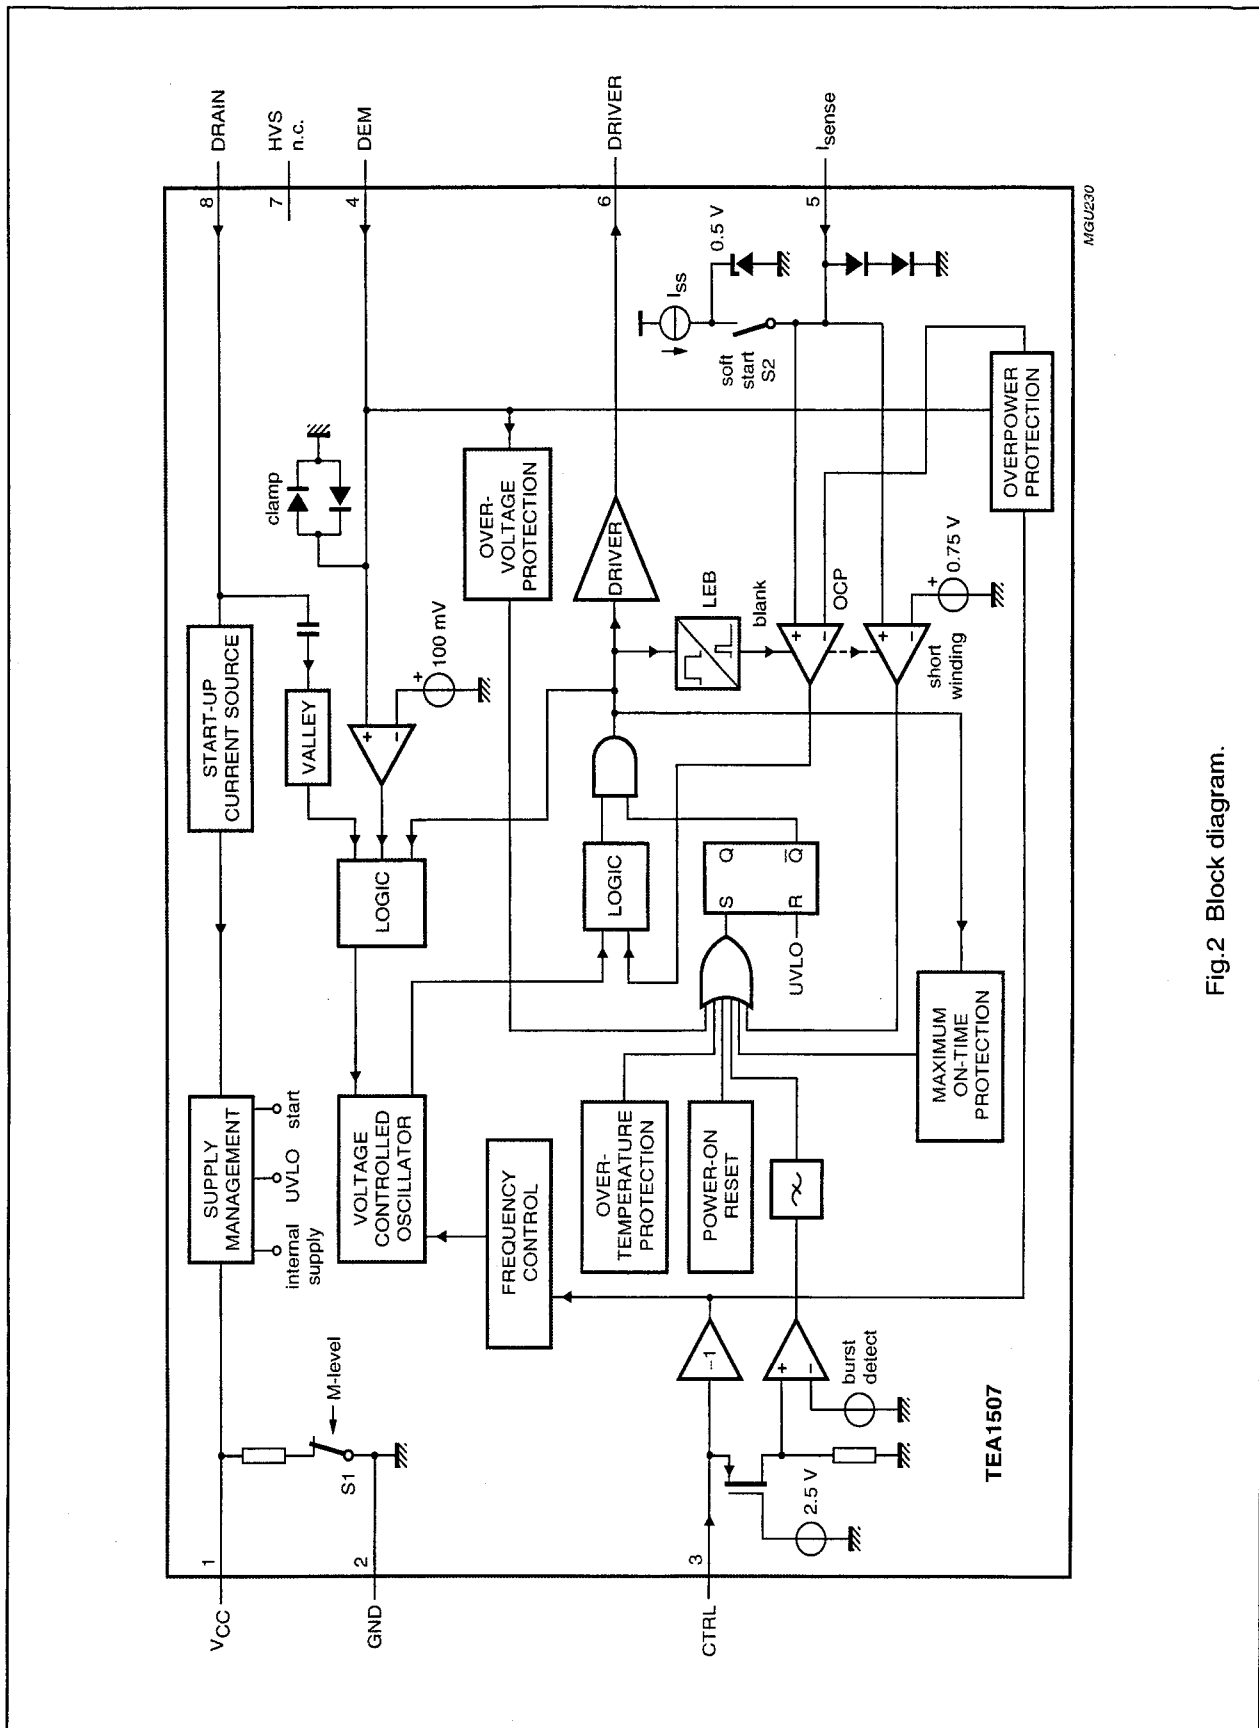


Fig.2 Block diagram.

IC7404: AD1582 Analog Board, Digital/Analogue Converter

FUNCTIONAL BLOCK DIAGRAM

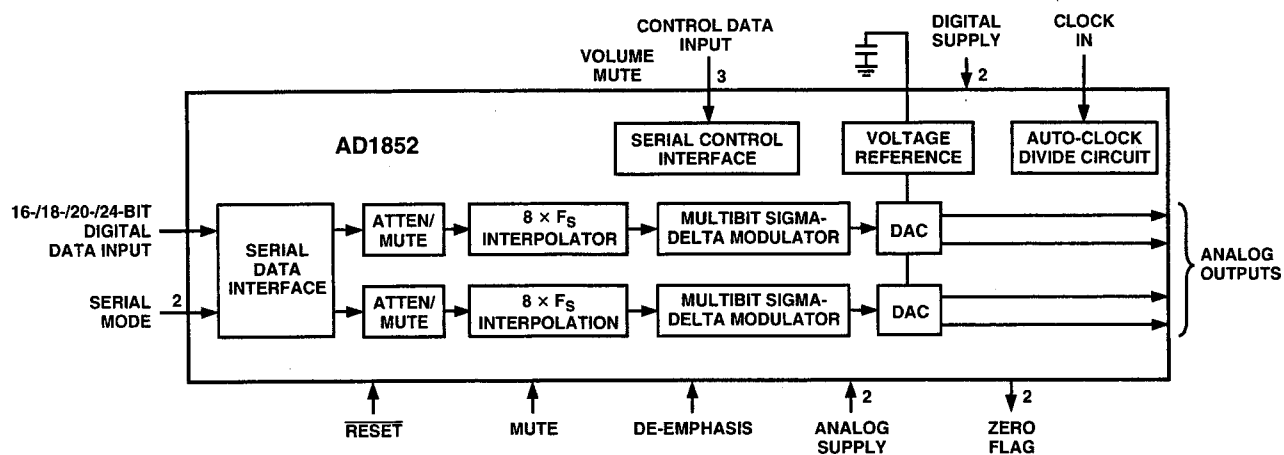

AD1852

PIN FUNCTION DESCRIPTIONS

Pin	Input/Output	Pin Name	Description
1	I	DGND	Digital Ground.
2	I	MCLK	Master Clock Input. Connect to an external clock source at either 256 F _S , 384 F _S , 512 F _S , 768 F _S , or 1024 F _S .
3	I	CLATCH	Latch Input for Control Data. This input is rising-edge sensitive.
4	I	CCLK	Control Clock Input for Control Data. Control input data must be valid on the rising edge of CCLK. CCLK may be continuous or gated.
5	I	CDATA	Serial Control Input, MSB first, containing 16 bits of unsigned data per channel. Used for specifying channel-specific attenuation and mute.
6		NC	No Connect.
7	I	192/48	Selects 48 kHz (LO) or 192 kHz Sample Frequency.
8	O	ZEROR	Right Channel Zero Flag Output. This pin goes HI when Right Channel has no signal input for more than 1024 LR Clock Cycles.
9	I	DEEMP	De-Emphasis. Digital de-emphasis is enabled when this input signal is HI. This is used to impose a 50 µs/15 µs response characteristic on the output audio spectrum at an assumed 44.1 kHz sample rate. Curves for 32 kHz and 48 kHz sample rates may be selected via SPI control register.
10	I	96/48	Selects 48 kHz (LO) or 96 kHz Sample Frequency.
11, 15	I	AGND	Analog Ground.
12	O	OUTR+	Right Channel Positive Line Level Analog Output.
13	O	OUTR-	Right Channel Negative Line Level Analog Output.
14	O	FILTR	Voltage Reference Filter Capacitor Connection. Bypass and decouple the voltage reference with parallel 10 µF and 0.1 µF capacitors to the AGND.
16	O	OUTL-	Left Channel Negative Line Level Analog Output.
17	O	OUTL+	Left Channel Positive Line Level Analog Output.
18	I	AVDD	Analog Power Supply. Connect to Analog 5 V Supply.
19		FILTB	Filter Capacitor Connection. Connect 10 µF capacitor to AGND (Pin 15).
20	I	IDPM1	Input Serial Data Port Mode Control One. With IDPM0, defines 1 of 4 serial modes.
21	I	IDPM0	Input Serial Data Port Mode Control Zero. With IDPM1, defines 1 of 4 serial modes.
22	O	ZEROL	Left Channel Zero Flag Output. This pin goes HI when Left Channel has no signal input for more than 1024 LR Clock Cycles.
23	I	MUTE	Mute. Assert HI to mute both stereo analog outputs. Deassert LO for normal operation.
24	I	RESET	Reset. The AD1852 is reset on the rising edge of this signal. The serial control port registers are reset to the default values. Connect HI for normal operation.
25	I	L/RCLK	Left/Right Clock Input for Input Data. Must run continuously.
26	I	BCLK	Bit Clock Input for Input Data. Need not run continuously; may be gated or used in a burst fashion.
27	I	SDATA	Serial Input, MSB first, containing two channels of 16, 18, 20, and 24 bits of two's complement data per channel.
28	I	DVDD	Digital Power Supply Connect to digital 5 V supply.

Table I. Serial Data Input Mode

IDPM1 (Pin 20)	IDPM0 (Pin 21)	Serial Data Input Format
0	0	Right-Justified
0	1	I ² S-Compatible
1	0	Left-Justified
1	1	DSP

9.12.3IC's Digital Board 1.5

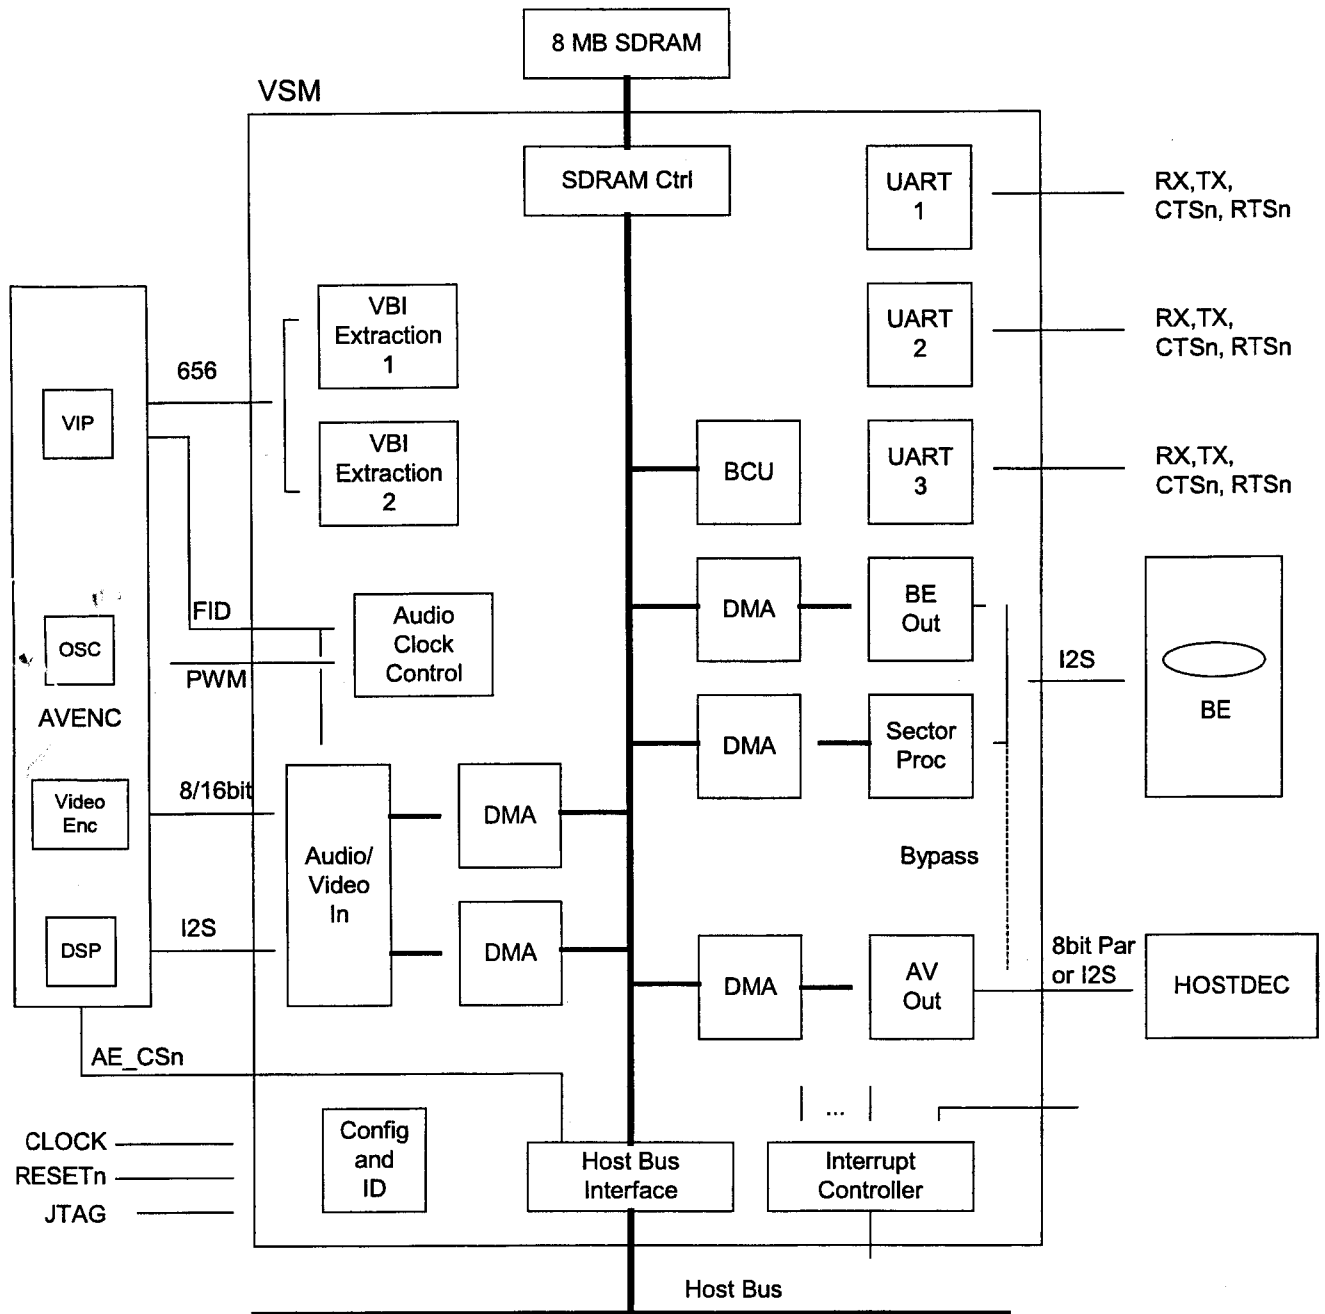
IC7100: VSM Digital Board 1.5, Versatile Stream Manager

Figure 2.1: VSM Overview

PINNING

OVERVIEW

Name	Pins	Type	Function
System			
RESETn	1	In	
SYSCLK (27MHz)	1	In	
Host Interface			
HO_A(21:1)	21	In	
HO_D(15:0)	16	In/Out	
HO_BEn(1:0)	2	In	
HO_RWn	1	In	
HO_CSLn	1	In	
HO_CSHn	1	In	
HO_A22	1	In	
HO_WAIT	1	Out	
HO_PROCCLK	1	In	
Memory Interface			
M_A(13:0)	14	Out	
M_DQ(15:0)	16	In/Out	
M_RASn	1	Out	
M_CASn	1	Out	
M_WEn	1	Out	
M_LDQM	1	Out	
M_UDQM	1	Out	
M_CLKOUT	1	Out	
M_CLKEN	1	Out	
Basic Engine Interface			
BE_BCLK	1	In	
BE_DATI	1	In	
BE_WCLK	1	In	
BE_SYNC	1	In/Out	
BE_FLAG	1	In	
BE_V4	1	In	
BE_DATO	1	Out	
Video Encoder Interface			
VE_D(15:0)	16	In	
VE_DS _n	1	Out	
VE_DTACK _n	1	In	
VE_VIP_ERROR	1	In	Signal coming from SAA7114
Audio Encoder Interface			
AE_CS _n	1	Out	
AE_BCLK	1	In/Out	(CR151,CR157)
AE_WCLK	1	In/Out	(CR151,CR157)
AE_DATA	1	In	(CR157)

Decoder Interface

D_PAR_D(7:0)	8	Out	
D_PAR_DVALID	1	Out	
D_PAR_STR	1	Out	
D_PAR_REQ	1	In	
D_PAR_SYNC	1	Out	
D_WCLK	1	Out	
D_V4	1	Out	

Audio Clock Control

ACC_FID	1	In	(CR200)
ACC_PWM	1	Out	
ACC_ACLK_OSC	1	In	
ACC_ACLK_DAI	1	In	
ACC_ACLK_PLL	1	In	
ACC_ACLK_DEC	1	Out	

VBI Extractor

VBI_IPD(7:0)	8	In	
VBI_ICLK	1	In	

UART 1

UART1_RX	1	In	
UART1_TX	1	Out (OC)	
UART1_CTSn	1	In	
UART1_RTSn	1	Out (OC)	

UART 2

UART2_RX	1	In	
UART2_TX	1	Out (OC)	
UART2_CTSn	1	In	
UART2_RTSn	1	Out (OC)	

UART 3 (vsm1B)

UART3_RX	1	In	
UART3_TX	1	Out	
UART3_CTSn	1	In	
UART3_RTSn	1	Out	

Interrupt Controller

EXTINT(3:0)	4	In	From: VEnc, AEnc, BE, VSync (STi5505)
CPUINT(1:0)	2	Out (OC)	

JTAG

TCK	1	In	Boundary Scan
TDI	1	In	
TDO	1	Out/Z	
TMS	1	In	
TRSTn	1	In	

Test

TEST0	1	In	Amsal Test
TEST1	1	In	

Power Supply

VDD	20	Power	10% of total pins package
VSS	20	Power	10% of total pins package

Total Pins	208		
------------	-----	--	--

IC7403: SAA6752H (EMPRESS), Digital Board 1.5, MPEG-2 Encoder

MPEG-2 video and MPEG-audio/AC-3 audio
encoder with multiplexer

SAA6752HS

5 BLOCK DIAGRAM

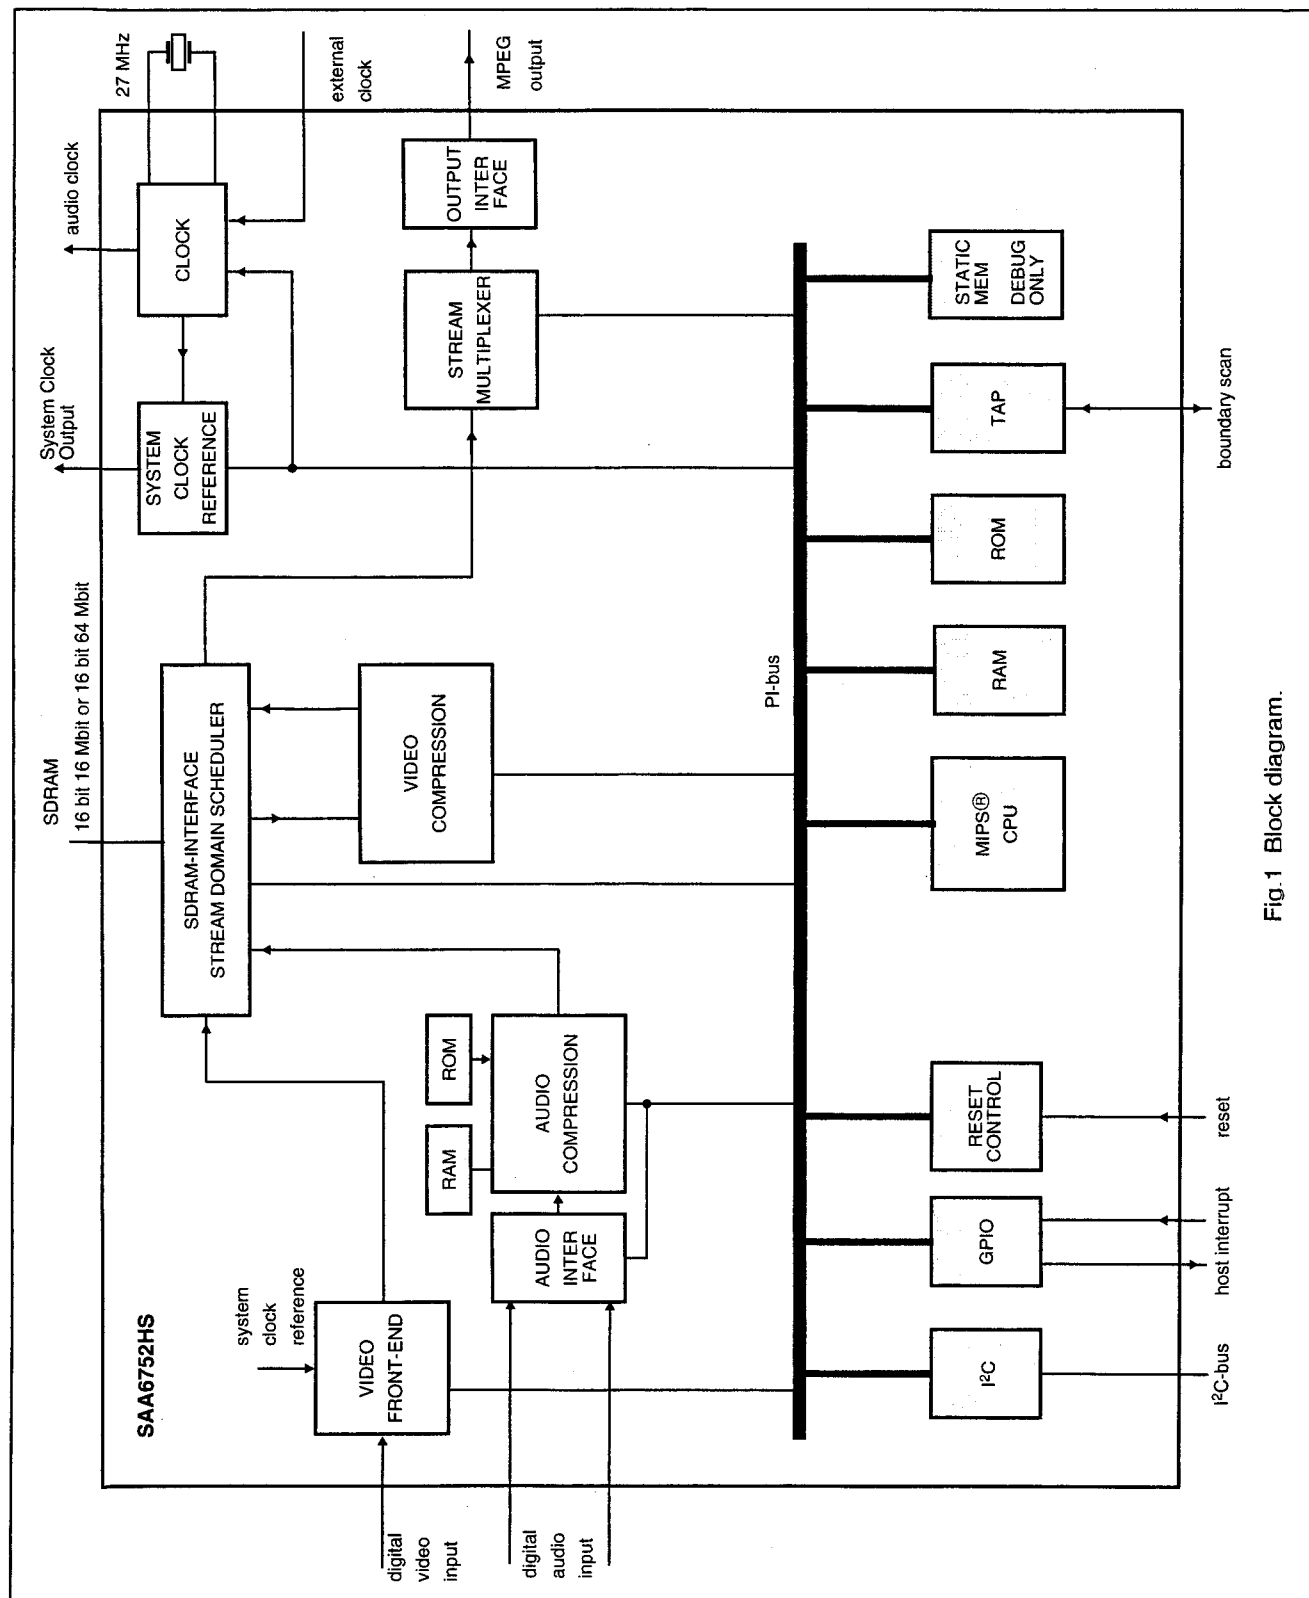


Fig.1 Block diagram.

MPEG-2 video and MPEG-audio/AC-3 audio encoder with multiplexer

SAA6752HS

6 PINNING

SYMBOL	PIN	INPUT/OUTPUT ⁽¹⁾	I _{max} (mA)	DESCRIPTION
V _{SSP}	1	ground	–	pad ground
SDATA1	2	input	–	I ² S-bus serial data input port 1 with internal pull-down resistor
SCLK1	3	input/output	4	I ² S-bus serial clock port 1 with internal pull-down resistor
SWS1	4	input/output	4	I ² S-bus word select port 1 with internal pull-down resistor
V _{DDP}	5	supply	–	pad ring supply voltage (3.3 V)
SDATA2	6	input/output	4	I ² S-bus serial data port 2 with internal pull-down resistor
SCLK2	7	input/output	4	I ² S-bus serial clock port 2 with internal pull-down resistor
SWS2	8	input/output	4	I ² S-bus word select port 2 with internal pull-down resistor
ACLK	9	output	4	audio clock output ($256 \times f_s$ or $384 \times f_s$)
V _{SSP}	10	ground	–	pad ground
IDQ	11	input	–	reserved (recommended connect to pin V _{SSP}) with internal pull-down resistor
YUV0	12	input	–	video input signal bit 0 (LSB)
YUV1	13	input	–	video input signal bit 1
YUV2	14	input	–	video input signal bit 2
YUV3	15	input	–	video input signal bit 3
YUV4	16	input	–	video input signal bit 4
YUV5	17	input	–	video input signal bit 5
YUV6	18	input	–	video input signal bit 6
YUV7	19	input	–	video input signal bit 7 (MSB)
V _{SSP}	20	ground	–	pad ground
HSYNC	21	input	–	horizontal sync input (video) with internal pull-down resistor
VSNC	22	input	–	vertical sync input (video) with internal pull-down resistor
FID	23	input	–	video field identification input (odd/even field) with internal pull-down resistor
VCLK1	24	input	–	video clock input 1 (27 MHz) with internal pull-down resistor
V _{SSCO}	25	ground	–	core ground
V _{SSCO}	26	ground	–	core ground
V _{DDCO}	27	supply	–	core supply voltage (2.5 V)
V _{DDCO}	28	supply	–	core supply voltage (2.5 V)
V _{DDP}	29	supply	–	pad ring supply voltage (3.3 V)
VCLK2	30	input	–	video clock input 2 (27 MHz) with internal pull-down resistor
PDOAV	31	3-state output	4	parallel stream data output for audio/video identifier
PDIDS	32	input	–	parallel stream data input for data strobe (request for packet in Data Expansion Bus Interface (DEBI) slave mode) with internal pull-up resistor
PDOSYNC	33	3-state output	4	parallel stream data output for packet sync
V _{SSP}	34	ground	–	pad ground
PDOVAL	35	3-state output	4	parallel stream data valid output with internal pull-up resistor
PDO0	36	3-state output	4	parallel stream data output bit 0 (LSB)

MPEG-2 video and MPEG-audio/AC-3 audio encoder with multiplexer

SAA6752HS

SYMBOL	PIN	INPUT/OUTPUT ⁽¹⁾	I _{max} (mA)	DESCRIPTION
PDO1	37	3-state output	4	parallel stream data output bit 1
PDO2	38	3-state output	4	parallel stream data output bit 2
V _{DDP}	39	supply	–	pad ring supply voltage (3.3 V)
PDO3	40	3-state output	4	parallel stream data output bit 3
PDO4	41	3-state output	4	parallel stream data output bit 4
PDO5	42	3-state output	4	parallel stream data output bit 5
PDO6	43	3-state output	4	parallel stream data output bit 6
V _{SSP}	44	ground	–	pad ground
PDO7	45	3-state output	4	parallel stream data output bit 7 (MSB)
PDIOCLK	46	input/output	4	parallel stream clock input/output
I2CADDRSEL	47	input	–	I ² C-bus address select input with internal pull-up resistor
SD_DQ15	48	input/output	8	SDRAM data input/output bit 15 (MSB)
V _{DDP}	49	supply	–	pad ring supply voltage (3.3 V)
SD_DQ0	50	input/output	8	SDRAM data input/output bit 0 (LSB)
SD_DQ14	51	input/output	8	SDRAM data input/output bit 14
SD_DQ1	52	input/output	8	SDRAM data input/output bit 1
V _{SSP}	53	ground	–	pad ground
SD_DQ13	54	input/output	8	SDRAM data input/output bit 13
SD_DQ2	55	input/output	8	SDRAM data input/output bit 2
SD_DQ12	56	input/output	8	SDRAM data input/output bit 12
V _{DDP}	57	supply	–	pad ring supply voltage (3.3 V)
SD_DQ3	58	input/output	8	SDRAM data input/output bit 3
SD_DQ11	59	input/output	8	SDRAM data input/output bit 11
SD_DQ4	60	input/output	8	SDRAM data input/output bit 4
SD_DQ10	61	input/output	8	SDRAM data input/output bit 10
V _{SSP}	62	ground	–	pad ground
SD_DQ5	63	input/output	8	SDRAM data input/output bit 5
SD_DQ9	64	input/output	8	SDRAM data input/output bit 9
SD_DQ6	65	input/output	8	SDRAM data input/output bit 6
SD_DQ8	66	input/output	8	SDRAM data input/output bit 8
V _{DDP}	67	supply	–	pad ring supply voltage (3.3 V)
SD_DQ7	68	input/output	8	SDRAM data input/output bit 7
SD_DQM1	69	output	8	SDRAM data mask enable output bit 1
SD_DQM0	70	output	8	SDRAM data mask enable output bit 0 (LSB)
SD_WE	71	output	8	SDRAM write enable output (active LOW)
V _{SSP}	72	ground	–	pad ground
SD_CAS	73	output	8	SDRAM column address strobe output (active LOW)
SD_CLK	74	output	8	SDRAM clock output
SD_RAS	75	output	8	SDRAM row address strobe output (active LOW)
SD_CKE	76	output	8	SDRAM clock enable output

MPEG-2 video and MPEG-audio/AC-3 audio encoder with multiplexer

SAA6752HS

SYMBOL	PIN	INPUT/OUTPUT ⁽¹⁾	I _{max} (mA)	DESCRIPTION
V _{SSCO}	77	ground	–	core ground
V _{SSCO}	78	ground	–	core and substrate ground
V _{DDCO}	79	supply	–	core supply voltage (2.5 V)
V _{DDCO}	80	supply	–	core supply voltage (2.5 V)
V _{DDP}	81	supply	–	pad ring supply voltage (3.3 V)
SD_CS	82	output	8	SDRAM chip select output (active LOW)
SD_A13	83	output	8	SDRAM address output bit 13 (bank selection for 64 Mbit)
SD_A9	84	output	8	SDRAM address output bit 9
SD_A8	85	output	8	SDRAM address output bit 8
V _{SSP}	86	ground	–	pad ground
SD_A11	87	output	8	SDRAM address output bit 11 (bank selection for 16 Mbit)
SD_A7	88	output	8	SDRAM address output bit 7
SD_A12	89	output	8	SDRAM address output bit 12 (bank selection for 64 Mbit)
SD_A6	90	output	8	SDRAM address output bit 6
V _{DDP}	91	supply	–	pad ring supply voltage (3.3 V)
SD_A10	92	output	8	SDRAM address output bit 10
SD_A5	93	output	8	SDRAM address output bit 5
SD_A0	94	output	8	SDRAM address output bit 0 (LSB)
SD_A4	95	output	8	SDRAM address output bit 4
V _{SSP}	96	ground	–	pad ground
SD_A1	97	output	8	SDRAM address output bit 1
SD_A3	98	output	8	SDRAM address output bit 3
SD_A2	99	output	8	SDRAM address output bit 2
SD_DQM3	100	output	8	reserved (do not connect)
V _{DDP}	101	supply	–	pad ring supply voltage (3.3 V)
SD_DQM2	102	output	8	reserved (do not connect)
SD_DQ31	103	input/output	8	reserved (do not connect)
SD_DQ16	104	input/output	8	reserved (do not connect)
V _{SSP}	105	ground	–	pad ground
SD_DQ30	106	input/output	8	reserved (do not connect)
SD_DQ17	107	input/output	8	reserved (do not connect)
SD_DQ29	108	input/output	8	reserved (do not connect)
V _{DDP}	109	supply	–	pad ring supply voltage (3.3 V)
SD_DQ18	110	input/output	8	reserved (do not connect)
SD_DQ28	111	input/output	8	reserved (do not connect)
SD_DQ19	112	input/output	8	reserved (do not connect)
SD_DQ27	113	input/output	8	reserved (do not connect)
V _{SSP}	114	ground	–	pad ground
SD_DQ20	115	input/output	8	reserved (do not connect)
SD_DQ26	116	input/output	8	reserved (do not connect)

MPEG-2 video and MPEG-audio/AC-3 audio
encoder with multiplexer

SAA6752HS

SYMBOL	PIN	INPUT/OUTPUT ⁽¹⁾	I _{max} (mA)	DESCRIPTION
V _{SSCO}	77	ground	–	core ground
V _{SSCO}	78	ground	–	core and substrate ground
V _{DDCO}	79	supply	–	core supply voltage (2.5 V)
V _{DDCO}	80	supply	–	core supply voltage (2.5 V)
V _{DDP}	81	supply	–	pad ring supply voltage (3.3 V)
SD_CS	82	output	8	SDRAM chip select output (active LOW)
SD_A13	83	output	8	SDRAM address output bit 13 (bank selection for 64 Mbit)
SD_A9	84	output	8	SDRAM address output bit 9
SD_A8	85	output	8	SDRAM address output bit 8
V _{SSP}	86	ground	–	pad ground
SD_A11	87	output	8	SDRAM address output bit 11 (bank selection for 16 Mbit)
SD_A7	88	output	8	SDRAM address output bit 7
SD_A12	89	output	8	SDRAM address output bit 12 (bank selection for 64 Mbit)
SD_A6	90	output	8	SDRAM address output bit 6
V _{DDP}	91	supply	–	pad ring supply voltage (3.3 V)
SD_A10	92	output	8	SDRAM address output bit 10
SD_A5	93	output	8	SDRAM address output bit 5
SD_A0	94	output	8	SDRAM address output bit 0 (LSB)
SD_A4	95	output	8	SDRAM address output bit 4
V _{SSP}	96	ground	–	pad ground
SD_A1	97	output	8	SDRAM address output bit 1
SD_A3	98	output	8	SDRAM address output bit 3
SD_A2	99	output	8	SDRAM address output bit 2
SD_DQM3	100	output	8	reserved (do not connect)
V _{DDP}	101	supply	–	pad ring supply voltage (3.3 V)
SD_DQM2	102	output	8	reserved (do not connect)
SD_DQ31	103	input/output	8	reserved (do not connect)
SD_DQ16	104	input/output	8	reserved (do not connect)
V _{SSP}	105	ground	–	pad ground
SD_DQ30	106	input/output	8	reserved (do not connect)
SD_DQ17	107	input/output	8	reserved (do not connect)
SD_DQ29	108	input/output	8	reserved (do not connect)
V _{DDP}	109	supply	–	pad ring supply voltage (3.3 V)
SD_DQ18	110	input/output	8	reserved (do not connect)
SD_DQ28	111	input/output	8	reserved (do not connect)
SD_DQ19	112	input/output	8	reserved (do not connect)
SD_DQ27	113	input/output	8	reserved (do not connect)
V _{SSP}	114	ground	–	pad ground
SD_DQ20	115	input/output	8	reserved (do not connect)
SD_DQ26	116	input/output	8	reserved (do not connect)

MPEG-2 video and MPEG-audio/AC-3 audio encoder with multiplexer

SAA6752HS

SYMBOL	PIN	INPUT/OUTPUT ⁽¹⁾	I _{max} (mA)	DESCRIPTION
SD_DQ21	117	input/output	8	reserved (do not connect)
SD_DQ25	118	input/output	8	reserved (do not connect)
V _{DDP}	119	supply	–	pad ring supply voltage (3.3 V)
SD_DQ22	120	input/output	8	reserved (do not connect)
SD_DQ24	121	input/output	8	reserved (do not connect)
SD_DQ23	122	input/output	8	reserved (do not connect)
EXTCLK	123	input	–	27 MHz external clock input with internal pull-up resistor
V _{SSP}	124	ground	–	pad ground
V _{SSA}	125	ground	–	oscillator analog ground
XTALI	126	analog input	–	crystal oscillator input (27 MHz); note 2
XTALO	127	analog output	–	crystal oscillator output (27 MHz)
V _{DDA}	128	supply	–	oscillator analog supply voltage (2.5 V)
V _{SSCO}	129	ground	–	core ground
V _{SSCO}	130	ground	–	core ground
V _{DDCO}	131	supply	–	core supply voltage (2.5 V)
V _{DDCO}	132	supply	–	core supply voltage (2.5 V)
V _{DDP}	133	supply	–	pad ring supply voltage (3.3 V)
TDI	134	input	–	boundary scan test data input; pin must float or set to HIGH during normal operating; with internal pull-up resistor; note 3
TMS	135	input	–	boundary scan test mode select; pin must float or set to HIGH during normal operating; with internal pull-up resistor; note 3
TCK	136	input	–	boundary scan test clock; pin must be set to LOW during normal operating; with internal pull-up resistor; note 3
TDO	137	3-state output	4	boundary scan test data output; pin not active during normal operating; with 3-state output; note 3
V _{SSP}	138	ground	–	pad ground
TRST	139	input	–	test reset input (active LOW), for boundary scan test (with internal pull-up); notes 3 and 4
CLKOUT	140	output	4	27 MHz system clock output
TEST0	141	input/output	4	reserved (do not connect)
TEST1	142	input/output	4	reserved (do not connect)
V _{DDP}	143	supply	–	pad ring supply voltage (3.3 V)
TEST2	144	input/output	4	reserved (do not connect)
SDA	145	input/open-drain output	–	serial data input/output (I ² C-bus)
SCL	146	input/open-drain output	–	serial clock input/output (I ² C-bus)
RESET	147	input	–	reset input (active LOW); with internal pull-up resistor
V _{SSP}	148	ground	–	pad ground
RTS	149	output	4	reserved (do not connect); Universal Asynchronous Receiver/Transmitter (UART) request to send output (active LOW)

MPEG-2 video and MPEG-audio/AC-3 audio encoder with multiplexer

SAA6752HS

SYMBOL	PIN	INPUT/OUTPUT ⁽¹⁾	I _{max} (mA)	DESCRIPTION
CTS	150	input	–	reserved (recommended connect to pin V _{DDP}); UART clear to send input; external static memory select input (active LOW); with internal pull-up resistor
RXD	151	input	–	reserved (recommended connect to pin V _{DDP}); UART receive data; internal boot select input; with internal pull-up resistor
TXD	152	output	4	reserved (do not connect); UART transmit data
V _{DDP}	153	supply	–	pad ring supply voltage (3.3 V)
SM_LB	154	input/output	4	reserved (do not connect)
SM_UB	155	input/output	4	reserved (do not connect)
H_IRF	156	3-state output	4	host interrupt ?ag output; with internal pull-up resistor
V _{SSP}	157	ground	–	pad ground
SM_OE	158	output	4	reserved (do not connect), static memory output enable output (active LOW)
SM_A9	159	output	4	reserved (do not connect), static memory address output bit 9
SM_A10	160	output	4	reserved (do not connect), static memory address output bit 10
V _{DDP}	161	supply	–	pad ring supply voltage (3.3 V)
SM_A8	162	output	4	reserved (do not connect), static memory address output bit 8
SM_A11	163	output	4	reserved (do not connect), static memory address output bit 11
SM_A7	164	output	4	reserved (do not connect), static memory address output bit 7
SM_A12	165	output	4	reserved (do not connect), static memory address output bit 12
V _{SSP}	166	ground	–	pad ground
SM_A6	167	output	4	reserved (do not connect), static memory address output bit 6
SM_A13	168	output	4	reserved (do not connect), static memory address output bit 13
SM_A5	169	output	4	reserved (do not connect), static memory address output bit 5
SM_A14	170	output	4	reserved (do not connect), static memory address output bit 14
V _{DDP}	171	supply	–	pad ring supply voltage (3.3 V)
SM_WE	172	output	4	reserved (do not connect), static memory write enable output (active LOW)
SM_D7	173	input/output	4	reserved (do not connect), static memory data input/output bit 7 with internal pull-down resistor
SM_D8	174	input/output	4	reserved (do not connect), static memory data input/output bit 8 with internal pull-down resistor
SM_D6	175	input/output	4	reserved (do not connect), static memory data input/output bit 6 with internal pull-down resistor
V _{SSP}	176	ground	–	pad ground
SM_D9	177	input/output	4	reserved (do not connect), static memory data input/output bit 9 with internal pull-down resistor
SM_D5	178	input/output	4	reserved (do not connect), static memory data input/output bit 5 with internal pull-down resistor
SM_D10	179	input/output	4	reserved (do not connect), static memory data input/output bit 10 with internal pull-down resistor


MPEG-2 video and MPEG-audio/AC-3 audio encoder with multiplexer

SAA6752HS


SYMBOL	PIN	INPUT/OUTPUT ⁽¹⁾	I _{max} (mA)	DESCRIPTION
SM_D4	180	input/output	4	reserved (do not connect), static memory data input/output bit 4 with internal pull-down resistor
V _{SSCO}	181	ground	–	internal pre-driver and substrate ground
V _{SSCO}	182	ground	–	core ground
V _{DDCO}	183	supply	–	core supply voltage (2.5 V)
V _{DDCO}	184	supply	–	internal pre-driver supply voltage (2.5 V)
V _{DDP}	185	supply	–	pad ring supply voltage (3.3 V)
SM_D11	186	input/output	4	reserved (do not connect), static memory data input/output bit 11 with internal pull-down resistor
SM_D3	187	input/output	4	reserved (do not connect), static memory data input/output bit 3 with internal pull-down resistor
SM_D12	188	input/output	4	reserved (do not connect), static memory data input/output bit 12 with internal pull-down resistor
SM_D2	189	input/output	4	reserved (do not connect), static memory data input/output bit 2 with internal pull-down resistor
V _{SSP}	190	ground	–	pad ground
SM_D13	191	input/output	4	reserved (do not connect), static memory data input/output bit 13 with internal pull-down resistor
SM_D1	192	input/output	4	reserved (do not connect), static memory data input/output bit 1 with internal pull-down resistor
SM_D14	193	input/output	4	reserved (do not connect), static memory data input/output bit 14 with internal pull-down resistor
SM_D0	194	input/output	4	reserved (do not connect), static memory data input/output bit 0 (LSB) with internal pull-down resistor
V _{DDP}	195	supply	–	pad ring supply voltage (3.3 V)
SM_D15	196	input/output	4	reserved (do not connect), static memory data input/output bit 15 (MSB) with internal pull-down resistor
SM_CS3	197	output	4	reserved (do not connect), static memory chip select output for external ROM or RAM (active LOW)
SM_A4	198	output	4	reserved (do not connect), static memory address output bit 4
SM_A3	199	output	4	reserved (do not connect), static memory address output bit 3
V _{SSP}	200	ground	–	pad ground
SM_A2	201	output	4	reserved (do not connect), static memory address output bit 2
SM_A15	202	output	4	reserved (do not connect), static memory address output bit 15
SM_A1	203	output	4	reserved (do not connect), static memory address output bit 1
SM_A16	204	output	4	reserved (do not connect), static memory address output bit 16
V _{DDP}	205	supply	–	pad ring supply voltage (3.3 V)
SM_A0	206	output	4	reserved (do not connect), static memory address output bit 0 (LSB)
SM_A17	207	output	4	reserved (do not connect), static memory address output bit 17 (MSB)
SM_CS0	208	output	4	reserved (do not connect)

IC7700: FLI2200, Digital Board 1.5, Deinterlacer

Simplified Block Diagram

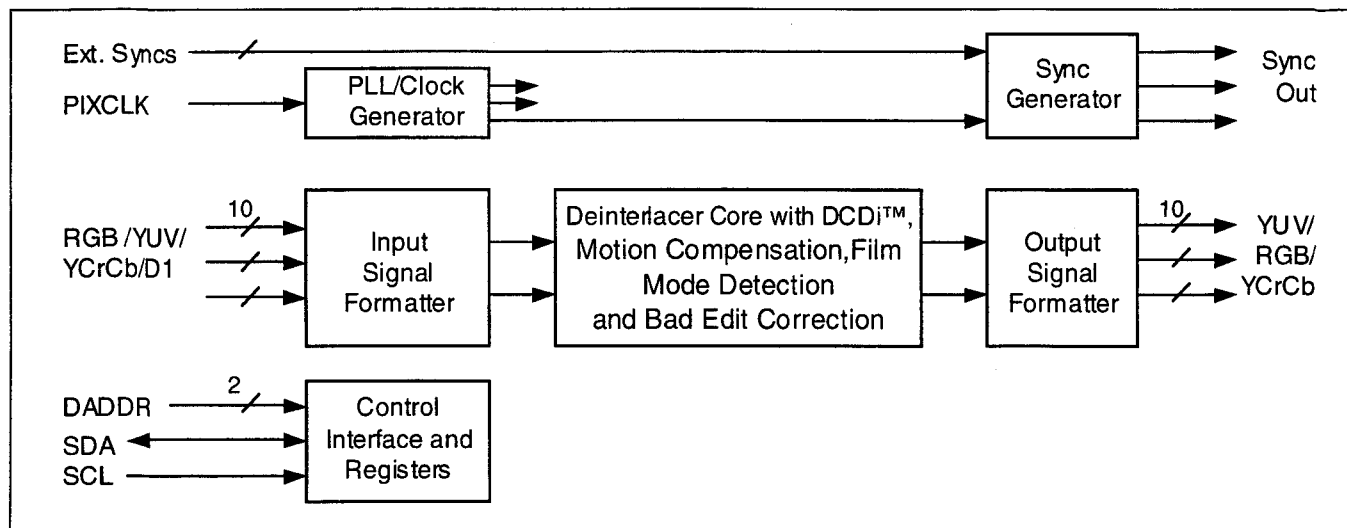

Pin description

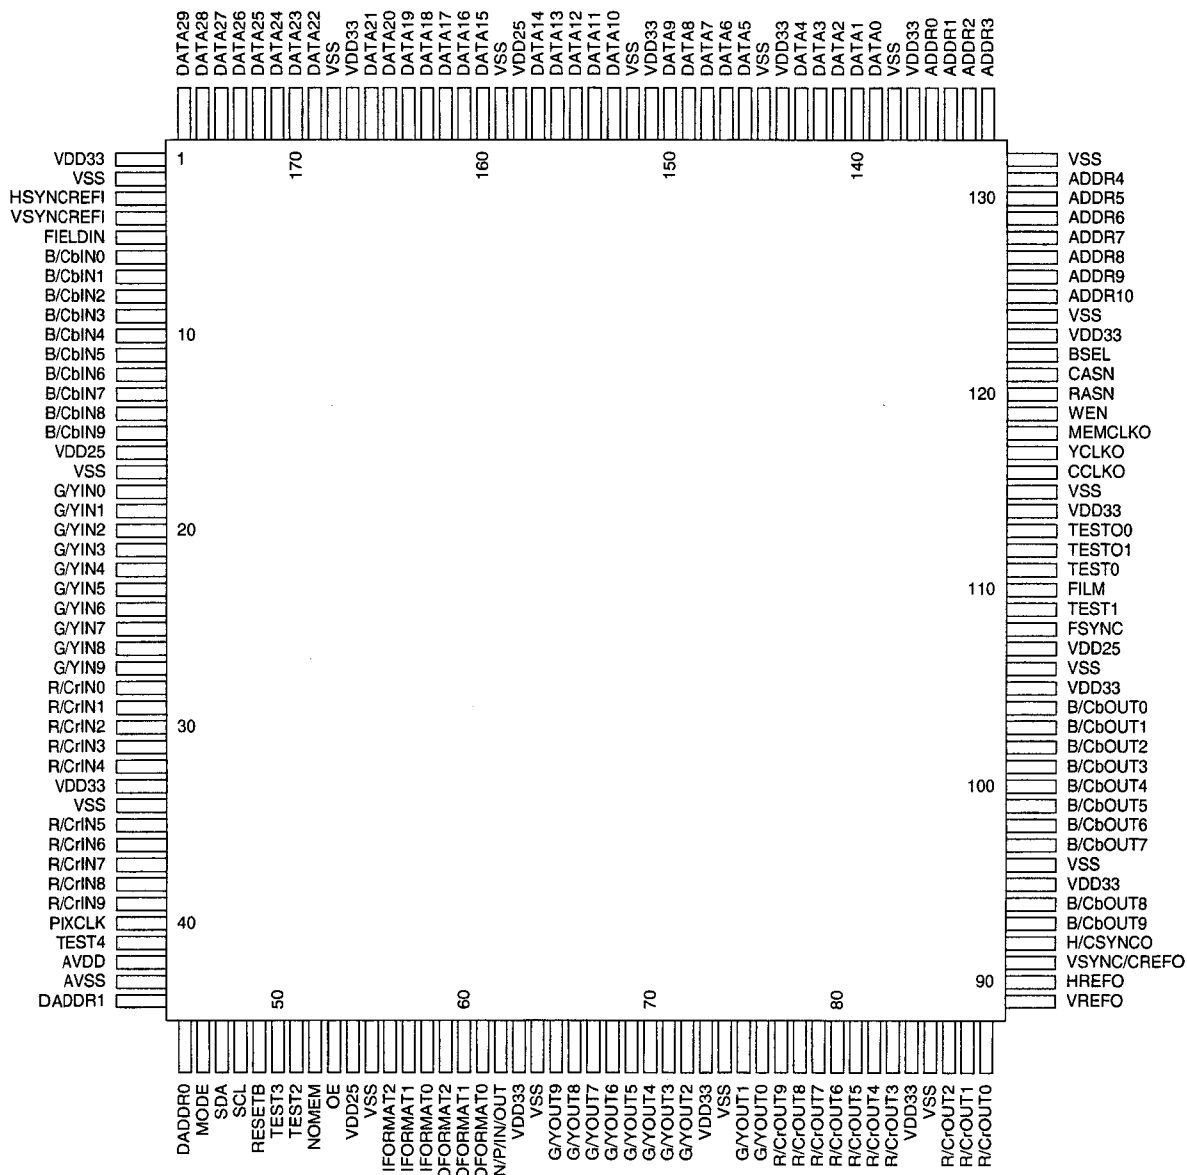

Pin #	Name	Description
52	NOMEM	No Memory Mode control input. This pin controls the operation of the FLI2200 as follows: When this pin is set low the device is used with external field memories and operates in the full set of deinterlacing modes, i.e., motion adaptive video deinterlacing and full frame film source deinterlacing using 3:2 pulldown detection (2:2 pulldown for 625/50 sources). When this pin is set high the FLI2200 is forced into the intra-field only deinterlacing mode, which requires no external memories, allowing the FLI2200 to be used in low-cost applications where the ultimate video quality is not a requirement. To ensure proper startup of the SDRAMs this pin should be set high during the power-up sequence. This can be overridden by the NMOvr bit, bit 1 in register 05 _H , allowing this function to be set or changed via the I ² C bus. Please refer to the description of register 05 _H for details.
27-18	G/YIN _{9,0}	10-bit green or luminance signal input bus. The mode is set by the IFORMAT _{2,0} pins. This can be overridden by the IFmtOvr bit, bit 3 in register 00 _H , allowing this function to be set or changed via the I ² C bus. Please refer to the description of register 00 _H for details. This signal is sampled on the rising edge of PIXCLK.
15-6	B/CbIN _{9,0}	10-bit blue or Cb chroma signal input bus. The mode is set by the IFORMAT _{2,0} pins. This can be overridden by the IFmtOvr bit, bit 3 in register 00 _H , allowing this function to be set or changed via the I ² C bus. Please refer to the description of register 00 _H for details. Bits 6, 4 and 3 in register 08 _H specify the busses used in the multiplexed modes. In all cases the signals are sampled on the rising edges of PIXCLK. In the Y Cb Cr and Y Pb Pr modes the Cb or Pb signal is sampled on alternate rising edges of PIXCLK in 4:2:2 mode. The frequency of PIXCLK will be 27 MHz in the multiplexed Y/Cb/Cr mode and 13.5 MHz in all other modes. These pins should be tied low when not used.
39-35 32-28	R/CrIN _{9,0}	10-bit red or Cr chroma signal input bus. The mode is set by the IFORMAT _{2,0} pins. This can be overridden by the IFmtOvr bit, bit 3 in register 00 _H , allowing this function to be set or changed via the I ² C bus. Please refer to the description of register 00 _H for details. Bits 6, 4 and 3 in register 08 _H specify the busses used in the multiplexed modes. In all cases the signals are sampled on the rising edges of PIXCLK. In the Y Cb Cr mode the Cr signal is sampled on alternate rising edges of PIXCLK in 4:2:2 mode. The frequency of PIXCLK will be 27 MHz in the multiplexed Y/Cb/Cr mode and 13.5 MHz in all other modes. These pins should be tied low when not used.
3	HSYNCREFI	Horizontal sync or reference. The horizontal sync or reference of the input signal should be connected to this pin. The function is programmed with bit 4 in register 00 _H . The polarity and position of the sync or reference pulse relative to the start of active video are both programmable within a small range. When the FLI2200 is used in the ITU-R BT 601/D1 input mode with embedded syncs (IFormat = 110) this input is not used and should be tied low; in this case all sync information will be derived from the signal.
4	VSYNCREFI	Vertical sync or reference. The vertical sync or reference of the input signal should be connected to this pin. The function is programmed with bit 4 in register 00 _H . The polarity and position of the sync or reference pulse relative to the start of active video are both programmable within a small range. When the FLI2200 is used in the ITU-R BT 601/D1 input mode with embedded syncs (IFormat = 110) this input is not used and should be tied low; in this case all sync information will be derived from the signal.
5	FLDIN	Field identifier input. The field identifier output of the source signal should be connected to this pin. A low setting signifies an even field and a high level signifies an odd field. When bit 4 in register 00 _H is set low, the input timing is based on HREF and VREF and this signal is required. When this bit is set high the input timing is based on HSYNC and VSYNC and this signal is generated internally and is not required. When bit 5 in register 06 is set high this signal is also used as the frame boundary identifier for 30 Hz film sources.

Pin Connections and Functions

Pin #	Name	Description
See list	V _{SS}	Ground connections. Connect to the digital ground plane. Pins: 2, 17, 34, 55, 64, 74, 85, 96, 106, 115, 124, 132, 138, 145, 152, 159, 168
See list	V _{DD33}	Pad Ring digital power connections. Connect to the digital 3.3 volt power supply and decouple to the digital ground plane. Pins: 1, 33, 63, 73, 84, 95, 105, 114, 123, 137, 144, 151, 167
See list	V _{DD25}	Core Logic digital power connections. Connect to the digital 2.5 volt power supply and decouple to the digital ground plane. Pins: 16, 54, 107, 158
43	AV _{SS}	Ground connection for the clock PLL circuits. Connect to the digital ground plane
42	AV _{DD}	Analog power connections for the clock PLL circuit. Connect to a separately decoupled 2.5 volt power supply and decouple directly to the AV _{SS} pin..
49	RESETB	Reset. When this input is set low it will reset all the internal registers to the default states. Refer to the section on the control registers for details of these states. The device must be reset after it is powered-up.
53	OE	When this pin is set high the outputs of the FLI2200 will be enabled; when it is set low the outputs will be set into a high-impedance state.
56-58	IFORMAT ₂₋₀	Input signal format control. The settings of these pins set the format of the input signal. This can be overridden by the IFmtOvr bit, bit 3 in register 00 _H , allowing this function to be set or changed via the I ² C bus. Please refer to the description of register 00 _H for details.
59-61	OFORMAT ₂₋₀	Output signal format control. The settings of these pins set the format of the output signal. This can be overridden by the OFmtOvr bit, bit 3 in register 07 _H , allowing this function to be set or changed via the I ² C bus. Please refer to the description of register 07 _H for details.
44-45	DADDR ₁₋₀	The settings of DADDR ₁₋₀ allow the device address of the control bus to be programmed to prevent conflict with the other devices connected to the bus. DADDR ₁₋₀ allow the device address to be set to any of the following values: C0/C1 _H , C2/C3 _H , E0/E1 _H , E2/E3 _H . Please refer to the section "Control Bus Operation and Protocol" for further information.
46	MODE	When this pin is set low the control bus will operate in the slave mode; allowing the device to be programmed from an external controller. When it is set high the FLI2200 will self-program from an external I ² C memory connected to the bus. Please refer to the "Control Bus Operation and Control Protocol" section for more details.
47	SDA	2-wire serial control bus data. Data can be written to the control registers via this pin when it is in the input mode and data can be read from the status registers when it is in the output mode. Refer to the section on the serial port for timing and format details and to the section on the registers for programming information.
48	SCL	2-wire serial control bus clock. When the control port operates in slave mode this pin will be an input and when it operates in the self programming mode it will be an output.
40	PIXCLK	Pixel clock input. This clock is used to drive all the circuits in the FLI2200. An internal PLL is used to upconvert this clock to provide the master clock signal and other clocks used internally. Note that when the FLI2200 is used in the D1 input mode the PIXCLK input should run at the rate of two cycles per pixel (one for luma and one for chroma).
62	N/P/IN/OUT	NTSC/PAL input or output. The default function of this pin is NTSC/PAL signal indicator output. When the input video signal is a 525 line signal this pin will be set high and when it is a 625 line signal the pin is set low. This function of this pin can be programmed to be an input according to the setting of this pin if the NPOp ₁₋₀ bits, bits 5-4 in register 03 _H , are set to 00 _H , overriding the internal line counter. i.e., it will treat the signal as a 525 line signal when it is set high and a 625 line signal when it is set low.


Pin #	Name	Description
65-72 75-76	G/YOUT _{9,0}	Green or luminance output bus. In the RGB mode this output is the Green signal and in the YCbCr mode it is the Y signal. The mode is set by the OFORMAT _{2,0} pins. This can be overridden by the OFmtOvr bit, bit 3 in register 07 _H , allowing this function to be set or changed via the I ² C bus. Please refer to the description of register 07 _H for details. The signal is clocked out on the falling edge of YCLKO.
93-94 97-104	B/CbOUT _{9,0}	Blue or Cb chrominance output bus. In the RGB mode this output is the Blue signal, in the Y Cb Cr mode it is the Cb signal. The mode is set by the OFORMAT _{2,0} pins. This can be overridden by the OFmtOvr bit, bit 3 in register 07 _H , allowing this function to be set or changed via the I ² C bus. Please refer to the description of register 07 _H for details. The busses used in the multiplexed modes are set by means of bit 5 in register 08 _H . The signal is clocked out on the falling edge of YCLKO in the RGB and YUV 4:4:4 modes, on the falling edge of YCLKO prior to the next rising edge of CCLKO in the YUV 4:2:2 mode, and on the rising edge of MEMCLKO in the multiplexed YCbCr (pseudo D1) mode.
77-83 86-88	R/CrOUT _{9,0}	Red or Cr chrominance output bus. In the RGB mode this output is the Red signal, in the YCbCr mode it is the Cr signal. The mode is set by the OFORMAT _{2,0} pins. This can be overridden by the OFmtOvr bit, bit 3 in register 07 _H , allowing this function to be set or changed via the I ² C bus. Please refer to the description of register 07 _H for details. The busses used in the multiplexed modes are set by means of bit 5 in register 08 _H . The signal is clocked out on the falling edge of YCLKO in the RGB and YUV 4:4:4 modes, on the falling edge of YCLKO prior to the next rising edge of CCLKO in the YUV 4:2:2 mode, and on the rising edge of MEMCLKO in the multiplexed YCbCr (pseudo D1) mode.
116	CCLKO	Chroma output sampling clock. This clock is derived from PIXCLK and will be at half the frequency of YCLKO. In 30-bit 4:2:2 output mode the chroma output signals will change on the falling edge of YCLKO prior to the next rising edge this clock.
117	YCLKO	Luma output sampling clock. This clock is derived from PIXCLK and is double the frequency of PIXCLK. In 30-bit and 20-bit output modes the output signals will change on the falling edge of this clock.
89	VREFO	Start of active field or frame indicator. This signal goes high to indicate the first active line in each field or frame and goes low during the vertical blanking interval. The polarity and timing of this signal are programmable.
90	HREFO	Start of active line indicator output. This signal goes high to indicate the first active pixel in each line and goes low during the horizontal blanking interval. The polarity and timing of this signal are programmable.
91	VSNC/ CREFO	Vertical sync output. This signal provides the vertical sync function for the outputs. Its polarity is programmable to be active high or active low. It can also be programmed to be a composite reference for applications requiring this instead of sync.
92	H/CSYNCO	Horizontal or composite sync output. This signal provides the horizontal sync function for the outputs. Its polarity is programmable to be active high or active low. This signal can also be programmed to be the composite sync output, CSYNC.
108	FSYNC	Film mode sync output. When film mode is detected this pin will toggle in sync with the 3:2 (NTSC) or 2:2 (PAL and 30 Hz film in NTSC) pulldown sequence detected in the source.
110	FILM	Film mode detector output. This pin will be set high when the FLI2200 detects that the video input was converted from 24 fps film with a teleciné machine. If film mode is not detected this pin will be set low.

Pin #	Name	Description
125-131 133-136	ADDR ₁₀₋₀	SDRAM Address bus. This signal bus is used to address the external SDRAM(s) used for field memories. It should be connected to the A ₁₀₋₀ bus of the memory chip(s). Please refer to the Applications section of this data sheet for further details.
176-169 166-160 157-153 150-146 143-139	DATA ₂₉₋₀	SDRAM Data bus. This signal bus is used to transfer the data to and from the external SDRAM(s) used for field memories. It should be connected to the DQ ₂₉₋₀ bus of the memory chip when using a 64 Mbit SDRAM. When using two 16 Mbit SDRAMs this 30-bit bus may be connected to the two 16-bit data busses of the memories in two ways: either connect 16 lines to one chip and 14 to the other, or connect 15 to both. In all cases the two unused data lines on the memory chip(s) should be connected to ground via 22 k Ω resistors. Please refer to the Applications section of this data sheet for further details.
118	MEMCLKO	SDRAM clock and 2x output sampling clock. This clock is derived from PIXCLK and will be at double the frequency of YCLKO. This active signal should be connected to the CLK pin(s) on the SDRAM(s). When the 10-bit output mode selected the output signals will also change at this clock rate and this should then be used as the output clock..
119	WEN	SDRAM Write Enable. This active low signal should be connected to the WE pin(s) on the SDRAM(s).
120	RASN	SDRAM Row Address Select. This active low signal should be connected to the RAS pin(s) on the SDRAM(s).
121	CASN	SDRAM Column Address Select. This active low signal should be connected to the CAS pin(s) on the SDRAM(s).
122	BSEL	SDRAM Bank Select. When using two 16 Mbit SDRAMs this signal should be connected to the BA (also called BS or A ₁₁) pin on both SDRAMs. When using a 64 Mbit SDRAM this signal should be connected to the BA0 (also called BS0 or A ₁₁) pin on the SDRAM and BA1/BS1 (also called BA when BA0 is referred to as A ₁₁) should be tied low.
41, 50, 51, 109, 111	TEST ₄₋₀	These pins are used for test purposes only and should always be tied low for normal operation.
112, 113	TESTO ₁₋₀	These pins are test outputs and should be left unconnected in normal operation.

9.12.4 IC's Divio 1.8

IC7400: uPD72852, DVIO Board, IEEE1394 Physical Layer Chip

BLOCK DIAGRAM

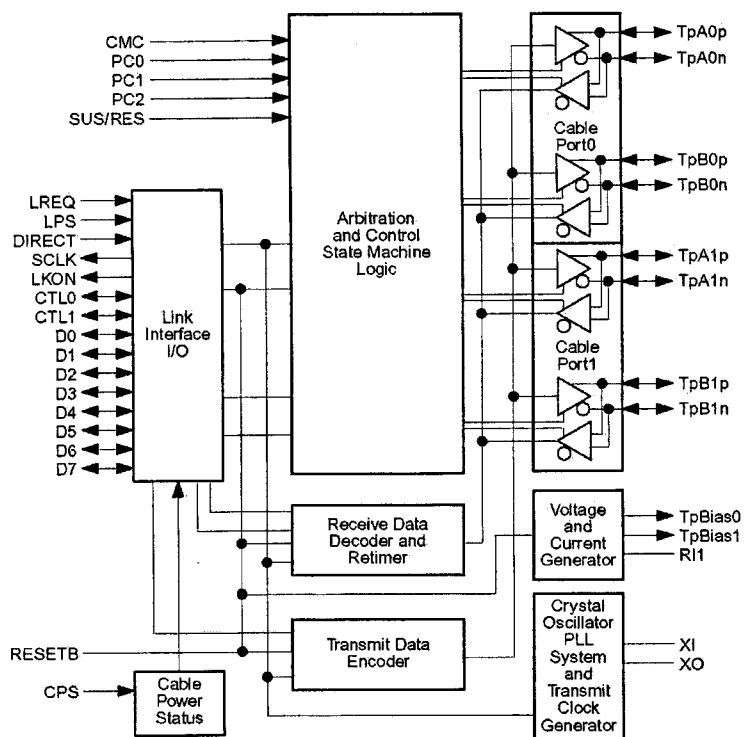

1.1 Cable Interface Pins

Name	Pin No.	I/O	Function
TpA0p	39	I/O	Port 0 twisted pair cable A positive phase I/O
TpA0n	38	I/O	Port 0 twisted pair cable A negative phase I/O
TpB0p	37	I/O	Port 0 twisted pair cable B positive phase I/O
TpB0n	36	I/O	Port 0 twisted pair cable B negative phase I/O
TpA1p	46	I/O	Port 1 twisted pair cable A positive phase I/O
TpA1n	45	I/O	Port 1 twisted pair cable A negative phase I/O
TpB1p	44	I/O	Port 1 twisted pair cable B positive phase I/O
TpB1n	43	I/O	Port 1 twisted pair cable B negative phase I/O
SUS/RES	19	I	Suspend/Resume function select 1: Suspend/Resume on (IEEE1394a-2000 compliant) 0: Suspend/Resume off (P1394a draft 1.3 compliant)
CPS	32	I	Cable power status Connect to the cable through a 390 k Ω resistor and to GND through a 100 k Ω resistor. 0: Cable power fail 1: Cable power on

1.2 Link Interface Pins

Name	Pin No.	I/O	Function
D0	8	I/O	Data input/output (bit 0)
D1	9	I/O	Data input/output (bit 1)
D2	11	I/O	Data input/output (bit 2)
D3	12	I/O	Data input/output (bit 3)
D4	14	I/O	Data input/output (bit 4)
D5	15	I/O	Data input/output (bit 5)
D6	17	I/O	Data input/output (bit 6)
D7	18	I/O	Data input/output (bit 7)
CTL0	5	I/O	Link interface control (bit 0)
CTL1	6	I/O	Link interface control (bit 1)
LREQ	63	I	Link request input
SCLK	2	O	Link control output clock LPS 1: 49.152 MHz output LPS 0: Clamp to 0 (The clock signal will be output within 25 μ sec after change to "0")
LPS	59	I	Link power status input 0: Link power off 1: Link power on (PHY/Link direct connection)
LKON	58	O	Link-on signal output Link-on signal is 6.144 MHz clock output. Please refer to 4.2 Link-on Indication.
DIRECT	50	I	PHY/Link isolation barrier control input 0: Isolation barrier 1: PHY/Link direct connection

1.3 Control Pins

Name	Pin No.	I/O	Function
PC0	26	I	Power class set input
PC1	27	I	This pin status will be loaded to Pwr_class bit which allocated to PHY register 4H.
PC2	28	I	IEEE1394a-2000 chapter [4.3.4.1]
CMC	30	I	Configuration manager capable setting This pin status will be loaded to Contender bit which allocated to PHY register 4H. 0: Non contender 1: Contender
RESETB	55	I	Power-on reset input Connect to GND through a 0.1 μ F capacitor. 0: Reset 1: Normal
SPD	61	I	Speed select 0: MAX. S200 1: MAX. S400

1.4 IC


Name	Pin No.	I/O	Function
IC(AL)	29, 51	-	Internally Connected (Low Clamped) Connect to GND.
IC(DL)	3	-	Internally Connected (Low Clamped) Connect to GND.

1.5 Power Supply Pins


Name	Pin No.	I/O	Function
AV _{DD}	25, 31, 40, 47, 54	-	Analog power
AGND	24, 33, 35, 42, 49, 52, 53	-	Analog GND
DV _{DD}	4, 10, 20, 56, 60	-	Digital V _{DD}
DGND	1, 7, 13, 16, 21, 57, 64	-	Digital GND

1.6 Other Pins

Name	Pin No.	I/O	Function
TpBias0	41	O	Port 0 twisted pair output
TpBias1	48	O	Port 1 twisted pair output
RI1	34	-	Resistor connection pin1 for reference current generator Connect to GND through a 9.1 k Ω resistor.
XI	23	-	Crystal oscillator connection XI
XO	22	-	Crystal oscillator connection XO
TEST	62	-	Test pin Internally connected (Low clamped). Connect to GND.

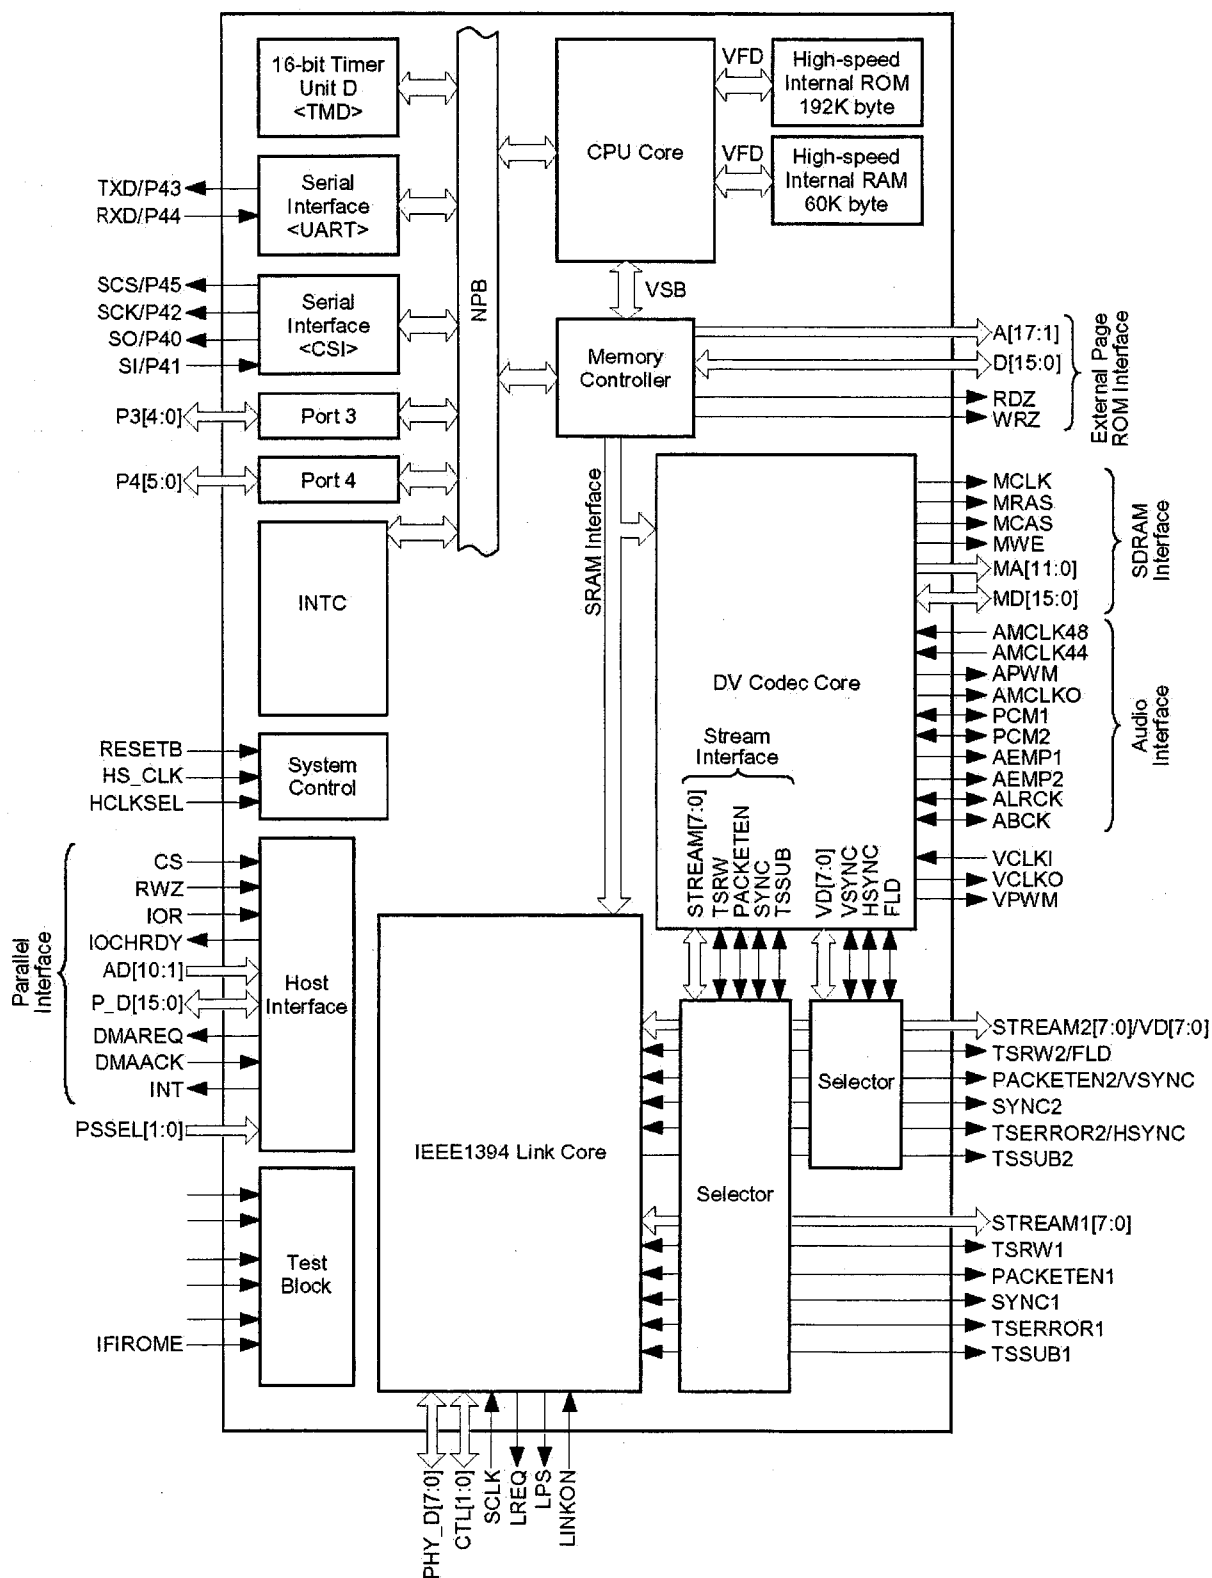IC7431: μ PD72893, DVIO Board, IEEE1394 Link Layer Chip and DV Decoder**BLOCK DIAGRAM** **μ PD72893 Block Diagram**

DV Codec Unit Block Diagram

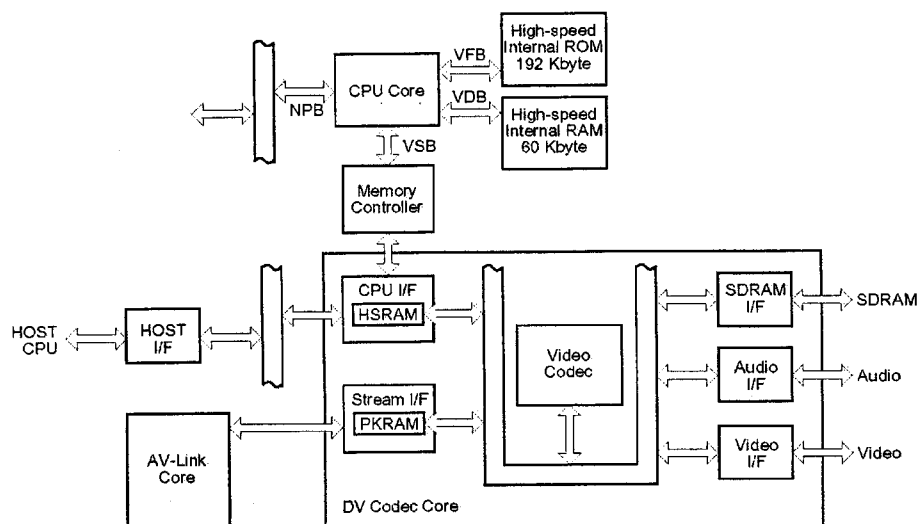

1. PIN FUNCTIONS

(1) Link-related pins

Pin Name	Pin No.	I/O	Function	Active	After Reset	Alternate Function
LINKON	18	I	Link-on signal input. Clock input. Inputs 0 if LPS is active.	—	I	—
LPS	17	O	Link power status output Link power OFF : 0 Link power ON : 2.7 MHz pulse output (54 MHz host clock divided by 20)	—	O	—
LREQ	16	O	Link request output	—	O	—
SCLK	15	I	Clock input for Link control When LPS is active : 49.152 MHz input LPS = 0 : Fixed to 0	—	I	—
CTL[1:0]	12, 13	I/O	PHY/Link control signal I/O	—	I	—
PHY_D[7:0]	2 to 4, 6 to 8, 10, 11	I/O	Data I/O between PHY and Link	—	I	—
STREAM1[7:0]	26 to 19	I/O	ISO data bus of stream interface 1 ^{Note}	—	I	—
PACKETEN1	27	I/O	Packet enable signal I/O to/from stream interface 1 ^{Note}	H/L	I	—
TSERROR1	28	I/O	Packet error signal I/O to/from stream interface 1 ^{Note}	H/L	I	—
TSRW1	29	I/O	Data read/write enable signal I/O to/from stream interface 1 ^{Note}	—	I	—
SYNC1	30	I/O	Frame sync signal I/O to/from stream interface 1 ^{Note}	H/L	I	—
TSSUB1	32	I/O	I : Inputs the packet gap signal when the stream is input through the stream interface O : Not used. Connect this pin to VDD or GND via a resistor.	H/L	I	—
STREAM2[7:0]	47 to 40	I/O	ISO data bus of stream interface 2 ^{Note}	—	I	VD[7:0]
PACKETEN2	33	I/O	Packet enable signal I/O to/from stream interface 2 ^{Note}	H/L	I	VSYSN
TSERROR2	34	I/O	Packet error signal I/O to/from stream interface 2 ^{Note}	H/L	I	HSYSN
TSRW2	36	I/O	Data read/write enable signal I/O to/from stream interface 2 ^{Note}	—	I	FLD
SYNC2	37	I/O	Frame sync signal I/O to/from stream interface 2. ^{Note}	H/L	I	—
TSSUB2	38	O	Not used. Leave open.	—	O	—

Note When this signal is switched for transmission or reception to/from IEEE1394, it must be controlled that output does not conflict.

To prevent a floating state, connect a pull-up or pull-down resistor to this pin.

(2) Video interface pins

Pin Name	Pin No.	I/O	Function	Active	After Reset	Alternate Function
VCLKI	50	I	Video clock input (27 MHz)	—	—	—
VCLKO	51	O	Video clock output (27 MHz)	—	—	—
VD[7:0]	47 to 40	I/O	Video data signal	—	—	STREAM2[7:0]
VSYN	33	I/O	Vertical sync video signal ^{Note}	L	—	PACKETEN2
HSYN	34	I/O	Horizontal sync video signal ^{Note}	L	—	TSERROR2
FLD	36	I/O	Field index signal ^{Note}	—	—	TSRW2
VPWM	53	O	PWM signal for video PLL	—	—	—

Note When this signal is switched for transmission or reception to/from IEEE1394, it must be controlled that output does not conflict.

(3) Audio interface pins

Pin Name	Pin No.	I/O	Function	Active	After Reset	Alternate Function
AMCLK48	104	I	Audio master clock input (for 48 kHz sampling frequency)	—	—	—
AMCLK44	103	I	Audio master clock input (for 44.1 kHz sampling frequency)	—	—	—
AMCKO	101	O	Audio master clock output	—	—	—
PCM1	96	I/O	Audio PCM serial data ^{Note} With 2 channels: CH1 With 4 channels: CH1 or CH1 and CH2 mixed	—	—	—
PCM2	97	I/O	Audio PCM serial data ^{Note} With 2 channels: Mute With 4 channels: CH2	—	—	—
AEMP1	98	O	PCM1 emphasis ON/OFF for PCM1 output	H	—	—
AEMP2	100	O	PCM2 emphasis ON/OFF for PCM2 output	H	—	—
ALRCK	93	I/O	Audio LR clock ^{Note} L-ch: High R-ch: Low	—	—	—
ABCK	94	I/O	Audio bit clock ^{Note}	—	—	—
AFS[1:2]	48, 49	O	Audio sampling frequency AFS2 AFS1 44.1 kHz 0 1 48 kHz 0 0 32 kHz 1 0	—	—	—
APWM	102	O	PWM signal for audio PLL	—	—	—

Note The input changes according to the switching of the encode/decode mode. It must be controlled so that the output does not conflict when the mode is switched.

To prevent a floating state, connect a pull-up or pull-down resistor to this pin.

(4) SDRAM interface pins

Pin Name	Pin No.	I/O	Function	Active	After Reset	Alternate Function
MCLK	77	O	CLK pin connection for SDRAM	–	–	–
MRAS	76	O	RAS pin connection for SDRAM	–	–	–
MCAS	75	O	CAS pin connection for SDRAM	–	–	–
MWE	74	O	WE pin connection for SDRAM	–	–	–
MA[11:0]	92, 90 to 83, 81 to 79	O	Address pin connection for SDRAM	–	–	–
MD[15:0]	73 to 69, 66 to 64, 62 to 57, 55, 54	I/O	Data pin connection for SDRAM These pins must be pulled up or down and then must be directly connected to the SDRAM pins.	–	–	–

(5) Host interface pins

(a) Parallel interface pins

Pin Name	Pin No.	I/O	Function	Active	After Reset	Alternate Function
CS	117	I	Parallel interface chip select input	L	I	–
RWZ	119	I	Parallel interface read/write control input ISA bus, SH-1 bus : Write strobe 68000 bus : Read/write select signal	L	I	–
IOR	120	I	Parallel interface IO read control input ISA bus, SH-1 bus : Read strobe 68000 bus : Data strobe (DS)	L	I	–
IOCHRDY	123	O	Parallel interface ready output	L	O	–
AD[10:1]	116 to 107	I	Parallel interface address input	–	I	–
P_D[15:0]	143 to 141, 139 to 132, 130 to 128, 126, 125	I/O	Parallel interface data input/output	–	I	–
DMAREQ	122	O	DMA request output	L	O	SIO_CNT0
DMAACK	121	I	DMA acknowledge input for parallel interface	L	I	SIO_CNT1

(b) Serial interface pins

Pin Name	Pin No.	I/O	Function	Active	After Reset	Alternate Function
SO	145	O	Serial transmit data output for clocked serial interface (CSI)	–	O	P40
SI	146	I	Serial receive data input for clocked serial interface (CSI)	–	I	P41
SCK	147	O	Clock output for clocked serial interface (CSI)	–	O	P42
TXD	149	O	Serial transmit data output for asynchronous serial interface (UART)	–	O	P43
RXD	150	I	Serial transmit data input for asynchronous serial interface (UART)	–	I	P44
SCS	151	O	Chip select output for clocked serial interface (CSI)	–	O	P45
SIO_CNTI	121	I	Control input for asynchronous serial interface (UART) Externally input data is loaded in synchronization with the end of RXD of UART.	–	I	DMAACK
SIO_CNTO	122	O	Control output for asynchronous serial interface (UART)	–	O	DMAREQ

(c) Others

Pin Name	Pin No.	I/O	Function	Active	After Reset	Alternate Function
INT	124	O	Interrupt output to external device	H	O	–
PSSEL[1:0]	106, 105	I	Parallel/serial interface selection. These signals select a parallel or serial interface as the external interface. PSSEL[1:0] Selected interface 00 Serial interface (UART) 01 Parallel interface (ISA bus) 10 Parallel interface (68000 bus) 11 Parallel interface (SH-1 bus)	–	I	–

(6) Port pins

Pin Name	Pin No.	I/O	Function	Active	After Reset	Alternate Function
P30	204	I/O	Port 3. This is a 4-bit I/O port that can be set in the input or output mode in 1-bit units. P30 : Connect this pin to GND via a resistor. P32 : This pin outputs an interrupt to the external device to read the DV status. It cannot be used as a port pin when DV is used.	-	I	-
P31	152					-
P32	153					-
P33	154					-
P34	155					-
P40	145	I/O	Port 4. This is a 6-bit I/O port that can be set in the input or output mode in 1-bit units. P40 to P45 are multiplexed with the pins described under the heading Alternate Function (they cannot be used as general-purpose port pins).	-	I	SO
P41	146					SI
P42	147					SCK
P43	149					TXD
P44	150					RXD
P45	151					SCS

(7) External ROM connection pins

Pin Name	Pin No.	I/O	Function	Active	After Reset	Alternate Function
D[15:0]	196, 194 to 189, 186 to 178	I/O	External ROM data bus External ROM data bus used to access external ROM	-	I	-
A[17:1]	175, 174, 172, 171, 169 to 167, 165 to 156	O	External ROM address bus External ROM address bus used to access external ROM. A space of 256 KB can be addressed.	-	O	-
RDZ	176	O	ROM read This is a strobe signal that indicates a read cycle to the external ROM. It is inactive in the idle state.	L	O	-
WRZ	177	O	ROM write This is a strobe signal that indicates a write cycle to the external ROM.	L	O	-

(8) Clock and reset pins

Pin Name	Pin No.	I/O	Function	Active	After Reset	Alternate Function
RESETB	1	I	Reset. RESETB is asynchronous input. If a signal with a specified low-level width is input to this pin independently of the operating clock, a system reset is effected, taking precedence over all the other operations. This signal can also be used to clear the power-saving mode (HALT or software STOP), as well as for normal initialization and starting. Caution RESETB is active-low.	L	I	—
HS_CLK	202	I	Host clock. This pin inputs the clock that is to be supplied to the CPU core and internal peripheral I/O. This clock is input to the internal clock generator. An internal clock is generated according to the value of HCLKSEL and is supplied to the CPU core and internal peripheral I/O. Usually, input a clock of 27 MHz to this pin.	—	I	—
HCLKSEL	197	I	Host clock selection. This pin inputs the clock that is to be supplied to the CPU core and internal peripheral I/O. The relationship between the clock supplied by the HS_CLK pin (27 MHz) and the clock supplied to the CPU core and internal peripheral I/O is as follows: <div style="display: flex; justify-content: space-between;"> <div>HCLKSEL</div> <div>Internal clock frequency</div> <div>PLL operation</div> </div> <div style="display: flex; justify-content: space-between;"> <div>0</div> <div>54 MHz</div> <div>Multiplied by 2</div> </div> <div style="display: flex; justify-content: space-between;"> <div>1</div> <div>Clock stops.</div> <div>PLL operation stops.</div> </div>	—	I	—

(9) Power supply, ground, and others

Pin Name	Pin No.	I/O	Function	Active	After Reset	Alternate Function
3.3V _{DD}	5, 31, 52, 63, 78, 95, 127, 140, 166, 187	—	3.3 V power supply. Supplies a positive voltage of 3.3 V to the I/O pins of the 3.3 V interface.	—	—	—
2.5V _{DD}	14, 67, 118, 170	—	2.5 V power supply. Supplies a positive voltage of 2.5 V to the respective internal blocks.	—	—	—
2.5GND	39, 91, 144, 195	—	Ground. These are ground pins.	—	—	—
3.3GND	9, 35, 56, 68, 82, 99, 131, 148, 173, 188	—	Connect all GND pins to a common ground.	—	—	—
PLLAV _{DD}	199	—	Analog power supply to multiplication circuit. Supplies a positive analog voltage to the PLL. Supply 2.5 V to this pin.	—	—	—
PLLAGND	200	—	Analog ground for multiplication circuit. Analog ground pin for PLL.	—	—	—
PLLDV _{DD}	198	—	Digital power supply to multiplication circuit. Supplies a positive digital voltage to the PLL. Supply 2.5 V to this pin.	—	—	—
PLLDGND	201	—	Digital ground for multiplication circuit. Digital ground pin for PLL.	—	—	—
IC(L)	203, 205 to 207	—	Internally connected pins Directly connect these pins to ground.	—	—	—
IFIROME	208	I	Internal ROM/external ROM select input 0: External ROM mode 1: Internal ROM mode	—	I	—

1.2 Connection of Unused Pins

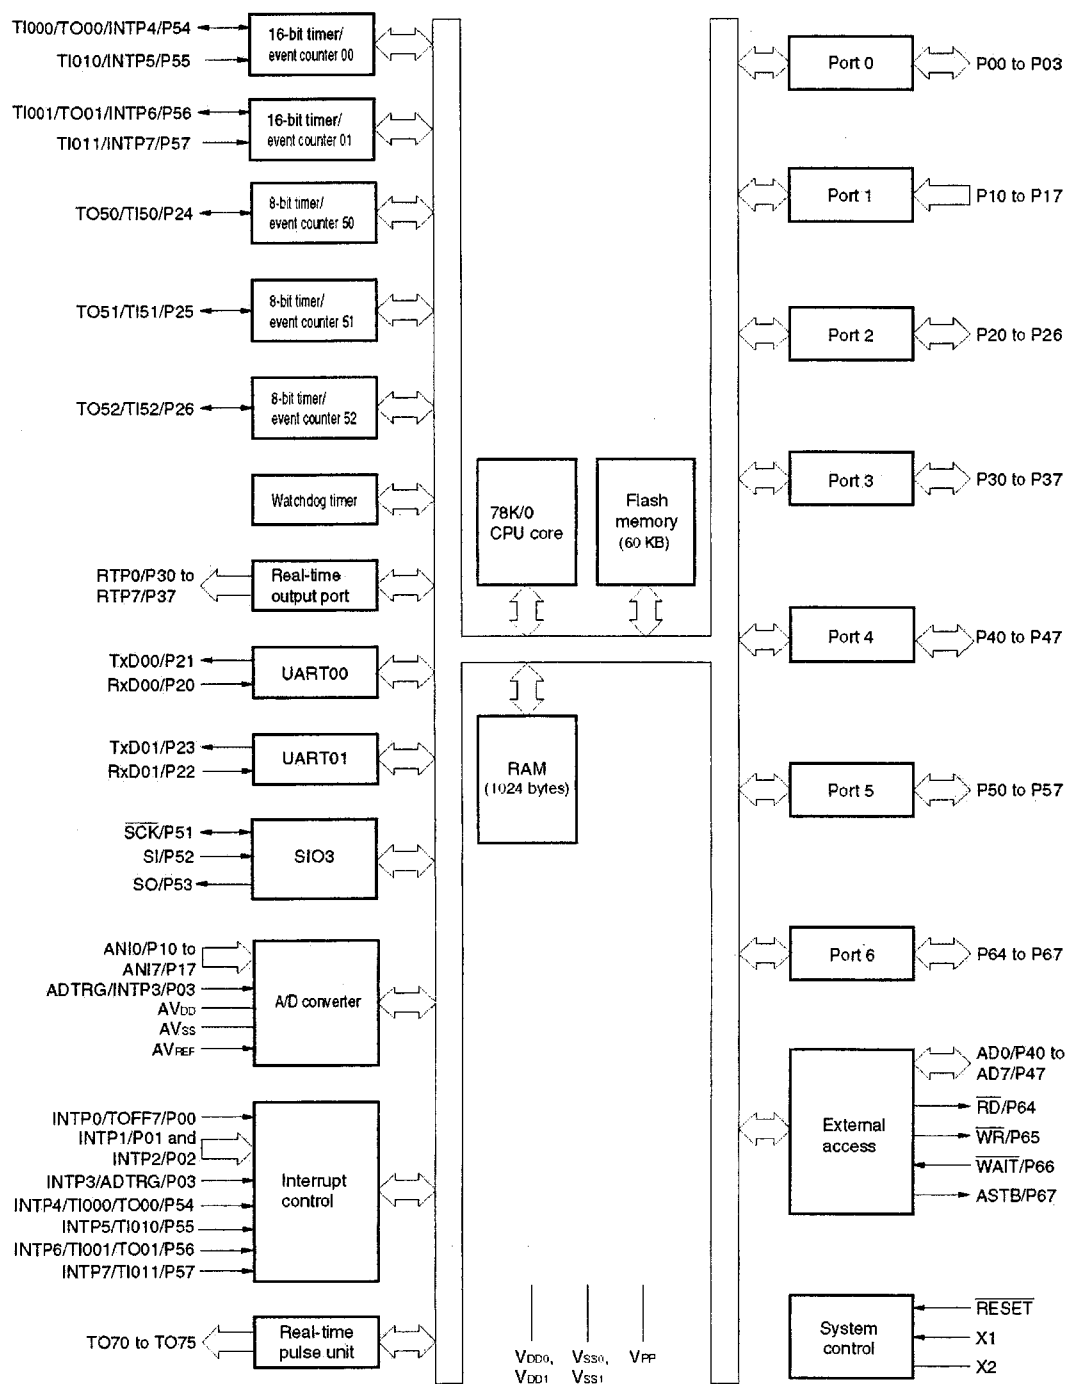
The following table shows how to connect unused pins.

Table 1-1. Connection of Unused Pins (1/2)

Pin Name	I/O	Interface	Recommended Connection of Unused Pin
PHY_D[7:0]	I/O	I/O Buffer (LVTTL) in 9 mA With Bus Holder	Connect these pins to V _{DD} or GND via a resistor.
CTL[1:0]			
SCLK	I	I/O Buffer (LVTTL) with bus holder	Leave open
LREQ	O	3-state Output Buffer (LVTTL) 9 mA	
LPS	O	Output Buffer (LVTTL) 9 mA	
LINKON	I	Input Buffer (LVTTL)	Connect these pins to V _{DD} or GND via a resistor.
STREAM1[7:0]	I/O	I/O Buffer (LVTTL) 6 mA	
PACKETEN1			
TSERROR1			
TSRW1			
SYNC1			
STREAM2[7:0]			
PACKETEN2			
TSERROR2			
TSRW2			
SYNC2			
TSSUB1			
TSSUB2	O	Output Buffer (LVTTL) 6 mA	Leave open
P3[4:0]	I/O	I/O Buffer (LVTTL) Schmitt in 6 mA	Connect these pins to V _{DD} or GND via a resistor.
P40/SO			
P41/SI			
P42/SCK			
P43/TXD			
P44/RXD			
P45/SCS			
A[17:1]	O	I/O Buffer (LVTTL) 6 mA	Leave open
RDZ	O	Output Buffer (LVTTL) 6 mA	
WRZ	O	Output Buffer (LVTTL) 6 mA	
D[15:0]	I/O	I/O Buffer (LVTTL) 6 mA	Connect these pins to V _{DD} or GND via a resistor.
AD[10:1]	I	Input Buffer (LVTTL)	
PSSEL[1:0]			
CS			
RWZ			
IOR			
DMAACK/SIO_CNTI			

Table 1-1. Connection of Unused Pins (2/2)

Pin Name	I/O	Interface	Recommended Connection of Unused Pin
INT	O	Output Buffer (LVTTL) 6 mA	Leave open
IOCHRDY			
DMAREQ/SIO_CNTO			
P_D[15:0]	I/O	I/O Buffer (LVTTL) 9 mA	Connect these pins to V _{DD} or GND via a resistor.
IFIROME	I	Input Buffer (LVTTL)	—
HS_CLK			
HCLKSEL			
RESETB	I	Output Buffer (LVTTL) Schmitt	

IC7802: uPD78F0988A, DVIO Board, Control and Communication**BLOCK DIAGRAM**

3. PIN FUNCTIONS

3.1 Port Pins

Pin Name	I/O	Function	After Reset	Alternate Function
P00	I/O	Port 0 4-bit I/O port Input/output can be specified in 1-bit units. Use of an on-chip pull-up resistor can be specified by software setting.	Input	INTP0/TOFF7
P01				INTP1
P02				INTP2
P03				INTP3/ADTRG
P10 to P17	Input	Port 1 8-bit input only port	Input	ANI0 to ANI7
P20	I/O	Port 2 7-bit I/O port Input/output can be specified in 1-bit units. Use of an on-chip pull-up resistor can be specified by software setting.	Input	RxD00
P21				TxD00
P22				RxD01
P23				TxD01
P24				TI50/TO50
P25				TI51/TO51
P26				TI52/TO52
P30 to P37	I/O	Port 3 8-bit I/O port Input/output can be specified in 1-bit units. Use of an on-chip pull-up resistor can be specified by software setting.	Input	RTP0 to RTP7
P40 to P47	I/O	Port 4 8-bit I/O port Input/output can be specified in 1-bit units. Use of an on-chip pull-up resistor can be specified by software setting.	Input	AD0 to AD7
P50	I/O	Port 5 8-bit I/O port Input/output can be specified in 1-bit units. LEDs can be driven directly. Use of an on-chip pull-up resistor can be specified by software setting.	Input	—
P51				SCK
P52				SI
P53				SO
P54				INTP4/TI000/TO00
P55				INTP5/TI010
P56				INTP6/TI001/TO01
P57				INTP7/TI011
P64	I/O	Port 6 4-bit I/O port Input/output can be specified in 1-bit units. Use of an on-chip pull-up resistor can be specified by software setting.	Input	RD
P65				WR
P66				WAIT
P67				ASTB

3.2 Non-Port Pins (1/2)

Pin Name	I/O	Function	After Reset	Alternate Function
INTP0	Input	External interrupt request input for which the valid edge (rising edge, falling edge, or both rising and falling edges) can be specified	Input	P00/TOFF7
INTP1			Input	P01
INTP2			Input	P02
INTP3			Input	P03/ADTRG
INTP4			Input	P54/TI000/TO00
INTP5			Input	P55/TI010
INTP6			Input	P56/TI001/TO01
INTP7			Input	P57/TI011
TI50	Input	External count clock input to 8-bit timer/event counter 50	Input	P24/TO50
TI51		External count clock input to 8-bit timer/event counter 51	Input	P25/TO51
TI52		External count clock input to 8-bit timer/event counter 52	Input	P26/TO52
TI000		External count clock input to 16-bit timer/event counter 00 Capture trigger input to capture register (CR000, CR010) of 16-bit timer/event counter 00	Input	P54/INTP4/TO00
TI010		Capture trigger input to capture register (CR000) of 16-bit timer/event counter 00	Input	P55/INTP5
TI001		External count clock input to 16-bit timer/event counter 01 Capture trigger input to capture register (CR001, CR011) of 16-bit timer/event counter 01	Input	P56/INTP6/TO01
TI011		Capture trigger input to capture register (CR001) of 16-bit timer/event counter 01	Input	P57/INTP7
TO50	Output	8-bit timer/event counter 50 output	Input	P24/TI50
TO51		8-bit timer/event counter 51 output	Input	P25/TI51
TO52		8-bit timer/event counter 52 output	Input	P26/TI52
TO00		16-bit timer/event counter 00 output	Input	P54/INTP4/TI000
TO01		16-bit timer/event counter 01 output	Input	P56/INTP6/TI001
RTP0 to RTP7	Output	Real-time output port that outputs pulses in synchronization with trigger signals outputs from the real-time pulse unit	Input	P30 to P37
TxD00	Output	Asynchronous serial interface serial data output	Input	P21
TxD01			Input	P23
RxD00	Input	Asynchronous serial interface serial data input	Input	P20
RxD01			Input	P22
SCK	I/O	Serial interface serial clock input/output	Input	P51
SI	Input	Serial interface serial data input	Input	P52
SO	Output	Serial interface serial data output	Input	P53
ANI0 to ANI7	Input	A/D converter analog input	Input	P10 to P17
ADTRG	Input	External trigger signal input to the A/D converter	Input	P03/INTP3
TO70 to TO75	Output	Timer output for the 3-phase PWM inverter control	Hi-Z	–
TOFF7	Input	Timer output (TO70 to TO75) stop external input	Input	P00/INTP0
AD0 to AD7	I/O	Address/data bus for expanding memory externally	Input	P40 to P47
RD	Output	Strobe signal output for reading from external memory	Input	P64
WR		Strobe signal output for writing to external memory	Input	P65
WAIT	Input	Wait insertion at external memory access	Input	P66
ASTB	Output	Strobe output that externally latches address information output to ports 4 and 5 to access external memory	Input	P67
AV _{REF}	Input	A/D converter reference voltage input	–	–
AV _{DD}	–	A/D converter analog power supply	–	–

3.2 Non-Port Pins (2/2)

Pin Name	I/O	Function	After Reset	Alternate Function
AV _{SS}	–	A/D converter ground potential	–	–
RESET	Input	System reset input	–	–
X1	Input	Connecting crystal resonator for system clock oscillation	–	–
X2	–		–	–
V _{DD0}	–	Positive power supply for ports	–	–
V _{SS0}	–	Ground potential for ports	–	–
V _{DD1}	–	Positive power supply except for ports	–	–
V _{SS1}	–	Ground potential except for ports	–	–
V _{PP}	–	High-voltage application during program write/verify. In the normal operation mode, connect directly to V _{SS0} .	–	–

3.3 Pin I/O Circuits and Recommended Connection of Unused Pins

The I/O circuit type of each pin and recommended connection of unused pins are shown in Table 3-1.

For the I/O circuit configuration of each type, refer to Figure 3-1.

Table 3-1. Types of Pin I/O Circuits

Pin Name	I/O Circuit Type	I/O	Recommended Connection of Unused Pins
P00/INTP0/TOFF7	8-C	I/O	Input: Independently connect to V _{SS0} via a resistor. Output: Leave open
P01/INTP1			
P02/INTP2			
P03/INTP3/ADTRG			
P10/ANI0 to P17/ANI7	25	Input	Independently connect to V _{DD0} or V _{SS0} via a resistor.
P20/RxD00	8-C	I/O	Input: Independently connect to V _{DD0} or V _{SS0} via a resistor. Output: Leave open.
P21/TxD00	5-H		
P22/RxD01	8-C		
P23/TxD01	5-H		
P24/TI50/TO50	8-C		
P25/TI51/TO51			
P26/TI52/TO52			
P30/RTP0 to P37/RTP7	5-H		
P40/AD0 to P47/AD7			
P50			
P51/SCK	8-C		
P52/SI	5-H		
P53/SO			
P54/INTP4/TI000/TO00			
P55/INTP5/TI010			
P56/INTP6/TI001/TO01			
P57/INTP7/TI011			
P64/RD			
P65/WR			
P66/WAIT			
P67/ASTB			
TO70 to TO75	4	Output	Leave open.
RESET	2	Input	—
AV _{DD}	—	—	Connect to V _{DD0} .
AV _{REF}			Connect to V _{SS0} .
AV _{SS}			Connect directly to V _{SS0} .
V _{PP}			

Explanation for terminal function

PIN No.	PIN NAME	FUNCTION
1	VDD2	Digital VDD for 27MHz clock output
2	VSS2	Digital GND for 27MHz clock output
3	CLK27M	27MHz clock output
4	TEST	Output for test
5	AVDD	Analog VDD
6	AVSS	Analog GND
7	XTALOUT	Standard crystal output
8	XTALIN	Standard crystal input
9	CLKA	clock output (FSEL1=Open:16.9344MHz, FSEL1=L:36.864MHz)
10	CLK512FS	clock output (FSEL1=Open:22.5792MHz, FSEL1=L:24.576MHz)
11	DVSS	Digital GND
12	DVDD	Digital VDD
13	CLK16M	16.9344MHz clock output
14	FSEL1	Output select :with pull-up Open:16.9344MHz (9pin), 22.5792MHz (10pin) L :36.864MHz (9pin), 24.576MHz (10pin)
15	CLK33M	33.8688MHz clock output
16	OE	Output enable(open:enable, L:disable):with pull-up

1 : VDD2

2 : VSS2

3 : CLK27M


4 : TEST

5 : AVDD

6 : AVSS

7 : XTALOUT

8 : XTALIN

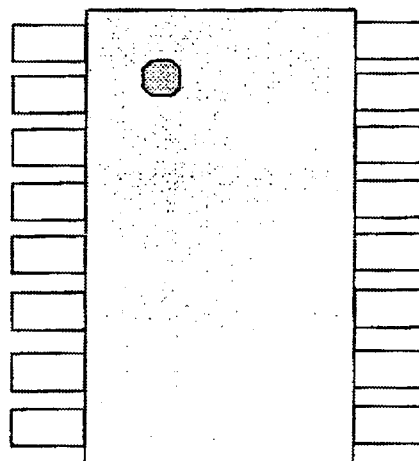

16 : OE

15 : CLK33M

14 : FSEL1

13 : CLK16M

12 : DVDD

11 : DVSS

10 : CLK512FS

9 : CLKA

IC7604: BA7082F, DVIO Board, PLL IC

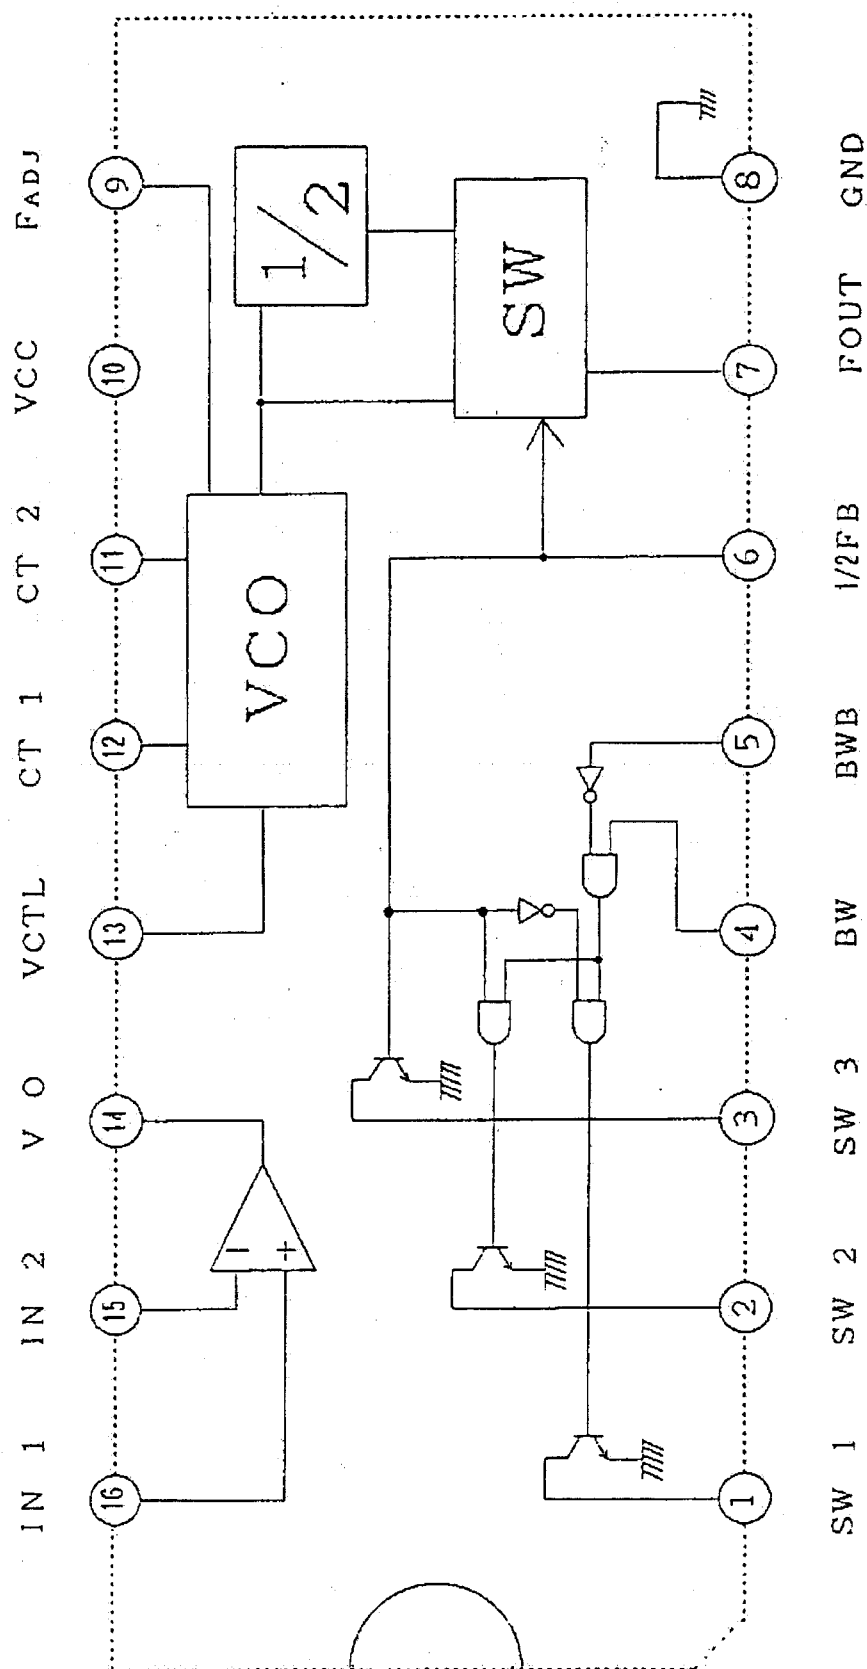
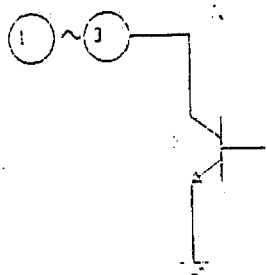
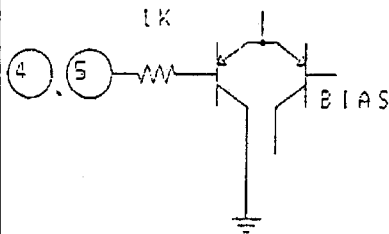
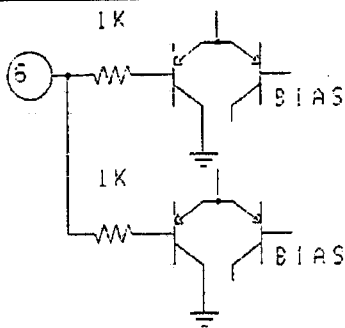
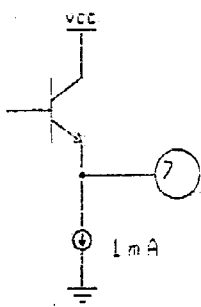

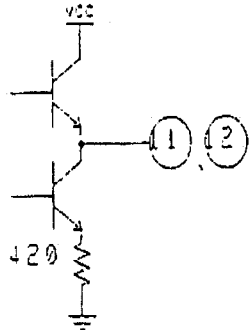
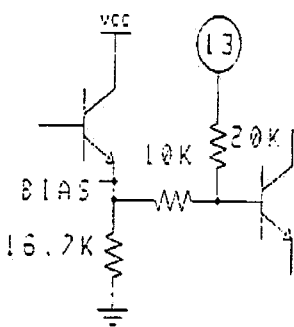
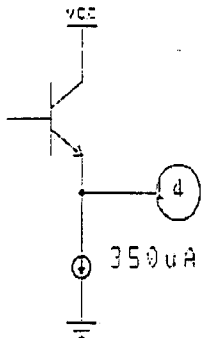
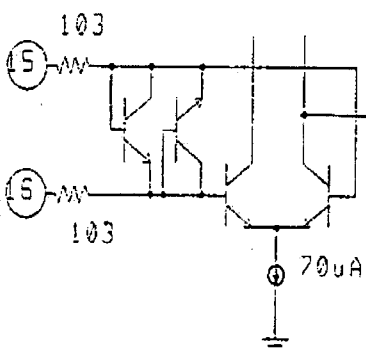


Fig-2 Block diagram



No.	Symbol	IN	OUT	normal DC Voltage	Internal pin configuration	Description
1	SW1		○	L 0.1V		Pin 1-3 are output pins at LOGIC parts for adjustment frequency sencitivity. These pins are open collector output.
2	SW2			—		
3	SW3			OPEN 5V		
4	BW	○		—		Pin 4,5 are input pins at logic parts for adjustment frequency sencitivity.
5	BWB					
6	1/2FB					Pin 6 is input pin at LOGIC parts for adjustment frequency sencitivity and changing 1/2 Frequency demultiplier. "H" is through output.and "L" is 1/2 Frequency demultiplier output.
7	Fout		○	3.6V		VCO Output.
8	GND	—	—	0V	GND	GND
9	FADJ	—	—	2.5V		Pin9 is a pin to adjust f0. It is possible to adjust f0 by added resistor(RADJ). If Value of RADJ down, oscillation frequency up. (Use to RADJ>22kΩ).

No.	Symbol	IN	OUT	normal DC V _o tag	Internal pin configuration	Description
10	VCC	—	—	5.0V	VCC	VCC
11	CT2	—	—	1.9V		<p>Pin 11,12 are added capacitor pins for oscillation. Use to added capacitor between CT1 and CT2.</p> <p>If value of capacitor down, oscillation frequency up.</p>
12	CT1					
13	VCTL	○		2.5V		<p>Pin13 is control pin for VCO.</p> <p>A regular this pin connect pin14(V0).</p>
14	V0		○	2.5V		<p>Pin14 is output pin at Amplifier for sencitivity adjustment.</p> <p>Adjustment amplifier GAIN by added resistor.</p>
15	IN2	○		2.5V		<p>Pin15,16 are input pins at amplifier for sencitivity adjustment.</p> <p>In1 ; normal input</p> <p>In2 ; inversion input</p>
16	IN1					

9.12.5ICs Digital Board Chrysalis

IC7106 NCP303LSN29, Digital Board 2.1 Chrysalis, Reset Circuit

NCP303LSNxxT1
Open Drain Output Configuration

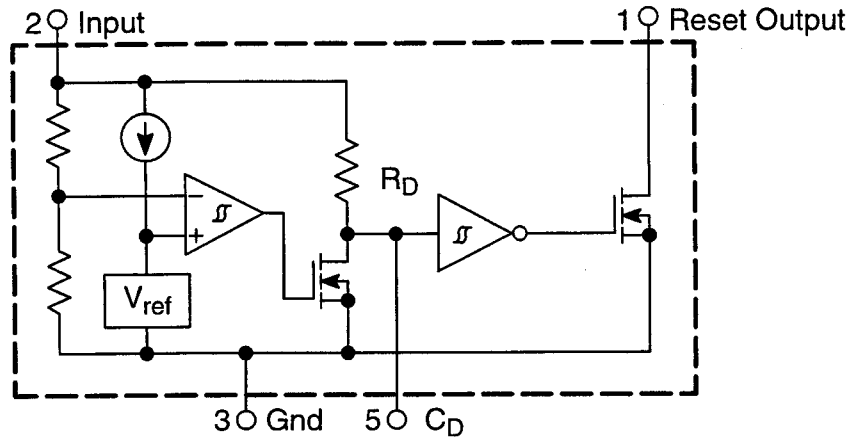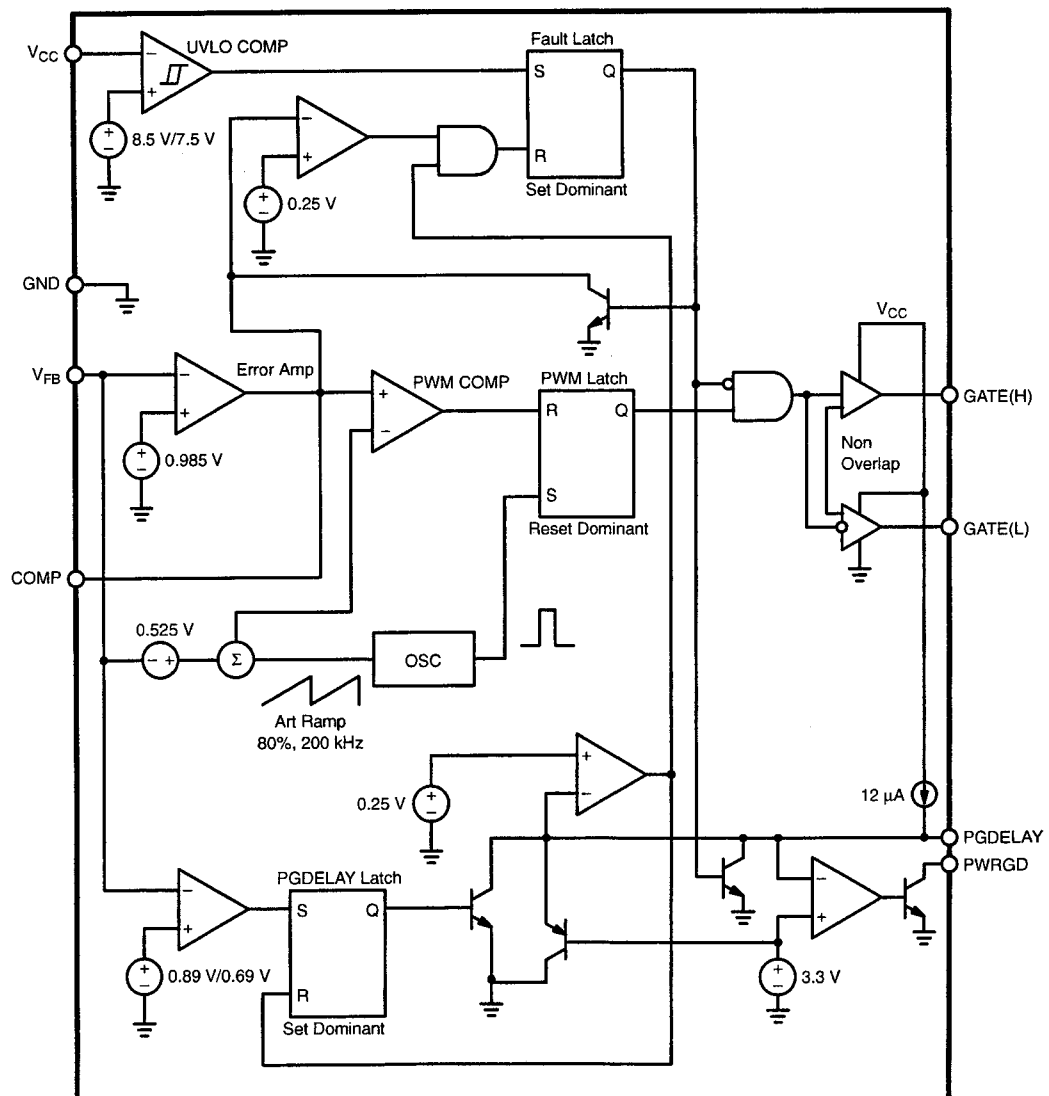
*IC7501 NCP1570D, Digital Board 2.1 Chrysalis, DC/DC Converter Control***NCP1570**

PACKAGE PIN DESCRIPTION

PACKAGE PIN #	PIN SYMBOL	FUNCTION
SO-8		
1	V _{CC}	Power supply input.
2	PWRGD	Open collector output goes low when V _{FB} is out of regulation. User must externally limit current into this pin to less than 20 mA.
3	PGDELAY	External capacitor programs PWRGD low-to-high transition delay.
4	COMP	Error amp output. PWM comparator reference input. A capacitor to LGND provides error amp compensation and Soft Start. Pulling pin < 0.45 locks gate outputs to a zero percent duty cycle state.
5	GATE(H)	High-side switch FET driver pin. Capable of delivering peak currents of 1.5 A.
6	GATE(L)	Low-side synchronous FET driver pin. Capable of delivering peak currents of 1.5 A.
7	V _{FB}	Error amplifier and PWM comparator input.
8	GND	Power supply return.

IC7703 ADV7196A, Digital Board 2.1 Chrysalis, Progressive Scan Video Encoder

FUNCTIONAL BLOCK DIAGRAM

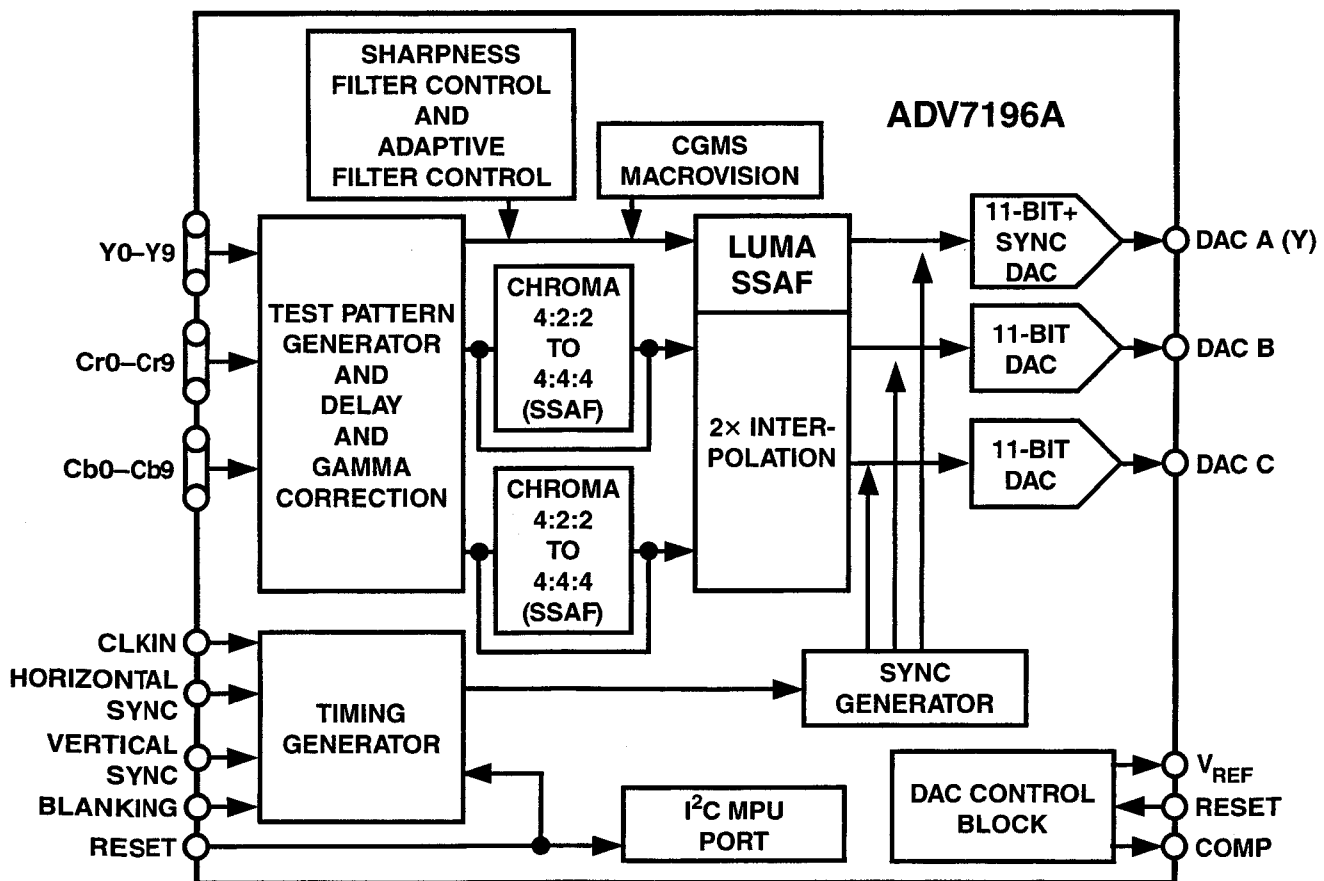

ADV7196A

PIN FUNCTION DESCRIPTIONS

Pin	Mnemonic	Input/Output	Function
1, 12	V _{DD}	P	Digital Power Supply
2–11	Y0–Y9	I	10-Bit Progressive Scan/HDTV Input Port for Y Data. Input for G data when RGB data is input.
13, 52	GND	G	Digital Ground
14–23	Cr0–Cr9	I	10-Bit Progressive Scan/HDTV Input Port for Color Data in 4:4:4 Input Mode. In 4:2:2 mode this input port is not used. Input port for R data when RGB data is input.
24, 35	V _{AA}	P	Analog Power Supply
25	CLKIN	I	Pixel Clock Input. Requires a 27 MHz reference clock for standard operation in Progressive Scan Mode or a 74.25 MHz (74.1758 MHz) reference clock in HDTV mode.
26, 33	AGND	G	Analog Ground
27	DV	I	Video Blanking Control Signal Input
28	$\overline{\text{VSYNC}}$ / TSYNC	I	$\overline{\text{VSYNC}}$, Vertical Sync Control Signal Input or TSYNC Input Control Signal in Async Timing Mode
29	$\overline{\text{HSYNC}}$ / SYNC	I	$\overline{\text{HSYNC}}$, Horizontal Sync Control Signal Input or SYNC Input Control Signal in Async Timing Mode
30	SCL	I	MPU Port Serial Interface Clock Input
31	SDA	I/O	MPU Port Serial Data Input/Output
32	DAC C	O	Color Component Analog Output of Input Data on Cb/Cr9–0 Input Pins
34	DAC A	O	Y Analog Output
36	DAC B	O	Color Component Analog Output of Input Data on Cr9–Cr0 Input Pins
37	COMP	O	Compensation Pin for DACs. Connect 0.1 μF capacitor from COMP pin to V _{AA} .
38	R _{SET}	I	A 2470 Ω resistor (for input ranges 64–940 and 64–960; output standards EIA-770.1–EIA-770.3) must be connected from this pin to ground and is used to control the amplitudes of the DAC outputs. For input ranges 0–1023 (output standards RS-170, RS-343A) the R _{SET} value must be 2820 Ω .
39	V _{REF}	I/O	Optional External Voltage Reference Input for DACs or Voltage Reference Output (1.235 V)
40	$\overline{\text{RESET}}$	I	This input resets the on-chip timing generator and sets the ADV7196A into Default Register setting. Reset is an active low signal.
41	ALSB	I	TTL Address Input. This signal sets up the LSB of the MPU address. When this pin is tied high, the I ² C filter is activated which reduces noise on the I ² C interface. When this pin is tied low, the input bandwidth on the I ² C interface is increased.
42–51	Cb/Cr9–0	I	10-Bit Progressive Scan/HDTV Input Port for Color Data. In 4:2:2 mode the multiplexed CrCb data must be input on these pins. Input port for B data when RGB is input.

9.13 List of Abbreviations

Analog Board

+5VSTBY
 Permanent Supply 5V
 8SC2
 Pin8 Scart2 (only for Europe)
 A_DATA
 Data from Analog- to Digital-Board (UART-Communication)
 A_RDY
 Analog-board ready (status information to digital-board)
 A18 - A19
 Parallel Address Bus (CC - Flash-ROM and S-RAM)
 A8 - A17
 Parallel Address Bus (CC - Flash-ROM and S-RAM)
 AD0 - AD7
 Parallel Address and Data Bus (CC - Flash-ROM and S-RAM)
 AFC
 Automatic Frequency Control
 AFEL
 Audio Frontend Left
 AFER
 Audio Frontend Right
 AGC / WSRI
 Automatic Gain Control (for Europe), Wide Screen Rear In (for NTSC)

AINFL
 Audio In Front Left
 AINFR
 Audio In Front Right
 AKILL
 Audio Kill Signal
 ALADC
 Audio Left to ADC
 ALDAC
 Audio Left from DAC
 ALE
 Address Latch Enable
 AM0
 Address-mode 0
 AM1
 Address-mode 1
 ARADC
 Audio Right to ADC
 ARDAC
 Audio Right from DAC
 ASCC1M
 Audio Scart 1 Mute (System Clock Output for Real time Clock-Adjustment)
 AVCC
 Power Supply for A/D-converter
 AVSS
 GND-Pin for A/D-converter
 CFIN

Chroma Front In
 CS0_
 Chip Select 0 (CC - S-RAM)
 CS2_
 Chip Select 2 (CC - Flash-ROM)
 CVBSFIN
 Video Front In
 D_DATA
 Data from Digital- to Analog-Board (UART-Communication)
 D_RDY
 Digital-board ready (status information from digital-board)
 DAC_MUTE
 Mute Signal for DAC
 DAOUT
 Digital Audio Out
 DVAL
 Audio from Digital Video In Left
 DVAR
 Audio from Digital Video In Right
 DVCC1
 Power Supply Pin
 DVCC2
 Power Supply Pin
 DVCC3
 Power Supply Pin
 DVSS1
 GND Pin
 DVSS2
 GND Pin
 DVSS3
 GND Pin
 FAN_OFF
 Fan for Basic engine
 FBIN
 Fast Blanking input
 FOME
 Follow ME Status line (matching signals yes/no; only for Europe)
 G1...10
 DISPLAY GRID
 INT
 Interrupt OUT for the CC
 INT
 Interrupt – line from Display Print
 ION
 Inverse ON-Line
 IPFAIL
 Inverse Power Fail Detection
 IPOR
 Inverse Power On Reset
 IRESET
 Inverse Reset Input
 IRR
 Signal from IR-Receiver
 K1
 Key-Input-Line
 K2
 Key-Input-Line
 KILL
 Audio Mute
 P50 IN
 P50 INput-line (only for Europe)
 P50 OUT
 P50 OUTput-line (only for Europe)
 POR_DC
 Power On Reset for Display Control Print (Ext_DL)
 PSS
 Pal/Secam-Select
 PWM_FIL
 Control line for Filament Voltage Generation
 PWONSW
 Amplifier Switch Audio A/D Converter
 RD_
 Output Enable Read (CC - Flash-ROM and S-RAM)
 RECLED

Control Signal for REC-LED
 RESET_DIG
 Reset Line to Digital Board
 RP_
 Inverse Reset line to Flash-ROM
 RSA1/2
 Record Selector 1/2
 RY/BY_
 Ready/Busy – input line (from Flash-ROM)
 SIF1
 Sound intermediate frequency
 SB1
 Secam Band 1 (PCB-Test entrance)
 SCL
 I²C-Bus
 SCLSW
 Switched I²C-Bus
 SDA
 I²C-Bus
 SDASW
 Switched I²C-Bus
 SFS_TS
 SAW Filter Select Trap Select
 STBY
 Standby-Line (Flash_Toshiba)
 SYNC
 Video Sync input
 TEMP_SENSE
 Temperature Sense Line
 VER
 HW-version input
 VEV
 Video from Frontend
 VKK
 VFT Driver Power Supply
 VREFH
 Pin for Reference-voltage input to A/D-converter
 VREFL
 Pin for Reference-voltage input to A/D-converter
 VS1/2
 View Selector 1/2
 WR_
 Write Enable (CC - Flash-ROM and S-RAM)
 WSFI
 Wide Screen Signalling Front In
 WU
 Wake Up
 X1
 Oscillator Pin
 X2
 Oscillator Pin
 XIN
 Oscillator Pin
 XOUT
 Oscillator Pin
 XT1
 Low Frequency Oscillator Pin
 XT2
 Low Frequency Oscillator Pin
 YFIN
 Luminance Front In

Digital Board

+12V
 +12V Power Supply
 +2V5_FLI
 +2V5 Power Supply for FLI
 +2V5_PLL
 +2V5 Power Supply for PLL
 +3V3
 +3V3 Power Supply
 +3V3_ANA
 +3V3 Power Supply Analogue

+3V3_DD	BE_CPR
+3V3 Power Supply Digital	Basic Engine Control Processor ready to accept data
+3V3_FLI	BE_DATA_RD
+3V3 Power Supply for FLI	Basic Engine Data read
+5V	BE_DATA_WR
+5V Power Supply	Basic Engine Data write
+5V_BUFFER	BE_FAN
+5V Power Supply for Video Filters	Basic Engine FAN
5508_HS	BE_FLAG
Horizontal Synchronisation from Host Decoder to Progressive Scan	Basic Engine error flag
5508_ODD_EVEN	BE_IRQN
Odd - Even control from Host Decoder to Progressive Scan	Basic Engine interrupt request
-5V	BE_LOADN
-5V Power Supply	Basic Engine LOAD(LOW active)
-5V_BUFFER	BE_RXD
-5V Power Supply for Video Filters	Basic Engine S2B received data
A_EMPRESS(13:0)	BE_SUR
EMPRESS address output to SDRAM	Basic Engine servo unit ready to accept data (S2B)
ACC_ACLK_OSC	BE_SYNC
Audio Clock PLL output sync with incoming video for record	Basic Engine sector/abs time sync
ACC_ACLK_PLL	BE_TXD
Audio Clock PLL output for play back	Basic Engine S2B transmitted data
ACLK_EMP	BE_V4
EMPRESS audio clock output	Basic Engine versatile input pin
AD_ACLK	BE_WCLK
Audio Decoder Clock	Basic Engine I2S word clock
AD_BCLK	C_IN
Audio Decoder I2S bit clock	Video Chrominance input
AD_DATAO	C_IN_VIP
Audio Decoder Output data (PCM)	Chrominance input to Video Input Processor
AD_SPDIF33	C_OUT
Audio digital output to the analog board	Chrominance output from Host Decoder
AD_WCLK	C_OUT_B
Audio Decoder I2S word clock	Filtered Chrominance output
AE_ACLK	CAS
Audio Encoder Clock	Column Address strobe
AE_ACLK_OEN	CB_OUT(9:0)
Audio Encoder Clock Output Enable	Chrominance Blue out
AE_BCLK	CLK4
Audio Encoder I2S bit clock	SDRAM clock
AE_BCLK_DV	CPUINT0
Audio Encoder I2S bit clock to DVIO	Control processor unit interrupt
AE_BCLK_VSM	CPUINT1
Audio Encoder I2S bit clock to VSM	Control processor unit interrupt
AE_DATAI	CR_OUT(9:0)
Audio Encoder Input data (PCM)	Chrominance Red out
AE_DATAI_DV	CTS1P
Audio Encoder Input data (PCM) from DVIO	Clear to send (Service Interface)
AE_DATAO	CVBS_OUT
Audio Encoder Output data (PCM)	Composite video output out of the Host Decoder
AE_WCLK	CVBS_OUT_B
Audio Encoder I2S word clock	Filtered Composite video output
AE_WCLK_DV	CVBS_OUT_B_VIP
Audio Encoder I2S word clock to DVIO	Composite video output to Video Input Processor(digital board video loop)
AE_WCLK_VSM	CVBS_Y_IN
Audio Encoder I2S word clock to VSM	Composite video/Luminance input
ANA_WE	CVBS_Y_IN_A
Analogue write enable	Composite video/Luminance input to Video Input Processor
ANA_WE_LV	CVBS_Y_IN_B
Analogue write enable Low Voltage	Composite video/Luminance input to Video Input Processor
B_IN_VIP	CVBS_Y_IN_C
Video blue input to Video Input Processor	Composite video/Luminance input to Video Input Processor
B_OUT	D_ADDR(10:0)
Video blue output from Host Decoder	Address bus
B_OUT_B	D_DATA(29:0)
Filtered blue video output	Data bus
BA	D_EMPRESS(15:0)
Bank Address	SDRAM data input/output of EMPRESS
BCLK_CTL_SERVICE	D_PAR_D(7:0)
Bitclock control Service Interface	Front-end parallel interface data (record)
BE_BCLK	D_PAR_DVALID
Basic Engine I2S bit clock	Front-end parallel interface data valid
BE_BCLK_VSM	D_PAR_REQ
Basic Engine I2S bit clock to VSM	Front-end parallel interface request

D_PAR_STR	JTAG3_TCK
Front-end parallel interface strobe	JTAG Test Clock
D_PAR_SYNC	JTAG3_TD_VIP_TO_VE
Front-end parallel interface sync	JTAG Transmitted Data Video Input Processor to Video Encoder
DV_IN_CLK	JTAG3_TD_VSM_TO_VIP
Digital Video in clock from DVIO board	JTAG Transmitted Data Versatile Stream Manager to Video Input Processor
DV_IN_DATA(7:0)	JTAG3_TMS
Digital Video in data bus from DVIO board	JTAG Test Mode Select
DV_IN_HS	JTAG3_TRSTN
Digital Video in horizontal synchronisation from DVIO board	JTAG Test part ResetN
DV_IN_VS	LOAD_DVN
Digital Video in vertical synchronisation from DVIO board	LOAD Digital Video(LOW active)
EMI_A(21:1)	MUTEN
External Memory Interface Address Bus(Host Decoder)	Mute enable
EMI_BE0N	MUTEN_LV
External Memory Interface Lower byte enable(Host Decoder)	Mute enable Low Voltage
EMI_BE1N	P_SCAN_YUV(7:0)
External Memory Interface Upper byte enable(Host Decoder)	Progressive Scan digital video bus
EMI_CAS0N	R_IN_VIP
External Memory Interface SDRAM column address strobe(Host Decoder)	Video Red input to Video Input Processor
EMI_CE1N	R_OUT
External Memory Interface VSM Lower bank enable	Video Red output from Host Decoder
EMI_CE2N	R_OUT_B
External Memory Interface VSM Higher bank enable	Filtered Red Video output from Host Decoder
EMI_CE3N	RAS
External Memory Interface flash IC's enable	Row Address Strobe
EMI_D(15:0)	RESETN
External Memory Interface Data Bus(Host Decoder)	Reset Host Decoder
EMI_PROCCLK	RESETN_BE
External Memory Interface Processor Clock(Host Decoder)	System reset basic engine (buffered)
EMI_RWN	RESETN_DVIO
External Memory Interface Read/Write control signal(Host Decoder)	System reset Digital Video Input Output (buffered)
EMI_WAIT	RESETN_VE
External Memory Interface Wait state request(Host Decoder)	System reset Video Encoder
EMPRESS_BOOT	ROMH_CEN
EMPRESS BOOT select input	Flash 2 chip enable
EMPRESS_IRQN	ROML_CEN
EMPRESS Interrupt request output	Flash 1 chip enable
FLASH_OEN	RSTN_BE
FLASH output enable control signal	Reset control of basic engine
G_IN_VIP	RSTN_DVIO
Video green input to Video Input Processor	Reset control of DVIO
G_OUT	RTS1P
Video green output from Host Decoder	Ready To Send data to service serial interface
G_OUT_B	RX1P
Filtered green video output from Host Decoder	Receive data from service serial interface
GNDD	SCL
Digital Ground	I2C bus clock
HD_M_AD(13:0)	SD_CASN
Host Decoder SDRAM address bus	SDRAM Column Address strobe output (active LOW)
HD_M_CASN	SD_CLK
Host Decoder SDRAM column address strobe	SDRAM clock output
HD_M_CLK	SD_CLKE
Host Decoder SDRAM clock	SDRAM clock enable output
HD_M_CS0N	SD_CSN
Host Decoder SDRAM chip select	SDRAM
HD_M_DQ(15:0)	SD_DQM(1:0)
Host Decoder SDRAM data bus	SDRAM data mask enable output
HD_M_DQML	SD_RASN
Host Decoder SDRAM data mask enable(Lower)	SDRAM row address strobe output
HD_M_DQMU	SD_WEN
Host Decoder SDRAM data mask enable(Upper)	SDRAM write enable output
HD_M_RASN	SDA
Host Decoder SDRAM row address strobe	I2C bus data
HD_M_WEN	SEL_ACLK1
Host Decoder SDRAM write enable	Select audio clock(playback)
HSOUT	SM_CS3N
Horizontal synchronisation OUT	SRAM chip select
ION	SM_LBN
Inverted ON: Enable the power supply for the digital board when LOW	SRAM lower bank
IRESET_DIG	SI_OEN
Initialisation of the digital board, HIGH when power ON	SI3AM output enable
	SM_UBN

SRAM upper bank
 SM_WEN
 SRAM write enable
 SMA(17:0)
 SRAM address output
 SMD(15:0)
 SRAM data input/output
 SYSCLK_EMPRESS
 System clock EMPRESS
 SYSCLK_PROGSCAN
 System clock Progressive Scan
 SYSCLK_VSM_5508
 System clock VSM and Host decoder
 TX1P
 Transmit data to service serial interface
 U_IN
 Video U input
 U_IN_VIP
 Video U input to Video Input Processor
 V_IN
 Video V input
 V_IN_VIP
 Video V input to Video Input Processor
 VCC3_CLK_BUF
 Power supply 3V3 clock buffer
 VCC3_VSM
 Power supply 3V3 Versatile Stream Manager
 VCC3_VSM_MEM
 Power supply 3V3 Versatile Stream Manager Memory
 VCC5_4046
 Power supply 5V to PLL IC
 VDD_125
 Power supply 5V to buffer 7202
 VDD_CORE
 Sti5508 Core supply voltage 2.5V
 VDD_EMP
 Empress supply voltage 3.3V
 VDD_EMP_CORE
 Empress Core supply voltage 2.5V
 VDD_FLASH_H
 Flash 7301 supply voltage
 VDD_FLASH_L
 Flash 7302 supply voltage
 VDD_LVC32
 Power supply LVC32
 VDD_PCM
 Power supply Audio decoder of Sti5508
 VDD_PLL
 Power supply PLL audio decoder of Sti5508
 VDD_RGB
 Power supply video encoder of Sti5508
 VDD_STI
 Power supply of Sti5508
 VDD_YCC
 Power supply video encoder of Sti5508
 VDD5_MK2703
 Power supply MK2703
 VDD5_OSC
 Power supply Oscillator
 VDDA1A_7118
 Power supply for analog input of VIP
 VDDA2A_7118
 Power supply for analog input of VIP
 VDDA3A_7118
 Power supply for analog input of VIP
 VDDA4A_7118
 Power supply for analog input of VIP
 VDDE_7118
 Power supply digital for peripheral cells of VIP
 VDDI_7118
 Power supply digital for core of VIP
 VDDX_7118
 Power supply for crystal oscillator of VIP
 VE_DATA(7:0)
 Video Encoder data Bus

VE_DSN
 Video Encoder Data Strobe
 VE_DTACKN
 Video Encoder Data Transfer acknowledge
 VIP_ERROR
 Video Input Processor error
 VIP_FB
 Video Input Processor Fast Blanking
 VIP_FID_FF
 Video Input Processor field identifier to Flip Flop
 VIP_HS
 Video Input Processor horizontal synchronisation
 VIP_ICLK
 Video Input Processor input Clock
 VIP_IDQ
 Video Input Processor output data qualifier
 VIP_IGP1
 Video Input Processor input general purpose 1
 VIP_INT
 Video Input Processor interrupt
 VIP_RTS1
 Video Input Processor ready to send
 VIP_VS
 Video Input Processor vertical synchronisation
 VIP_YUV(7:0)
 Video Input Processor digital video(CCIR 656)
 VS_IN
 Vertical synchronisation IN
 VSM_M_A(13:0)
 Versatile Stream Manager SDRAM address bus
 VSM_M_CASN
 Versatile Stream Manager SDRAM column address strobe
 VSM_M_CLKEN
 Versatile Stream Manager SDRAM clock enable
 VSM_M_CLKOUT
 Versatile Stream Manager SDRAM clock out
 VSM_M_D(15:0)
 Versatile Stream Manager SDRAM data bus
 VSM_M_LDQM
 Versatile Stream Manager SDRAM lower data mask enable
 VSM_M_RASN
 Versatile Stream Manager SDRAM row address strobe
 VSM_M_UDQM
 Versatile Stream Manager SDRAM upper data mask enable
 VSM_M_WEN
 Versatile Stream Manager SDRAM write enable
 VSM_UART1_CTSN
 Versatile Stream Manager UART1 clear to send to analog board (UART1 is gateway to analog board)
 VSM_UART1_RTSN
 Versatile Stream Manager UART2 clear to send to DVIO board (UART2 is gateway to DVIO board)
 VSM_UART1_RX
 Versatile Stream Manager UART1 ready to send to analog board
 VSM_UART1_TX
 Versatile Stream Manager UART2 ready to send to DVIO board
 VSM_UART2_CTSN
 Versatile Stream Manager UART1 received data to analog board
 VSM_UART2_RTSN
 Versatile Stream Manager UART2 received data to DVIO board
 VSM_UART2_RX
 Versatile Stream Manager UART1 transmitted data to analog board
 VSM_UART2_TX
 Versatile Stream Manager UART2 transmitted data to DVIO board
 VSOUT
 Vertical synchronisation OUT
 WE
 Write Enable
 Y_IN

Luminance input from analog board
Y_OUT
Luminance output from Host Decoder
Y_OUT_B
Filtered luminance output
YY_OUT(9:0)
Luminance output from FLI

Digital Board Chrysalis

ADC: Analog to Digital Converter
DAC: Digital to Analog Converter
DENC: Digital (Video) Encoder (Video DAC)
DV: Digital Video (Camcorder)
EF: Emitter Follower
OSD: On-Screen Display
VIP: Video Input Processor (Video ADC)
2Fh: Progressive scan video
2V5
+2V5 Power supply for Link+Codec IC7431
3V3
+3V3 Power supply
3V3_A
+3V3 Analog power supply for PHY IC7400
3V3_D
+3V3 Digital power supply for PHY IC7400
3V3_DLY
+3V3 Power supply for IC7500
3V3_LINK
+3V3 Power supply for Link+Codec IC7431
3V3_F
+3V3 Power supply for optional Flash memory IC7432
3V3_RAM
+3V3 Power supply for SDRAM IC7430
3V3_uP
+3V3 Power supply for Micro-controller IC7802
3V3_32kHz
+3V3 Power supply for audio format adaptation circuitry
IC7507 and IC7508
3V3_AC
+3V3 Power supply for audio system clock generator IC7605
and IC7606
+5V
+5V Power supply
5V_PLL
+5V Power supply for VCO of audio PLL IC7604
A (1:17)
Flash address lines of uPD72893
A_MUTE
Audio Mute
ABCK
Audio Bit Clock
AD (1:10)
Address bus lines for Host I/F of Link+Codec IC7431
AEMP1
PCM1 emphasis ON/OFF for PCM1 output
AFS1
Audio sampling frequency indication signal
ALRCLK
Audio Word Select
AMCLK44
11.2896MHz (=256 * 44.1 kHz) audio master clock signal for
44.1 kHz audio
AMCLK48
12.288MHz (=256 * 48 kHz) audio master clock signal for 32
kHz and 48 kHz audio
APWM
PWM signal for audio PLL
ASIC
Application Specific Integrated Circuit
BUFENN_AUD
Buffer Enable Audio
BUFENN_VID
Buffer Enable Video

CLK27M_CON
27MHz Clock to Digital Board
CS
Parallel interface chip select input of Link+Codec IC7431
CTL (0:1)
Link interface control lines
CTSN
Clear to Send
D (0:15)
Flash data lines of Link+Codec IC7431
DCDi
Directional Correlational Deinterlacing. Circuitry that reduces
jaggies on diagonal edges when deinterlacing video-sourced
material.
DV_STATUS
Interrupt pin for reading DV-status
HS_CLK
Video clock input of Link+Codec IC7431
INT
Interrupt request output of Link+Codec IC7431 (input to Micro-
Controller)
IOR
Parallel interface IO read control input of Link+Codec IC7431
ISPN
In System Programming signal (used for programming IC7802)
LKON
Link-on signal output
LPS
Link power status input
LREQ
Link request input
MA (0:10)
SDRAM address lines of Link+Codec IC7431
MCAS
SDRAM column address strobe signal
MCLK
SDRAM clock signal
MD (0:15)
SDRAM data lines of Link+Codec IC7431
MRAS
SDRAM row-address strobe signal
MWE
SDRAM write enable signal
PCM1
Audio Serial Data Output of Link+Codec IC7431
PCM1_NEW
'MSB justified' to I2S converted audio serial data; audio serial
data input of audio DAC UDA1334A
PD (0:15)
Data bus lines for Host I/F of Link+Codec IC7431
PHY_D (0:7)
Data bus connection between PHY and LINK device
RESETn
DVIO board reset
RESET_FM
Reset signal driven by Flashmaster programming device
RETB
Reset input of Link+Codec IC7431
RTSN
Request to Send
RWZ
Parallel interface read/write control input of Link+Codec
IC7431
RXD
Receive Data
SCLK
Link control output clock
TXD
Transmit Data
VPP
+10V switchable programming voltage of microcontroller
YUV (0:7)
Digital Video

Divio 1.8 Board

2V5
 +2V5 Power supply for Link+Codec IC7431
 3V3
 +3V3 Power supply
 3V3_A
 +3V3 Analog power supply for PHY IC7400
 3V3_D
 +3V3 Digital power supply for PHY IC7400
 3V3_DLY
 +3V3 Power supply for IC7500
 3V3_LINK
 +3V3 Power supply for Link+Codec IC7431
 3V3_F
 +3V3 Power supply for optional Flash memory IC7432
 3V3_RAM
 +3V3 Power supply for SDRAM IC7430
 3V3_uP
 +3V3 Power supply for Micro-controller IC7802
 3V3_32kHz
 +3V3 Power supply for audio format adaptation circuitry
 IC7507 & IC7508
 3V3_AC
 +3V3 Power supply for audio system clock generator IC7605 &
 IC7606
 +5V
 +5V Power supply
 5V_PLL
 +5V Power supply for VCO of audio PLL IC7604
 A(1:17)
 Flash address lines of uPD72893
 A_MUTE
 Audio Mute
 ABCK
 Audio Bit Clock
 AD(1:10)
 Address bus lines for Host I/F of Link+Codec IC7431
 AEMP1
 PCM1 emphasis ON/OFF for PCM1 output
 AFS1
 Audio sampling frequency indication signal
 ALRCLK
 Audio Word Select
 AMCLK44
 11,2896MHz (=256*44.1kHz) audio master clock signal for
 44.1kHz audio
 AMCLK48
 12,288MHz (=256*48kHz) audio master clock signal for 32kHz
 and 48kHz audio
 APWM
 PWM signal for audio PLL
 BUFENn_AUD
 Buffer Enable Audio
 BUFENn_VID
 Buffer Enable Video
 CLK27M_CON
 27MHz Clock to Digital Board
 CS
 Parallel interface chip select input of Link+Codec IC7431
 CTL(0:1)
 Link interface control lines
 CTSN
 Clear to Send
 D(0:15)
 Flash data lines of Link+Codec IC7431
 DV_STATUS
 Interrupt pin for reading DV-status
 HS_CLK
 Video clock input of Link+Codec IC7431
 INT
 Interrupt request output of Link+Codec IC7431 (input to Micro-
 Controller)
 IOR

Parallel interface IO read control input of Link+Codec IC7431
 ISPN
 In System Programming signal (used for programming IC7802)
 LKON
 Link-on signal output
 LPS
 Link power status input
 LREQ
 Link request input
 MA(0:10)
 SDRAM address lines of Link+Codec IC7431
 MCAS
 SDRAM column address strobe signal
 MCLK
 SDRAM clock signal
 MD(0:15)SDRAM data lines of Link+Codec IC7431
 MRAS
 SDRAM row-address strobe signal
 MWE
 SDRAM write enable signal
 PCM1
 Audio Serial Data Output of Link+Codec IC7431
 PCM1_NEW
 "MSB justified" to I2S converted audio serial
 data; audio serial data input of audio DAC
 UDA1334A
 PD(0:15)
 Data bus lines for Host I/F of Link+Codec IC7431
 PHY_D(0:7)
 Data bus connection between PHY and LINK device
 RESETn
 DVIO board reset
 RESET_FM
 Reset signal driven by Flashmaster programming device
 RESTB
 Reset input of Link+Codec IC7431
 RTSN
 Request to Send
 RWZ
 Parallel interface read/write control input of Link+Codec
 IC7431
 RXD
 Receive Data
 SCLK
 Link control output clock
 TXD
 Transmit Data
 VPP
 +10V switchable programming voltage of microcontroller
 YUV(0:7)
 Digital Video

10. Spare Parts List

10.1 Exploded View of the Set

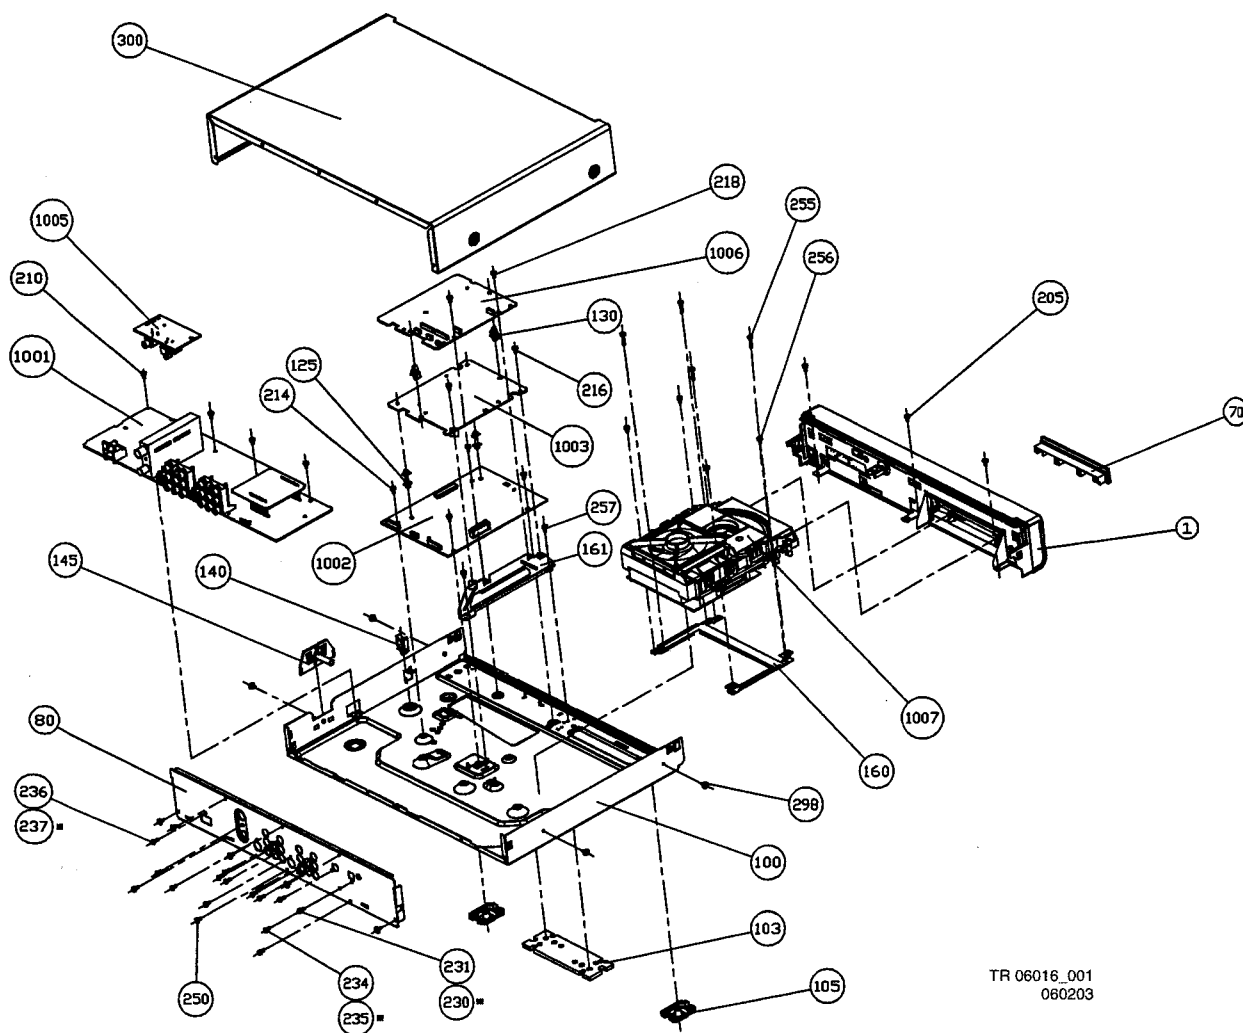
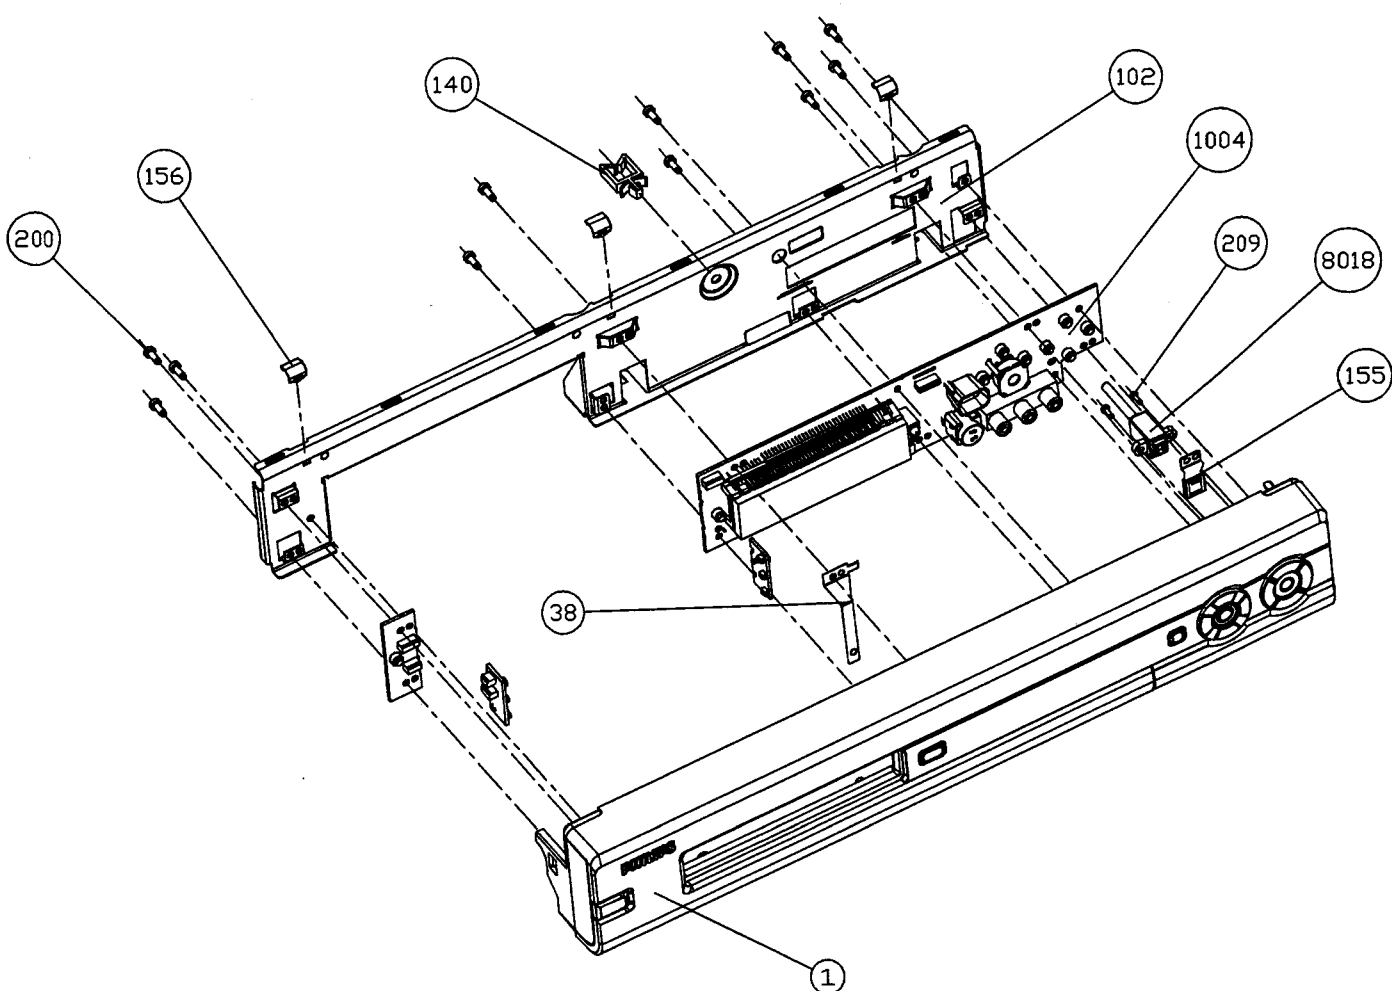


Figure 10-1

10.2 Exploded View of the Front Panel Complete

TR 06017_001
040203

Figure 10-2

10.3 Exploded View of the Front without PWBs

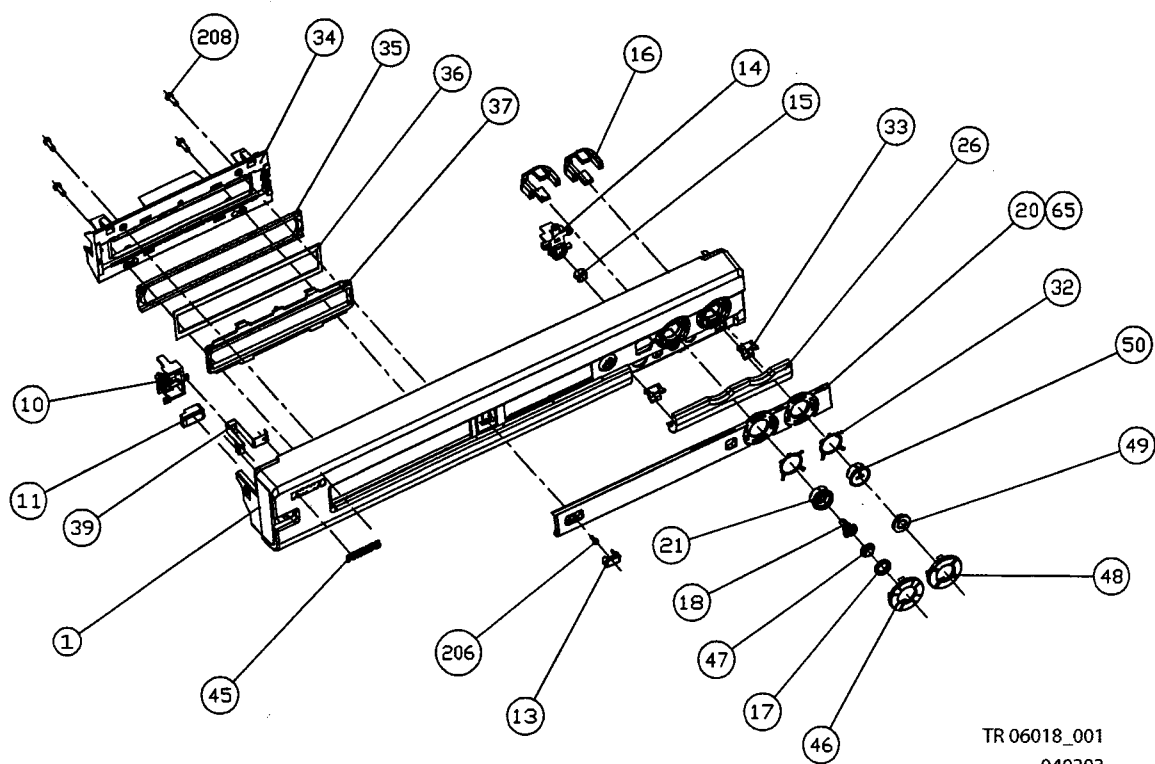


Figure 10-3

Mechanical

Various

0001	3139 247 57931	FRONT DVDR70/001/021
0001	3139 247 58111	FRONT DVDR75/051
0001	3139 247 58121	FRONT DVDR75/001/021
0001	3139 247 58131	FRONT DVDR70/051
0011	3103 607 50341	BUTTON CAP STAND BY
0013	3103 607 50361	BUTTON CAP OPEN/CLS
0020	3139 247 58041	WINDOW DISPLAY
0026	3139 247 58581	FLAP AV DVDR75/051
0026	3139 247 58591	FLAP AV DVDR75/001
0033	3103 604 00441	HINGE DOOR FRONT AV
0046	3139 247 58021	RING RECORD
0047	3103 607 50411	BUTTON CAP RECORD
0048	3139 247 58001	RING ROCKER PLAY/P
0070	3139 247 57981	COVER TRAY
0105	3103 607 50491	FOOT
0300	3103 607 50461	COVER
0350	3128 147 14551	REM. CONTR. RC25115/05
0351▲	2422 070 98133	MAINSORD EUR 1M5 BK
0351▲	4822 321 10713	MAINSORD UK
0352	3103 601 00111	SCART CABLE EU
0357	4822 320 50377	CONNECT. CABLE PAL
8001	3103 601 00190	FFC 22-POL-A-TYP 225MM (AB-DB)
8004	3103 601 00220	FFC 10-POL-D-TYP 350MM (UP-DB)
8005	3103 601 00230	FFC 22-POL-A-TYP 210MM (AB-DB)
8007	3103 601 00250	KR 4POL GESCH 180MM
8008	3103 601 00062	CBLE KR 12P/115/12P KR
8008	3103 601 00441	CBLE KR 12P/130/12P UL
8009	3103 601 00270	FFC 30/15-15-POL-A-TYP 400MM
8010	3103 601 00280	FFC 10-POL-A-TYP 650MM (AB-DC)
8012	3103 601 00400	CBLE KR 8P/125/8P KR UL
8013	3103 601 00310	KR 9POL GESCH 370MM
8018	3103 601 00350	IEEE 1394 DVIO
8019	3103 601 00360	IEEE 1394 CHRYSALIS
8026	3103 601 00431	FFC 22-POL-A-TYP 245MM (AB-DB)

Display Board

Various

1110	4822 242 82114	EFOEC8004/T4
1130	4822 276 13732	SWITCH TACT PUSH
1165	4822 276 13732	SWITCH TACT PUSH
1166	4822 276 13732	SWITCH TACT PUSH
1167	4822 276 13732	SWITCH TACT PUSH
1168	4822 276 13732	SWITCH TACT PUSH
1169	4822 276 13732	SWITCH TACT PUSH
1170	4822 276 13732	SWITCH TACT PUSH
1910	4822 267 11031	10P. FEM. V
1911	3103 601 00160	CABLE TREE 4 POL DA
1920	2422 026 05301	SOC CINCH V 3P FJPJ1127
1921	2422 026 05307	CON MDIN H 4P F YKF51 B
1922	2422 025 10185	CON BM H 9P M 2.00 PH B

-II-

2100	5322 126 11583	10nF 10% 50V 0603
2101	3198 017 34730	0603 16V 47nF COL
2102	4822 124 11946	22µF 20% 16V
2103	5322 126 11583	10nF 10% 50V 0603
2104	2238 586 59812	0603 50V 100NP80M
2110	4822 124 21732	10µF 20% 25V
2111	3198 017 34730	0603 16V 47nF COL
2112	4822 126 13879	220nF 20% 16V
2113	5322 121 42498	680nF 5% 63V
2114	5322 126 11578	1nF 10% 50V 0603
2115	3198 024 44730	47nF 50V 0603
2116	4822 124 11946	22µF 20% 16V
2117	4822 124 81151	22µF 50V
2118	2020 552 94427	0603 50V 100P 5%
2119	2020 552 94427	0603 50V 100P 5%
2120	2020 552 94427	0603 50V 100P 5%
2121	2020 552 94427	0603 50V 100P 5%
2122	2020 552 94427	0603 50V 100P 5%
2123	2020 552 94427	0603 50V 100P 5%
2124	2020 552 94427	0603 50V 100P 5%
2125	2020 552 94427	0603 50V 100P 5%
2126	2020 552 94427	0603 50V 100P 5%
2200	4822 126 14241	0603 50V 330P
2201	4822 126 14241	0603 50V 330P
2202	2238 586 59812	0603 50V 100NP80M



3100	4822 051 30223	22k 5% 0.062W
3101	4822 051 30223	22k 5% 0.062W
3102	4822 051 30222	2k2 5% 0.062W
3103	4822 051 30221	220Ω 5% 0.062W
3104	4822 051 30103	10k 5% 0.062W
3106	4822 117 12925	47k 1% 0.063W 0603
3107	4822 051 30222	2k2 5% 0.062W
3108	4822 117 12925	47k 1% 0.063W 0603
3110	4822 051 30221	220Ω 5% 0.062W
3111	4822 051 30223	22k 5% 0.062W
3112	4822 050 11002	1k 1% 0.4W
3113	4822 051 30102	1k 5% 0.062W
3114	4822 051 30101	100Ω 5% 0.062W
3115	4822 051 30101	100Ω 5% 0.062W
3116	4822 051 30331	330Ω 5% 0.062W
3117	4822 051 30103	10k 5% 0.062W
3118	4822 051 30331	330Ω 5% 0.062W
3119	4822 051 30471	470Ω 5% 0.062W
3120	4822 051 30102	1k 5% 0.062W
3121	4822 116 83872	220Ω 5% 0.5W
3122	4822 051 30103	10k 5% 0.062W
3123	4822 051 30471	470Ω 5% 0.062W
3124	4822 051 30103	10k 5% 0.062W
3125	4822 051 30471	470Ω 5% 0.062W
3126	4822 051 30101	100Ω 5% 0.062W
3127	4822 117 13632	100k 1% 0603 0.62W
3128	4822 117 13632	100k 1% 0603 0.62W
3130	4822 051 30103	10k 5% 0.062W
3132	4822 051 30102	1k 5% 0.062W
3134	4822 117 12063	NTC DC 5W 10k 5%
3137	4822 116 83876	270Ω 5% 0.5W
3139	4822 116 83876	270Ω 5% 0.5W
3141	4822 117 12925	47k 1% 0.063W 0603
3144	4822 051 30103	10k 5% 0.062W
3147	4822 116 52257	22k 5% 0.5W
3148	4822 116 52257	22k 5% 0.5W
3149	4822 116 52257	22k 5% 0.5W
3150	4822 051 30223	22k 5% 0.062W
3151	4822 051 30223	22k 5% 0.062W
3152	4822 051 30223	22k 5% 0.062W
3153	4822 051 30223	22k 5% 0.062W
3200	4822 051 30102	1k 5% 0.062W
3201	4822 051 30105	1M 5% 0.062W
3202	4822 051 30102	1k 5% 0.062W
3203	4822 051 30105	1M 5% 0.062W
3204	4822 051 30689	68Ω 5% 0.063W 0603 RC21
3205	4822 051 30759	75Ω 5% 0.062W
3206	4822 051 30759	75Ω 5% 0.062W
3207	4822 051 30759	75Ω 5% 0.062W
3300	4822 051 30472	4k7 5% 0.062W



5100	4822 157 11706	10µH 5% 2.4X3.4
5101	2422 549 44607	EMI100mH z 600RR
5103	2422 549 44607	EMI100mH z 600RR
5104	4822 157 50964	100µH



6100	4822 130 11416	PDZ6.8B
6101	9322 190 44676	LED VS LTL-1MHHR (LITO)
6102	9322 190 44676	LED VS LTL-1MHHR (LITO)
6103	9322 190 44676	LED VS LTL-1MHHR (LITO)
6105	4822 130 11397	BAS316
6106	4822 130 11397	BAS316
6111	4822 130 11397	BAS316
6200	9322 146 61685	DIO REG SM DF3A6.8FU
6201	9322 146 61685	DIO REG SM DF3A6.8FU
6202	9322 146 61685	DIO REG SM DF3A6.8FU
6203	9322 146 61685	DIO REG SM DF3A6.8FU
6204	9322 146 61685	DIO REG SM DF3A6.8FU



7100	2722 171 07736	VFD BJ900GNK 100*25
7101	3198 010 42310	BC847BW
7102	3198 010 42310	BC847BW
7103	3103 165 13731	IC TMP87C874F/LDCP1
7104	3198 010 42310	BC847BW
7105	3198 010 42310	BC847BW
7106	4822 130 40981	BC337-25
7107	9322 185 97667	IR REC. TSOP4836ZC1
7108	4822 130 41246	BC327-25
7109	3198 010 42310	BC847BW
7112	4822 130 60854	DTA124EU-W

Analog Board

Various

1001▲	2422 086 10919	PROT DEV 65V 125MA MP13
1300▲	2422 086 10899	FUSE5X20ET1A25 250V IEC B
1302▲	4822 252 11215	DSP301N-A21F
1303▲	4822 071 51002	19372(1A)
1304▲	2422 086 10786	FUSE,RADIAL4AMP,
1304▲	9965 000 07786	FUSE RAD T4.0A IEC UL250V
1306▲	2422 086 10919	PROT DEV 65V 125MA MP13
1307▲	4822 071 51002	19372(1A)
1308▲	2422 086 10951	PROT DEV 65V 500MA PSC
1308▲	4822 252 51187	19398E1(0,500A)
1309▲	4822 071 58001	19372(800MA)
1600	4822 242 10434	L1101-95263-0E1(18,432MHz)
1701	4822 242 81436	OFWK3953M
1702	2422 549 44341	FIL SAW 38MHz 9 OFWK9656M
1703	4822 242 10307	OFWK3956M
1703	4822 242 81436	OFWK3953M
1704	2422 549 44611	5MHz 5 TPSR*MBQ2 BS A
1704	4822 242 72586	TPS5,5MB-TF20
1705	3139 147 17001	TUNER UV1316MK3
1706	2422 549 44612	6MHz TPSR*MBQ2 BS A
1706	4822 242 81572	TPS6,0MB-TF21
1900	4822 265 11154	52030-2210 (22P)
1931▲	2422 030 00304	SOC SUPP AC HOR MALE 9452 B
1932	2422 025 10772	CON BM V 12P M 2.00 PH B
1933	4822 265 11352	CONN. 8P
1940	2422 033 00334	CON BM EURO H 42P F BK GRND-L
1942	2422 025 10769	CON BMT 9P VERT PH-B
1943	4822 267 11031	10P. FEM. V
1947	4822 265 11154	52030-2210 (22P)
1948	4822 267 10994	4P, MDIN
1949	2422 026 05308	CINCH H 3P F YEWHRD Y
1951	4822 267 31729	CONNECTOR
1960	2422 025 09406	CON BM 4P VERT PH-B
1990	4822 242 73552	13,875 000 MHz

-II-

2000	4822 124 80483	47µF 20% 6.3V
2001	4822 124 42234	100µF 20% 6.3V
2001	4822 124 80483	47µF 20% 6.3V
2002	2238 586 59812	0603 50V 100NP80M
2002	4822 124 42234	100µF 20% 6.3V
2003	2238 586 59812	0603 50V 100NP80M
2004	2238 586 59812	0603 50V 100NP80M
2004	4822 124 80483	47µF 20% 6.3V
2005	4822 124 42234	100µF 20% 6.3V
2006	3198 016 31020	0603 25V 1nF
2006	4822 126 11785	0603 50V 47P 5%
2007	4822 124 21732	10µF 20% 25V
2008	3198 016 31020	0603 25V 1nF
2009	2020 552 94427	0603 50V 100P 5%
2009	2238 586 59812	0603 50V 100NP80M
2010	4822 124 80483	47µF 20% 6.3V
2011	2238 586 59812	0603 50V 100NP80M
2011	4822 124 21732	10µF 20% 25V
2012	2238 586 59812	0603 50V 100NP80M
2013	4822 124 42234	100µF 20% 6.3V
2014	2238 586 59812	0603 50V 100NP80M
2015	2238 586 59812	0603 50V 100NP80M
2016	4822 124 22652	2.2µF 20% 50V
2017	2020 552 94427	0603 50V 100P 5%
2018	2238 586 59812	0603 50V 100NP80M
2018	4822 124 21732	10µF 20% 25V
2019	2238 586 59812	0603 50V 100NP80M
2019	4822 124 21732	10µF 20% 25V
2020	4822 124 21732	10µF 20% 25V
2020	4822 124 80483	47µF 20% 6.3V
2021	2238 586 59812	0603 50V 100NP80M
2023	3198 016 31020	0603 25V 1nF
2023	4822 124 12392	47µF 20% 16V
2024	4822 126 11669	27pF
2025	3198 016 31020	0603 25V 1nF
2026	4822 126 11669	27pF
2029	4822 124 12392	47µF 20% 16V
2030	3198 016 31020	0603 25V 1nF
2031	4822 124 22652	2.2µF 20% 50V
2032	3198 016 31020	0603 25V 1nF
2032	5322 126 11583	10nF 10% 50V 0603
2033	2020 552 94427	0603 50V 100P 5%

2033	4822 126 13881	470pF 5% 50V	2432	4822 124 42234	100µF 20% 6.3V	2728	5322 126 11583	10nF 10% 50V 0603
2034	4822 126 13881	470pF 5% 50V	2433	3198 017 34730	0603 16V 47nF COL	2729	4822 124 21732	10µF 20% 25V
2035	2238 586 59812	0603 50V 100NP80M	2434	4822 124 80483	47µF 20% 6.3V	2730	4822 126 13879	220µF 20% 16V
2037	2238 586 59812	0603 50V 100NP80M	2435	2238 586 59812	0603 50V 100NP80M	2731	2020 552 94523	0603 50V 8P2 PM0P5
2037	4822 126 13193	4.7nF 10% 63V	2436	3198 017 41050	0603 10V 1µF	2732	4822 124 22652	2.2µF 20% 50V
2038	4822 124 42234	100µF 20% 6.3V	2437	3198 017 41050	0603 10V 1µF	2733	2238 586 59812	0603 50V 100NP80M
2038	4822 126 13193	4.7nF 10% 63V	2438	3198 017 41050	0603 10V 1µF	2734	5322 126 11578	1nF 10% 50V 0603
2039	4822 126 13193	4.7nF 10% 63V	2439	2238 586 59812	0603 50V 100NP80M	2737	4822 124 80483	47µF 20% 6.3V
2040	4822 126 13193	4.7nF 10% 63V	2440	3198 017 41050	0603 10V 1µF	2740	4822 124 22652	2.2µF 20% 50V
2041	2020 552 94427	0603 50V 100P 5%	2441	3198 017 41050	0603 10V 1µF	2741	5322 126 11578	1nF 10% 50V 0603
2042	2238 586 59812	0603 50V 100NP80M	2442	4822 124 11946	22µF 20% 16V	2742	5322 126 11578	1nF 10% 50V 0603
2043	4822 124 80483	47µF 20% 6.3V	2443	4822 124 42234	100µF 20% 6.3V	2932	2238 586 59812	0603 50V 100NP80M
2045	3198 016 31020	0603 25V 1nF	2444	4822 126 13881	470pF 5% 50V	2933	4822 124 80483	47µF 20% 6.3V
2047	3198 016 31020	0603 25V 1nF	2445	4822 126 13881	470pF 5% 50V	2934	2238 586 59812	0603 50V 100NP80M
2048	4822 124 12392	47µF 20% 16V	2446	3198 017 41050	0603 10V 1µF	2935	2238 586 59812	0603 50V 100NP80M
2048	4822 124 80483	47µF 20% 6.3V	2447	4822 126 13881	470pF 5% 50V	2936	4822 122 33761	22pF 5% 50V
2049	5322 126 11583	10nF 10% 50V 0603	2448	4822 126 13881	470pF 5% 50V	2937	4822 122 33761	22pF 5% 50V
2050	4822 124 12392	47µF 20% 16V	2449	4822 126 13956	68pF 5% 63V 0603	2938	2238 586 59812	0603 50V 100NP80M
2050	4822 124 80483	47µF 20% 6.3V	2450	2238 586 59812	0603 50V 100NP80M	2940	2238 586 59812	0603 50V 100NP80M
2301▲	2020 554 90173	CERSAFKX250V.S2	2459	3198 017 41050	0603 10V 1µF	2941	4822 124 21732	10µF 20% 25V
2301▲	4822 126 14088	2.2nF 20% 250V	2460	4822 124 40769	4.7µF 20% 100V	2942	4822 126 14238	0603 50V 2N2
2302▲	4822 121 10512	275V 220nF 20%	2461	4822 124 40769	4.7µF 20% 100V	2943	4822 126 14508	180pF 5% 50V 0603
2303	4822 122 31175	1nF 10% 500V	2462	4822 124 11947	10µF 20% 16V	2944	4822 126 14238	0603 50V 2N2
2304	4822 121 51598	2.2nF 5% 400V	2463	4822 124 11947	10µF 20% 16V	2945	4822 126 14508	180pF 5% 50V 0603
2305	2020 021 91506	EL ZL 16V S 1000µF PM20 B	2464	4822 124 21732	10µF 20% 25V	2946	3198 017 41050	0603 10V 1µF
2305	4822 124 40849	330µF 20% 16V	2501	3198 017 41050	0603 10V 1µF	2947	3198 017 41050	0603 10V 1µF
2306	2020 021 91528	EL ZL 6V3 560µF PM20 A	2502	2238 586 59812	0603 50V 100NP80M			
2306	4822 124 40184	1000µF 20% 10V	2503	2238 586 59812	0603 50V 100NP80M			
2307	4822 122 31175	1nF 10% 500V	2504	3198 017 41050	0603 10V 1µF			
2308	4822 121 70386	47nF 10% 250V	2505	3198 017 41050	0603 10V 1µF			
2309▲	4822 151 90053	EL 151 400V S 68µF PM20	2506	3198 017 41050	0603 10V 1µF			
2310	5322 126 11578	1nF 10% 50V 0603	2507	3198 017 41050	0603 10V 1µF			
2311	5322 126 11578	1nF 10% 50V 0603	2508	3198 017 41050	0603 10V 1µF			
2312	2020 021 91506	EL ZL 16V S 1000µF PM20 B	2509	2238 586 59812	0603 50V 100NP80M			
2313	2020 021 91528	EL ZL 6V3 560µF PM20 A	2510	4822 124 42234	100µF 20% 6.3V			
2313	4822 124 40184	1000µF 20% 10V	2511	2020 009 90097	EL BP NA 16V S 100µF PM20 A			
2315▲	4822 126 14525	47pF 5% 1KV						
2317	5322 126 11578	1nF 10% 50V 0603	2512	2238 586 59812	0603 50V 100NP80M			
2318	4822 126 10206	2.2nF 10% 500V	2513	2020 552 96807	0603 X5R 10V 1µF PM10 R			
2319	2020 021 91506	EL ZL 16V S 1000µF PM20 B	2514	2238 586 59812	0603 50V 100NP80M			
2319	4822 124 40849	330µF 20% 16V	2515	2020 552 96807	0603 X5R 10V 1µF PM10 R			
2320	4822 124 40849	330µF 20% 16V	2516	2020 009 90097	EL BP NA 16V S 100µF PM20 A			
2320	4822 124 80791	470µF 16V 20% 105C DXH=8X11.5	2517	5322 126 11578	1nF 10% 50V 0603			
2321	2238 586 59812	0603 50V 100NP80M	2518	2238 586 59812	0603 50V 100NP80M			
2322	2020 021 91506	EL ZL 16V S 1000µF PM20 B	2519	4822 124 42234	100µF 20% 6.3V			
2322	4822 124 41584	100µF 20% 10V	2520	5322 126 11578	1nF 10% 50V 0603			
2323	4822 124 42234	100µF 20% 6.3V	2521	2238 586 59812	0603 50V 100NP80M			
2324	2238 586 59812	0603 50V 100NP80M	2522	2020 009 90097	EL BP NA 16V S 100µF PM20 A			
2325	4822 124 81151	22µF 50V	2523	5322 126 11578	1nF 10% 50V 0603			
2326	4822 121 41857	10nF 5% 250V	2524	3198 017 41050	0603 10V 1µF			
2327	2238 586 59812	0603 50V 100NP80M	2525	3198 017 41050	0603 10V 1µF			
2328	4822 124 81151	22µF 50V	2526	2020 009 90097	EL BP NA 16V S 100µF PM20 A			
2329	2238 586 59812	0603 50V 100NP80M	2527	5322 126 11578	1nF 10% 50V 0603			
2330	5322 126 11578	1nF 10% 50V 0603	2530	2238 586 59812	0603 50V 100NP80M			
2331	2238 586 59812	0603 50V 100NP80M	2535	2238 586 59812	0603 50V 100NP80M			
2332	4822 124 22651	1.0µF 20% 50V	2536	2238 586 59812	0603 50V 100NP80M			
2334	2238 586 59812	0603 50V 100NP80M	2580	2238 586 59812	0603 50V 100NP80M			
2335	4822 124 21732	10µF 20% 25V	2581	4822 124 42234	100µF 20% 6.3V			
2336	2238 586 59812	0603 50V 100NP80M	2585	2238 586 59812	0603 50V 100NP80M			
2337	4822 122 33741	10pF 10% 50V	2586	5322 126 11578	1nF 10% 50V 0603			
2338	2238 586 59812	0603 50V 100NP80M	2587	3198 017 41050	0603 10V 1µF			
2339	3198 017 41050	0603 10V 1µF	2590	4822 122 33753	150pF 5% 50V			
2340▲	2020 554 90148	NSA 250V S 470P PM20	2600	4822 124 21732	10µF 20% 25V			
2340▲	2020 554 90169	KX 250V S 470P PM10 B	2601	5322 126 11583	10nF 10% 50V 0603			
2341	3198 017 41050	0603 10V 1µF	2602	4822 124 21732	10µF 20% 25V			
2342	3198 017 41050	0603 10V 1µF	2603	2238 586 59812	0603 50V 100NP80M			
2402	2238 586 59812	0603 50V 100NP80M	2604	5322 126 11583	10nF 10% 50V 0603			
2403	4822 124 80483	47µF 20% 6.3V	2605	4822 124 21732	10µF 20% 25V			
2404	2238 586 59812	0603 50V 100NP80M	2606	2238 586 59812	0603 50V 100NP80M			
2405	4822 124 80483	47µF 20% 6.3V	2607	4822 126 14225	56pF 5% 50V 0603			
2406	5322 126 11583	10nF 10% 50V 0603	2608	4822 124 21732	10µF 20% 25V			
2407	4822 122 33741	10pF 10% 50V	2609	4822 126 14225	56pF 5% 50V 0603			
2408	3198 017 41050	0603 10V 1µF	2610	5322 126 11583	10nF 10% 50V 0603			
2409	2238 586 59812	0603 50V 100NP80M	2611	4822 124 80231	47µF 20% 16V			
2410	3198 017 41050	0603 10V 1µF	2612	4822 124 40769	4.7µF 20% 100V			
2411	2238 586 59812	0603 50V 100NP80M	2616	5322 126 11578	1nF 10% 50V 0603			
2412	4822 122 33741	10pF 10% 50V	2617	5322 126 11578	1nF 10% 50V 0603			
2413	4822 124 80483	47µF 20% 6.3V	2620	3198 016 33380	0603 50V 3P3 COL			
2414	2238 586 59812	0603 50V 100NP80M	2621	3198 016 33380	0603 50V 3P3 COL			
2416	3198 017 41050	0603 10V 1µF	2623	2238 586 59812	0603 50V 100NP80M			
2417	4822 124 11947	10µF 20% 16V	2626	4822 124 22652	2.2µF 20% 50V			
2418	3198 017 41050	0603 10V 1µF	2627	4822 124 22652	2.2µF 20% 50V			
2419	3198 017 41050	0603 10V 1µF	2713	4822 124 11946	22µF 20% 16V			
2420	2238 586 59812	0603 50V 100NP80M	2719	4822 126 13883	220pF 5% 50V			
2421	4822 124 11947	10µF 20% 16V	2720	4822 124 42234	100µF 20% 6.3V			
2422	5322 126 11583	10nF 10% 50V 0603	2721	5322 122 33861	12pF 10% 50V			
2423	3198 017 41050	0603 10V 1µF	2722	5322 124 41379	2.2µF 20% 50V			
2424	4822 124 80483	47µF 20% 6.3V	2723	4822 126 13881	470pF 5% 50V			
2425	2238 586 59812	0603 50V 100NP80M	2724	2238 586 59812	0603 50V 100NP80M			
2427	3198 017 41050	0603 10V 1µF	2725	4822 122 33761	22pF 5% 50V			
2428	4822 124 11947	10µF 20% 16V	2727	2238 586 59812	0603 50V 100NP80M			
2429	4822 124 11946	22µF 20% 16V						
2430	2238 586 59812	0603 50V 100NP80M						



3000	4822 117 13632	100k 1% 0603 0.62W
3001	2120 108 93941	0603 MCR03 5k62 PM1 R
3001	4822 117 13613	2Ω 5% 0603
3001	5322 117 13031	5k6 1% 0.063W 0603 RC22H
3002	4822 117 13613	2Ω 5% 0603
3003	4822 051 30103	10k 5% 0.062W
3003	4822 051 30472	4k7 5% 0.062W
3004	4822 117 12139	22Ω 5% 0.062W
3004	5322 117 13024	33k 1% 0.063W 0603 RC22H
3005	4822 051 30472	4k7 5% 0.062W
3005	4822 117 12139	22Ω 5% 0.062W
3006	4822 051 30472	4k7 5% 0.062W
3006	4822 117 12139	22Ω 5% 0.062W
3007	4822 117 12925	47k 1% 0.063W 0603
3008	4822 051 30102	1k 5% 0.062W
3008	5322 117 13038	27k 1% 0.063W 0603 RC22H
3009	2120 108 93941	0603 MCR03 5k62 PM1 R
3009	5322 117 13026	4k7 1% 0.063W 0603 RC22H
3009	5322 117 13031	5k6 1% 0.063W 0603 RC22H
3010	2322 704 67502	0603 RC22H 7k5 PM1 R
3010	4822 117 13632	100k 1% 0603 0.62W
3011	4822 117 12917	1Ω 5% 0.062W CASE 0603
3011	4822 117 13632	100k 1% 0603 0.62W
3012	4822 051 30103	10k 5% 0.062W
3012	5322 117 13047	330Ω 1% 0.063W 0603 RC22H
3013	2322 704 67502	0603 RC22H 7k5 PM1 R
3013	4822 117 12139	22Ω 5% 0.062W
3014	2120 108 93941	0603 MCR03 5k62 PM1 R
3014	4822 051 30103	10k 5% 0.062W
3014	5322 117 13031	5k6 1% 0.063W 0603 RC22H
3015	4822 051 30471	470Ω 5% 0.062W
3015	4822 117 13613	22Ω 5% 0603
3016	5322 117 13038	27k 1% 0.063W 0603 RC22H
3017	4822 117 13613	22Ω 5% 0603
3017	5322 117 13024	33k 1% 0.063W 0603 RC22H
3018	2120 108 93941	0603 MCR03 5k62 PM1 R
3018	4822 117 12139	22Ω 5% 0.062W
3018	5322 117 13031	5k6 1% 0.063W 0603 RC22H
3019	4822 116 52186	22Ω 5% 0.5W
3019	4822 117 12139	22Ω 5% 0.062W
3020	4822 051 30472	4k7 5% 0.062W
3020	4822 117 12139	22Ω 5% 0.062W
3021	4822 051 30103	10k 5% 0.062W
3022	4822 117 12139	22Ω 5% 0.062W
3023	4822 117 12139	22Ω 5% 0.062W
3024	4822 117 12139	22Ω 5% 0.062W
3024	4822 117 12925	47k 1% 0.063W 0603
3025	4822 117 13632	100k 1% 0603 0.62W
3026	4822 117 12139	22Ω 5% 0.062W
3026	4822 117 12925	47k 1% 0.063W 0603
3027	5322 117 13024	33k 1% 0.063W 0603 RC22H
3027	5322 117 13026	4k7 1% 0.063W 0603 RC22H
3028	4822 117 12139	22Ω 5% 0.062W
3029	4822 051 30101	100Ω 5% 0.062W
3029	4822 117 12917	1Ω 5% 0.062W CASE 0603
3030	5322 117 13038	27k 1% 0.063W 0603 RC22H
3030	5322 117 13047	330Ω 1% 0.063W 0603 RC22H
3031	4822 051 30103	10k 5% 0.062W
3032	2322 704 67502	0603 RC22H 7k5 PM1 R
3033	4822 117 12139	22Ω 5% 0.062W
3034	4822 117 12925	47k 1% 0.063W 0603
3034	4822 117 13613	2Ω 5% 0603

3035	4822 050 21003	10k 1% 0.6W	3363	4822 051 30222	2k2 5% 0.062W	3466	2122 551 00031	VDR 0805 1M A/6V4 MAX 21V R
3035	4822 117 13613	20Ω 5% 0603	3364	4822 051 30103	10k 5% 0.062W	3466	2322 574 10402	VDR 0805 1M A/6V4 MAX 21VR
3036	2322 704 67502	0603 RC22H 7k5 PM1 R	3365	4822 051 30332	3k3 5% 0.062W	3467	2122 551 00031	VDR 0805 1M A/6V4 MAX 21V R
3039	4822 050 21003	10k 1% 0.6W	3366	4822 051 30152	1k5 5% 0.062W	3467	2322 574 10402	VDR 0805 1M A/6V4 MAX 21VR
3039	5322 117 13038	27k 1% 0.063W 0603 RC22H	3367	4822 117 12903	1k8 1% 0.063W 0603	3468	2122 551 00031	VDR 0805 1M A/6V4 MAX 21V R
3040	5322 117 13024	33k 1% 0.063W 0603 RC22H	3368	4822 051 30332	3k3 5% 0.062W	3468	2322 574 10402	VDR 0805 1M A/6V4 MAX 21VR
3041	4822 050 21003	10k 1% 0.6W	3371	4822 051 30479	47Ω 5% 0.062W	3469	4822 117 13632	100k 1% 0603 0.62W
3042	4822 050 21003	10k 1% 0.6W	3372	4822 051 30339	33Ω 5% 0.062W	3470	4822 117 13632	100k 1% 0603 0.62W
3043	4822 117 12139	22Ω 5% 0.062W	3373	4822 051 30339	33Ω 5% 0.062W	3471	4822 117 13632	100k 1% 0603 0.62W
3043	4822 117 12925	47k 1% 0.063W 0603	3374	4822 051 30471	470Ω 5% 0.062W	3472	4822 117 13632	100k 1% 0603 0.62W
3044	4822 051 30103	10k 5% 0.062W	3375	4822 051 30471	470Ω 5% 0.062W	3473	4822 051 30101	100Ω 5% 0.062W
3044	4822 117 12925	47k 1% 0.063W 0603	3376	4822 051 30471	470Ω 5% 0.062W	3474	4822 051 30101	100Ω 5% 0.062W
3045	4822 051 30102	1k 5% 0.062W	3401	5322 117 13055	75Ω 1% 0.063W 0603 RC22H	3475	4822 051 30101	100Ω 5% 0.062W
3045	4822 117 12925	47k 1% 0.063W 0603	3402	5322 117 13055	75Ω 1% 0.063W 0603 RC22H	3476	4822 051 30101	100Ω 5% 0.062W
3045	4822 117 13632	100k 1% 0603 0.62W	3403	5322 117 13055	75Ω 1% 0.063W 0603 RC22H	3477	4822 051 30101	100Ω 5% 0.062W
3046	4822 051 30471	470Ω 5% 0.062W	3404	4822 051 30759	75Ω 5% 0.062W	3478	4822 051 30101	100Ω 5% 0.062W
3046	4822 116 52257	22k 5% 0.5W	3405	4822 051 30223	22k 5% 0.062W	3487	4822 117 13632	100k 1% 0603 0.62W
3047	4822 050 21003	10k 1% 0.6W	3406	4822 117 12891	220k 1% ERJ3Ω	3488	4822 117 13632	100k 1% 0603 0.62W
3047	4822 117 13632	100k 1% 0603 0.62W	3407	4822 051 30332	3k3 5% 0.062W	3489	4822 117 12864	82k 5% 0.6W
3048	4822 051 30101	100Ω 5% 0.062W	3408	4822 051 30392	3k9 5% 0.063W 0603	3490	4822 051 30151	150Ω 5% 0.062W
3049	4822 051 30472	47k 5% 0.062W	3409	5322 117 13055	75Ω 1% 0.063W 0603 RC22H	3491	4822 051 30151	150Ω 5% 0.062W
3050	4822 117 13632	100k 1% 0603 0.62W	3410	5322 117 13055	75Ω 1% 0.063W 0603 RC22H	3492	4822 051 30151	150Ω 5% 0.062W
3051	4822 051 30223	22k 5% 0.062W	3411	4822 051 30759	75Ω 5% 0.062W	3493	4822 051 30151	150Ω 5% 0.062W
3051	4822 117 13632	100k 1% 0603 0.62W	3412	4822 116 52201	75Ω 5% 0.5W	3494	4822 051 30151	150Ω 5% 0.062W
3052	4822 051 30223	22k 5% 0.062W	3413	5322 117 13055	75Ω 1% 0.063W 0603 RC22H	3495	4822 051 30471	470Ω 5% 0.062W
3052	4822 051 30332	3k3 5% 0.062W	3414	4822 051 30759	75Ω 5% 0.062W	3495	4822 051 30472	4k7 5% 0.062W
3053	4822 050 21003	10k 1% 0.6W	3415	4822 051 30102	1k 5% 0.062W	3496	4822 051 30471	470Ω 5% 0.062W
3053	4822 117 13632	100k 1% 0603 0.62W	3416	4822 051 30472	4k7 5% 0.062W	3496	4822 051 30472	4k7 5% 0.062W
3054	4822 051 30332	3k3 5% 0.062W	3417	4822 051 30759	75Ω 5% 0.062W	3501	4822 051 30102	1k 5% 0.062W
3054	4822 117 12139	22Ω 5% 0.062W	3418	4822 117 13632	100k 1% 0603 0.62W	3502	4822 050 11002	1k 1% 0.4W
3300▲	4822 053 21335	3M3 5% 0.5W	3419	4822 051 30223	22k 5% 0.062W	3503	4822 117 13632	100k 1% 0603 0.62W
3301▲	4822 053 21335	3M3 5% 0.5W	3420	4822 051 30151	150Ω 5% 0.062W	3504	4822 117 13632	100k 1% 0603 0.62W
3302	4822 051 30102	1k 5% 0.062W	3421	4822 051 30273	27k 5% 0.062W	3505	4822 117 13632	100k 1% 0603 0.62W
3303	4822 051 30102	1k 5% 0.062W	3422	4822 116 52231	820Ω 5% 0.5W	3506	4822 117 13632	100k 1% 0603 0.62W
3304	4822 051 30103	10k 5% 0.062W	3423	4822 051 30391	390Ω 5% 0.062W	3507	4822 117 13632	100k 1% 0603 0.62W
3305▲	4822 053 21684	680k 5% 0.5W	3424	4822 051 30333	33k 5% 0.062W	3508	4822 051 30102	1k 5% 0.062W
3306	4822 116 83872	220Ω 5% 0.5W	3425	4822 051 30471	470Ω 5% 0.062W	3509	4822 050 11002	1k 1% 0.4W
3307	4822 051 30103	10k 5% 0.062W	3426	4822 051 30333	33k 5% 0.062W	3510	4822 117 13632	100k 1% 0603 0.62W
3308	4822 116 52272	330k 5% 0.5W	3427	4822 051 30759	75Ω 5% 0.062W	3511	4822 117 13632	100k 1% 0603 0.62W
3309	4822 116 52272	330k 5% 0.5W	3428	4822 117 13632	100k 1% 0603 0.62W	3512	4822 051 30102	1k 5% 0.062W
3310	4822 116 52272	330k 5% 0.5W	3429	4822 117 12925	47k 1% 0.063W 0603	3513	4822 051 30102	1k 5% 0.062W
3311	4822 051 30102	1k 5% 0.062W	3431	4822 051 30472	4k7 5% 0.062W	3514	4822 117 13632	100k 1% 0603 0.62W
3312	4822 051 30221	220Ω 5% 0.062W	3432	4822 116 52175	100Ω 5% 0.5W	3515	4822 050 11002	1k 1% 0.4W
3313	4822 116 52234	100k 5% 0.5W	3433	4822 116 52175	100Ω 5% 0.5W	3516	4822 117 13632	100k 1% 0603 0.62W
3314	4822 117 13611	1k 1% 0603 ERJ3Ω	3434	4822 116 52283	4k7 5% 0.5W	3517	4822 116 52283	4k7 5% 0.5W
3314	5322 117 13018	1k0 1% 0.063W 0603 RC22H	3435	4822 116 52201	75Ω 5% 0.5W	3518	4822 051 30102	1k 5% 0.062W
3315	4822 117 12902	8k2 1% 0.063W 0603	3436	4822 116 52199	68Ω 5% 0.5W	3519	4822 116 52283	4k7 5% 0.5W
3315	5322 117 13056	8k2 1% 0.063W 0603 RC22H	3437	4822 051 30103	10k 5% 0.062W	3520	4822 051 30221	220Ω 5% 0.062W
3316	5322 117 13026	4k7 1% 0.063W 0603 RC22H	3438	4822 051 30103	10k 5% 0.062W	3521	4822 051 30221	220Ω 5% 0.062W
3317	4822 051 30102	1k 5% 0.062W	3439	4822 051 30103	10k 5% 0.062W	3522	4822 051 30221	220Ω 5% 0.062W
3318	4822 116 52175	100Ω 5% 0.5W	3440	4822 051 30103	10k 5% 0.062W	3523	4822 050 11002	1k 1% 0.4W
3321	2322 193 14477	PR01 A 0Ω47 PM5 A	3441	4822 116 52201	75Ω 5% 0.5W	3524	4822 117 12968	820Ω 5% 0.62W
3323	4822 117 12891	220k 1% ERJ3Ω	3442	4822 051 30154	150k 5% 0.062W	3525	4822 051 30221	220Ω 5% 0.062W
3324	2322 702 60564	D 0603 560k 5%	3443	4822 117 13632	100k 1% 0603 0.62W	3526	4822 051 30102	1k 5% 0.062W
3325	4822 117 12925	47k 1% 0.063W 0603	3444	4822 117 13632	100k 1% 0603 0.62W	3527	4822 117 12968	820Ω 5% 0.62W
3326	4822 116 52175	100Ω 5% 0.5W	3445	4822 051 30151	150Ω 5% 0.062W	3528	4822 051 30472	4k7 5% 0.062W
3326	4822 116 52195	47Ω 5% 0.5W	3446	4822 117 12925	47k 1% 0.063W 0603	3529	4822 051 30472	4k7 5% 0.062W
3327	4822 051 30105	1M 5% 0.062W	3447	4822 116 83884	47k 5% 0.5W	3530	4822 117 12968	820Ω 5% 0.62W
3328	4822 051 30103	10k 5% 0.062W	3448	4822 051 30471	470Ω 5% 0.062W	3531	4822 117 12968	820Ω 5% 0.62W
3329	3198 021 32250	0603 2M 2 PM5	3449	4822 051 30151	150Ω 5% 0.062W	3532	4822 050 11002	1k 1% 0.4W
3330	4822 051 30471	470Ω 5% 0.062W	3450	4822 051 30471	470Ω 5% 0.062W	3533	4822 050 11002	1k 1% 0.4W
3331	4822 051 30109	10Ω 5% 0.062W	3451	4822 050 21003	10k 1% 0.6W	3534	4822 117 13632	100k 1% 0603 0.62W
3332	2120 108 93941	0603 MCR03 5k62 PM1 R	3452	4822 051 30151	150Ω 5% 0.062W	3580	4822 051 30759	75Ω 5% 0.062W
3332	5322 117 13031	5k6 1% 0.063W 0603 RC22H	3454	4822 050 11002	1k 1% 0.4W	3581	4822 051 30222	2k2 5% 0.062W
3333	5322 117 13026	4k7 1% 0.063W 0603 RC22H	3455	4822 051 30103	10k 5% 0.062W	3582	4822 051 30331	330Ω 5% 0.062W
3334	4822 051 30563	56k 5% 0.062W	3458	4822 051 30472	4k7 5% 0.062W	3584	4822 051 30471	470Ω 5% 0.062W
3335	4822 051 30471	470Ω 5% 0.062W	3459	4822 051 30103	10k 5% 0.062W	3585	4822 051 30561	560Ω 5% 0.062W
3336	4822 051 30471	470Ω 5% 0.062W	3460	4822 051 30472	4k7 5% 0.062W	3600	4822 051 30103	10k 5% 0.062W
3337	4822 051 30102	1k 5% 0.062W	3461	2122 551 00031	VDR 0805 1M A/6V4 MAX 21V R	3601	4822 116 52175	100Ω 5% 0.5W
3338	4822 051 30221	220Ω 5% 0.062W	3461	2322 574 10402	VDR 0805 1M A/6V4 MAX 21VR	3602	4822 051 30472	4k7 5% 0.062W
3339	5322 117 13026	4k7 1% 0.063W 0603 RC22H	3462	2122 551 00031	VDR 0805 1M A/6V4 MAX 21V R	3603	4822 116 52175	100Ω 5% 0.5W
3340	5322 117 13026	4k7 1% 0.063W 0603 RC22H	3462	2322 574 10402	VDR 0805 1M A/6V4 MAX 21VR	3606	4822 051 30102	1k 5% 0.062W
3341	4822 051 30683	68k 5% 0.062W	3463	2122 551 00031	VDR 0805 1M A/6V4 MAX 21V R	3607	4822 051 30102	1k 5% 0.062W
3346	4822 051 30222	2k2 5% 0.062W	3464	2122 551 00031	VDR 0805 1M A/6V4 MAX 21V R	3611	4822 051 30101	100Ω 5% 0.062W
3347	4822 051 30472	4k7 5% 0.062W	3464	2322 574 10402	VDR 0805 1M A/6V4 MAX 21VR	3612	4822 051 30101	100Ω 5% 0.062W
3348	4822 051 30681	680Ω 5% 0.062W	3465	2122 551 00031	VDR 0805 1M A/6V4 MAX 21V R	3701	4822 116 52228	680Ω 5% 0.5W
3349	4822 051 30479	47Ω 5% 0.062W	3465	2122 551 00031	VDR 0805 1M A/6V4 MAX 21V R	3702	4822 051 30471	470Ω 5% 0.062W
3350	4822 051 30102	1k 5% 0.062W	3466	2322 574 10402	VDR 0805 1M A/6V4 MAX 21VR	3703	4822 116 52245	150k 5% 0.5W
3351	2322 702 60564	D 0603 560k 5%	3466	2122 551 00031	VDR 0805 1M A/6V4 MAX 21VR	3704	4822 051 30221	220Ω 5% 0.062W
3351	4822 051 30105	1M 5% 0.062W	3466	2122 551 00031	VDR 0805 1M A/6V4 MAX 21VR	3705	4822 051 30103	10k 5% 0.062W
3352	2322 193 14687	PR01 A 0Ω268 PM5	3466	2122 551 00031	VDR 0805 1M A/6V4 MAX 21VR	3710	4822 051 30562	5k6 5% 0.063W 0603 RC21
3353	4822 051 30272	2k7 5% 0.062W	3466	2122 551 00031	VDR 0805 1M A/6V4 MAX 21VR	3711	4822 051 30333	33k 5% 0.062W
3354	4822 051 30272	2k7 5% 0.062W	3466	2122 551 00031	VDR 0805 1M A/6V4 MAX 21VR	3714	4822 051 30183	18k 5% 0.062W

3725	4822 117 12902	8k2 1% 0.063W 0603
3726	4822 051 30101	100Ω 5% 0.062W
3727	4822 117 12917	1Ω 5% 0.062W CASE0603
3728	4822 051 30101	100Ω 5% 0.062W
3729	4822 117 12917	1Ω 5% 0.062W CASE0603
3730	4822 051 30472	4k7 5% 0.062W
3731	4822 051 30271	270Ω 5% 0.062W
3731	4822 051 30331	330Ω 5% 0.062W
3732	4822 051 30102	1k 5% 0.062W
3733	4822 051 30472	4k7 5% 0.062W
3734	4822 051 30272	2k7 5% 0.062W
3735	4822 051 30332	3k3 5% 0.062W
3736	4822 051 30331	330Ω 5% 0.062W
3737	4822 051 30222	2k2 5% 0.062W
3738	4822 051 30682	6k8 5% 0.062W
3739	4822 051 30562	5k6 5% 0.063W 0603 RC21
3740	4822 051 30681	680Ω 5% 0.062W
3741	4822 051 30472	4k7 5% 0.062W
3742	4822 051 30472	4k7 5% 0.062W
3743	4822 051 30563	56k 5% 0.062W
3744	4822 117 13632	100k 1% 0.063W 0.62W
3745	4822 051 30562	5k6 5% 0.063W 0603 RC21
3746	4822 051 30562	5k6 5% 0.063W 0603 RC21
3758	4822 051 30103	10k 5% 0.062W
3931	4822 117 12925	47k 1% 0.063W 0603
3932	4822 117 12925	47k 1% 0.063W 0603
3933	4822 117 12925	47k 1% 0.063W 0603
3934	4822 051 30101	100Ω 5% 0.062W
3935	4822 051 30101	100Ω 5% 0.062W
3936	4822 051 30103	10k 5% 0.062W
3937	4822 051 30222	2k2 5% 0.062W
3938	4822 051 30222	2k2 5% 0.062W
3939	4822 051 30472	4k7 5% 0.062W
3940	3198 021 31060	0603 10M PM5
3941	3198 021 31060	0603 10M PM5
3942	4822 051 30333	33k 5% 0.062W
3943	4822 051 30333	33k 5% 0.062W
3944	4822 051 30333	33k 5% 0.062W
3945	4822 051 30333	33k 5% 0.062W
3946	4822 051 30333	33k 5% 0.062W
3947	4822 051 30333	33k 5% 0.062W
3948	4822 051 30472	4k7 5% 0.062W
3950	4822 117 13632	100k 1% 0.063W 0.62W
3951	4822 051 30223	22k 5% 0.062W
3952	4822 051 30153	15k 5% 0.062W
3953	4822 051 30472	4k7 5% 0.062W
3954	4822 051 30472	4k7 5% 0.062W
3955	4822 051 30103	10k 5% 0.062W

5001	2422 549 43062	EMI 100mH z 600R R
5300▲	2422 531 02546	SLOT SRW28EC9-E01V0* B
5302▲	2422 549 44509	MAINS 25mH 0A4 HF2022R
5304	4822 157 70826	2.4μH
5305	4822 157 70826	2.4μH
5306	2422 535 94634	IND FXD LHL08 S 2U2 PM20
5307	4822 157 11737	22μH 10% 9X9.5
5308	4822 157 11737	22μH 10% 9X9.5
5309	4822 157 11737	22μH 10% 9X9.5
5401	4822 157 11706	10μH 5% 2.4X3.4
5402	4822 157 11706	10μH 5% 2.4X3.4
5403	4822 157 11706	10μH 5% 2.4X3.4
5404	4822 157 11706	10μH 5% 2.4X3.4
5406	4822 157 11706	10μH 5% 2.4X3.4
5580	2422 536 00019	TRANSFORMER 6RG
5581	4822 157 11706	10μH 5% 2.4X3.4
5600▲	4822 157 11706	10μH 5% 2.4X3.4
5601▲	4822 157 11706	10μH 5% 2.4X3.4
5602▲	4822 157 11706	10μH 5% 2.4X3.4
5705	4822 157 11139	6.8μH 5%
5709	4822 157 11139	6.8μH 5%
5710	2422 549 44162	IND VAR 7MM Y 77M8 B
5711	2422 549 44162	IND VAR 7MM Y 77M8 B
5713	4822 157 11747	15μH 5%
5714	4822 157 11747	15μH 5%
5931	4822 157 11706	10μH 5% 2.4X3.4
5932	2422 549 43062	EMI 100mH z 600R R



6001	4822 130 11397	BAS316
6002	4822 130 11397	BAS316
6003	4822 130 11397	BAS316
6003	4822 130 30621	1N4148
6004	4822 130 11397	BAS316
6004	4822 130 30621	1N4148
6005	4822 130 11397	BAS316
6006	9340 260 20115	DIO SIG SM BAW56W
6007	4822 130 11397	BAS316
6300	5322 130 32677	1N5822
6300	9322 161 76682	DIO REC SB340L-7024

6300	9322 182 65682	DIO REC STTH302-C2
6301	4822 130 31603	1N4006
6302	4822 130 31603	1N4006
6303	5322 130 32677	1N5822
6303	9322 161 76682	DIO REC SB340L-7024
6303	9322 182 65682	DIO REC STTH302-C2
6304	4822 130 31878	1N4003G
6305	4822 130 31603	1N4006
6306	4822 130 31603	1N4006
6307	9322 161 77682	DIO REC SB540L-7024
6307	9322 184 68682	DIO REC STPS5L40-C2
6308	9322 161 77682	DIO REC SB540L-7024
6308	9322 184 68682	DIO REC STPS5L40-C2
6309	9322 126 71673	DIO REC BYT42M A (TEG0)
6310	9322 161 78682	DIO REC SB360L-7024
6310	9322 182 65682	DIO REC STTH302-C2
6310	9322 188 34682	DIO REC STPS3L60-C2
6311	4822 130 31878	1N4003G
6312	4822 130 11416	PDZ6.8B
6313	4822 130 10871	SBYV27-200
6314	4822 130 10837	UDZS8.2B
6315	4822 130 11397	BAS316
6316	4822 130 30842	BAV21
6317	4822 130 42488	BYD33D
6317	9322 126 71673	DIO REC BYT42M A (TEG0)
6318	3198 010 53390	DIO REG BZX79-B33 A COL
6319	4822 130 42488	BYD33D
6319	9322 126 71673	DIO REC BYT42M A (TEG0)
6320	4822 130 11397	BAS316
6321	4822 130 10654	BAT254
6321	4822 130 80622	BAT54
6322	4822 130 11416	PDZ6.8B
6324	9340 548 69115	DIO REG SM PDZ27B
6325	4822 130 10871	SBYV27-200
6325	4822 130 81234	1N5819
6401	9340 548 61115	DIO REG SM PDZ12B
6402	9340 548 61115	DIO REG SM PDZ12B
6403	9340 548 61115	DIO REG SM PDZ12B
6404	9340 548 61115	DIO REG SM PDZ12B
6409	4822 130 11416	PDZ6.8B
6414	4822 130 11416	PDZ6.8B
6415	9340 548 61115	DIO REG SM PDZ12B
6416	9340 548 61115	DIO REG SM PDZ12B
6417	9340 548 61115	DIO REG SM PDZ12B
6418	9340 548 61115	DIO REG SM PDZ12B
6419	9340 548 61115	DIO REG SM PDZ12B
6420	9340 548 61115	DIO REG SM PDZ12B
6422	4822 130 11564	UDZ3.9B
6423	9340 548 61115	DIO REG SM PDZ12B
6424	9340 548 61115	DIO REG SM PDZ12B
6425	9340 548 61115	DIO REG SM PDZ12B
6426	9340 548 61115	DIO REG SM PDZ12B
6427	9340 548 61115	DIO REG SM PDZ12B
6428	9340 548 61115	DIO REG SM PDZ12B
6429	9340 548 61115	DIO REG SM PDZ12B
6600	4822 130 11397	BAS316
6703	9340 552 30115	DIO SIG SM BA591 (PHSE)
6704	9340 552 30115	DIO SIG SM BA591 (PHSE)
6705	9340 552 30115	DIO SIG SM BA591 (PHSE)



7001	4822 130 60854	DTA124EU-W
7001	9352 668 47118	IC SM UDA1334BTS/N2
7002	4822 209 62312	MC33078D
7003	4822 130 60854	DTA124EU-W
7003	4822 209 62312	MC33078D
7004	9322 148 78668	IC SM AD1852JRS (ANA0) R
7005	3198 010 42310	BC847BW
7005	9352 670 99118	IC SM UDA1361TS/N1
7006	3198 010 42310	BC847BW
7006	3198 010 42320	BC857BW
7007	9352 670 99118	IC SM UDA1361TS/N1
7008	3198 010 42310	BC847BW
7008	3198 010 42320	BC857BW
7009	3198 010 42310	BC847BW
7009	3198 010 42320	BC857BW
7010	4822 130 61553	DTC124EU
7011	3198 010 42320	BC857BW
7301	4822 209 14933	TL431IZ
7302	4822 130 11336	STP16NE06FP
7302	9322 163 75685	SI2306DS(VISH)
7303	9322 160 70668	FET POW SM SI4936ADY
7303	9322 183 38668	FET POW SM STS9NF30L
7304	4822 209 14933	TL431IZ
7305	4822 209 14933	TL431IZ
7306	4822 130 61553	DTC124EU
7307	9322 157 37687	FET POW STP3NC60FP L
7308	4822 130 61553	DTC124EU
7309	9322 180 12685	FET POW SM SI2312DS
7310	3198 010 42310	BC847BW
7311	3198 010 42310	BC847BW
7312	4822 130 41782	BF422

7313	9352 673 56112	IC TEA1507P/N1 (PHSE) L
7314▲	9322 153 43682	OPT CP LTV817BM-
7314▲	9965 000 09548	TCET1108G VISHAY
7315	4822 209 14933	TL431IZ
7317	9322 163 75685	SI2306DS(VISH)
7317	9322 191 71687	FET POW STD17NF03L-1 L
7318	9322 163 75685	SI2306DS(VISH)
7319	5322 130 60159	BC846B
7320	9322 163 75685	SI2306DS(VISH)
7321	4822 130 61553	DTC124EU
7322	3198 010 42320	BC857BW
7401	3198 010 42320	BC857BW
7402	3198 010 42310	BC847BW
7403	3198 010 42320	BC857BW
7404	3198 010 42320	BC857BW
7405	3198 010 42310	BC847BW
7406	3198 010 42320	BC857BW
7407	3198 010 42310	BC847BW
7408	9322 173 41668	IC SM ST6618 R
7409	3198 010 42310	BC847BW
7410	9322 174 76668	IC SM NJM2267M (JRC0) R
7411	9322 179 71668	IC SM NJM2285M (JRC0) R
7412	4822 130 61553	DTC124EU
7415	9340 219 30115	BC817-25W
7416	9340 219 30115	BC817-25W
7419	9340 560 36235	BSH111
7420	9340 560 36235	BSH111
7421	3198 010 42310	BC847BW
7501	5322 209 11102	HEF4052BT
7502	4822 209 32071	MC33079D
7503	5322 209 11102	HEF4052BT
7504	5322 209 11102	HEF4052BT
7505	4822 209 62312	MC33078D
7506	9340 219 30115	BC817-25W
7508	9340 219 30115	BC817-25W
7509	9340 219 30115	BC817-25W
7511	9340 219 30115	BC817-25W
7580	5322 209 11517	PC74HCU04T
7600	9322 186 87668	SM MSP3415G-QG-B8V3
7701	4822 130 61553	DTC124EU
7702	4822 130 61553	DTC124EU
7704	4822 130 61553	DTC124EU
7705	4822 130 61553	DTC124EU
7706	4822 130 61553	DTC124EU
7710	9352 606 11118	IC SM TDA9818T/V1
7710	9352 621 13118	IC SM TDA9817T/V1
7711	3198 010 42320	BC857BW
7712	4822 130 61553	DTC124EU
7713	3198 010 42320	BC857BW
7714	3198 010 42310	BC847BW
7716	3198 010 42320	BC857BW
7717	3198 010 42310	BC847BW
7931	4822 209 17505	STV5348D
7932	3198 010 42310	BC847BW
7933	3198 010 42310	BC847BW
7934	4822 209 60177	LM339D

UP Sub Board

Various

1801	2422 543 01115	24M576 12P CX-11F R
1805	4822 242 70938	TA252E00 (32,768KHz)
1980	2422 025 17723	CON BM V 8P M2.00C36 B
1984	2422 025 17723	CON BM V 8P M2.00C36 B
1986	2422 025 16677	CON BM H 10P F 1.0 FFC
1987	2422 025 17723	CON BM V 8P M2.00C36 B
1988	2422 025 17723	CON BM V 8P M2.00C36 B



2800	2238 586 59812	0603 50V 100NP80M
2801	4822 122 33752	15pF 5% 50V
2802	4822 122 33752	15pF 5% 50V
2803	2238 586 59812	0603 50V 100NP80M
2804	2238 586 59812	0603 50V 100NP80M
2805	2238 586 59812	0603 50V 100NP80M
2806	2238 586 59812	0603 50V 100NP80M
2807	4822 126 13879	220nF 20% 16V
2808	2238 586 59812	0603 50V 100NP80M
2809	2238 586 59812	0603 50V 100NP80M
2810	4822 122 33741	10pF 10% 50V
2811	4822 122 33741	10pF 10% 50V
2812	5322 126 11583	10nF 10% 50V 0603
2813	4822 122 33741	10pF 10% 50V
2814	4822 122 33741	10pF 10% 50V
2815	4822 126 13883	220pF 5% 50V
2816	4822 124 11968	220mF 20% 5.5V
2817	2238 586 59812	0603 50V 100NP80M
2818	4822 126 13883	220pF 5% 50V
2819	4822 124 42234	100uF 20% 6.3V

2820	5322 126 11583	10nF 10% 50V 0603
2821	5322 126 11583	10nF 10% 50V 0603
2822	2238 586 59812	0603 50V 100NP80M
2823	5322 126 11578	1nF 10% 50V 0603
2824	3198 017 41050	0603 10V 1µF
2825	2020 552 94427	0603 50V 100P 5%
2828	2238 586 59812	0603 50V 100NP80M
2829	4822 124 21732	10µF 20% 25V
2830	2238 586 59812	0603 50V 100NP80M
2831	5322 126 11583	10nF 10% 50V 0603



3800	4822 051 30223	22k 5% 0.062W
3801	4822 051 30103	10k 5% 0.062W
3802	4822 051 30223	22k 5% 0.062W
3803	4822 051 30102	1k 5% 0.062W
3804	4822 051 30103	10k 5% 0.062W
3805	4822 051 30101	100Ω 5% 0.062W
3806	4822 051 30223	22k 5% 0.062W
3807	4822 117 13632	100k 1% 0603 0.62W
3808	4822 117 13632	100k 1% 0603 0.62W
3809	4822 117 13632	100k 1% 0603 0.62W
3810	4822 117 13632	100k 1% 0603 0.62W
3811	4822 051 30101	100Ω 5% 0.062W
3812	4822 051 30223	22k 5% 0.062W
3813	4822 051 30103	10k 5% 0.062W
3814	4822 051 30103	10k 5% 0.062W
3815	4822 051 30183	18k 5% 0.062W
3816	4822 051 30103	10k 5% 0.062W
3817	4822 051 30222	2k2 5% 0.062W
3818	4822 051 30472	4k7 5% 0.062W
3819	4822 051 30103	10k 5% 0.062W
3820	4822 051 30102	1k 5% 0.062W
3821	4822 051 30103	10k 5% 0.062W
3822	4822 051 30103	10k 5% 0.062W
3823	4822 117 13632	100k 1% 0603 0.62W
3824	4822 051 30102	1k 5% 0.062W
3825	4822 051 30103	10k 5% 0.062W
3826	4822 051 30102	1k 5% 0.062W
3827	4822 051 30102	1k 5% 0.062W
3828	4822 051 30103	10k 5% 0.062W
3829	4822 051 30103	10k 5% 0.062W
3830	4822 051 30102	1k 5% 0.062W
3831	4822 051 30102	1k 5% 0.062W
3832	4822 051 30333	33k 5% 0.062W
3833	4822 051 30102	1k 5% 0.062W
3834	4822 051 30102	1k 5% 0.062W
3835	4822 051 30102	1k 5% 0.062W
3836	4822 051 30101	100Ω 5% 0.062W
3837	4822 051 30123	12k 5% 0.062W
3838	4822 051 30102	1k 5% 0.062W
3839	4822 051 30273	27k 5% 0.062W
3840	4822 051 30472	4k7 5% 0.062W
3841	4822 117 13632	100k 1% 0603 0.62W
3842	4822 117 12891	220k 1% ERJ3Ω
3843	4822 051 30333	33k 5% 0.062W
3844	4822 051 30221	220Ω 5% 0.062W
3845	4822 051 30102	1k 5% 0.062W
3846	4822 051 30333	33k 5% 0.062W
3847	4822 051 30103	10k 5% 0.062W
3849	4822 117 12925	47k 1% 0.063W 0603
3850	4822 051 30183	18k 5% 0.062W
3851	4822 051 30103	10k 5% 0.062W
3852	4822 051 30103	10k 5% 0.062W
3854	4822 051 30102	1k 5% 0.062W
3855	4822 051 30471	470Ω 5% 0.062W
3856	4822 051 30103	10k 5% 0.062W
3857	4822 051 30103	10k 5% 0.062W
3858	4822 117 13632	100k 1% 0603 0.62W
3860	4822 051 30222	2k2 5% 0.062W
3861	3198 021 32250	0603 2M 2 PM5
3862	4822 051 30103	10k 5% 0.062W
3863	4822 117 13608	4.7Ω 5% 0603 0.0016W
3864	4822 117 13608	4.7Ω 5% 0603 0.0016W
3865	4822 117 13608	4.7Ω 5% 0603 0.0016W
3866	4822 117 13608	4.7Ω 5% 0603 0.0016W
3867	4822 051 30759	75Ω 5% 0.062W
3868	4822 051 30103	10k 5% 0.062W
3869	4822 051 30331	330Ω 5% 0.062W
3870	4822 117 13632	100k 1% 0603 0.62W
3871	4822 051 30103	10k 5% 0.062W
3872	4822 051 30103	10k 5% 0.062W
3873	4822 051 30472	4k7 5% 0.062W
3874	4822 051 30103	10k 5% 0.062W
3875	4822 051 30103	10k 5% 0.062W
3876	4822 051 30103	10k 5% 0.062W
3878	4822 051 30102	1k 5% 0.062W
3879	4822 051 30102	1k 5% 0.062W
3881	4822 117 12925	47k 1% 0.063W 0603
3882	4822 117 12925	47k 1% 0.063W 0603
3884	4822 051 30101	100Ω 5% 0.062W
3885	4822 051 30101	100Ω 5% 0.062W

3886	4822 051 30472	4k7 5% 0.062W
3887	4822 051 30472	4k7 5% 0.062W
3888	4822 051 30471	470Ω 5% 0.062W
3889	4822 051 30183	18k 5% 0.062W
3916	4822 051 30273	27k 5% 0.062W
3917	2322 704 63603	0603 RC22H 36k PM1 R
3919	5322 117 13024	33k 1% 0.063W 0603 RC22H
3920	4822 051 30562	5k6 5% 0.063W 0603 RC21
3921	4822 051 30471	470Ω 5% 0.062W
3922	4822 051 30102	1k 5% 0.062W
3923	4822 051 30103	10k 5% 0.062W
3924	4822 051 30103	10k 5% 0.062W
3925	4822 117 12706	10k 1% 0.063W CASE0603 RC22H
3927	4822 051 30333	33k 5% 0.062W



5801	2422 549 44607	EMI100mH z 600RR
5802	2422 549 44607	EMI100mH z 600RR
5803	2422 549 44607	EMI100mH z 600RR
5804	2422 549 44607	EMI100mH z 600RR



6800	4822 130 11397	BAS316
6801	4822 130 11564	UDZ3.9B
6802	4822 130 10654	BAT254
6803	4822 130 10654	BAT254
6804	4822 130 10654	BAT254
6805	4822 130 10654	BAT254
6901	5322 130 34331	BAV70



7801	9352 190 00118	IC SM 74LVC573AD
7802	4822 130 61553	DTC124EU
7803	9322 186 16668	IC SM CY62128VLL-70SC
7804	3103 165 13721	IC TMP91CW12AF/LIRP1
7805	9965 000 17112	M29W800DT-70N6/AN1300XX
7806	9322 163 26685	IC SM NCP301LSN30
7807	4822 209 73852	PMBT2369
7808	4822 209 16907	M24C16-MN6T
7813	3198 010 42310	BC847BW
7814	3198 010 42310	BC847BW
7815	3198 010 42310	BC847BW
7816	3198 010 42310	BC847BW
7817	3198 010 42310	BC847BW
7818	4822 130 60854	DTA124EU-W
7821	9340 560 36235	BSH111
7822	9340 560 36235	BSH111
7825	9322 181 92682	LA7213
7902	4822 209 63709	LM324D
7903	4822 130 61553	DTC124EU
7906	4822 130 61553	DTC124EU
7908	4822 130 61553	DTC124EU

DVIO Board

Various

1400	2422 543 01115	24M576 12P CX-11F R
1500	2422 025 17084	BM V 60P F 0.80 179161 R
1501	2422 025 16543	BM H 4P M 2.00 PH SMD R
1502	2422 086 11075	FUSE SM F 750MA 125V UL
1800	2422 543 89022	XTL SM 6M000 20P CX-5F R
1901	2422 025 17106	CON BM H 4P F 0.8 IEEE R
1903	2422 025 16542	BM H 2P M 2.00 PH SMD R



2400	2238 586 59812	0603 50V 100NP80M
2401	3198 017 41050	0603 10V 1µF
2402	4822 126 14506	270pF 5% 50V 0603
2403	4822 124 80151	47µF 16V
2404	2238 586 59812	0603 50V 100NP80M
2405	2238 586 59812	0603 50V 100NP80M
2406	2238 586 59812	0603 50V 100NP80M
2407	2238 586 59812	0603 50V 100NP80M
2408	2238 586 59812	0603 50V 100NP80M
2412	4822 122 33741	10pF 10% 50V
2413	4822 122 33741	10pF 10% 50V
2415	4822 124 80151	47µF 16V
2416	2238 586 59812	0603 50V 100NP80M
2417	2238 586 59812	0603 50V 100NP80M
2418	2238 586 59812	0603 50V 100NP80M
2419	2238 586 59812	0603 50V 100NP80M
2420	2238 586 59812	0603 50V 100NP80M
2431	4822 124 80151	47µF 16V

2432	2238 586 59812	0603 50V 100NP80M
2433	2238 586 59812	0603 50V 100NP80M
2434	2238 586 59812	0603 50V 100NP80M
2435	2238 586 59812	0603 50V 100NP80M
2436	2238 586 59812	0603 50V 100NP80M
2437	2238 586 59812	0603 50V 100NP80M
2438	2238 586 59812	0603 50V 100NP80M
2439	2238 586 59812	0603 50V 100NP80M
2440	2238 586 59812	0603 50V 100NP80M
2441	2238 586 59812	0603 50V 100NP80M
2442	2238 586 59812	0603 50V 100NP80M
2443	2238 586 59812	0603 50V 100NP80M
2444	2238 586 59812	0603 50V 100NP80M
2445	2238 586 59812	0603 50V 100NP80M
2446	2238 586 59812	0603 50V 100NP80M
2447	2238 586 59812	0603 50V 100NP80M
2449	2238 586 59812	0603 50V 100NP80M
2450	4822 124 23002	10µF 16V
2451	2238 586 59812	0603 50V 100NP80M
2452	2238 586 59812	0603 50V 100NP80M
2453	2238 586 59812	0603 50V 100NP80M
2454	2238 586 59812	0603 50V 100NP80M
2455	2238 586 59812	0603 50V 100NP80M
2456	2238 586 59812	0603 50V 100NP80M
2501	2238 586 59812	0603 50V 100NP80M
2502	2238 586 59812	0603 50V 100NP80M
2503	2238 586 59812	0603 50V 100NP80M
2504	2238 586 59812	0603 50V 100NP80M
2505	2238 586 59812	0603 50V 100NP80M
2506	4822 124 80151	47µF 16V
2507	4822 124 80151	47µF 16V
2508	2238 586 59812	0603 50V 100NP80M
2512	2238 586 59812	0603 50V 100NP80M
2513	2238 586 59812	0603 50V 100NP80M
2514	4822 124 80151	47µF 16V
2520	2238 586 59812	0603 50V 100NP80M
2521	4822 124 80151	47µF 16V
2522	4822 124 80151	47µF 16V
2523	5322 126 11583	10nF 10% 50V 0603
2524	5322 126 11583	10nF 10% 50V 0603
2525	4822 124 80151	47µF 16V
2526	2238 586 59812	0603 50V 100NP80M
2527	2238 586 59812	0603 50V 100NP80M
2528	2238 586 59812	0603 50V 100NP80M
2529	2238 586 59812	0603 50V 100NP80M
2534	2238 586 59812	0603 50V 100NP80M
2600	2238 586 59812	0603 50V 100NP80M
2601	4822 124 23002	10µF 16V
2602	3198 017 44740	0603 10V 470nF COL
2603	2238 586 59812	0603 50V 100NP80M
2605	2238 586 59812	0603 50V 100NP80M
2606	3198 016 31020	0603 25V 1nF
2607	2238 586 59812	0603 50V 100NP80M
2608	2238 586 59812	0603 50V 100NP80M
2609	2238 586 59812	0603 50V 100NP80M
2610	2238 586 59812	0603 50V 100NP80M
2611	2238 586 59812	0603 50V 100NP80M
2612	2238 586 59812	0603 50V 100NP80M
2613	2238 586 59812	0603 50V 100NP80M
2614	3198 017 44740	0603 10V 470nF COL
2617	2238 586 59812	0603 50V 100NP80M
2618	2238 861 18229	50V 22P PM1 R
2801	4822 126 11669	27pF
2802	4822 126 11669	27pF
2803	2238 586 59812	0603 50V 100NP80M
2804	2238 586 59812	0603 50V 100NP80M
2805	4822 124 80151	47µF 16V
2806	2238 586 59812	0603 50V 100NP80M
2807	4822 124 80151	47µF 16V
2808	2238 586 59812	0603 50V 100NP80M
2809	2238 586 59812	0603 50V 100NP80M
2810	2238 586 59812	0603 50V 100NP80M
2812	2238 586 59812	0603 50V 100NP80M
2813	2238 586 59812	0603 50V 100NP80M
2814	5322 124 41945	22µF 20% 35V
2816	2238 586 59812	0603 50V 100NP80M
2818	2238 586 59812	0603 50V 100NP80M
2820	2238 586 59812	0603 50V 100NP80M
2822	3198 016 31020	0603 25V 1nF

3410	4822 117 12139	22Ω 5% 0.062W
3413	4822 117 12139	22Ω 5% 0.062W
3414	4822 117 12139	22Ω 5% 0.062W
3415	4822 117 12139	22Ω 5% 0.062W
3416	4822 117 12139	22Ω 5% 0.062W
3417	4822 117 12139	22Ω 5% 0.062W
3418	4822 117 12139	22Ω 5% 0.062W
3419	4822 117 12139	22Ω 5% 0.062W
3420	4822 117 12139	22Ω 5% 0.062W
3421	4822 117 12139	22Ω 5% 0.062W
3422	4822 117 12139	22Ω 5% 0.062W
3423	4822 117 12139	22Ω 5% 0.062W
3424	4822 117 12139	22Ω 5% 0.062W
3425	4822 051 30103	10k 5% 0.062W
3426	4822 051 30103	10k 5% 0.062W
3427	4822 051 30103	10k 5% 0.062W
3428	4822 051 30103	10k 5% 0.062W
3429	4822 051 30103	10k 5% 0.062W
3430	4822 051 30103	10k 5% 0.062W
3431	4822 051 30103	10k 5% 0.062W
3432	4822 051 30103	10k 5% 0.062W
3433	4822 051 30103	10k 5% 0.062W
3434	4822 051 30103	10k 5% 0.062W
3435	4822 051 30103	10k 5% 0.062W
3436	4822 051 30103	10k 5% 0.062W
3437	4822 051 30103	10k 5% 0.062W
3438	4822 051 30103	10k 5% 0.062W
3439	4822 051 30103	10k 5% 0.062W
3440	4822 051 30103	10k 5% 0.062W
3441	4822 051 30103	10k 5% 0.062W
3442	4822 051 30103	10k 5% 0.062W
3443	4822 051 30103	10k 5% 0.062W
3444	4822 051 30103	10k 5% 0.062W
3445	4822 051 30103	10k 5% 0.062W
3446	4822 051 30103	10k 5% 0.062W
3447	4822 051 30103	10k 5% 0.062W
3448	4822 051 30103	10k 5% 0.062W
3449	4822 051 30103	10k 5% 0.062W
3450	4822 051 30103	10k 5% 0.062W
3451	4822 051 30103	10k 5% 0.062W
3452	4822 051 30103	10k 5% 0.062W
3453	4822 051 30102	1k 5% 0.062W
3454	4822 051 30103	10k 5% 0.062W
3455	4822 051 30103	10k 5% 0.062W
3456	4822 051 30103	10k 5% 0.062W
3457	4822 051 30103	10k 5% 0.062W
3458	4822 051 30103	10k 5% 0.062W
3459	4822 051 30103	10k 5% 0.062W
3460	4822 051 30103	10k 5% 0.062W
3461	4822 117 12925	47k 1% 0.063W 0603
3462	4822 051 30103	10k 5% 0.062W
3463	4822 051 30103	10k 5% 0.062W
3464	4822 051 30103	10k 5% 0.062W
3465	4822 051 30103	10k 5% 0.062W
3466	4822 051 30103	10k 5% 0.062W
3467	4822 051 30103	10k 5% 0.062W
3468	4822 051 30103	10k 5% 0.062W
3469	4822 051 30103	10k 5% 0.062W
3470	4822 051 30103	10k 5% 0.062W
3471	4822 051 30103	10k 5% 0.062W
3472	4822 051 30102	1k 5% 0.062W
3473	4822 051 30103	10k 5% 0.062W
3474	4822 051 30102	1k 5% 0.062W
3475	4822 051 30103	10k 5% 0.062W
3476	4822 051 30103	10k 5% 0.062W
3477	4822 051 30103	10k 5% 0.062W
3478	4822 051 30102	1k 5% 0.062W
3481	4822 051 30103	10k 5% 0.062W
3482	4822 051 30103	10k 5% 0.062W
3483	4822 051 30103	10k 5% 0.062W
3484	4822 051 30103	10k 5% 0.062W
3485	4822 051 30103	10k 5% 0.062W
3486	4822 051 30103	10k 5% 0.062W
3487	4822 051 30103	10k 5% 0.062W
3488	4822 051 30103	10k 5% 0.062W
3489	4822 051 30103	10k 5% 0.062W
3490	4822 051 30103	10k 5% 0.062W
3491	4822 051 30103	10k 5% 0.062W
3492	4822 051 30103	10k 5% 0.062W
3493	4822 051 30103	10k 5% 0.062W
3494	4822 051 30103	10k 5% 0.062W
3495	4822 051 30103	10k 5% 0.062W
3496	4822 051 30103	10k 5% 0.062W
3497	4822 051 30103	10k 5% 0.062W
3498	4822 051 30103	10k 5% 0.062W
3499	4822 051 30103	10k 5% 0.062W
3502	4822 051 30479	47Ω 5% 0.062W
3503	4822 051 30479	47Ω 5% 0.062W
3504	4822 051 30479	47Ω 5% 0.062W
3505	4822 051 30479	47Ω 5% 0.062W
3506	4822 051 30479	47Ω 5% 0.062W
3507	4822 051 30479	47Ω 5% 0.062W
3508	4822 051 30479	47Ω 5% 0.062W
3509	4822 051 30479	47Ω 5% 0.062W

3510	4822 051 30479	47Ω 5% 0.062W
3514	4822 051 30479	47Ω 5% 0.062W
3515	4822 051 30479	47Ω 5% 0.062W
3516	4822 051 30479	47Ω 5% 0.062W
3517	4822 051 30101	100Ω 5% 0.062W
3518	4822 051 30101	100Ω 5% 0.062W
3519	4822 117 12891	220k 1% ERJ3Ω
3520	4822 117 12891	220k 1% ERJ3Ω
3530	4822 117 12139	22Ω 5% 0.062W
3531	4822 117 12139	22Ω 5% 0.062W
3532	4822 117 12139	22Ω 5% 0.062W
3533	4822 117 12139	22Ω 5% 0.062W
3534	4822 117 12139	22Ω 5% 0.062W
3535	4822 117 12139	22Ω 5% 0.062W
3536	4822 117 12139	22Ω 5% 0.062W
3537	4822 117 12139	22Ω 5% 0.062W
3538	4822 117 12139	22Ω 5% 0.062W
3539	4822 117 12139	22Ω 5% 0.062W
3540	4822 117 12139	22Ω 5% 0.062W
3541	4822 117 12139	22Ω 5% 0.062W
3542	4822 117 12139	22Ω 5% 0.062W
3543	4822 117 12139	22Ω 5% 0.062W
3544	4822 117 12139	22Ω 5% 0.062W
3545	4822 117 12139	22Ω 5% 0.062W
3546	4822 117 12139	22Ω 5% 0.062W
3547	4822 117 12139	22Ω 5% 0.062W
3548	4822 117 12139	22Ω 5% 0.062W
3549	4822 117 12139	22Ω 5% 0.062W
3550	4822 117 12139	22Ω 5% 0.062W
3551	4822 117 12139	22Ω 5% 0.062W
3552	4822 117 12139	22Ω 5% 0.062W
3553	4822 117 12139	22Ω 5% 0.062W
3554	4822 117 12139	22Ω 5% 0.062W
3555	4822 117 12139	22Ω 5% 0.062W
3556	4822 117 12139	22Ω 5% 0.062W
3557	4822 117 12139	22Ω 5% 0.062W
3558	4822 117 12139	22Ω 5% 0.062W
3559	4822 117 12139	22Ω 5% 0.062W
3560	4822 117 12139	22Ω 5% 0.062W
3561	4822 117 12139	22Ω 5% 0.062W
3562	4822 051 30103	10k 5% 0.062W
3563	4822 117 12917	1Ω 5% 0.062W CASE0603
3564	4822 117 12139	22Ω 5% 0.062W
3600	4822 117 12891	220k 1% ERJ3Ω
3601	4822 117 12917	1Ω 5% 0.062W CASE0603
3602	4822 051 30103	10k 5% 0.062W
3603	4822 117 12917	1Ω 5% 0.062W CASE0603
3605	2120 358 90533	22k H RH03ADC R
3606	4822 117 12706	10k 1% 0.063W CASE0603 RC22H
3607	2322 702 60184	0603 RC21 180k PM5 R
3608	4822 117 12891	220k 1% ERJ3Ω
3609	2322 704 65604	0603 RC22H 560k PM1 R
3610	2322 704 62003	0603 RC22H 20k PM1 R
3610	5322 117 13024	33k 1% 0.063W 0603 RC22H
3612	4822 117 12706	10k 1% 0.063W CASE0603 RC22H
3613	2322 704 65102	0603 RC22H 5k1 PM1
3614	4822 117 13632	100k 1% 0603 0.62W
3617	4822 051 30103	10k 5% 0.062W
3618	4822 051 30103	10k 5% 0.062W
3800	4822 051 30331	330Ω 5% 0.062W
3801	4822 051 30103	10k 5% 0.062W
3802	4822 051 30223	22k 5% 0.062W
3803	4822 051 30103	10k 5% 0.062W
3804	4822 051 30103	10k 5% 0.062W
3806	4822 051 30103	10k 5% 0.062W
3807	4822 051 30103	10k 5% 0.062W
3808	4822 051 30008	0Ω jumper
3809	4822 051 30103	10k 5% 0.062W
3810	4822 051 30103	10k 5% 0.062W
3812	4822 051 30103	10k 5% 0.062W
3814	4822 051 30472	4k7 5% 0.062W
3815	5322 117 13047	330Ω 1% 0.063W 0603 RC22H
3816	5322 117 13018	1k0 1% 0.063W 0603 RC22H
3817	4822 051 30103	10k 5% 0.062W
3818	4822 051 30103	10k 5% 0.062W
3819	4822 051 30102	1k 5% 0.062W
3820	4822 117 12925	47k 1% 0.063W 0603
3821	4822 051 30103	10k 5% 0.062W
3822	4822 117 13632	100k 1% 0603 0.62W
3823	5322 117 13018	1k0 1% 0.063W 0603 RC22H
3824	5322 117 13042	3k9 1% 0.063W 0603 RC22H
3825	4822 051 30101	100Ω 5% 0.062W
3826	4822 051 30101	100Ω 5% 0.062W
3827	4822 051 30103	10k 5% 0.062W
3828	4822 051 30101	100Ω 5% 0.062W
3829	4822 117 12925	47k 1% 0.063W 0603
3831	4822 117 13632	100k 1% 0603 0.62W
3832	4822 051 30103	10k 5% 0.062W
3833	4822 051 30103	10k 5% 0.062W
3834	4822 051 30103	10k 5% 0.062W
3835	4822 051 30102	1k 5% 0.062W

3836	4822 051 30472	4k7 5% 0.062W
3837	4822 051 30103	10k 5% 0.062W
3838	4822 051 30102	1k 5% 0.062W
3839	4822 051 30222	2k2 5% 0.062W

5400	4822 157 11499	BLM11P600SPT
5401	4822 157 11499	BLM11P600SPT
5431	4822 157 11499	BLM11P600SPT
5432	4822 157 11499	BLM11P600SPT
5433	4822 157 11499	BLM11P600SPT
5501	4822 157 11499	BLM11P600SPT
5503	4822 157 11499	BLM11P600SPT
5504	4822 157 11499	BLM11P600SPT
5505	4822 157 11499	BLM11P600SPT
5600	4822 157 11499	BLM11P600SPT
5601	4822 157 11499	BLM11P600SPT
5602	4822 157 11499	BLM11P600SPT
5603	4822 157 11499	BLM11P600SPT
5800	4822 157 11499	BLM11P600SPT
5801	4822 157 11499	BLM11P600SPT
5802	4822 157 71593	10μH 10%

6801	9340 548 52115	PDZ5.1B
6802	4822 130 11397	BAS316
6803	4822 130 11397	BAS316
6804	4822 130 11397	BAS316



7400	9322 182 04671	IC SM UPD72852GB-8EU
7430	9322 144 59668	MT48LC1M16A1TG-7S
7431	9322 184 70671	IC SM UPD72893GD-LML
7433	9322 142 88668	IC SM LF25CDT R
7501	9352 685 96115	IC SM 74LVC1GU04GW
7505	9352 029 90118	IC SM 74LVT16244BDGG
7506	9352 668 39118	IC SM UDA1334ATS/N2
7507	9351 751 40118	IC SM 74LV74PW
7508	9352 685 96115	IC SM 74LVC1GU04GW
7601	2722 171 08709	27MHZ 120P FXO-31 R
7602	9352 456 40115	IC SM 74HCT1G04GW
7604	9322 186 60668	IC SM BA7082F (RHM0) R
7605	9322 186 59668	IC SM BU2288FV (RHM0) R
7606	9351 751 40118	IC SM 74LV74PW
7608	9352 685 96115	IC SM 74LVC1GU04GW
7800	9340 310 30215	PDTC144ET (
7801	9322 186 70668	IC SM LM2931D R
7802	3103 607 40011	UPD78F0988AGC DV91XX0105
7803	3198 010 42310	BC847BW
7804	3198 010 42310	BC847BW
7805	3198 010 42310	BC847BW
7806	9340 310 30215	PDTC144ET
7807	9352 683 81115	IC SM 74LVC1G32GW
7808	9340 560 36235	BSH111
7809	9352 683 81115	IC SM 74LVC1G32GW
7810	3198 010 42320	BC857BW
7811	3198 010 42310	BC847BW

EN 275

2112	2238 586 59812	0603 50V 100NP80M	2421	2238 586 59812	0603 50V 100NP80M	2625	2238 586 59812	0603 50V 100NP80M
2113	2238 586 59812	0603 50V 100NP80M	2422	2238 586 59812	0603 50V 100NP80M	2626	4822 126 11785	0603 50V 47P 5%
2114	2238 586 59812	0603 50V 100NP80M	2423	2238 586 59812	0603 50V 100NP80M	2627	4822 126 11785	0603 50V 47P 5%
2115	2238 586 59812	0603 50V 100NP80M	2424	2238 586 59812	0603 50V 100NP80M	2628	2238 586 59812	0603 50V 100NP80M
2116	2238 586 59812	0603 50V 100NP80M	2425	2238 586 59812	0603 50V 100NP80M	2629	2238 586 59812	0603 50V 100NP80M
2117	2238 586 59812	0603 50V 100NP80M	2426	2238 586 59812	0603 50V 100NP80M	2630	3198 030 74780	EL SM 35V 4U7 PM20 COL
2118	2238 586 59812	0603 50V 100NP80M	2427	2238 586 59812	0603 50V 100NP80M	2632	2238 586 59812	0603 50V 100NP80M
2119	3198 030 74780	EL SM 35V 4U7 PM20 COL	2428	2238 586 59812	0603 50V 100NP80M	2633	2238 586 59812	0603 50V 100NP80M
2120	2238 586 59812	0603 50V 100NP80M	2429	2238 586 59812	0603 50V 100NP80M	2634	4822 126 14494	22nF 10% 25V 0603
2121	2238 586 59812	0603 50V 100NP80M	2430	2238 586 59812	0603 50V 100NP80M	2635	2238 586 59812	0603 50V 100NP80M
2122	2238 586 59812	0603 50V 100NP80M	2431	3198 030 74780	EL SM 35V 4U7 PM20 COL	2636	3198 030 74780	EL SM 35V 4U7 PM20 COL
2123	2238 586 59812	0603 50V 100NP80M	2432	2238 586 59812	0603 50V 100NP80M	2722	2238 586 59812	0603 50V 100NP80M
2124	2238 586 59812	0603 50V 100NP80M	2433	2238 586 59812	0603 50V 100NP80M	2900	2238 586 59812	0603 50V 100NP80M
2125	2238 586 59812	0603 50V 100NP80M	2434	2238 586 59812	0603 50V 100NP80M	2901	2238 586 59812	0603 50V 100NP80M
2126	2238 586 59812	0603 50V 100NP80M	2435	2238 586 59812	0603 50V 100NP80M	2902	2238 586 59812	0603 50V 100NP80M
2127	3198 030 74780	EL SM 35V 4U7 PM20 COL	2436	2238 586 59812	0603 50V 100NP80M	2903	2238 586 59812	0603 50V 100NP80M
2128	3198 016 31020	0603 25V 1nF	2437	2238 586 59812	0603 50V 100NP80M	2904	2238 586 59812	0603 50V 100NP80M
2129	2222 867 15339	0603 50V 33P 5%	2438	2238 586 59812	0603 50V 100NP80M	2906	2238 586 59812	0603 50V 100NP80M
2130	4822 126 13856	68pF 5% 63V 0603	2439	2238 586 59812	0603 50V 100NP80M	2907	3198 030 74780	EL SM 35V 4U7 PM20 COL
2131	3198 030 74780	EL SM 35V 2U2 PM20 COL	2440	2238 586 59812	0603 50V 100NP80M	2908	2238 586 59812	0603 50V 100NP80M
2131	3198 030 74780	EL SM 35V 4U7 PM20 COL	2441	3198 030 74780	EL SM 35V 4U7 PM20 COL	2909	4822 126 14247	0603 50V 1N5
2131	5322 124 41945	22μF 20% 35V	2442	2238 586 59812	0603 50V 100NP80M	2911	2238 586 59812	0603 50V 100NP80M
2132	2238 586 59812	0603 50V 100NP80M	2443	4822 122 33741	10pF 10% 50V	2912	4822 126 14247	0603 50V 1N5
2135	3198 030 74780	EL SM 35V 4U7 PM20 COL	2444	2238 586 59812	0603 50V 100NP80M	2914	3198 030 74780	EL SM 35V 4U7 PM20 COL
2136	4822 126 11785	0603 50V 47P 5%	2446	3198 016 31020	0603 25V 1nF	2915	2238 586 59812	0603 50V 100NP80M
2137	2238 586 59812	0603 50V 100NP80M	2500	3198 016 31020	0603 25V 1nF	2916	4822 126 14494	22nF 10% 25V 0603
2139	2238 586 59812	0603 50V 100NP80M	2501	2238 586 59812	0603 50V 100NP80M			
2141	4822 126 11785	0603 50V 47P 5%	2502	2238 586 59812	0603 50V 100NP80M			

3223	4822 051 30222	2k2 5% 0.062W
3224	4822 051 30103	10k 5% 0.062W
3225	4822 051 30103	10k 5% 0.062W
3226	4822 051 30103	10k 5% 0.062W
3227	4822 117 12139	22Ω 5% 0.062W
3228	4822 117 12139	22Ω 5% 0.062W
3229	2322 704 61303	0603 RC22H 13k PM1 R
3230	2322 704 61303	0603 RC22H 13k PM1 R
3231	5322 117 13042	3k9 1% 0.063W 0603 RC22H
3232	5322 117 13042	3k9 1% 0.063W 0603 RC22H
3234	3198 031 14720	RST NETW 1206 4X4k7 PM5
3235	4822 117 12917	1Ω 5% 0.062W CASE0603
3236	4822 117 13576	NETW 4 X 33Ω 5% 1206
3237	4822 117 13576	NETW 4 X 33Ω 5% 1206
3239	4822 051 30103	10k 5% 0.062W
3241	4822 051 30103	10k 5% 0.062W
3243	4822 051 30103	10k 5% 0.062W
3244	4822 051 30103	10k 5% 0.062W
3245	4822 051 30103	10k 5% 0.062W
3300	4822 051 30479	47Ω 5% 0.062W
3301	4822 051 30479	47Ω 5% 0.062W
3400	4822 051 30101	100Ω 5% 0.062W
3401	4822 051 30101	100Ω 5% 0.062W
3403	4822 051 30103	10k 5% 0.062W
3404	4822 051 30008	0Ω jumper
3405	4822 051 30332	3k3 5% 0.062W
3406	4822 051 30479	47Ω 5% 0.062W
3407	4822 051 30181	180Ω 5% 0.062W
3408	4822 117 12139	22Ω 5% 0.062W
3409	4822 117 12139	22Ω 5% 0.062W
3410	4822 117 12139	22Ω 5% 0.062W
3500	4822 051 30101	100Ω 5% 0.062W
3501	4822 051 30101	100Ω 5% 0.062W
3502	4822 051 30222	2k2 5% 0.062W
3503	4822 051 30102	1k 5% 0.062W
3504	4822 051 30681	680Ω 5% 0.062W
3505	4822 117 12139	22Ω 5% 0.062W
3506	4822 051 30222	2k2 5% 0.062W
3507	4822 051 30472	4k7 5% 0.062W
3508	4822 051 30103	10k 5% 0.062W
3513	4822 051 30681	680Ω 5% 0.062W
3515	4822 117 12917	1Ω 5% 0.062W CASE0603
3600	2322 704 65609	0603 RC22H 56Ω PM1 R
3601	5322 117 13059	560Ω 1% 0.063W 0603 RC22H
3602	5322 117 13059	560Ω 1% 0.063W 0603 RC22H
3603	4822 051 30102	1k 5% 0.062W
3604	4822 051 30101	100Ω 5% 0.062W
3605	4822 117 12917	1Ω 5% 0.062W CASE0603
3606	5322 117 13059	560Ω 1% 0.063W 0603 RC22H
3607	5322 117 13059	560Ω 1% 0.063W 0603 RC22H
3608	4822 051 30102	1k 5% 0.062W
3610	4822 117 12917	1Ω 5% 0.062W CASE0603
3611	5322 117 13059	560Ω 1% 0.063W 0603 RC22H
3612	5322 117 13059	560Ω 1% 0.063W 0603 RC22H
3613	4822 051 30102	1k 5% 0.062W
3615	4822 051 30101	100Ω 5% 0.062W
3616	5322 117 13059	560Ω 1% 0.063W 0603 RC22H
3617	5322 117 13059	560Ω 1% 0.063W 0603 RC22H
3618	4822 051 30102	1k 5% 0.062W
3619	4822 051 30561	560Ω 5% 0.062W
3620	4822 051 30222	2k2 5% 0.062W
3621	5322 117 13059	560Ω 1% 0.063W 0603 RC22H
3622	5322 117 13059	560Ω 1% 0.063W 0603 RC22H
3623	4822 051 30101	100Ω 5% 0.062W
3624	4822 051 30102	1k 5% 0.062W
3625	4822 051 30101	100Ω 5% 0.062W
3626	5322 117 13059	560Ω 1% 0.063W 0603 RC22H
3627	5322 117 13059	560Ω 1% 0.063W 0603 RC22H
3628	4822 051 30102	1k 5% 0.062W
3629	4822 051 30181	180Ω 5% 0.062W
3630	4822 051 30181	180Ω 5% 0.062W
3631	4822 117 12917	1Ω 5% 0.062W CASE0603
3632	4822 051 30561	560Ω 5% 0.062W
3633	4822 051 30561	560Ω 5% 0.062W
3635	4822 051 30101	100Ω 5% 0.062W
3636	4822 051 30181	180Ω 5% 0.062W
3637	4822 051 30101	100Ω 5% 0.062W
3638	4822 051 30222	2k2 5% 0.062W
3639	4822 051 20008	0Ω jumper . (0805)
3639	4822 051 30008	0Ω jumper
3900	4822 051 30103	10k 5% 0.062W
3901	4822 117 12139	22Ω 5% 0.062W

3902	4822 051 30472	4k7 5% 0.062W
3902	4822 117 12925	47k 1% 0.063W 0603
3903	4822 051 30472	4k7 5% 0.062W
3903	4822 117 13632	100k 1% 0.0603 0.62W
3904	4822 117 12139	22Ω 5% 0.062W
3906	4822 051 30479	47Ω 5% 0.062W
3908	4822 117 12139	22Ω 5% 0.062W
3910	4822 051 30101	100Ω 5% 0.062W
3911	4822 051 30103	10k 5% 0.062W
3913	4822 051 30682	6k8 5% 0.062W
3914	4822 051 30479	47Ω 5% 0.062W
3915	4822 051 30479	47Ω 5% 0.062W
3916	4822 117 13632	100k 1% 0.0603 0.62W
3917	4822 117 12139	22Ω 5% 0.062W
3918	4822 117 13632	100k 1% 0.0603 0.62W
3919	4822 051 30101	100Ω 5% 0.062W
3920	4822 117 12139	22Ω 5% 0.062W
3921	4822 051 30103	10k 5% 0.062W
3922	4822 051 30682	6k8 5% 0.062W
3923	4822 117 13632	100k 1% 0.0603 0.62W
3924	4822 051 30152	1k5 5% 0.062W
3925	4822 051 30472	4k7 5% 0.062W

5100	4822 157 11717	BLM31P500SPT
5101	4822 157 11717	BLM31P500SPT
5102	4822 157 11499	BLM11P600SPT
5103	4822 157 11499	BLM11P600SPT
5200	4822 157 11499	BLM11P600SPT
5201	4822 157 11499	BLM11P600SPT
5202	4822 157 11499	BLM11P600SPT
5203	4822 157 11499	BLM11P600SPT
5204	4822 157 11499	BLM11P600SPT
5205	4822 157 11499	BLM11P600SPT
5206	4822 157 11499	BLM11P600SPT
5207	4822 157 11499	BLM11P600SPT
5208	4822 157 11499	BLM11P600SPT
5209	4822 157 11499	BLM11P600SPT
5300	4822 157 11499	BLM11P600SPT
5302	4822 157 11499	BLM11P600SPT
5400	4822 157 11499	BLM11P600SPT
5402	4822 157 11499	BLM11P600SPT
5403	4822 157 11499	BLM11P600SPT
5404	4822 157 11499	BLM11P600SPT
5500	4822 157 11499	BLM11P600SPT
5501	4822 157 11499	BLM11P600SPT
5502	4822 157 11499	BLM11P600SPT
5503	4822 157 11499	BLM11P600SPT
5504	4822 157 11499	BLM11P600SPT
5505	4822 157 11499	BLM11P600SPT
5506	4822 157 11499	BLM11P600SPT
5507	4822 157 11499	BLM11P600SPT
5508	4822 157 11499	BLM11P600SPT
5600	4822 157 70651	12μH (NL322522T-120J)
5601	4822 157 70651	12μH (NL322522T-120J)
5602	4822 157 70651	12μH (NL322522T-120J)
5603	4822 157 70651	12μH (NL322522T-120J)
5604	4822 157 70651	12μH (NL322522T-120J)
5605	4822 157 70651	12μH (NL322522T-120J)
5606	4822 157 70649	4.7μH (NL322522T-4R7J)
5607	4822 157 70649	4.7μH (NL322522T-4R7J)
5900	4822 157 11717	BLM31P500SPT
5901	4822 157 11717	BLM31P500SPT
5903	4822 157 11499	BLM11P600SPT
5904	4822 157 11717	BLM31P500SPT
5905	4822 157 11499	BLM11P600SPT
5907	4822 157 11499	BLM11P600SPT



6500	4822 130 80622	BAT54
6900	4822 130 80622	BAT54



7100	9352 692 48557	IC SM SAA7333HL/M1
7101	9322 166 67668	MT48LC4M16A2TG-7E
7102	5322 209 16384	PC74HCT9046AD
7103	9322 170 16685	IC SM NC7SZ58 (FSC0) R
7104	9352 456 50115	HC1G04
7200	9322 169 81671	STI5508EVB
7201	9322 130 41668	IC SM M24C64-WMN6 R
7202	4822 209 30212	PC74HCT125T
7203	9322 142 88668	IC SM LF25CDT R
7204	9322 142 88668	IC SM LF25CDT R
7300	9322 166 67668	MT48LC4M16A2TG-7E
7303	9352 499 60118	IC SM 74LVC00AD
7402	9322 166 67668	MT48LC4M16A2TG-7E
7403	9352 701 80557	IC SM SAA6752HS/V101
7404	9322 142 88668	IC SM LF25CDT R
7500	9352 673 95518	IC SM SAA7118E/V1

7501	9352 500 60118	IC SM 74LVC32AD
7502	5322 209 71589	74HC74D
7504	5322 130 60159	BC846B
7600	5322 130 60159	BC846B
7601	5322 130 60159	BC846B
7602	5322 130 60159	BC846B
7603	5322 130 60159	BC846B
7604	5322 130 60159	BC846B
7605	5322 130 60159	BC846B
7606	5322 130 60159	BC846B
7702	9352 501 00118	IC SM 74LVC86ADB
7900	9322 151 71668	IC SM MK2703STR (M1CL) R
7901	5322 130 60159	BC846B
7902	9322 165 15685	IC SM NCP303LSN30
7904	4822 209 16399	74LVC04AD
7905	5322 209 71568	PC74HCT14T
7906	4822 242 10838	27MHZ 120P FX0-31FT

Digital Board 2.1 (Chrysalis)

Various

1001	2422 543 01115	24M576 12P CX-11F R
1100	2422 025 17018	BM V 15P F 1.00 FFC 0.3 R
1103	2422 025 17104	BM V 7P M 2.00 PH SMD R
1104	2422 025 16729	BM V 10P F 1.00 FFC 0.3 R
1105	2422 025 17018	BM V 15P F 1.00 FFC 0.3 R
1201	2422 543 01115	24M576 12P CX-11F R
1203	2422 025 17955	CON V 6P M 1.00 SM SR R
1400	8203 107 92221	CON BM V 28P SMD 1.27
1500	2422 025 17441	BM V 12P M 2.00 PH SMD R
1505▲	2422 086 11087	FUSE SM F 1A 125V UL R
1506▲	2422 086 11087	FUSE SM F 1A 125V UL R
1507▲	2422 086 11087	FUSE SM F 1A 125V UL R
1900	2422 025 16389	BM V 22P F 1.00 FFC 0.3 R
1901	2422 025 16987	V 6P F 1.00 SM FFC 0.3 R
1904	2422 025 16389	BM V 22P F 1.00 FFC 0.3 R



2014	4822 124 80151	47μF 16V
2015	2238 586 59812	0603 50V 100NP80M
2016	2238 586 59812	0603 50V 100NP80M
2017	2238 586 59812	0603 50V 100NP80M
2018	2238 586 59812	0603 50V 100NP80M
2019	2238 586 59812	0603 50V 100NP80M
2020	2238 586 59812	0603 50V 100NP80M
2021	2238 586 59812	0603 50V 100NP80M
2022	2020 021 91729	EL SM RKV 35V 4U7 PM20
2026	2238 586 59812	0603 50V 100NP80M
2027	2238 586 59812	0603 50V 100NP80M
2028	2238 586 59812	0603 50V 100NP80M
2029	2238 586 59812	0603 50V 100NP80M
2030	2238 586 59812	0603 50V 100NP80M
2031	2238 586 59812	0603 50V 100NP80M
2032	2238 586 59812	0603 50V 100NP80M
2033	2020 021 91729	EL SM RKV 35V 4U7 PM20
2035	2238 586 59812	0603 50V 100NP80M
2036	4822 126 14506	270pF 5% 50V 0603
2037	2238 586 59812	0603 50V 100NP80M
2038	2238 586 59812	0603 50V 100NP80M
2039	2238 586 59812	0603 50V 100NP80M
2040	2238 586 59812	0603 50V 100NP80M
2041	2238 586 59812	0603 50V 100NP80M
2042	2238 586 59812	0603 50V 100NP80M
2043	2238 586 59812	0603 50V 100NP80M
2044	2020 021 91729	EL SM RKV 35V 4U7 PM20
2046	4822 122 33761	22pF 5% 50V
2048	4822 122 33753	150pF 5% 50V
2049	2020 021 91729	EL SM RKV 35V 4U7 PM20
2050	2238 586 59812	0603 50V 100NP80M
2052	2238 586 59812	0603 50V 100NP80M
2053	2238 586 59812	0603 50V 100NP80M
2054	2238 586 59812	0603 50V 100NP80M
2056	2238 586 59812	0603 50V 100NP80M
2058	2238 586 59812	0603 50V 100NP80M
2059	4822 126 14507	18pF 5% 50V 0603
2060	4822 126 14507	18pF 5% 50V 0603
2061	2238 586 59812	0603 50V 100NP80M
2063	2238 586 59812	0603 50V 100NP80M
2064	2238 586 59812	0603 50V 100NP80M
2065	2238 586 59812	0603 50V 100NP80M
2066	3198 016 31020	0603 25V 1nF
2067	2238 586 59812	0603 50V 100NP80M
2071	2238 586 59812	0603 50V 100NP80M
2101	2238 916 15641	0603 25V 22nF PM10 R
2103	2238 586 59812	0603 50V 100NP80M
2108	4822 126 14585	100nF 10% 50V
2112	4822 126 14247	0603 50V 1N5
2113	4822 126 13881	470pF 5% 50V
2119	4822 126 14247	0603 50V 1N5

2120	2238 586 59812	0603 50V 100NP80M	2900	2238 586 59812	0603 50V 100NP80M	3136	4822 051 30479	47Ω 5% 0.062W
2125	2238 586 59812	0603 50V 100NP80M	2901	2238 586 59812	0603 50V 100NP80M	3139	4822 051 30479	47Ω 5% 0.062W
2200	3198 017 41050	0603 10V 1μF	2902	2238 586 59812	0603 50V 100NP80M	3140	4822 051 30479	47Ω 5% 0.062W
2201	4822 126 14506	270pF 5% 50V 0603	2903	2238 586 59812	0603 50V 100NP80M	3141	4822 051 30479	47Ω 5% 0.062W
2202	4822 126 11663	12pF	2904	2238 586 59812	0603 50V 100NP80M	3142	4822 051 30101	100Ω 5% 0.062W
2203	4822 126 11663	12pF	2905	2238 586 59812	0603 50V 100NP80M	3143	4822 117 13501	82Ω 5% 0.62W 0603
2206	2238 586 59812	0603 50V 100NP80M	2906	2238 586 59812	0603 50V 100NP80M	3145	4822 051 30562	5k6 5% 0.063W 0603 RC21
2207	2238 586 59812	0603 50V 100NP80M	2907	2238 586 59812	0603 50V 100NP80M	3152	4822 051 30479	47Ω 5% 0.062W
2209	2238 586 59812	0603 50V 100NP80M	2908	2238 586 59812	0603 50V 100NP80M	3157	4822 051 30479	47Ω 5% 0.062W
2210	2238 586 59812	0603 50V 100NP80M	2909	2238 586 59812	0603 50V 100NP80M	3162	4822 051 30472	4k7 5% 0.062W
2212	4822 124 12095	100μF 20% 16V	2910	4822 122 33761	22pF 5% 50V	3173	4822 051 30472	4k7 5% 0.062W
2214	2238 586 59812	0603 50V 100NP80M	2911	2238 916 15641	0603 25V 22nF PM10 R	3184	4822 051 30472	4k7 5% 0.062W
2215	2238 586 59812	0603 50V 100NP80M	2912	2238 586 59812	0603 50V 100NP80M	3185	4822 051 30101	100Ω 5% 0.062W
2217	2238 586 59812	0603 50V 100NP80M	2913	2238 586 59812	0603 50V 100NP80M	3186	4822 051 30103	10k 5% 0.062W
2218	2238 586 59812	0603 50V 100NP80M	2914	4822 126 14506	270pF 5% 50V 0603	3187	4822 051 30472	4k7 5% 0.062W
2219	2238 586 59812	0603 50V 100NP80M	2915	4822 126 14506	270pF 5% 50V 0603	3189	4822 051 30103	10k 5% 0.062W
2220	2238 586 59812	0603 50V 100NP80M	2916	4822 126 14506	270pF 5% 50V 0603	3191	4822 117 13632	100k 1% 0.603 0.62W
2221	2238 586 59812	0603 50V 100NP80M	2917	4822 126 14506	270pF 5% 50V 0603	3192	4822 051 30682	6k8 5% 0.062W
2222	2238 586 59812	0603 50V 100NP80M	2918	4822 122 33761	22pF 5% 50V	3195	4822 117 13632	100k 1% 0.603 0.62W
2223	2238 586 59812	0603 50V 100NP80M	2919	4822 122 33761	22pF 5% 50V	3197	4822 051 30101	100Ω 5% 0.062W
2224	2238 586 59812	0603 50V 100NP80M	2920	2238 586 59812	0603 50V 100NP80M	3199	4822 051 30103	10k 5% 0.062W
2225	2238 586 59812	0603 50V 100NP80M	2921	4822 122 33761	22pF 5% 50V	3200	4822 051 30103	10k 5% 0.062W
2226	2238 586 59812	0603 50V 100NP80M	2922	4822 122 33761	22pF 5% 50V	3202	4822 051 30101	100Ω 5% 0.062W
2227	2238 586 59812	0603 50V 100NP80M	2923	2238 586 59812	0603 50V 100NP80M	3204	4822 051 30103	10k 5% 0.062W
2228	2238 586 59812	0603 50V 100NP80M	2924	2238 586 59812	0603 50V 100NP80M	3205	2322 704 66342	0603 RC22H 6k34 PM1 R
2229	2238 586 59812	0603 50V 100NP80M	2925	2238 586 59812	0603 50V 100NP80M	3210	4822 051 30339	33Ω 5% 0.062W
2230	2238 586 59812	0603 50V 100NP80M	2926	4822 126 14506	270pF 5% 50V 0603	3211	4822 051 30339	33Ω 5% 0.062W
2231	2238 586 59812	0603 50V 100NP80M	2927	4822 126 14506	270pF 5% 50V 0603	3212	2322 734 65609	0805 RC12H 56Ω PM1 R
2232	2238 586 59812	0603 50V 100NP80M	2928	4822 126 14506	270pF 5% 50V 0603	3213	2322 734 65609	0805 RC12H 56Ω PM1 R
2233	2238 586 59812	0603 50V 100NP80M	2929	4822 126 14506	270pF 5% 50V 0603	3214	4822 051 30339	33Ω 5% 0.062W
2234	2238 586 59812	0603 50V 100NP80M	2930	2238 586 59812	0603 50V 100NP80M	3215	4822 051 30339	33Ω 5% 0.062W
2235	3198 016 31020	0603 25V 1nF	2931	2020 021 91729	EL SM RKV 35V 4U7 PM20	3216	4822 051 30109	10k 5% 0.062W
2236	2020 021 91729	EL SM RKV 35V 4U7 PM20	2933	2238 586 59812	0603 50V 100NP80M	3217	4822 051 30339	33Ω 5% 0.062W
2237	2238 586 59812	0603 50V 100NP80M	2934	2238 586 59812	0603 50V 100NP80M	3218	4822 051 30339	33Ω 5% 0.062W
2238	2238 586 59812	0603 50V 100NP80M	2935	4822 126 14506	270pF 5% 50V 0603	3219	4822 051 30103	10k 5% 0.062W
2308	2238 586 59812	0603 50V 100NP80M	2936	4822 126 14506	270pF 5% 50V 0603	3220	4822 051 30109	10Ω 5% 0.062W
2310	2238 586 59812	0603 50V 100NP80M	2937	4822 126 14506	270pF 5% 50V 0603	3221	4822 051 30339	33Ω 5% 0.062W
2403	2238 586 59812	0603 50V 100NP80M	2938	2238 586 59812	0603 50V 100NP80M	3222	4822 051 30339	33Ω 5% 0.062W
2404	4822 124 23002	10μF 16V	2939	2020 021 91729	EL SM RKV 35V 4U7 PM20	3223	4822 051 30109	10Ω 5% 0.062W
2405	2238 586 59812	0603 50V 100NP80M	2940	2238 586 59812	0603 50V 100NP80M	3224	4822 117 13501	82Ω 5% 0.62W 0603
2406	2238 586 59812	0603 50V 100NP80M				3225	4822 051 30109	10Ω 5% 0.062W
2407	2238 586 59812	0603 50V 100NP80M				3226	4822 051 30339	33Ω 5% 0.062W
2408	4822 124 23002	10μF 16V				3227	4822 051 30339	33Ω 5% 0.062W
2409	2238 586 59812	0603 50V 100NP80M				3228	4822 051 30109	10Ω 5% 0.062W
2410	2238 586 59812	0603 50V 100NP80M				3229	4822 051 30339	33Ω 5% 0.062W
2411	2238 586 59812	0603 50V 100NP80M				3230	4822 051 30103	10k 5% 0.062W
2412	2238 586 59812	0603 50V 100NP80M				3231	4822 051 30109	10Ω 5% 0.062W
2413	2238 586 59812	0603 50V 100NP80M				3232	2322 734 65609	0805 RC12H 56Ω PM1 R
2414	2238 586 59812	0603 50V 100NP80M				3233	2322 734 65609	0805 RC12H 56Ω PM1 R
2415	2238 586 59812	0603 50V 100NP80M				3234	4822 051 30109	10Ω 5% 0.062W
2416	2238 586 59812	0603 50V 100NP80M				3235	4822 051 30103	10k 5% 0.062W
2417	2238 586 59812	0603 50V 100NP80M				3236	4822 051 30109	10Ω 5% 0.062W
2418	4822 124 23002	10μF 16V				3237	4822 051 30339	33Ω 5% 0.062W
2419	2238 586 59812	0603 50V 100NP80M				3238	4822 051 30109	10Ω 5% 0.062W
2420	4822 124 23002	10μF 16V				3239	4822 051 30339	33Ω 5% 0.062W
2421	2238 586 59812	0603 50V 100NP80M				3240	2322 704 65102	0603 RC22H 5k1 PM1
2422	2238 586 59812	0603 50V 100NP80M				3241	4822 051 30339	33Ω 5% 0.062W
2423	2238 586 59812	0603 50V 100NP80M				3242	4822 051 30109	10Ω 5% 0.062W
2424	2238 586 59812	0603 50V 100NP80M				3243	4822 051 30339	33Ω 5% 0.062W
2425	2238 586 59812	0603 50V 100NP80M				3244	4822 051 30339	33Ω 5% 0.062W
2426	2238 586 59812	0603 50V 100NP80M				3245	4822 051 30109	10Ω 5% 0.062W
2427	2238 586 59812	0603 50V 100NP80M				3246	4822 051 30339	33Ω 5% 0.062W
2428	2238 586 59812	0603 50V 100NP80M				3247	4822 051 30339	33Ω 5% 0.062W
2429	2238 586 59812	0603 50V 100NP80M				3248	4822 051 30109	10Ω 5% 0.062W
2432	2238 586 59812	0603 50V 100NP80M				3249	4822 051 30339	33Ω 5% 0.062W
2433	2238 586 59812	0603 50V 100NP80M				3250	4822 051 30472	4k7 5% 0.062W
2512	2020 001 90085	EL SM NA 6V3 82μF PM20 R				3251	4822 051 30339	33Ω 5% 0.062W
2514	2238 586 59812	0603 50V 100NP80M				3252	4822 051 30339	33Ω 5% 0.062W
2515	3198 017 44740	0603 10V 470nF COL				3253	4822 117 12917	1Ω 5% 0.062W CASE0603
2516	2020 001 90085	EL SM NA 6V3 82μF PM20 R				3254	4822 051 30339	33Ω 5% 0.062W
2518	2020 552 94427	0603 50V 100P 5%				3255	4822 051 30472	4k7 5% 0.062W
2519	2238 586 59812	0603 50V 100NP80M				3256	4822 051 30472	4k7 5% 0.062W
2521	2238 586 59812	0603 50V 100NP80M				3257	4822 051 30223	22k 5% 0.062W
2524	2238 586 59812	0603 50V 100NP80M				3258	4822 051 30223	22k 5% 0.062W
2525	2238 586 59812	0603 50V 100NP80M				3259	4822 051 30472	4k7 5% 0.062W
2526	2238 586 59812	0603 50V 100NP80M				3260	4822 051 30101	100Ω 5% 0.062W
2527	5322 126 11583	10nF 10% 50V 0603				3261	4822 117 12917	1Ω 5% 0.062W CASE0603
2806	2238 586 59812	0603 50V 100NP80M				3262	4822 051 30472	4k7 5% 0.062W
2807	2238 586 59812	0603 50V 100NP80M				3263	4822 051 30472	4k7 5% 0.062W
2808	2238 586 59812	0603 50V 100NP80M				3264	4822 051 30472	4k7 5% 0.062W
2809	2238 586 59812	0603 50V 100NP80M				3265	4822 051 30472	4k7 5% 0.062W
2810	2238 586 59812	0603 50V 100NP80M				3266	4822 051 30472	4k7 5% 0.062W
2811	2238 586 59812	0603 50V 100NP80M				3267	4822 051 30472	4k7 5% 0.062W
2812	2238 586 59812	0603 50V 100NP80M				3268	4822 051 30472	4k7 5% 0.062W
2820	2238 586 59812	0603 50V 100NP80M				3269	4822 051 30472	4k7 5% 0.062W
2821	2238 586 59812	0603 50V 100NP80M				3270	4822 051 30101	100Ω 5% 0.062W
2822	2238 586 59812	0603 50V 100NP80M				3271	4822 051 30101	100Ω 5% 0.062W
2823	2238 586 59812	0603 50V 100NP80M				3272	4822 051 30101	100Ω 5% 0.062W
2824	2238 586 59812	0603 50V 100NP80M				3273	4822 051 30339	33Ω 5% 0.062W
2825	2238 586 59812	0603 50V 100NP80M				3274	4822 051 30101	100Ω 5% 0.062W
2826	2238 586 59812	0603 50V 100NP80M				3276	4822 051 30102	1k 5% 0.062W
2830	2238 586 59812	0603 50V 100NP80M				3277	4822 051 30101	100Ω 5% 0.062W
2832	2238 586 59812	0603 50V 100NP80M				3278	4822 051 30101	100Ω 5% 0.062W
2833	2238 586 59812	0603 50V 100NP80M				3279	4822 051 30101	100Ω 5% 0.062W

3280	4822 051 30103	10k 5% 0.062W	3473	4822 117 12139	22Ω 5% 0.062W	3926	4822 051 30102	1k 5% 0.062W
3281	4822 051 30103	10k 5% 0.062W	3474	4822 117 12139	22Ω 5% 0.062W	3927	5322 117 13055	75Ω 1% 0.063W 0603 RC22H
3282	4822 051 30103	10k 5% 0.062W	3475	4822 117 12139	22Ω 5% 0.062W	3928	4822 051 30102	1k 5% 0.062W
3285	4822 051 30109	10Ω 5% 0.062W	3476	4822 117 12139	22Ω 5% 0.062W	3929	2322 704 65609	0603 RC22H 56Ω PM1 R
3287	4822 051 30472	4k7 5% 0.062W	3477	4822 117 12139	22Ω 5% 0.062W	3930	5322 117 13055	75Ω 1% 0.063W 0603 RC22H
3289	4822 051 30472	4k7 5% 0.062W	3478	4822 117 12139	22Ω 5% 0.062W	3931	4822 051 30102	1k 5% 0.062W
3290	4822 051 30472	4k7 5% 0.062W	3479	4822 117 12139	22Ω 5% 0.062W	3932	5322 117 13055	75Ω 1% 0.063W 0603 RC22H
3292	4822 051 30472	4k7 5% 0.062W	3480	4822 117 12139	22Ω 5% 0.062W	3933	4822 051 30102	1k 5% 0.062W
3294	4822 051 30101	100Ω 5% 0.062W	3481	4822 117 12139	22Ω 5% 0.062W	3934	5322 117 13055	75Ω 1% 0.063W 0603 RC22H
3295	4822 051 30101	100Ω 5% 0.062W	3482	4822 117 12139	22Ω 5% 0.062W	3935	5322 117 13055	75Ω 1% 0.063W 0603 RC22H
3296	4822 051 30101	100Ω 5% 0.062W	3483	4822 117 12139	22Ω 5% 0.062W	3936	5322 117 13055	75Ω 1% 0.063W 0603 RC22H
3297	4822 051 30101	100Ω 5% 0.062W	3484	4822 117 12139	22Ω 5% 0.062W	3937	5322 117 13055	75Ω 1% 0.063W 0603 RC22H
3298	4822 051 30101	100Ω 5% 0.062W	3485	4822 117 12139	22Ω 5% 0.062W	3938	5322 117 13055	75Ω 1% 0.063W 0603 RC22H
3299	4822 051 30101	100Ω 5% 0.062W	3486	4822 117 12139	22Ω 5% 0.062W	3939	5322 117 13055	75Ω 1% 0.063W 0603 RC22H
3307	4822 051 30103	10k 5% 0.062W	3487	4822 117 12139	22Ω 5% 0.062W	3955	4822 117 12917	1Ω 5% 0.062W CASE0603
3311	4822 051 30103	10k 5% 0.062W	3488	4822 117 12139	22Ω 5% 0.062W			
3315	4822 051 30101	100Ω 5% 0.062W	3489	4822 117 12139	22Ω 5% 0.062W			
3316	4822 051 30101	100Ω 5% 0.062W	3490	4822 117 12139	22Ω 5% 0.062W			
3317	4822 051 30101	100Ω 5% 0.062W	3491	4822 117 12139	22Ω 5% 0.062W			
3318	4822 051 30101	100Ω 5% 0.062W	3492	4822 117 12139	22Ω 5% 0.062W			
3319	4822 051 30101	100Ω 5% 0.062W	3493	4822 117 12139	22Ω 5% 0.062W			
3320	4822 051 30103	10k 5% 0.062W	3494	4822 117 12139	22Ω 5% 0.062W			
3400	4822 051 30472	4k7 5% 0.062W	3495	4822 117 12139	22Ω 5% 0.062W			
3401	4822 051 30472	4k7 5% 0.062W	3496	4822 051 30339	33Ω 5% 0.062W			
3402	4822 051 30472	4k7 5% 0.062W	3497	4822 117 13632	100k 1% 0.603 0.62W			
3403	4822 051 30472	4k7 5% 0.062W	3498	4822 051 30103	10k 5% 0.062W			
3404	4822 051 30472	4k7 5% 0.062W	3499	4822 051 30103	10k 5% 0.062W			
3405	4822 051 30332	3k3 5% 0.062W	3503	5322 117 13034	1k5 1% 0.063W 0603 RC22H			
3406	4822 051 30332	3k3 5% 0.062W	3504	2322 704 61302	1k3 1% 0.063W RC22H 0603			
3407	4822 051 30332	3k3 5% 0.062W	3704	4822 117 11817	1k2 1% 1/16W			
3408	4822 051 30332	3k3 5% 0.062W	3712	4822 117 11817	1k2 1% 1/16W			
3409	4822 051 30472	4k7 5% 0.062W	3720	4822 117 11817	1k2 1% 1/16W			
3410	4822 051 30472	4k7 5% 0.062W	3727	4822 051 30339	33Ω 5% 0.062W			
3411	4822 051 30472	4k7 5% 0.062W	3805	4822 051 30101	100Ω 5% 0.062W			
3412	4822 051 30472	4k7 5% 0.062W	3806	4822 051 30101	100Ω 5% 0.062W			
3413	4822 051 30472	4k7 5% 0.062W	3807	4822 051 30101	100Ω 5% 0.062W			
3414	4822 051 30472	4k7 5% 0.062W	3808	4822 051 30472	4k7 5% 0.062W			
3415	4822 051 30472	4k7 5% 0.062W	3809	4822 051 30103	10k 5% 0.062W			
3416	4822 051 30472	4k7 5% 0.062W	3810	4822 051 30103	10k 5% 0.062W			
3417	4822 051 30472	4k7 5% 0.062W	3811	4822 051 30103	10k 5% 0.062W			
3418	4822 051 30472	4k7 5% 0.062W	3812	4822 051 30103	10k 5% 0.062W			
3419	4822 051 30472	4k7 5% 0.062W	3813	4822 051 30103	10k 5% 0.062W			
3420	4822 051 30472	4k7 5% 0.062W	3814	4822 051 30103	10k 5% 0.062W			
3421	4822 051 30472	4k7 5% 0.062W	3815	4822 051 30103	10k 5% 0.062W			
3422	4822 051 30472	4k7 5% 0.062W	3817	4822 051 30472	4k7 5% 0.062W			
3423	4822 051 30472	4k7 5% 0.062W	3820	4822 051 30472	4k7 5% 0.062W			
3424	4822 051 30103	10k 5% 0.062W	3821	4822 051 30472	4k7 5% 0.062W			
3425	4822 051 30103	10k 5% 0.062W	3822	4822 051 30472	4k7 5% 0.062W			
3426	4822 051 30103	10k 5% 0.062W	3823	4822 051 30472	4k7 5% 0.062W			
3427	4822 051 30103	10k 5% 0.062W	3825	4822 051 30472	4k7 5% 0.062W			
3428	4822 051 30103	10k 5% 0.062W	3826	4822 051 30472	4k7 5% 0.062W			
3429	4822 051 30339	33Ω 5% 0.062W	3827	4822 051 30472	4k7 5% 0.062W			
3430	4822 051 30339	33Ω 5% 0.062W	3832	4822 051 30472	4k7 5% 0.062W			
3431	4822 051 30339	33Ω 5% 0.062W	3836	4822 051 30101	100Ω 5% 0.062W			
3432	4822 051 30339	33Ω 5% 0.062W	3837	4822 051 30103	10k 5% 0.062W			
3433	5322 117 13036	1k2 1% 0.063W 0603 RC22H	3838	4822 051 30103	10k 5% 0.062W			
3434	4822 117 12971	15Ω 5% 0.603 MCR03 0.62W	3839	4822 051 30103	10k 5% 0.062W			
3435	4822 117 12971	15Ω 5% 0.603 MCR03 0.62W	3840	4822 051 30103	10k 5% 0.062W			
3436	4822 051 30339	33Ω 5% 0.062W	3849	4822 051 30103	10k 5% 0.062W			
3437	4822 051 30339	33Ω 5% 0.062W	3850	4822 051 30103	10k 5% 0.062W			
3438	4822 051 30339	33Ω 5% 0.062W	3851	4822 051 30103	10k 5% 0.062W			
3439	4822 051 30339	33Ω 5% 0.062W	3852	4822 051 30103	10k 5% 0.062W			
3440	4822 051 30339	33Ω 5% 0.062W	3854	4822 051 30222	2k2 5% 0.062W			
3442	4822 117 12139	22Ω 5% 0.062W	3855	4822 051 30223	22k 5% 0.062W			
3443	4822 117 12139	22Ω 5% 0.062W	3901	5322 117 13061	180Ω 1% 0.063W 0603 RC22H			
3444	4822 117 12139	22Ω 5% 0.062W	3902	5322 117 13059	560Ω 1% 0.063W 0603 RC22H			
3445	4822 117 12139	22Ω 5% 0.062W	3905	5322 117 13061	180Ω 1% 0.063W 0603 RC22H			
3446	4822 117 12139	22Ω 5% 0.062W	3906	5322 117 13059	560Ω 1% 0.063W 0603 RC22H			
3447	4822 117 12139	22Ω 5% 0.062W	3907	4822 051 30101	100Ω 5% 0.062W			
3448	4822 117 12139	22Ω 5% 0.062W	3908	4822 051 30181	180Ω 5% 0.062W			
3449	4822 117 12139	22Ω 5% 0.062W	3909	4822 051 30689	68Ω 5% 0.063W 0603 RC21			
3450	4822 117 12139	22Ω 5% 0.062W	3910	4822 051 30689	68Ω 5% 0.063W 0603 RC21			
3451	4822 117 12139	22Ω 5% 0.062W	3911	4822 051 30561	560Ω 5% 0.062W			
3452	4822 117 12139	22Ω 5% 0.062W	3912	4822 051 30222	2k2 5% 0.062W			
3453	4822 117 12139	22Ω 5% 0.062W	3913	4822 117 12139	22Ω 5% 0.062W			
3454	4822 117 12139	22Ω 5% 0.062W	3914	4822 051 30689	68Ω 5% 0.063W 0603 RC21			
3455	4822 117 12139	22Ω 5% 0.062W	3915	4822 051 30472	4k7 5% 0.062W			
3456	4822 117 12139	22Ω 5% 0.062W	3916	4822 051 30479	47Ω 5% 0.062W			
3457	4822 117 12139	22Ω 5% 0.062W	3917	4822 051 30479	47Ω 5% 0.062W			
3458	4822 117 12139	22Ω 5% 0.062W	3918	5322 117 13055	75Ω 1% 0.063W 0603 RC22H			
3459	4822 117 12139	22Ω 5% 0.062W	3919	4822 051 30102	1k 5% 0.062W			
3460	4822 117 12139	22Ω 5% 0.062W	3920	5322 117 13055	75Ω 1% 0.063W 0603 RC22H			
3461	4822 117 12139	22Ω 5% 0.062W	3921	4822 051 30102	1k 5% 0.062W			
3462	4822 117 12139	22Ω 5% 0.062W	3922	4822 051 30689	68Ω 5% 0.063W 0603 RC21			
3463	4822 117 12139	22Ω 5% 0.062W	3923	4822 051 30223	22k 5% 0.062W			
3464	4822 117 12139	22Ω 5% 0.062W	3924	5322 117 13055	75Ω 1% 0.063W 0603 RC22H			
3465	4822 117 12139	22Ω 5% 0.062W	3925	4822 051 30103	10k 5% 0.062W			
3466	4822 117 12139	22Ω 5% 0.062W						
3467	4822 117 12139	22Ω 5% 0.062W						
3468	4822 117 12139	22Ω 5% 0.062W						
3469	4822 117 12139	22Ω 5% 0.062W						
3470	4822 117 12139	22Ω 5% 0.062W						
3471	4822 117 12139	22Ω 5% 0.062W						
3472	4822 117 12139	22Ω 5% 0.062W						



6000 4822 130 11528 1PS76SB10
6100 4822 130 11528 1PS76SB10
6101 4822 130 11528 1PS76SB10



7001 9322 116 74668 LD1117D33
7002 9352 683 81115 IC SM 74LVC1G32GW
7003 5322 130 60159 BC846B
7004 9352 673 95518 IC SM SAA7118E/V1
7100 4822 130 61553 DTC124EU
7101 4822 130 61553 DTC124EU
7103 9352 683 81115 IC SM 74LVC1G32GW
7104 9352 500 20118 IC SM 74LVC08AD
7105 4822 130 61553 DTC124EU
7106 9322 191 99685 IC SM NCP303LSN29
7107 9352 500 20118 IC SM 74LVC08AD

7108	4822 130 61553	DTC124EU
7111	5322 209 71568	PC74HCT14T
7200	9352 683 02157	IC SM PDI1394P25BD
7201	9352 682 52557	IC SM PDI1394L40
7300	9352 317 00118	74LVC125AD
7400	9352 725 55557	IC SM PNX7100EH/C1
7401	9352 115 40118	IC SM 74LVC245APW
7402	2722 171 08804	4MHZ 20P FXO-31 R
7402	2722 171 08819	4MHZ 15P FXO34FL R
7500	9322 188 69668	FET POW SM STS5DNF20V
7501	9322 188 68668	IC SM NCP1570D (ONSE) R
7801	9965 000 18077	AM29DL324GB-70EI/ DVDRW_ALEAD
7804	9322 182 03668	MT48LC8M16A2TG-75
7808	9322 182 03668	MT48LC8M16A2TG-75
7809	9322 130 41668	IC SM M24C64-WMN6 R
7810	9965 000 18099	M24C64-WMN6/CHR BOOT1.0
7900	9352 684 56115	74LVC1G04GW
7901	9352 684 56115	74LVC1G04GW
7902	4822 130 61553	DTC124EU
7903	9352 456 80115	74HCT1G125GW
7904	5322 130 60159	BC846B
7905	4822 130 61553	DTC124EU
7906	5322 130 60159	BC846B
7907	5322 130 60159	BC846B
7908	5322 130 60159	BC846B
7909	5322 130 60159	BC846B
7911	5322 130 60159	BC846B
7912	5322 130 60159	BC846B

11. Revision List

11.1 3122 785 13321

- May 19th 2003.

Added Digital Board Chrysalis 2.1.

The Digital Board Chrysalis 2.1_E1 replaces Digital Board 1.5 Empress and DVIO 1.8 board in DVDR75/0x1.

The Digital Board Chrysalis 2.1_E2 replaces Digital Board 1.5 Empress in DVDR70/0x1.